Cucumber Report

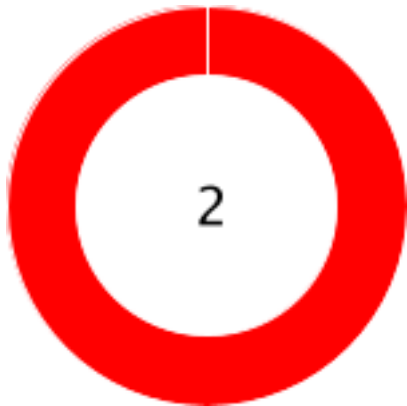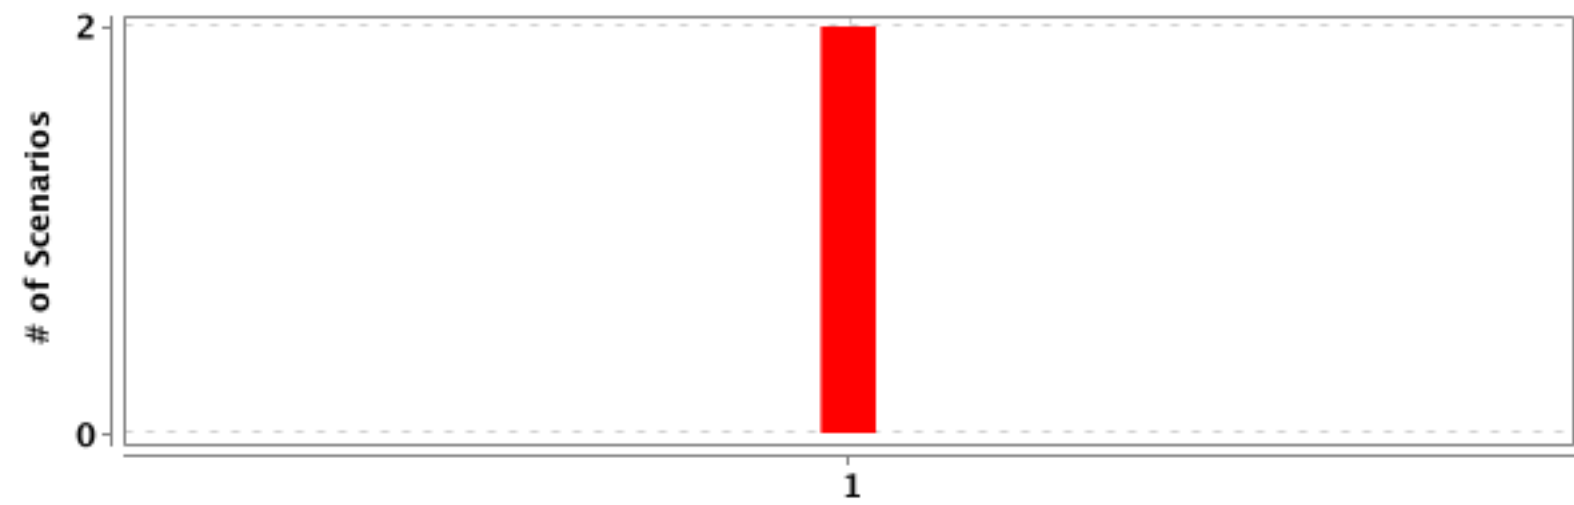| Start : Dec 17, 3:24:28.391 pm	End : Dec 17, 3:24:29.060 pm	Duration : 0.669 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 2 SKIPPED - 0	PASSED - 0 FAILED - 2 SKIPPED - 0

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Demo Feature	*0.669 s*	*2*	*0*	*2*	*0*	*2*	*0*	*2*	*0*

#	Feature Name	Scenario Name
1	*Demo Feature*	*To Test Android Simulator with Page Factory Approach*
2		*To Test Android Simulator with Page Factory Approach*

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@Regression	2	0	2	0	1	0	1	0
@Test1	2	0	2	0	1	0	1	0

#	Feature Name	T	P	F	S	Duration
1	Demo Feature	2	0	2	0	0.669 s

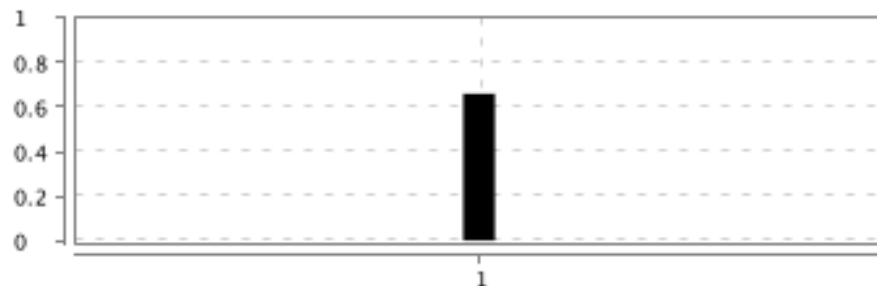| #	Feature Name	Scenario Name	T	P	F	S	Duration
1	Demo Feature	To Test Android Simulator with Page Factory Approach	1	0	1	0	0.668 s
2		To Test Android Simulator with Page Factory Approach	1	0	1	0	0.666 s

Demo Feature

FAILED	DURATION - 0.669 s	Scenarios Total - 2 Pass - 0 Fail - 2 Skip - 0	Steps Total - 2 Pass - 0 Fail - 2 Skip - 0
/ 3:24:28.391 pm // 3:24:29.060 pm /			

To Test Android Simulator with Page Factory Approach

FAILED	DURATION - 0.668 s	Steps Total - 1 Pass - 0 Fail - 1 Skip - 0
/ 3:24:28.392 pm // 3:24:29.060 pm /		
Demo Feature		
@Regression @Test1		

#	Step / Hook Details	Status	Duration
1	Given launch the Android Simulator "Android Device 1"	FAILED	0.659 s

	java.lang.NullPointerException: Cannot invoke "String.equalsIgnoreCase(String)" because the return value of "org.testng.ITestContext.getName()" is null
	    at builds.utilities.MobileInstance.mobileInit(MobileInstance.java:23)
	    at builds.actions.MobileActions.mobileSetup(MobileActions.java:27)
	    at workDirectory.stepDefinitions.notepad.NotePadStepDefinitions.launchTheAndroidSimulator(NotePadStepDefinitions.java:39)
	    at ?.launch the Android Simulator "Android Device 1"(file:///Users/00131018amirulhakim/git/BDD-Framework/src/test/resources/features/Demo%20Features/Demo.feature:25)
	* Not displayable characters are replaced by '?'.		

	AFTER_STEP - workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(io.cucumber.java.Scenario)	FAILED	0.002 s

	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "builds.actions.MobileActions.getMobileDriver()" is null
	    at builds.actions.MobileActions.screenshot(MobileActions.java:117)
	    at workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(Hooks.java:30)		

To Test Android Simulator with Page Factory Approach

FAILED	DURATION - 0.666 s

/ 3:24:28.393 pm // 3:24:29.059 pm /

Demo Feature

@Regression @Test1

Steps

Total - 1

Pass - 0

Fail - 1

Skip - 0

#	Step / Hook Details	Status	Duration
1	Given launch the Android Simulator "Android Device 2"	FAILED	0.660 s

	java.lang.NullPointerException: Cannot invoke "String.equalsIgnoreCase(String)" because the return value of "org.testng.ITestContext.getName()" is null
	    at builds.utilities.MobileInstance.mobileInit(MobileInstance.java:23)
	    at builds.actions.MobileActions.mobileSetup(MobileActions.java:27)
	    at workDirectory.stepDefinitions.notepad.NotePadStepDefinitions.launchTheAndroidSimulator(NotePadStepDefinitions.java:39)
	    at ?.launch the Android Simulator "Android Device 2"(file:///Users/00131018amirulhakim/git/BDD-Framework/src/test/resources/features/Demo%20Features/Demo.feature:29)
	* Not displayable characters are replaced by '?'.		

	AFTER_STEP - workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(io.cucumber.java.Scenario)	FAILED	0.001 s

	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "builds.actions.MobileActions.getMobileDriver()" is null
	    at builds.actions.MobileActions.screenshot(MobileActions.java:117)
	    at workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(Hooks.java:30)		