
## **Cucumber Report**

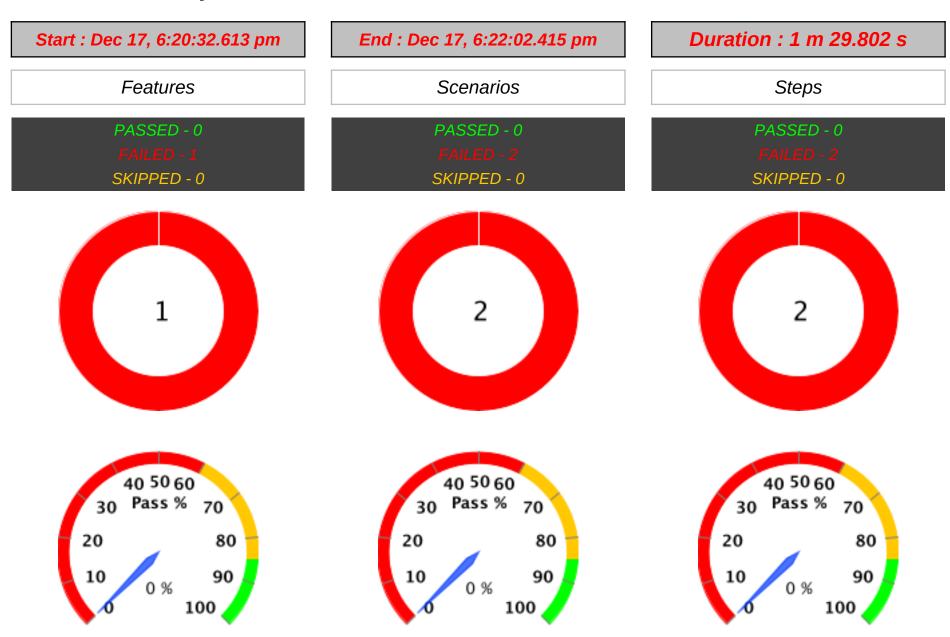


Feature			Scer	nario		Step			
Name	Duration	T	P	F	S	T	P	F	S
Demo Feature	1 m 29.802 s	2	0	2	0	2	0	2	0

FAIL & SKIP SCENARIOS -- 3 --

#	Feature Name	Scenario Name
1	Demo Feature	To Test Android Simulator with Page Factory Approach
2		To Test Android Simulator with Page Factory Approach

TAG	Scenario			Feature				
Name	T	P	F	S	T	P	F	S
@Regression	2	0	2	0	1	0	1	0
@Test1	2	0	2	0	1	0	1	0

FEATURES SUMMARY -- 5 --

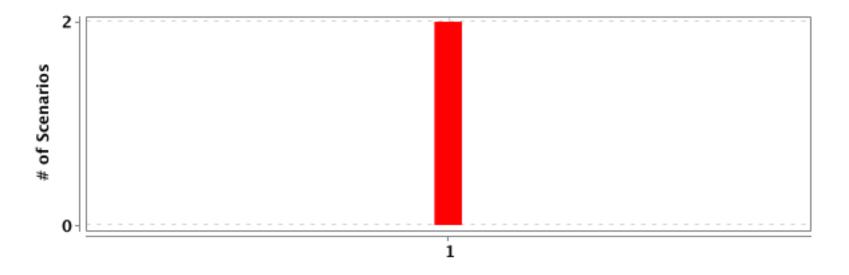

#	Feature Name	T	P	F	S	Duration
1	<u>Demo Feature</u>	2	0	2	0	1 m 29.802 s

SCENARIOS SUMMARY -- 6 --




#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Demo Feature	To Test Android Simulator with Page Factory Approach	1	0	1	0	1 m 29.801 s
2		To Test Android Simulator with Page Factory Approach	1	0	1	0	1 m 29.800 s

DETAILED SECTION -- 7

## **Demo Feature**

FAILED	DURATION - 1 m 29.802 s	Scenarios		Steps	
		Total - 2		Total - 2	
/ 6:20:32.613 pm // 6	6:22:02.415 pm /	Pass - 0	2	Pass - 0	2
		Fail - 2	<b>L</b> '	Fail - 2	
		Skip - 0		Skip - 0	


## **To Test Android Simulator with Page Factory Approach**

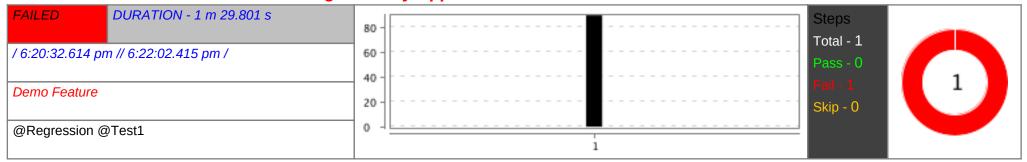

#	Step / Hook Details	Status	Duration
1	Given launch the Android Simulator "Android Device 1"	FAILED	1 m 29.791 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: An unknown server-side error occurred while processing the command. Original error: Could not find a connected Android device in 66715ms. Host info: host: '00131018s-MBP.dlinkrouter.local', ip: '2001:e68:82c9:ac00:f5ce:2e2a:ee9c:5a6b%en0' Build info: version: '4.27.0', revision: 'd6e718d134' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '14.6.1', java.version: '22.0.2' Driver info: io.appium.java_client.android. AndroidDriver Command: [null, newSession {capabilities=[Capabilities {appium:app: /Users/00131018amirulhakim/, appium:appActivity: com. atomczak.notepat.MainAc, appium:appackage: com.atomczak.notepat, appium:automationName: uiautomator2, appium:noReset: true, appium:resetKeyboard: true, platformName: ANDROID}]]] Capabilities {appium:app: /Users/00131018amirulhakim/, appium:appActivity: com.atomczak.notepat.MainAc, appium:appPackage: com.atomczak.notepat, appium:automationName: uiautomator2, appium:fullReset: false, appium:newCommandTimeout: 300, appium:noReset: true, appium:automationName: uiautomator2, appium:fullReset: false, appium:newCommandTimeout: 300, appium:noReset: true, appium:resetKeyboard: true, appium:did: emulator-5554, appium:uiautomator2ServerLaunchTimeout: 300000, appium:unicodeKeyboard: true, platformName: ANDROID}  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:114)  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:61)  at io.appium.java_client.remote.AppiumCommandExecutor.createSession(AppiumCommandExecutor.java:237)  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545)		

#	Step / Hook Details	Status	Duration
	at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:270) at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:174) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:91) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:103) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:109) at builds.utilities.MobileInstance.mobileInit(MobileInstance.java:47) at builds.actions.MobileActions.mobileSetup(MobileActions.java:30) at workDirectory.pages.notepad.NotePadAppPage.start(NotePadAppPage.java:22) at workDirectory.stepDefinitions.notepad.NotePadStepDefinitions.launchTheAndroidSimulator(NotePadStepDefinitions.java:35) at ?.launch the Android Simulator "Android Device 1"(file:///Users/00131018amirulhakim/git/BDD-Framework/src/test/resources/features/Demo%20Features/Demo.feature:25) * Not displayable characters are replaced by '?'.</init></init></init></init>		
	AFTER_STEP - workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(io.cucumber.java.Scenario)  java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "builds.actions.MobileActions.getMobileDriver()" is null at builds.actions.MobileActions.screenshot(MobileActions.java:120) at workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(Hooks.java:30)	FAILED	0.002 s

## **To Test Android Simulator with Page Factory Approach**

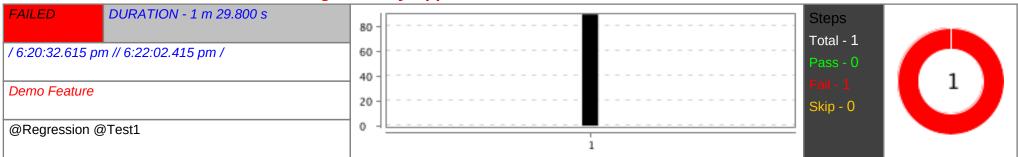

#	Step / Hook Details	Status	Duration
1	Given launch the Android Simulator "Android Device 2"	FAILED	1 m 29.791 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: An unknown server-side error occurred while processing the command. Original error: Could not find a connected Android device in 66728ms. Host info: host: '00131018s-MBP.dlinkrouter.local', ip: '2001:e68:82c9:ac00:f5ce:2e2a:ee9c:5a6b%en0' Build info: version: '4.27.0', revision: 'd6e718d134' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '14.6.1', java.version: '22.0.2' Driver info: io.appium.java_client.android. AndroidDriver Command: [null, newSession {capabilities=[Capabilities {appium:app: /Users/00131018amirulhakim/, appium:appActivity: com. atomczak.notepat.MainAc, appium:appPackage: com.atomczak.notepat, appium:automationName: uiautomator2, appium:fullReset: false, appium:newCommandTimeout: 300, appium:noReset: true, appium:resetKeyboard: true, appium:udid: emulator-5556, appium:uiautomator2ServerLaunchTimeout: 300000, appium:unicodeKeyboard: true, platformName: ANDROID}]]] Capabilities {appium:app:		

#	Step / Hook Details	Status	Duration
	/Users/00131018amirulhakim/, appium:appActivity: com.atomczak.notepat.MainAc, appium:appPackage: com.atomczak.notepat, appium:automationName: uiautomator2, appium:fullReset: false, appium:newCommandTimeout: 300, appium:noReset: true, appium:resetKeyboard: true, appium:udid: emulator-5556, appium:uiautomator2ServerLaunchTimeout: 300000, appium:unicodeKeyboard: true, platformName: ANDROID} at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:114) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:75) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:61)		
	at io.appium.java_client.remote.AppiumCommandExecutor.createSession(AppiumCommandExecutor.java:176) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:237) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:270) at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:174)</init>		
	at io.appium.java_client.AppiumDriver. <init>(AppiumDriver.java:91) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:103) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:109) at builds.utilities.MobileInstance.mobileInit(MobileInstance.java:47) at builds.actions.MobileActions.mobileSetup(MobileActions.java:30) at workDirectory.pages.notepad.NotePadAppPage.start(NotePadAppPage.java:22) at workDirectory.stepDefinitions.notepad.NotePadStepDefinitions.launchTheAndroidSimulator(NotePadStepDefinitions.java:35) at ?.launch the Android Simulator "Android Device 2"(file:///Users/00131018amirulhakim/git/BDD-Framework/src/test/resources/features/Demo%20Features/Demo.feature:29)</init></init></init>		
	* Not displayable characters are replaced by '?'.  AFTER_STEP - workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "builds.actions.MobileActions.getMobileDriver()" is null at builds.actions.MobileActions.screenshot(MobileActions.java:120) at workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(Hooks.java:30)		