

# Cucumber Report

17 Dec 2024, 11:58:51 am

Start : Dec 17, 11:58:51.237 am

End : Dec 17, 11:58:51.505 am

Duration : 0.268 s

Features



Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 2  
SKIPPED - 0


PASSED - 0  
FAILED - 2  
SKIPPED - 0

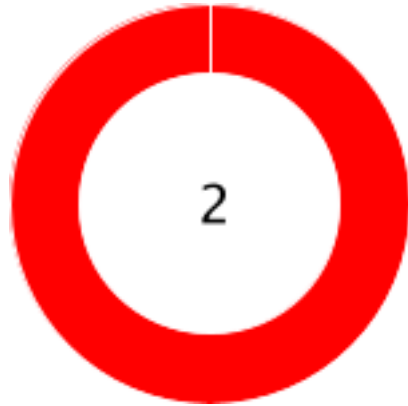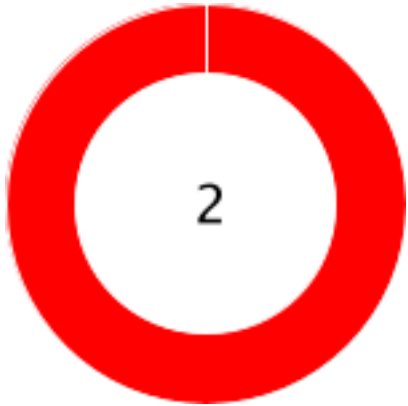

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Demo Feature</u>	0.268 s	2	0	2	0	2	0	2	0

#	Feature Name	Scenario Name
1	<u>Demo Feature</u>	<u>To Test Android Simulator with Page Factory Approach</u>
2		<u>To Test Android Simulator with Page Factory Approach</u>

<b>TAG</b>	<b>Scenario</b>				<b>Feature</b>			
<b>Name</b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>
@Regression	2	0	2	0	1	0	1	0
@Test1	2	0	2	0	1	0	1	0

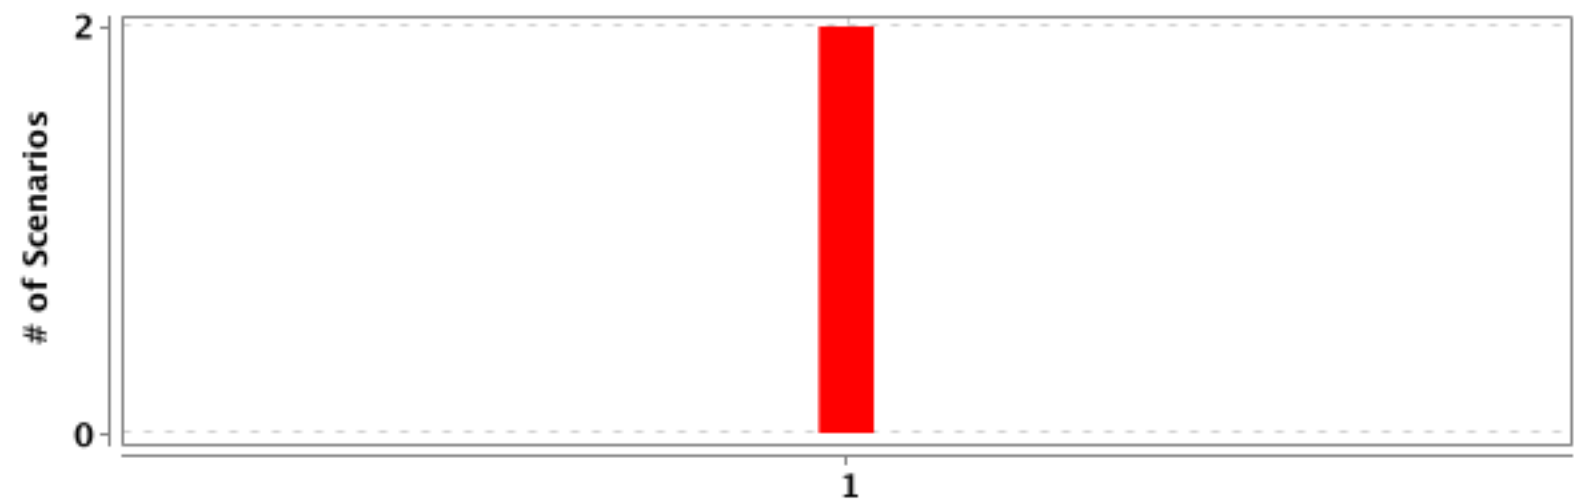



#	Feature Name	T	P	F	S	Duration
1	<u>Demo Feature</u>	2	0	2	0	0.268 s




#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Demo Feature</u>	<u>To Test Android Simulator with Page Factory Approach</u>	1	0	1	0	0.267 s
2		<u>To Test Android Simulator with Page Factory Approach</u>	1	0	1	0	0.266 s

## Demo Feature

<b>FAILED</b>	<b>DURATION - 0.268 s</b>	Scenarios		Steps	
/ 11:58:51.237 am // 11:58:51.505 am /		Total - 2		Total - 2	
		Pass - 0		Pass - 0	
		Fail - 2		Fail - 2	
		Skip - 0		Skip - 0	



## To Test Android Simulator with Page Factory Approach

<div>FAILED</div> <div>DURATION - 0.267 s</div>			<div>Steps</div> <div>Total - 1</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 0</div>	
/ 11:58:51.238 am // 11:58:51.505 am /				
Demo Feature				
@Regression @Test1				

#	Step / Hook Details	Status	Duration
1	<p>Given launch the Android Simulator</p> <pre>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: An unknown server-side error occurred while processing the command. Original error: The application at '/Users/00131018amirulhakim/Documents/com.test.2.framework/Apk/NotePad.apk' does not exist or is not accessible Host info: host: '00131018s-MacBook-Pro.local', ip: 'fe80:0:0:0:4e1:1f7e:bb97:27a9%en0' Build info: version: '4.27.0', revision: 'd6e718d134' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '14.6.1', java.version: '22.0.2' Driver info: io.appium.java_client.android.AndroidDriver Command: [null, newSession {capabilities=[Capabilities {appium:app: /Users/00131018amirulhakim/..., appium:appActivity: com.atomczak.notepat.MainAc..., appium:appPackage: com.atomczak.notepat, appium:automationName: uiautomator2, appium:fullReset: true, appium:newCommandTimeout: 300, appium:noReset: false, appium:resetKeyboard: true, appium:udid: emulator-5554, appium:uiautomator2ServerLaunchTimeout: 300000, appium:unicodeKeyboard: true, platformName: ANDROID}]] Capabilities {appium:app: /Users/00131018amirulhakim/..., appium:appActivity: com.atomczak.notepat.MainAc..., appium:appPackage: com.atomczak.notepat, appium:automationName: uiautomator2, appium:fullReset: true, appium:newCommandTimeout: 300, appium:noReset: false, appium:resetKeyboard: true, appium:udid: emulator-5554, appium:uiautomator2ServerLaunchTimeout: 300000, appium:unicodeKeyboard: true, platformName: ANDROID} at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:114) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:75) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:61) at io.appium.java_client.remote.AppiumCommandExecutor.createSession(AppiumCommandExecutor.java:176) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:237) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545)</pre>	<b>FAILED</b>	0.258 s

#	Step / Hook Details	Status	Duration
	<pre> at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:270) at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:174) at io.appium.java_client.AppiumDriver.&lt;init&gt;(AppiumDriver.java:91) at io.appium.java_client.AppiumDriver.&lt;init&gt;(AppiumDriver.java:103) at io.appium.java_client.android.AndroidDriver.&lt;init&gt;(AndroidDriver.java:109) at builds.utilities.MobileInstance.androidInit(MobileInstance.java:51) at builds.actions.MobileActions.androidSetup(MobileActions.java:26) at workDirectory.stepDefinitions.notepad.NotePadStepDefinitions.launchTheAndroidSimulator(NotePadStepDefinitions.java:44) at ?.launch the Android Simulator(file:///Users/00131018amirulhakim/git/BDD-Framework/src/test/resources/features/Demo%20Features/ Demo.feature:29) * Not displayable characters are replaced by '?'. </pre>		
	<b>AFTER_STEP - workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(io.cucumber.java.Scenario)</b> <pre> java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "builds.actions.MobileActions.getMobileDriver()" is null at builds.actions.MobileActions.screenshot(MobileActions.java:120) at workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(Hooks.java:30) </pre>	FAILED	0.002 s

### To Test Android Simulator with Page Factory Approach
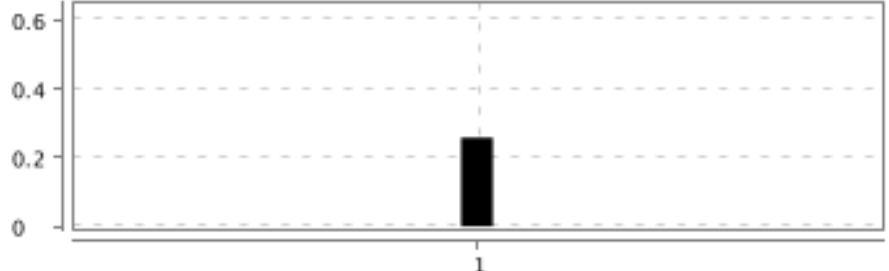
<b>FAILED</b>	<b>DURATION - 0.266 s</b>		<b>Steps</b> Total - 1 Pass - 0 Fail - 1 Skip - 0	
/ 11:58:51.239 am // 11:58:51.505 am /				
Demo Feature				
@Regression @Test1				

#	Step / Hook Details	Status	Duration
1	<b>Given launch the Android Simulator</b> <pre> org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: An unknown server-side error occurred while processing the command. Original error: The application at '/Users/00131018amirulhakim/Documents/com.test 2.framework/Apk/NotePad.apk' does not exist or is not accessible Host info: host: '00131018s-MacBook-Pro.local', ip: 'fe80:0:0:0:4e1:1f7e:bb97:27a9%en0' Build info: version: '4.27.0', revision: 'd6e718d134' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '14.6.1', java.version: '22.0.2' Driver info: io.appium.java_client.android.AndroidDriver Command: [null, newSession {capabilities=[Capabilities {appium:app: /Users/00131018amirulhakim/..., appium:appActivity: com.atomczak.notepad.MainAc..., appium:appPackage: com.atomczak.notepad, appium:automationName: uiautomator2, appium:fullReset: true, appium:newCommandTimeout: 300, appium:noReset: false, appium:resetKeyboard: true, appium:udid: emulator-5554, appium:uiautomator2ServerLaunchTimeout: 300000, appium:unicodeKeyboard: true, platformName: ANDROID}]] Capabilities {appium:app: /Users/00131018amirulhakim/..., appium:appActivity: </pre>	FAILED	0.258 s



#	Step / Hook Details	Status	Duration
	<p>com.atomczak.notepat.MainAc..., appium:appPackage: com.atomczak.notepat, appium:automationName: uiautomator2, appium:fullReset: true, appium:newCommandTimeout: 300, appium:noReset: false, appium:resetKeyboard: true, appium:udid: emulator-5554, appium:uiautomator2ServerLaunchTimeout: 300000, appium:unicodeKeyboard: true, platformName: ANDROID}</p> <p>at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:114)  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:75)  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:61)  at io.appium.java_client.remote.AppiumCommandExecutor.createSession(AppiumCommandExecutor.java:176)  at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:237)  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545)  at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:270)  at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:174)  at io.appium.java_client.AppiumDriver.&lt;init&gt;(AppiumDriver.java:91)  at io.appium.java_client.AppiumDriver.&lt;init&gt;(AppiumDriver.java:103)  at io.appium.java_client.android.AndroidDriver.&lt;init&gt;(AndroidDriver.java:109)  at builds.utilities.MobileInstance.androidInit(MobileInstance.java:51)  at builds.actions.MobileActions.androidSetup(MobileActions.java:26)  at workDirectory.stepDefinitions.notepad.NotePadStepDefinitions.launchTheAndroidSimulator(NotePadStepDefinitions.java:44)  at ?.launch the Android Simulator(file:///Users/00131018amirulhakim/git/BDD-Framework/src/test/resources/features/Demo%20Features/Demo.feature:25)  * Not displayable characters are replaced by '?'. </p>		
	<p>AFTER_STEP - workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(io.cucumber.java.Scenario)</p> <p>java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "builds.actions.MobileActions.getMobileDriver()" is null  at builds.actions.MobileActions.screenshot(MobileActions.java:120)  at workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(Hooks.java:30)</p>	FAILED	0.001 s