

Cucumber Report

17 Dec 2024, 6:16:53 pm

Start : Dec 17, 6:16:49.361 pm

End : Dec 17, 6:16:53.135 pm

Duration : 3.774 s

Features


Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 2
SKIPPED - 0


PASSED - 0
FAILED - 2
SKIPPED - 0

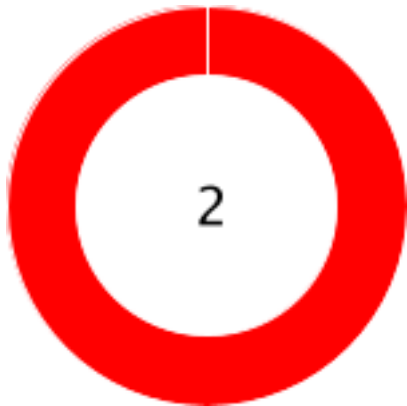

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Demo Feature</u>	3.774 s	2	0	2	0	2	0	2	0

#	Feature Name	Scenario Name
1	<u>Demo Feature</u>	<u>To Test Android Simulator with Page Factory Approach</u>
2		<u>To Test Android Simulator with Page Factory Approach</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@Regression	2	0	2	0	1	0	1	0
@Test1	2	0	2	0	1	0	1	0

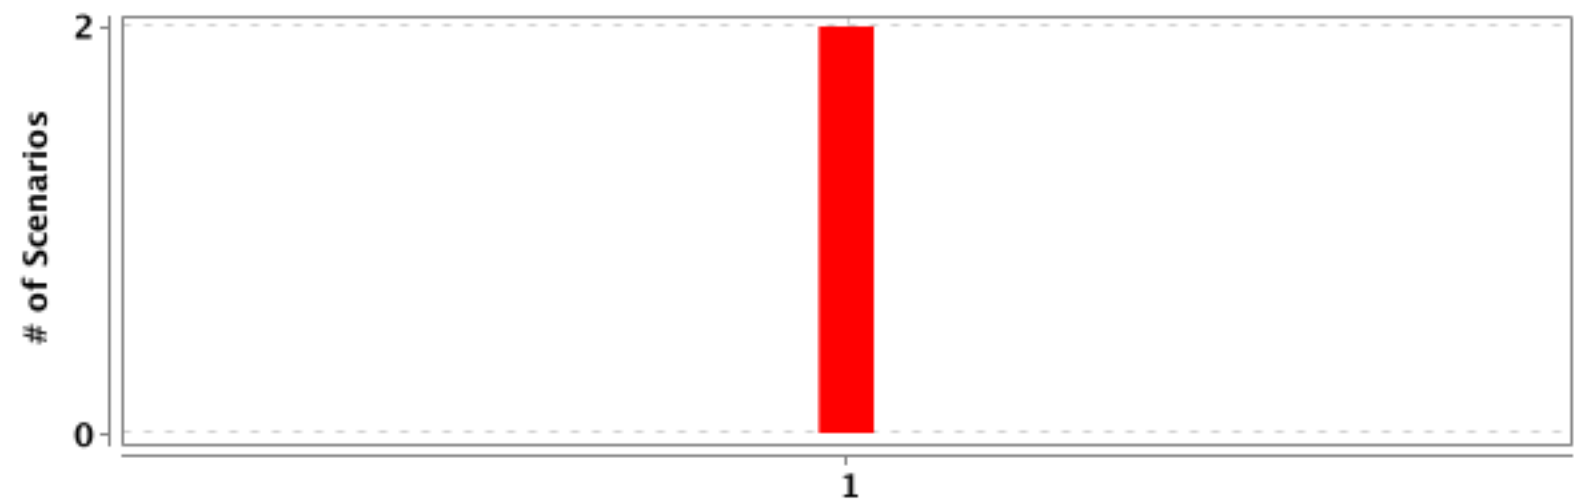



#	Feature Name	T	P	F	S	Duration
1	<u>Demo Feature</u>	2	0	2	0	3.774 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Demo Feature</u>	<u>To Test Android Simulator with Page Factory Approach</u>	1	0	1	0	3.773 s
2		<u>To Test Android Simulator with Page Factory Approach</u>	1	0	1	0	3.771 s

Demo Feature

FAILED	DURATION - 3.774 s	Scenarios		Steps	
/ 6:16:49.361 pm // 6:16:53.135 pm /		Total - 2		Total - 2	
		Pass - 0		Pass - 0	
		Fail - 2		Fail - 2	
		Skip - 0		Skip - 0	

To Test Android Simulator with Page Factory Approach
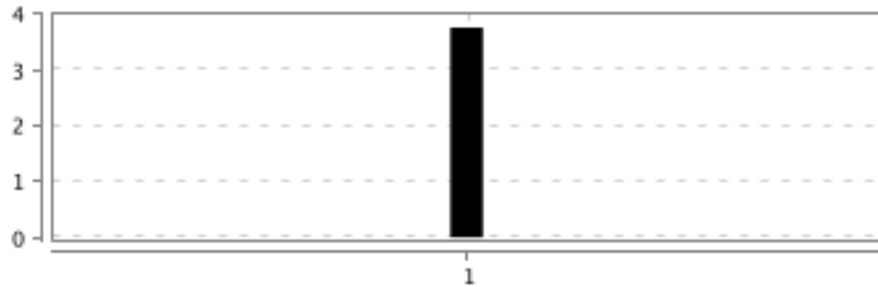
<div>FAILED</div> <div>DURATION - 3.773 s</div>		<div></div>	<div>Steps</div> <div>Total - 1</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 0</div>	<div></div>
<div>/ 6:16:49.362 pm // 6:16:53.135 pm /</div>				
<div>Demo Feature</div>				
<div>@Regression @Test1</div>				

#	Step / Hook Details	Status	Duration
1	<p>Given launch the Android Simulator "Android Device 2"</p> <p>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: An unknown server-side error occurred while processing the command. Original error: The application at '/Users/00131018amirulhakim/git/BDD-Framework/ Apk\NotePad.apk' does not exist or is not accessible Host info: host: '00131018s-MBP.dlinkrouter.local', ip: '2001:e68:82c9:ac00:f5ce:2e2a:ee9c:5a6b%en0' Build info: version: '4.27.0', revision: 'd6e718d134' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '14.6.1', java.version: '22.0.2' Driver info: io.appium.java_client.android.AndroidDriver Command: [null, newSession {capabilities=[Capabilities {appium:app: /Users/00131018amirulhakim/..., appium:appActivity: com.atomczak.notepad.MainAc..., appium:appPackage: com.atomczak.notepad, appium:automationName: uiautomator2, appium:fullReset: false, appium:newCommandTimeout: 300, appium:noReset: true, appium:resetKeyboard: true, appium:udid: emulator-5556, appium:uiautomator2ServerLaunchTimeout: 300000, appium:unicodeKeyboard: true, platformName: ANDROID}]] Capabilities {appium:app: /Users/00131018amirulhakim/..., appium:appActivity: com.atomczak.notepad.MainAc..., appium:appPackage: com.atomczak.notepad, appium:automationName: uiautomator2, appium:fullReset: false, appium:newCommandTimeout: 300, appium:noReset: true, appium:resetKeyboard: true, appium:udid: emulator-5556, appium:uiautomator2ServerLaunchTimeout: 300000, appium:unicodeKeyboard: true, platformName: ANDROID}</p> <p>at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:114)</p> <p>at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:75)</p> <p>at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:61)</p> <p>at io.appium.java_client.remote.AppiumCommandExecutor.createSession(AppiumCommandExecutor.java:176)</p> <p>at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:237)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545)</p>	FAILED	3.762 s

#	Step / Hook Details	Status	Duration
	<pre> at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:270) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:174) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:91) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:103) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:109) at builds.utilities.MobileInstance.mobileInit(MobileInstance.java:47) at builds.actions.MobileActions.mobileSetup(MobileActions.java:30) at workDirectory.pages.notepad.NotePadAppPage.start(NotePadAppPage.java:22) at workDirectory.stepDefinitions.notepad.NotePadStepDefinitions.launchTheAndroidSimulator(NotePadStepDefinitions.java:35) at ?.launch the Android Simulator "Android Device 2"(file:///Users/00131018amirulhakim/git/BDD-Framework/src/test/resources/features/Demo%20Features/Demo.feature:29) * Not displayable characters are replaced by '?'. </pre>		
	AFTER_STEP - workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(io.cucumber.java.Scenario) <pre> java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "builds.actions.MobileActions.getMobileDriver()" is null at builds.actions.MobileActions.screenshot(MobileActions.java:120) at workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(Hooks.java:30) </pre>	FAILED	0.002 s

To Test Android Simulator with Page Factory Approach

FAILED	DURATION - 3.771 s		Steps Total - 1 Pass - 0 Fail - 1 Skip - 0	
/ 6:16:49.364 pm // 6:16:53.135 pm /				
Demo Feature				
@Regression @Test1				

#	Step / Hook Details	Status	Duration
1	Given launch the Android Simulator "Android Device 1" <pre> org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: An unknown server-side error occurred while processing the command. Original error: The application at '/Users/00131018amirulhakim/git/BDD-Framework/Apk\NotePad.apk' does not exist or is not accessible Host info: host: '00131018s-MBP.dlinkrouter.local', ip: '2001:e68:82c9:ac00:f5ce:2e2a:ee9c:5a6b%en0' Build info: version: '4.27.0', revision: 'd6e718d134' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '14.6.1', java.version: '22.0.2' Driver info: io.appium.java_client.android.AndroidDriver Command: [null, newSession {capabilities=[Capabilities {appium:app: /Users/00131018amirulhakim/..., appium:appActivity: com.atomczak.notepad.MainAc..., appium:appPackage: com.atomczak.notepad, appium:automationName: uiautomator2, appium:fullReset: false, appium:newCommandTimeout: 300, appium:noReset: true, appium:resetKeyboard: true, appium:udid: emulator-5554, appium:uiautomator2ServerLaunchTimeout: 300000, </pre>	FAILED	3.762 s

#	Step / Hook Details	Status	Duration
	<pre> appium:unicodeKeyboard: true, platformName: ANDROID}}]] Capabilities {appium:app: /Users/00131018amirulhakim/..., appium:appActivity: com.atomczak.notepad.MainAc..., appium:appPackage: com.atomczak.notepad, appium:automationName: uiautomator2, appium:fullReset: false, appium:newCommandTimeout: 300, appium:noReset: true, appium:resetKeyboard: true, appium:udid: emulator-5554, appium:uiautomator2ServerLaunchTimeout: 300000, appium:unicodeKeyboard: true, platformName: ANDROID} at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:114) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:75) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:61) at io.appium.java_client.remote.AppiumCommandExecutor.createSession(AppiumCommandExecutor.java:176) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:237) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:270) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:174) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:91) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:103) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:109) at builds.utilities.MobileInstance.mobileInit(MobileInstance.java:47) at builds.actions.MobileActions.mobileSetup(MobileActions.java:30) at workDirectory.pages.notepad.NotePadAppPage.start(NotePadAppPage.java:22) at workDirectory.stepDefinitions.notepad.NotePadStepDefinitions.launchTheAndroidSimulator(NotePadStepDefinitions.java:35) at ?.launch the Android Simulator "Android Device 1"(file:///Users/00131018amirulhakim/git/BDD-Framework/src/test/resources/features/ Demo%20Features/Demo.feature:25) * Not displayable characters are replaced by '?'. </pre>		
	<p>AFTER_STEP - workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(io.cucumber.java.Scenario)</p> <pre> java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "builds.actions.MobileActions.getMobileDriver()" is null at builds.actions.MobileActions.screenshot(MobileActions.java:120) at workDirectory.stepDefinitions.Hooks.takeScreenshotIfFailed(Hooks.java:30) </pre>	FAILED	0.003 s