



Application Server Installaton

يمن سوفت
YEMENSOFT



ULTIMATE
SOLUTIONS



• The Used Programs


Program	Version
JDK	jdk-7u76-windows-x64
JRE	jre-8u121-windows-i586 (For Client devices) (download jre based on O.S.)
Oracle Weblogic	Wls_10.3.6_generic (for all O.S.)
Oracle Forms&Reports(OFR)	11g (11.1.2.2.0) 'R2'

Pre-Installation Setting:

(Attention !! – App. Server device name must not have underscore) ex: (right name: ERP-IAS)



&& Put IPv4 manually

&& Uncheck ipv6 protocol

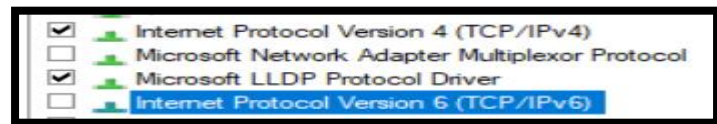


1 - Create “Temp” Folder In Short Path as “C:\temp” Then

- Access To Environment Variables .
- Determine Temp & tmp Paths in User variables and System Variables as Shown :

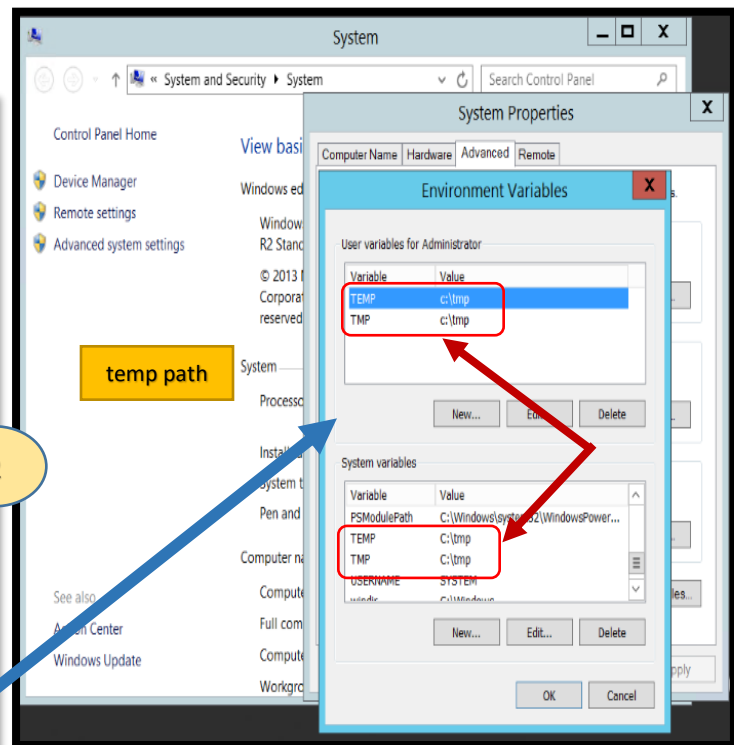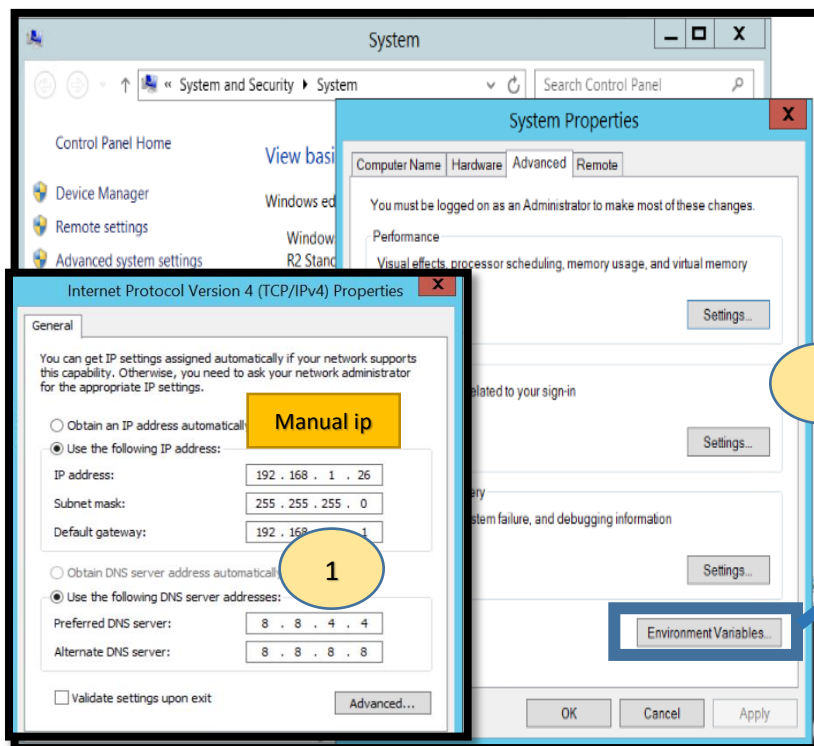

Pre-Installation Setting (Cont.) :

***Temp Folder Creation**
In C:\


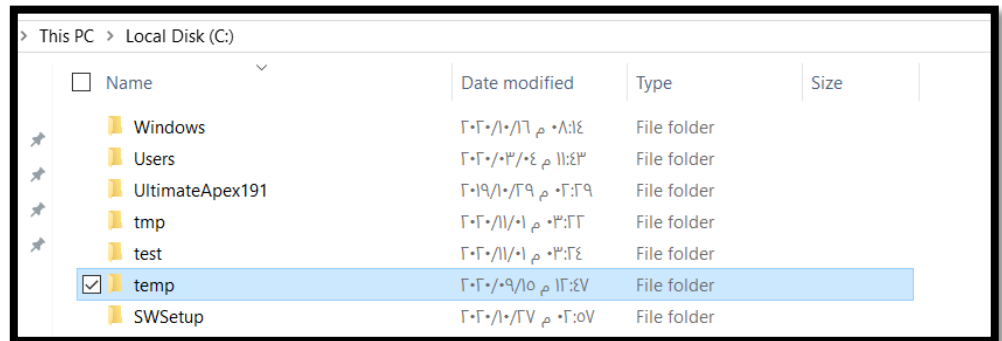


2 - Create folders for installation as shown:

Java_Home → D:\Oracle\Java\Jdk

Weblogic_home → D:\oracle\ofm\ofr

Forms&Report → D:\oracle\ofm\ofr

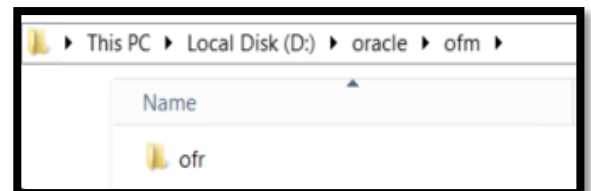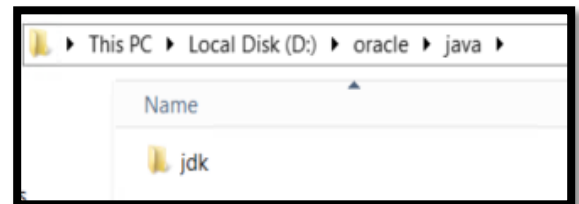

Start installing programs

JDK



Weblogic



Forms&Reports


• First JDK

- Normal installation of the program
- Next
- Change Location to
D:\oracle\java\jdk
- Next
- Close

JDK Installation



completed

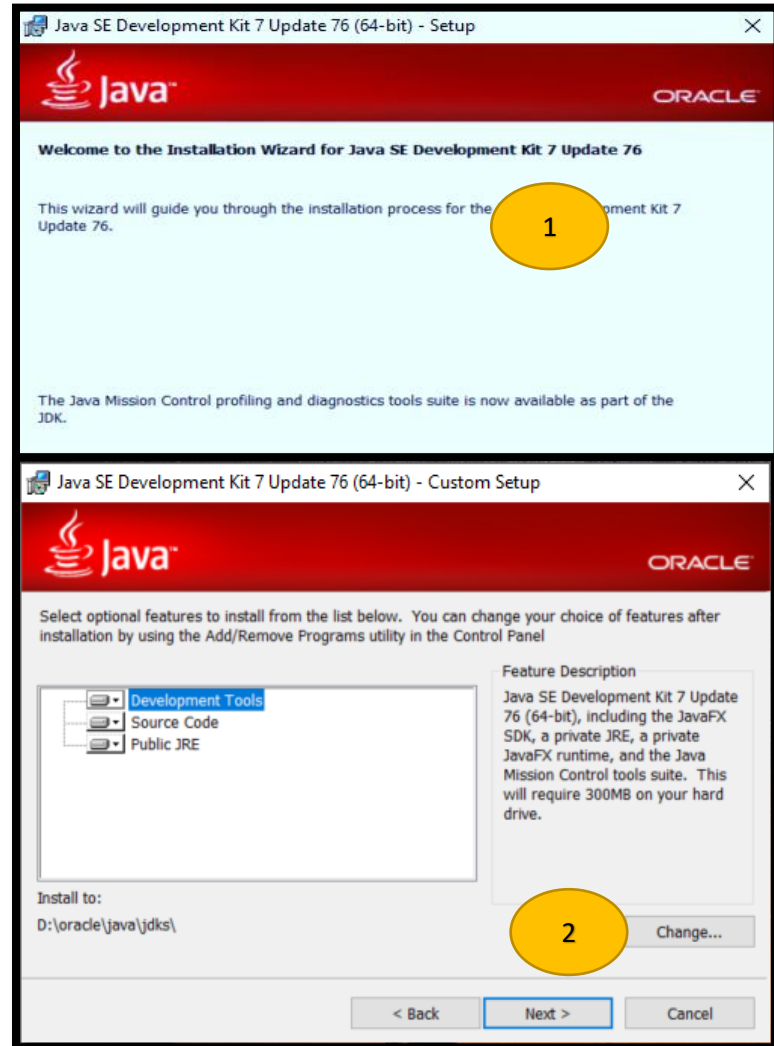




• Second **Weblogic**





- Run Weblogic By Java

or `D:\myfiles\wls1036_generic.jar D:\oracle\java\jdk8\bin\java -jar`

- Next

- Determine the installation location in `D:\oracle\ofm\ofr`

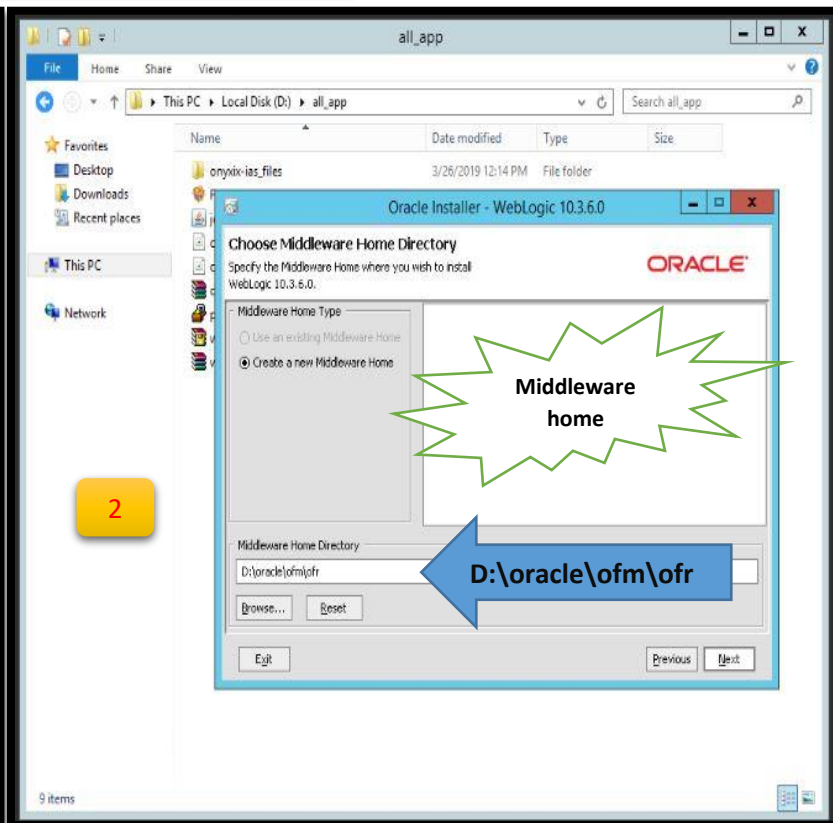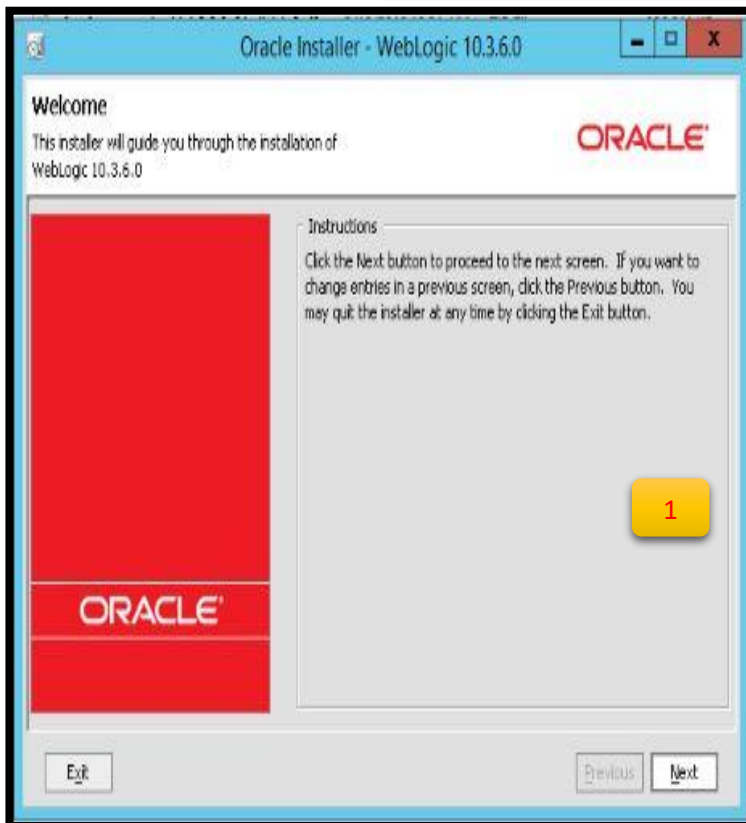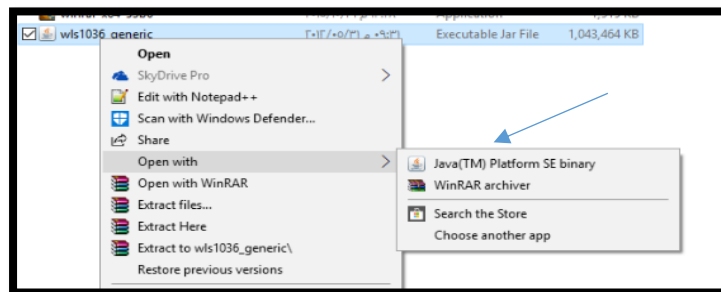

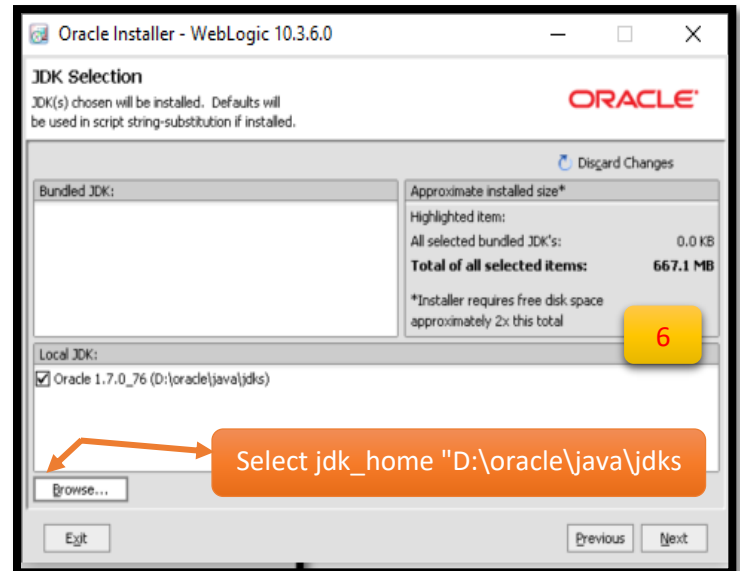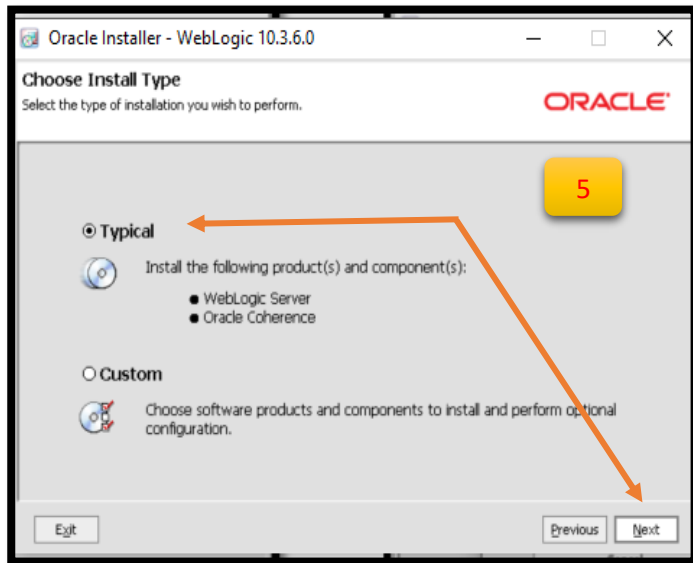
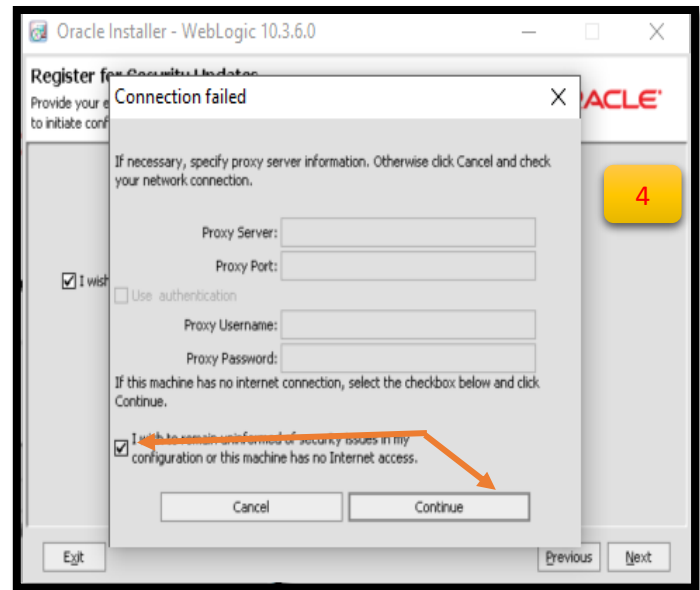
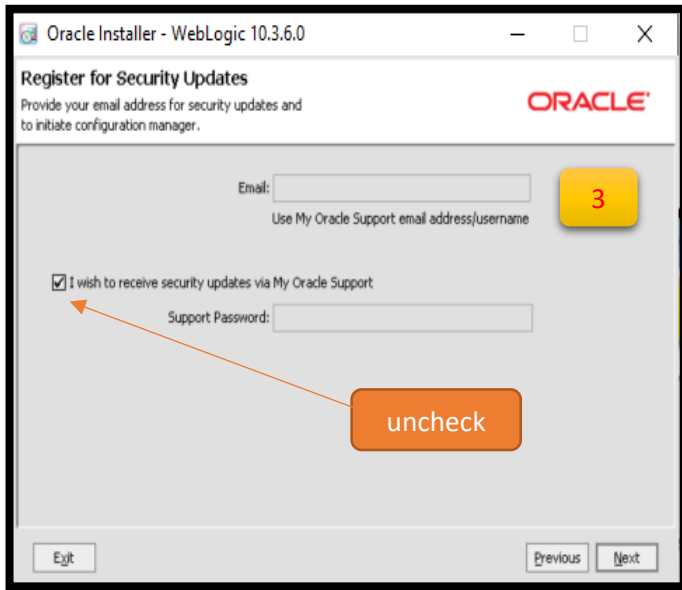


- Select installation directions for **weblogic&coherence** as:

D:\oracle\ofm\ofr\wls

D:\oracle\ofm\ofr\coh

note : the name written to be shorter (ex:coherence-> coh)

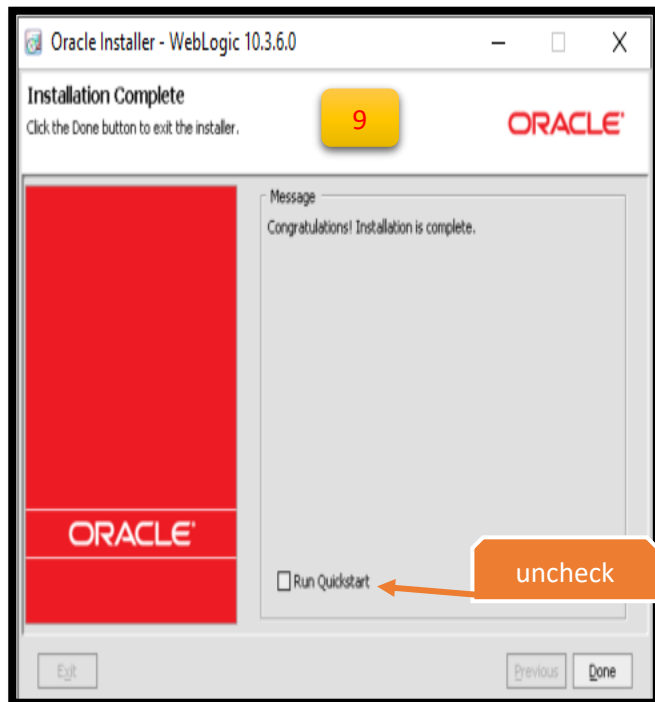
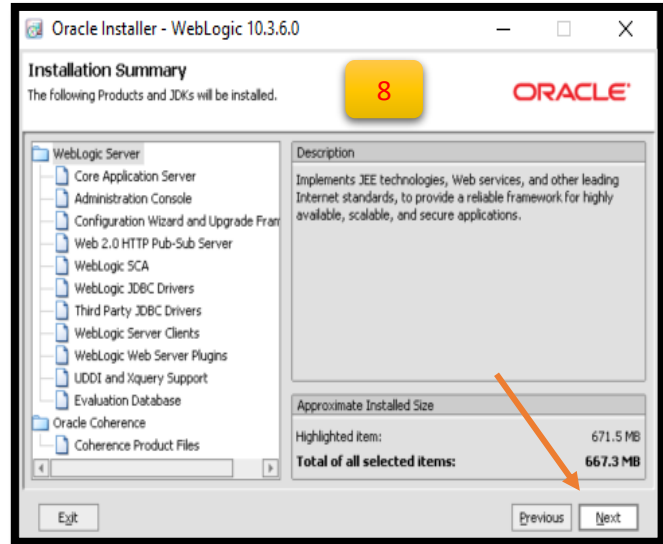
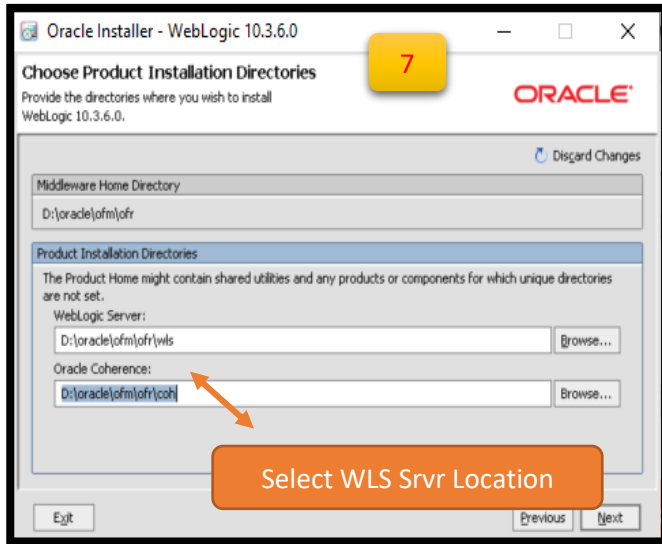


Weblogic installation completed



Third Oracle Forms&Report 11g r2 Installation

- Run program as Administrator

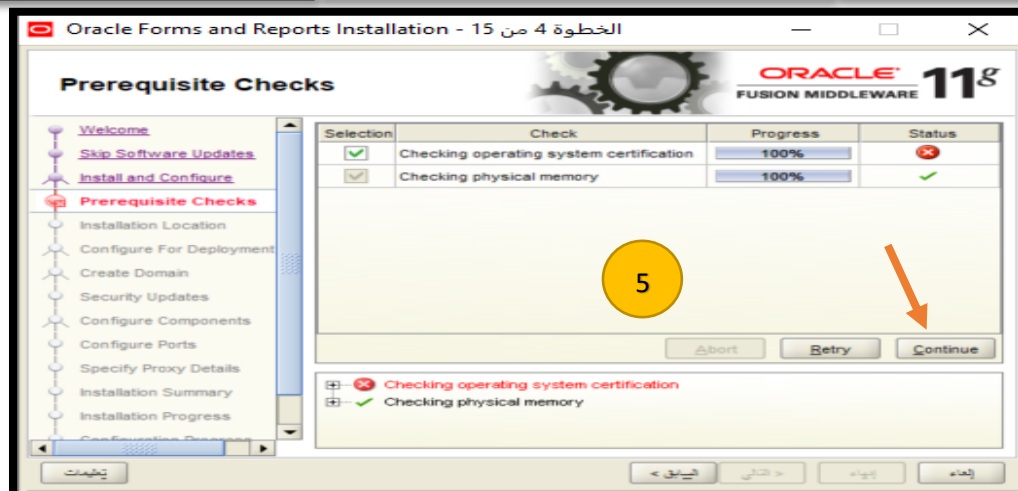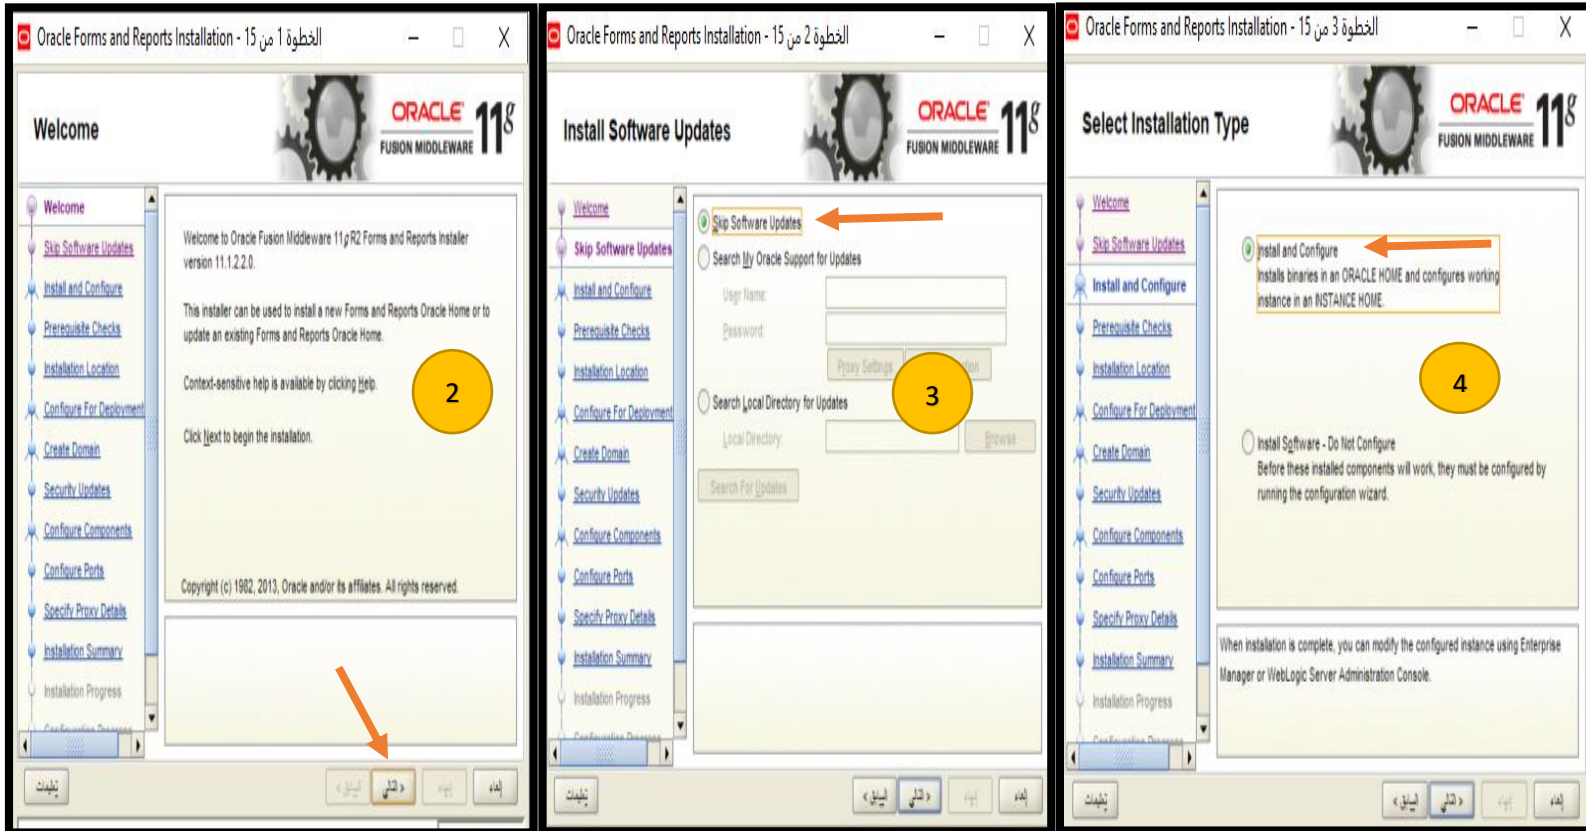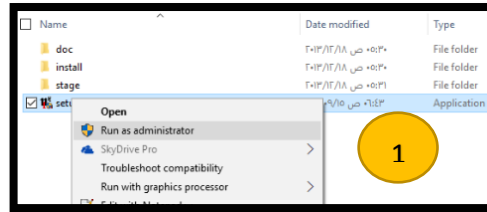

Oracle Forms and Reports Installation - الخطوة 5 من 15

Installation Location

6

Oracle Middleware Home Location: D:\oracle\ofm\ofr Browse

Oracle Home Directory: as1

Weblogic Server Location: D:\oracle\ofm\ofr\wls Browse

Oracle Instance Location: D:\oracle\ofm\ofr\asinst1 Browse

Oracle Instance Name: asinst1

The Oracle Instance name may only contain alphanumeric and underscore (_) characters, it must begin with an alphabetic (a-z or A-Z) character, and must be from 4 to 30 characters in length.

Elapsed Time: 78m 43s

Middleware home → D:\oracle\ofm\ofr

Oracle home Direction named → **as1**

Weblogic server location → D:\oracle\ofm\ofr\wls

Oracle instance location → D:\oracle\ofm\ofr\asinst1

Oracle instance Name → **asinst1**

Oracle Forms and Reports Installation - الخطوة 6 من 15

Configuration Type

7

☒ Configure For Deployment
This option configures Forms and Reports Servers. OHS and Oracle Enterprise Management Agent are included.

☐ Configure For Development
This option configures Forms and Reports Builders. OHS and Oracle Enterprise Management Agent are not included.

This option configures Forms and Reports Servers. OHS and Oracle Enterprise Management Agent are included.

Oracle Forms and Reports Installation - الخطوة 7 من 15

Select Domain

8

☒ Create Domain

Username: ultimate

User Password:

Confirm Password:

Domain Name: ultimate

Domain Location: e:\ofm\ofr\user_projects\domains

☐ Extend Domain

☐ Expand Cluster

Ensure that a domain by this name doesn't already exist in the Domain Location.

Weblogic name "ultimate"

Weblogic domain password

Domain name "ultimate"

D:\oracle\ofm\ofr\user_projects\domains

Oracle Forms and Reports Installation - الخطوة 8 من 15

Specify Security Updates

Provide your email address to be informed of security issues, install the product and initiate configuration manager. [View details](#)

Email:

Easier for you if you use your My Oracle Support email address/username.

☐ I wish to receive security updates via My Oracle Support

My Oracle Support Password:

9

uncheck

تعليمات

الرجوع

التالي

إلغاء

Oracle Forms and Reports Installation - الخطوة 9 من 17

Configure Components

Oracle Forms and Reports 11g R2

- ☒ Server Components
 - ☒ Oracle Forms
 - ☒ Oracle Reports
- ☒ Developer Tools
 - ☒ Oracle Forms
 - ☒ Oracle Reports
- ☒ Management Components
 - ☒ Enterprise Manager
- ☒ System Components
- ☐ Clustered

10

Check all

uncheck

تعليمات

الرجوع

التالي

إلغاء

Oracle Forms and Reports Installation - الخطوة 10 من 17

Configure Ports

☒ Auto Port Configuration

☐ Specify Ports using Configuration file

File name: C:\Users\Mahmoud_Wafa\staticports.ini

11

تعليمات

الرجوع

التالي

إلغاء

Oracle Forms and Reports Installation - الخطوة 11 من 17

Specify Proxy Details

☒ Do Not Use Proxy Settings

☐ Enable Proxy

HTTP Proxy Host:

HTTP Proxy Port:

Bypass proxy for address:



12

تعليمات

الرجوع


التالي

إلغاء

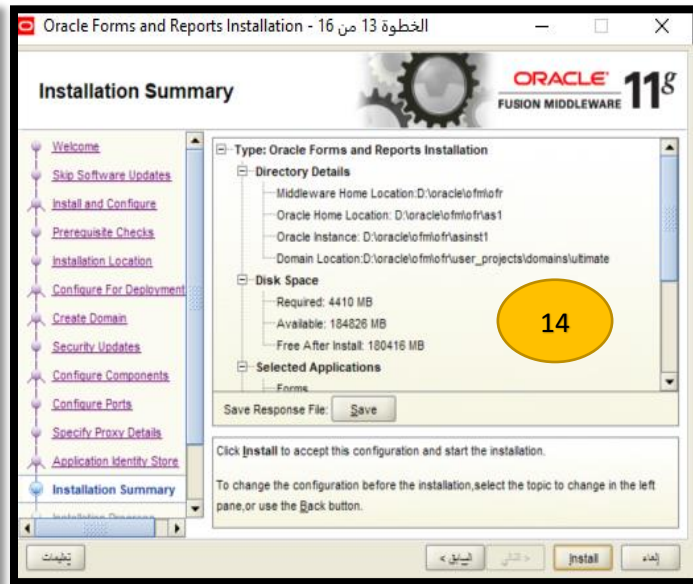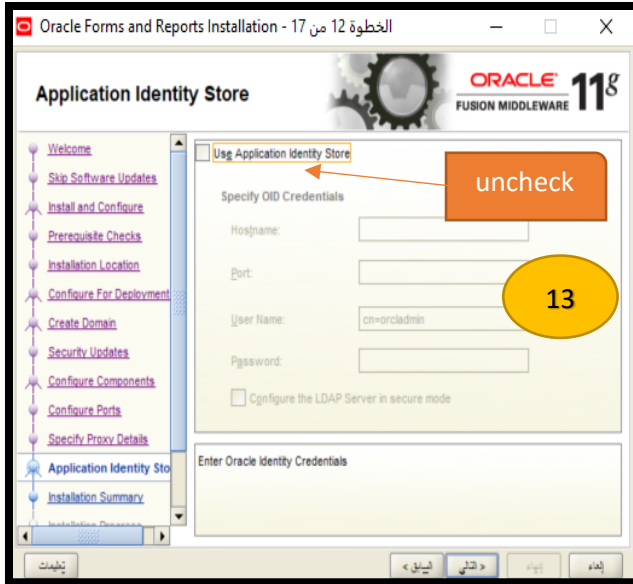

• Some Setting After Installation:

1- TNSnames → D:\oracle\ofm\ofr\asinst1\config\TNSNAMES.ORA

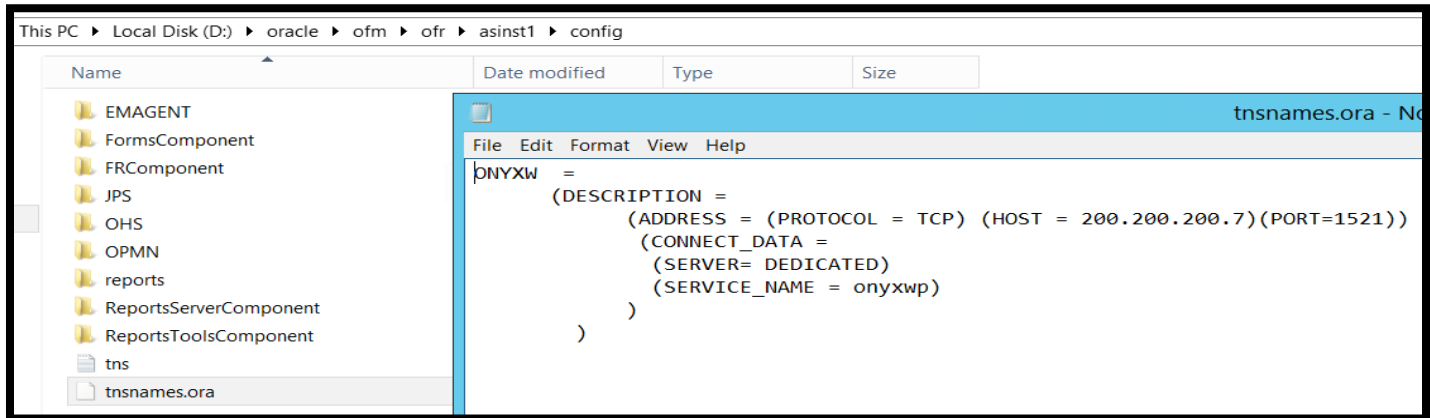

*** In presence IX related configuration [files] as
(webutil folders & webutil config & registry & formsweb & frmwebbar & java files)**

2- Replace **formsweb.cfg** File with the formsweb file in this path

D:\oracle\ofm\ofr\user_projects\domains\ultimate\config\fmwconfig\servers\WLS_FORMS\applications\formsapp_11.1.2\config\formsweb.cfg

Note Hostname & envFile in formsweb.cfg (AR & EN)

```

[ONYXIX_AR]
disableMDIScrollbars=TRUE
clientDPI=90
baseHTML=base.htm
baseHTMLjpi=basejpi.htm
HTMLdelimiter=?
envFile=ONYXW_env
escapeparams=true
form=ErpMnu.FMX
userid=
debug=no
host=ipaddress
port=8888
  
```

3- Repace **Registry** file with the registry file in path

D:\oracle\ofm\ofr\user_projects\domains\ultimate\config\fmwconfig\servers\WLS_FORMS\applications\formsapp_11.1.2\config\forms\registry\oracle\forms\registry

4- Replace **Webutil** folders with the same folders in path

D:\oracle\ofm\ofr\as1\forms\webutil

5- Replace **frmwebbar.res** file with the other in path

D:\Oracle\ofm\ofr\as1\forms


6- Replace **webutil.cfg** file with the other in path

D:\oracle\ofm\ofr\asinst1\config\FormsComponent\forms\server


7- Put **JAVA** Files (That you have) in java folder in this path

D:\oracle\ofm\ofr\as1\forms\java

**** only replace frmwebutil.jar with our frmwebutil.jar file & put our others jar files in same folder**

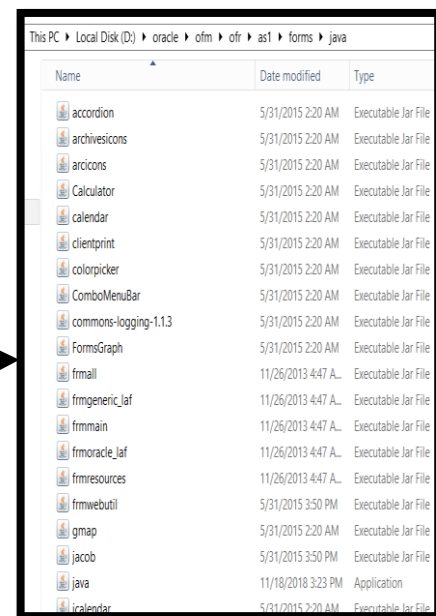

-8- First You must create Folders Of IX-System like(forms,reports,lib.....) as shown:

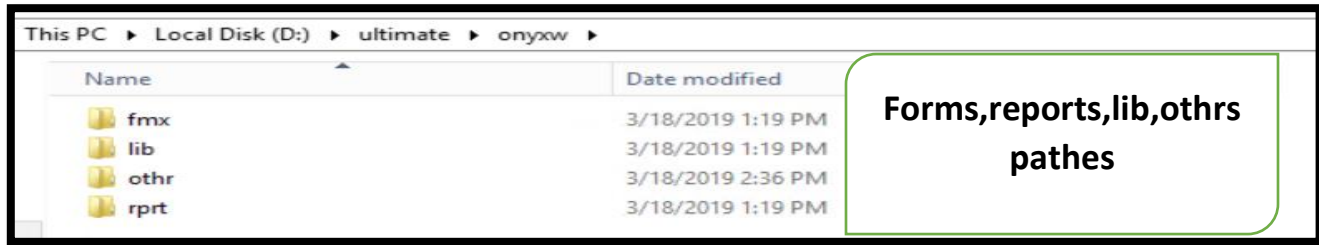

Second : We Have Two diffrenet files (**ONYX.env** && **ONYX_EN.env**) That contain Oracle&forms&report pathes and nls lang (Arabic&English)etc

***we must edit our onyx.env files as in setting in figure x**

*** .Env Files Path is :**

D:\oracle\ofm\ofr\user_projects\domains\ultimate\config\fmwconfig\servers\WLS_FORMS\application s\formsapp_11.1.2\config

```
FORMS=D:\oracle\ofm\ofr\as1\forms
NLS_DATE_FORMAT=DD/MM/RRRR
NLS_LANG=ARABIC SAUDI ARABIA.AR8MSWIN1256
NLS_CALENDAR= English Gregorian
ORACLE_PATH=D:\ultimate\onyxw\lib;D:\ultimate\onyxw\fmw
FORMS_PATH=D:\ultimate\onyxw\lib;D:\ultimate\onyxw\fmw
SRVURL= ERP-IAS
S_PORT=8888
RPRTSRVR= onyx-iax_rppt_
REPORTS_PATH=D:\ultimate\onyxw\rppt;C:\Windows\Fonts
DAMP_PATH=D:\ultimate\onyxw\othr\bk
USER_IMAGES=D:\ultimate\onyxw\othr\usr_imgs
USR_RPRTS=D:\ultimate\onyxw\othr\usr_rppts
SYS_TMP_RPRTS=D:\ultimate\onyxw\othr\erp_Rpvt_tmp
SYS_CSH_RPRTS=D:\ultimate\onyxw\othr\erp_Rpvt_cch
DB_NM=ONYXW
PORT_REQ=1
```

ONYXW.env

nls_lang =ARABIC_SAUDI ARABIA.AR8MSWIN1256


Onyxw_en.env

nls_lang =AMERICAN AMERICA.AR8MSWIN1256

App. Server NM

Note:

You can edit our (env) Files only instead of this step
Just edit host name & rep_server_name

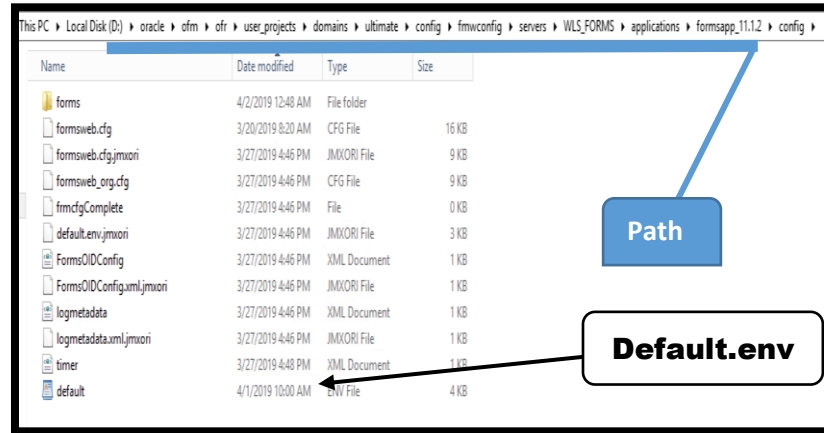

Execute This Steps:

1- Copy Default.env File then open the copy

2- Hash Forms_path as:

```
#FORMS_PATH=D:\oracle\ofm\ofr\as1\forms;D:\oracle\ofm\ofr\asinst1\FormsComponent\forms
```

3- Copy Pathes Script From **ONYXW.env** File (shown in figure x) Then **Paste** it into **Default_copy.env** file

Then Rename The **Default_copy.env** to **ONYXW.env** Then **Save**

4- After Saving → **ONYXW.env** , Take copy from Same file (**ONYXW.env**)

Then rename The Copy to → (**ONYXW_EN.env**)

5- Open **ONYXW_EN.env** Then Edit **NLS_LANG** to Equal

➔ **AMERICAN_AMERICA.AR8MSWIN1256**




NOTE : Check All Pathes in Environment files To be sure it the same pathes of programs after installation .

- in Uploaded Files , Env Files are prepared successfully with all edition

****Rename webutil.pll to be webutil_old.pll which in path**

D:\oracle\ofm\ofr\as1\forms

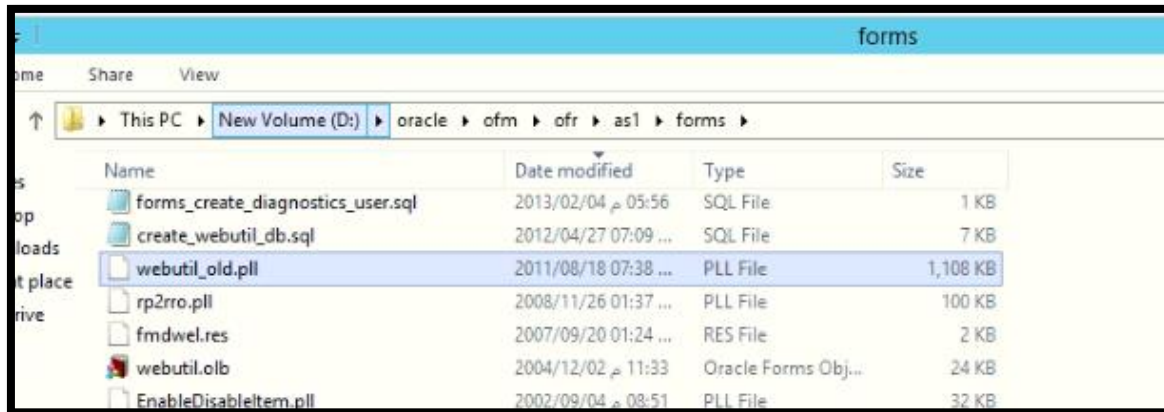

Replace **fontui.ali** of us with file in this path

D:\oracle\ofm\ofr\asinst1\config\FRComponent\frcommon\tools\COMMON

Purpose: to run Arabic Reports without errors


Reports configuration

*Edit file (rwsvrlet.properties) in the path

D:\oracle\ofm\ofr\user_projects\domains\ultimate\config\fmwconfig\servers\WLS_REPORTS\applications\reports_11.1.2\configuration

by adding this script

```
<webcommandaccess>L2</webcommandaccess>
```

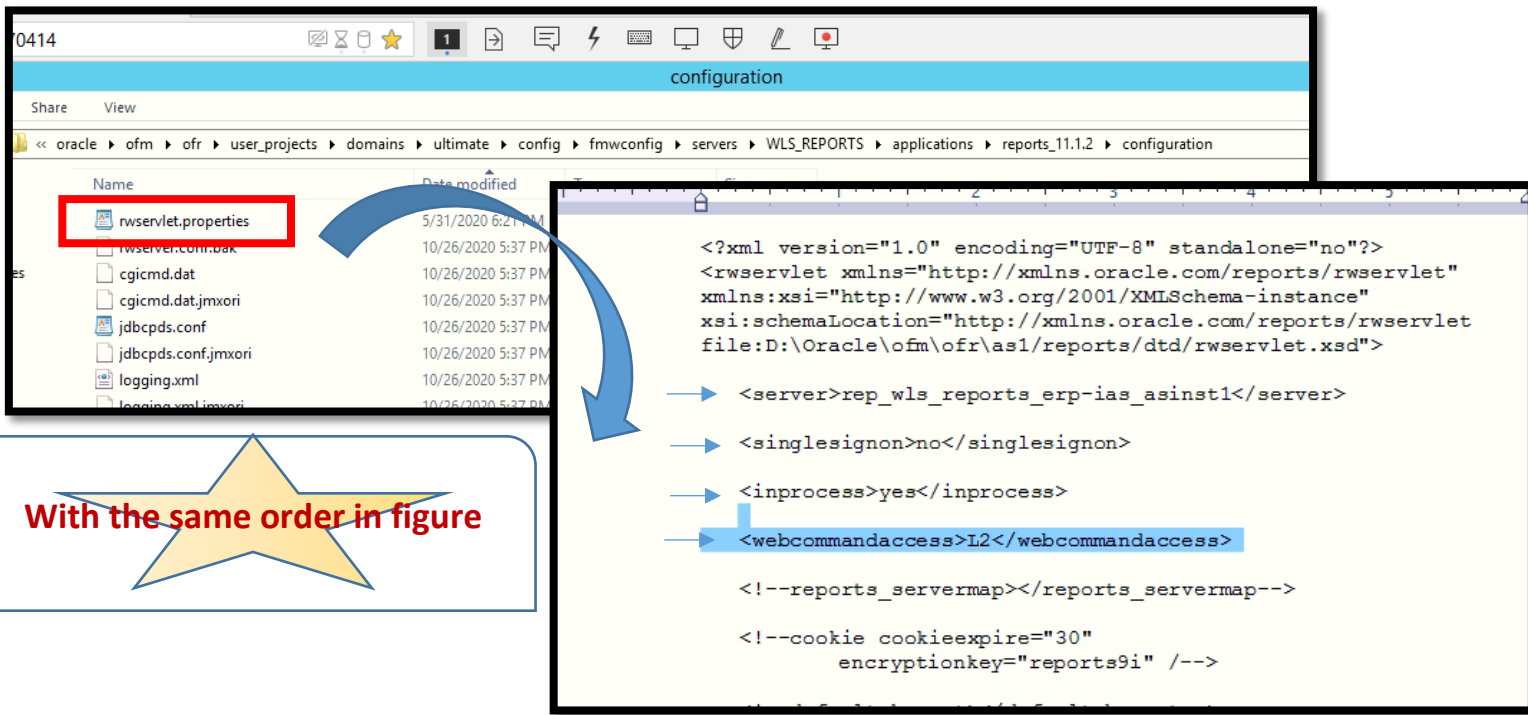

The screenshot shows a file explorer window with the path: oracle > ofm > ofr > user_projects > domains > ultimate > config > fmwconfig > servers > WLS_REPORTS > applications > reports_11.1.2 > configuration. The file rwsvrlet.properties is highlighted with a red box. A blue arrow points from this file to a code editor window. The code editor shows the XML configuration for the reports server, with the tag <webcommandaccess>L2</webcommandaccess> highlighted in blue. The XML content is as follows:

```
<?xml version="1.0" encoding="UTF-8" standalone="no"?>
<rwsvrlet xmlns="http://xmlns.oracle.com/reports/rwsvrlet"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://xmlns.oracle.com/reports/rwsvrlet
file:D:\Oracle\ofm\ofr\as1\reports\dtd\rwsvrlet.xsd">

  <server>rep_wls_reports_erp-ias_asinst1</server>

  <singlelogin>no</singlelogin>

  <inprocess>yes</inprocess>

  <webcommandaccess>L2</webcommandaccess>

  <!--reports_servermap-->

  <!--cookie cookieexpire="30"
        encryptionkey="reports9i" /-->
```

With the same order in figure

Creating System Report Servers




APP. Server Installation



***The benefit of this step is to distribute loading reports on more one report server.

First : run

→ Start Weblogic Admin Server

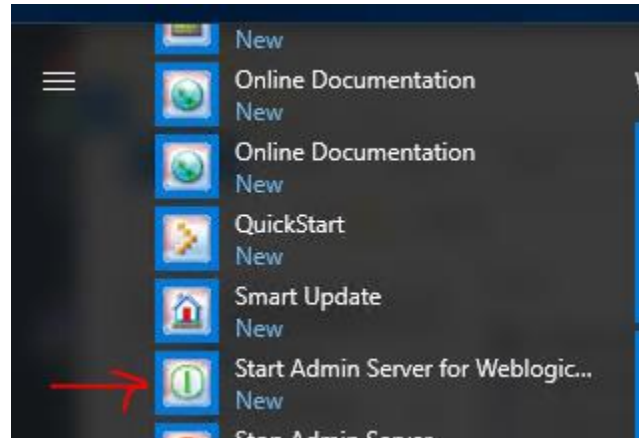

Second: open **cmd** then copy the scripts one then another

→ Create report server for Authorized systems (gnr,gl,inv...etc) one by one

```
D:\oracle\ofm\ofr\asinst1\bin\oprmctl createcomponent -adminUsername ultimate -adminHost ERP-
IAS -adminPort 7001 -oracleHome D:\Oracle\ofm\ofr\as1 -oracleInstance D:\Oracle\ofm\ofr\asinst1 -
instanceName asinst1 -componentName onyx-iax_rpvt_gnr -componentType
ReportsServerComponent
```

Note : in first case

weblogic name	ultimate
App.Server n.m	ERP-IAS
Rprt . svr for general module	onyx-iax_rpvt_gnr

```
D:\Oracle\ofm\ofr\asinst1\bin\oprmctl createcomponent -adminUsername ultimate -adminHost ERP-
IAS -adminPort 7001 -oracleHome D:\Oracle\ofm\ofr\as1 -oracleInstance D:\Oracle\ofm\ofr\asinst1 -
instanceName asinst1 -componentName onyx-iax_rpvt_adm -componentType
ReportsServerComponent
```

Other Modules

gnr stp adm gls inv aps ars prl fng hrs mrp fas pos

