Experiment 16

EDA – Quantitative and Qualitative analysis

```
import seaborn as sns
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
%matplotlib inline
```

✓ 0.0s

```
tips=sns.load_dataset('tips')
```

✓ 0.0s

```
tips.head()
```


✓ 0.0s

	total_bill	tip	sex	smoker	day	time	size
0	16.99	1.01	Female	No	Sun	Dinner	2
1	10.34	1.66	Male	No	Sun	Dinner	3
2	21.01	3.50	Male	No	Sun	Dinner	3
3	23.68	3.31	Male	No	Sun	Dinner	2
4	24.59	3.61	Female	No	Sun	Dinner	4

```
sns.displot(tips.total_bill,kde=True)
```

0.4s


```
<seaborn.axisgrid.FacetGrid object at 0x7f4cc7d41b20>
```

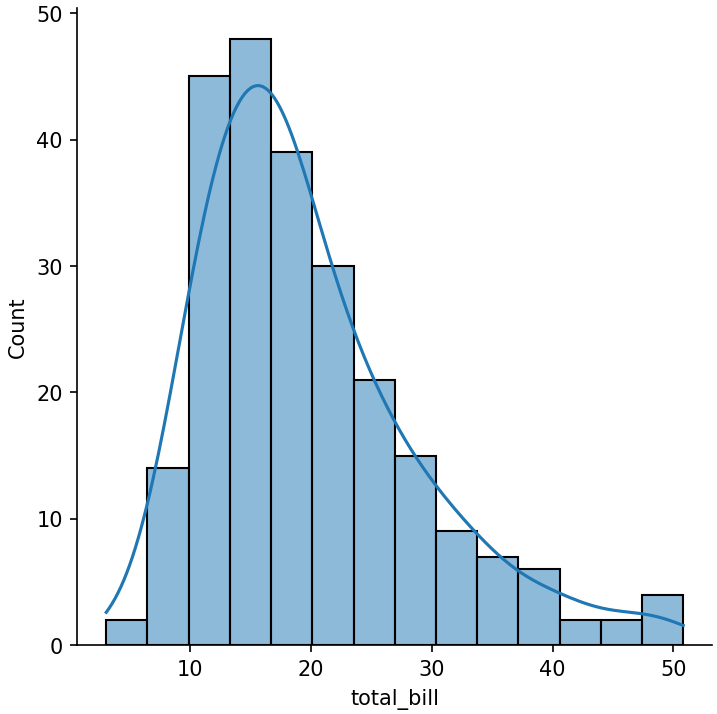

```
sns.displot(tips.total_bill,kde=False)
```

0.2s


```
<seaborn.axisgrid.FacetGrid object at 0x7f4cc8134860>
```

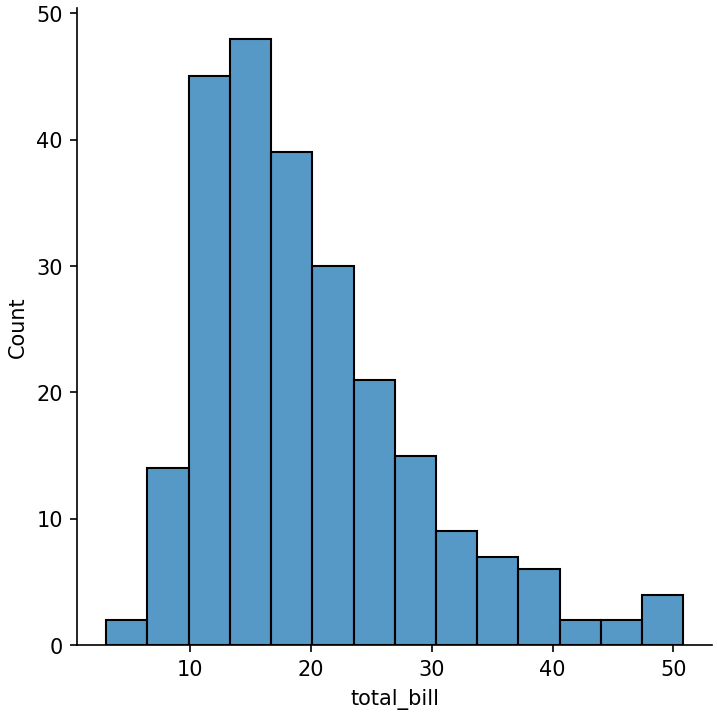

```
sns.jointplot(x=tips.tip,y=tips.total_bill)
```

✓ 0.4s


```
<seaborn.axisgrid.JointGrid object at 0x7f4cc72cc260>
```

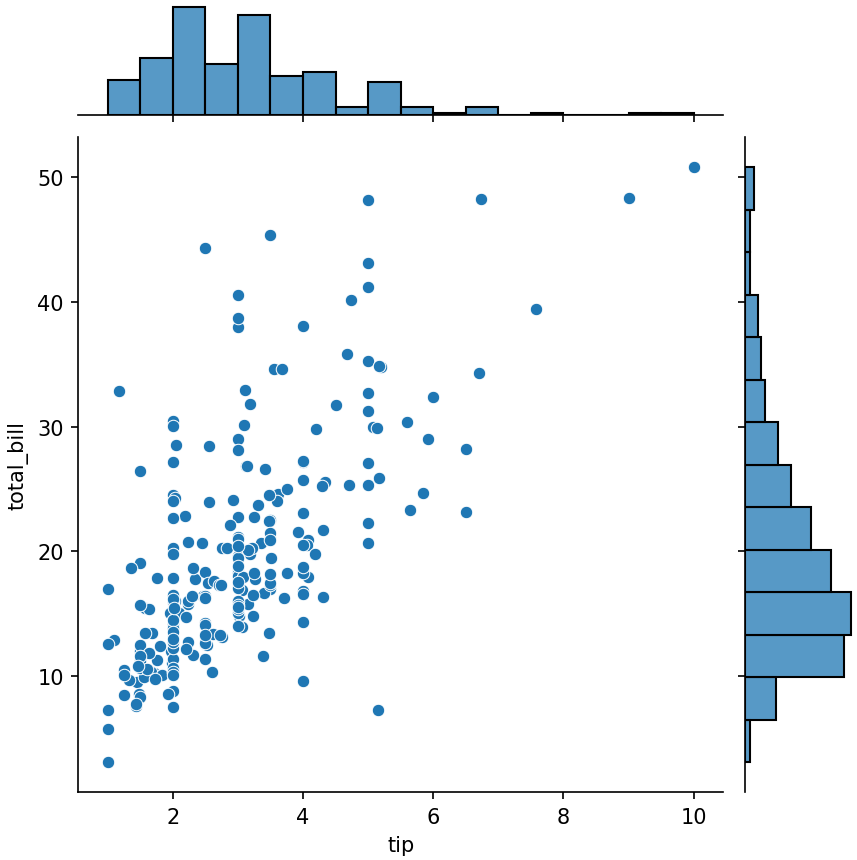

```
sns.jointplot(x=tips.tip,y=tips.total_bill,kind="reg")
```

✓ 0.5s


```
<seaborn.axisgrid.JointGrid object at 0x7f4cc72cf080>
```

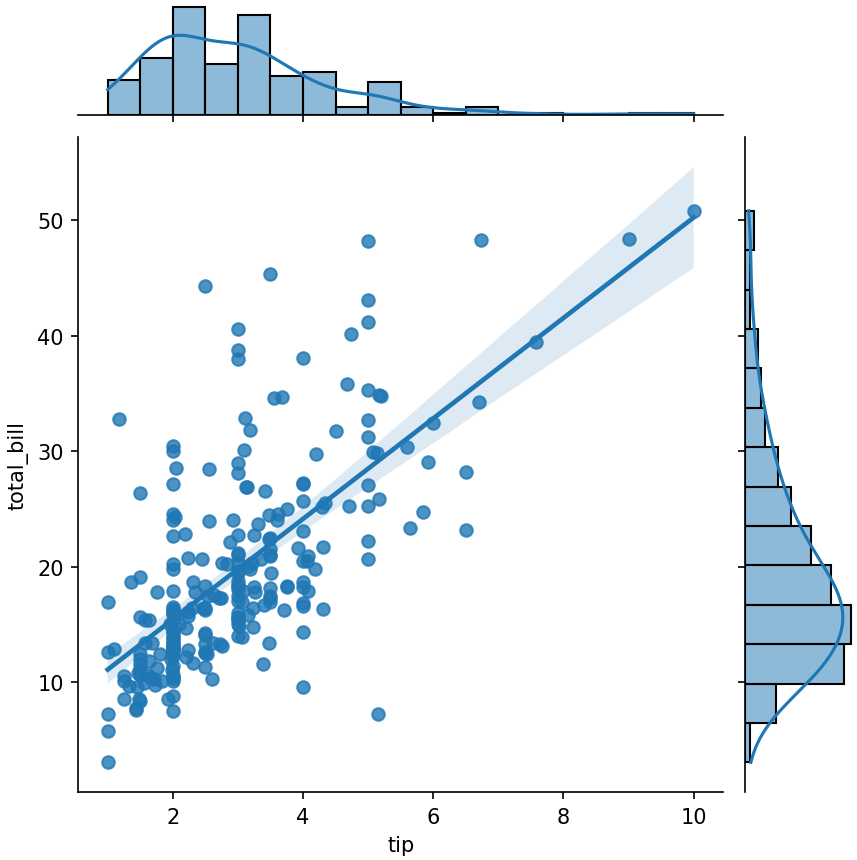

```
sns.jointplot(x=tips.tip,y=tips.total_bill,kind="hex")
```

✓ 0.4s


```
<seaborn.axisgrid.JointGrid object at 0x7f4cc7ec8c20>
```

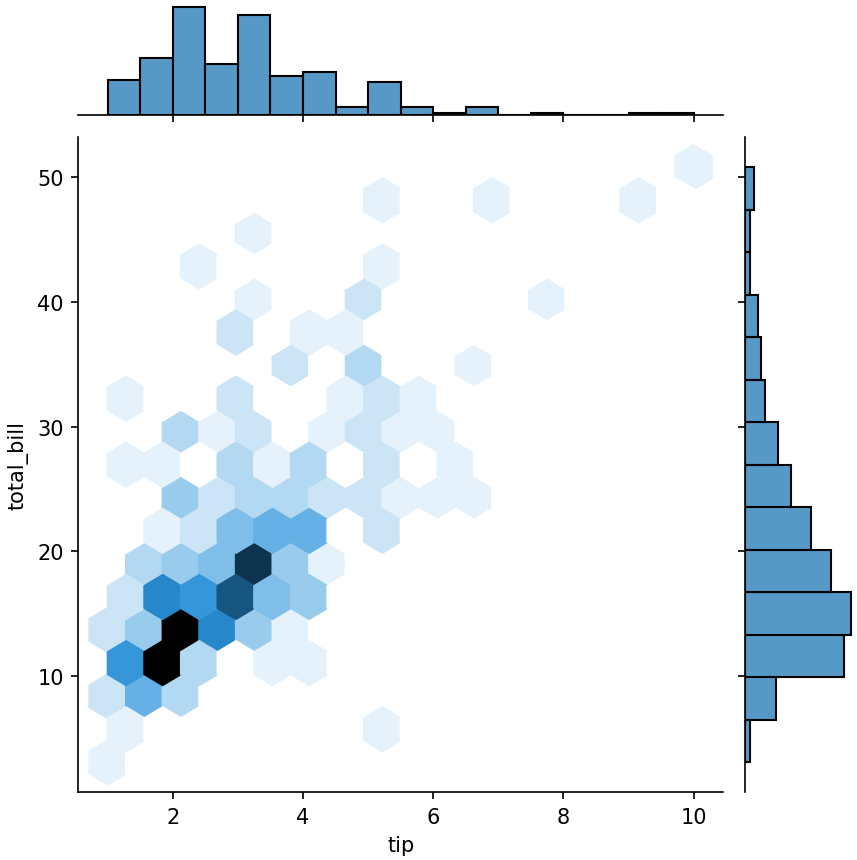

```
sns.pairplot(tips)
```

✓ 1.4s

```
<seaborn.axisgrid.PairGrid object at 0x7f4cc70b4c80>
```

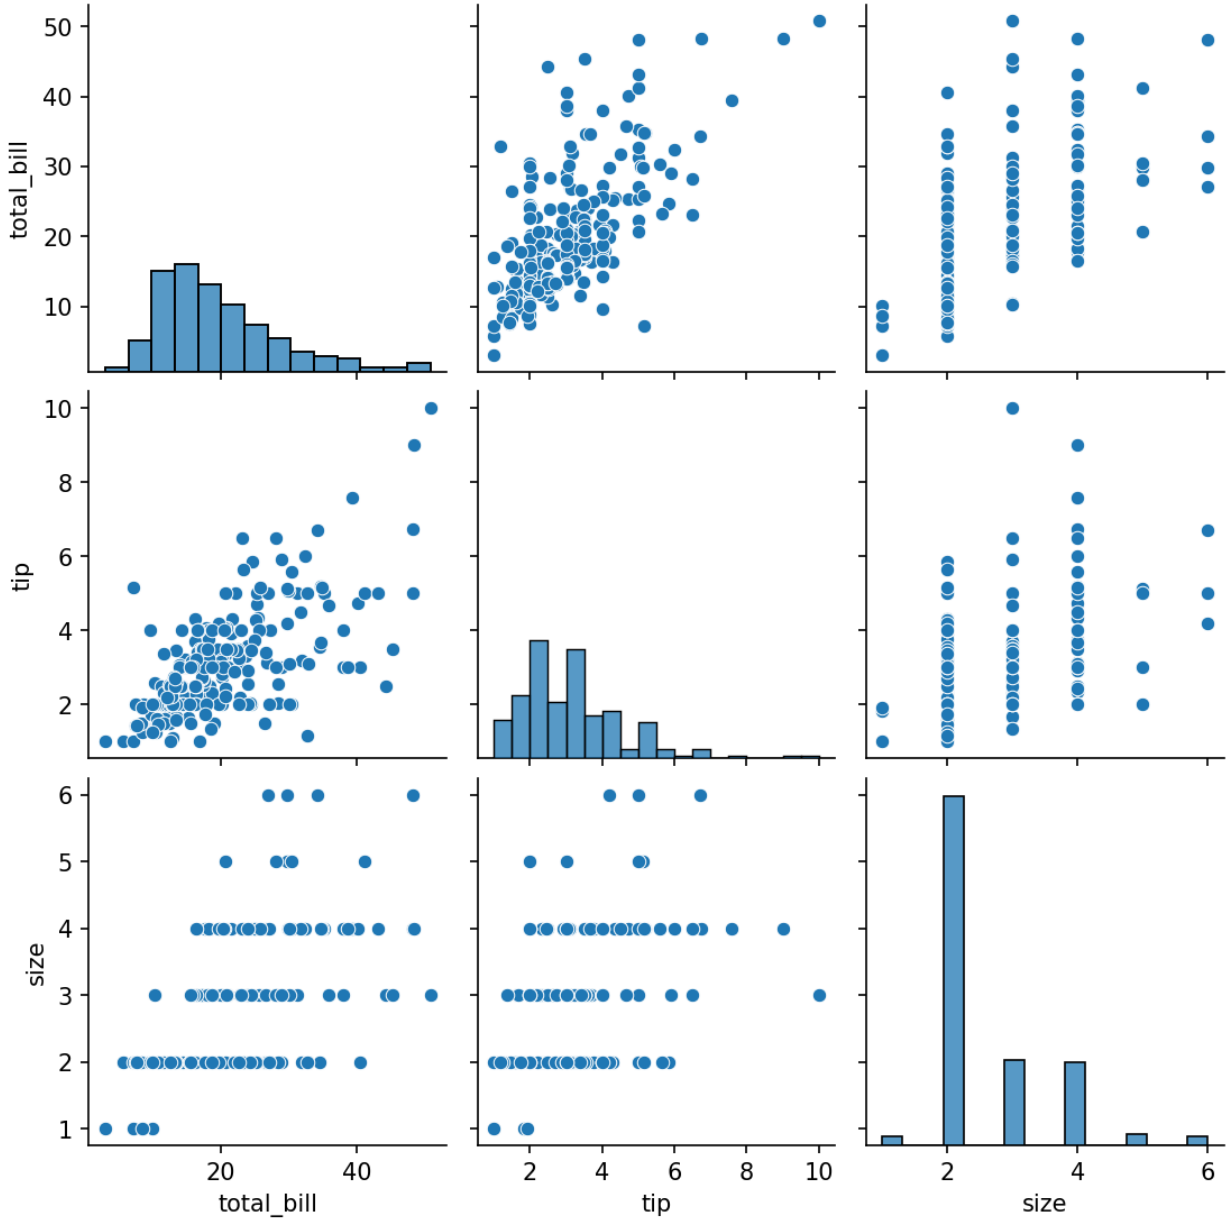

```
tips.time.value_counts()
```


✓ 0.0s

	count
time	
Dinner	176
Lunch	68

```
sns.pairplot(tips,hue='time')
```

✓ 1.9s


```
<seaborn.axisgrid.PairGrid object at 0x7f4cc7ec8c20>
```

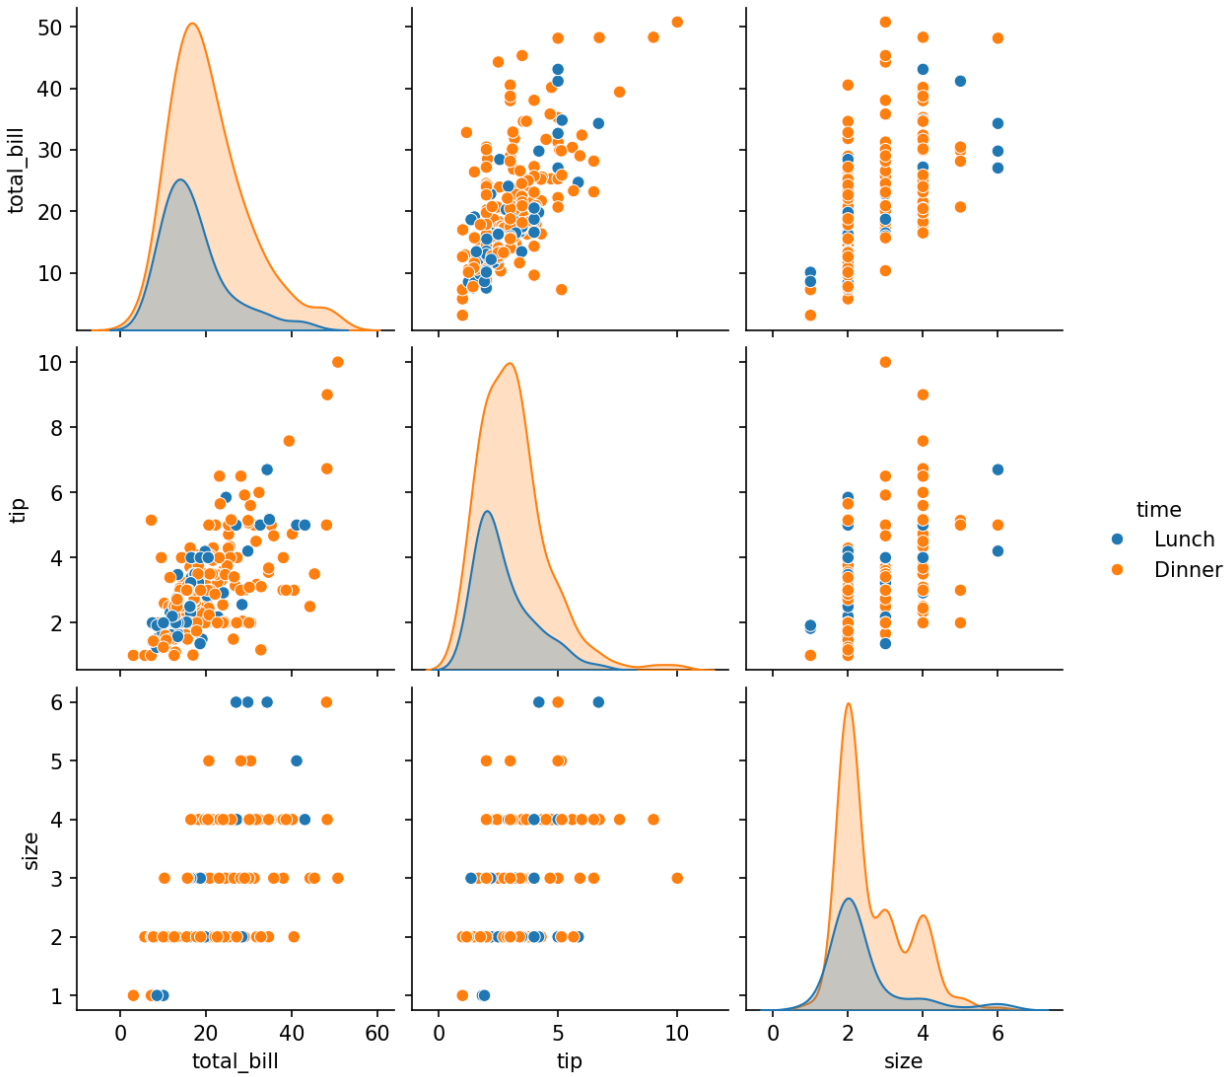

```
sns.pairplot(tips,hue='day')
```

✓ 1.7s


```
<seaborn.axisgrid.PairGrid object at 0x7f4cc29b79b0>
```

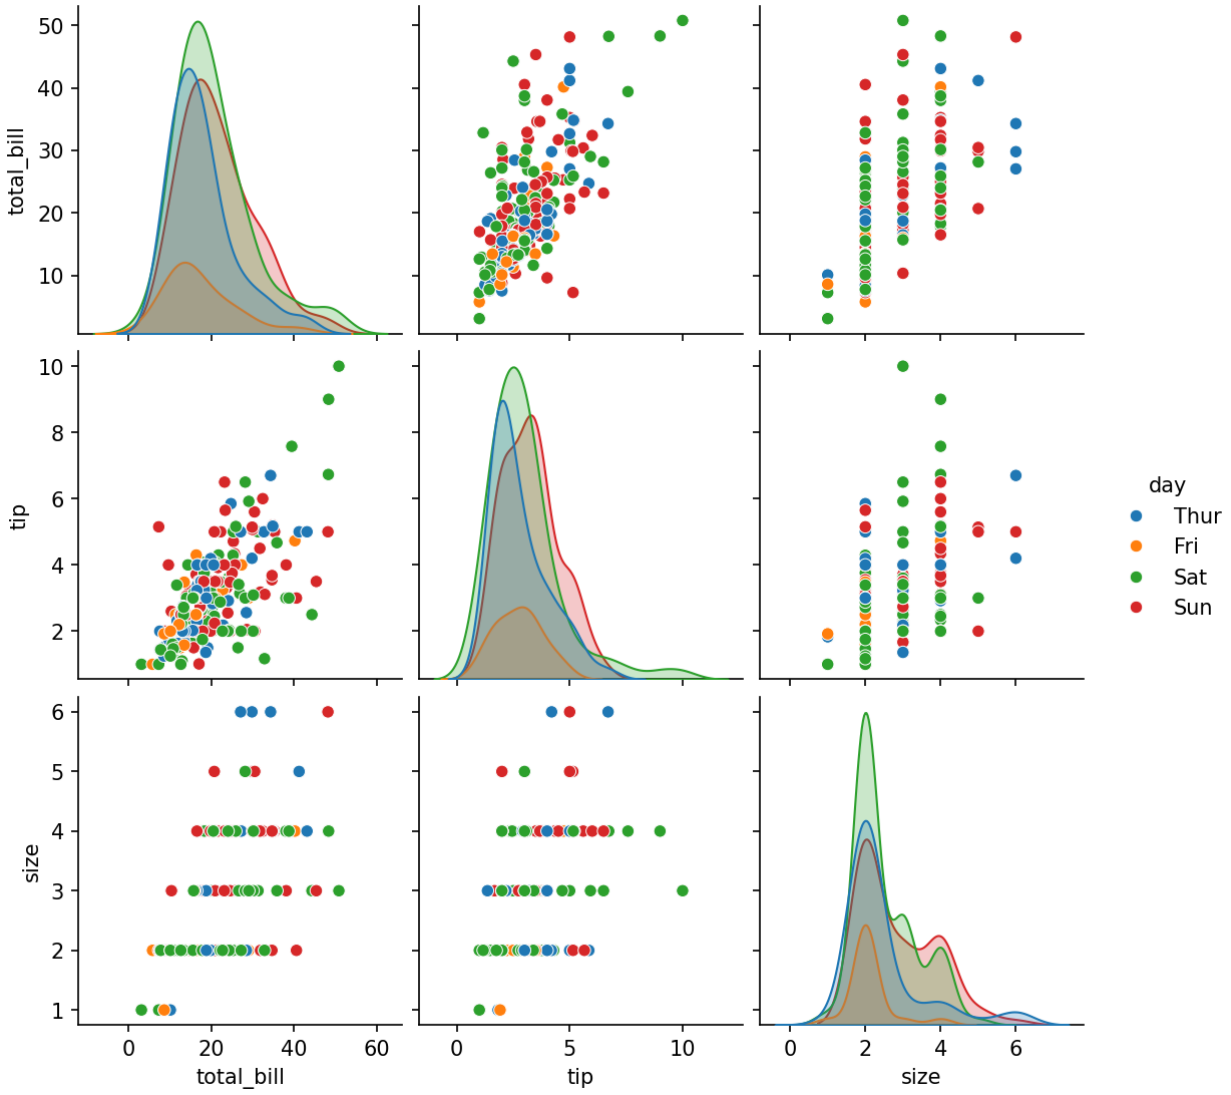

```
sns.heatmap(tips.corr(numeric_only=True),annot=True)
```

✓ 0.2s


```
<Axes: >
```

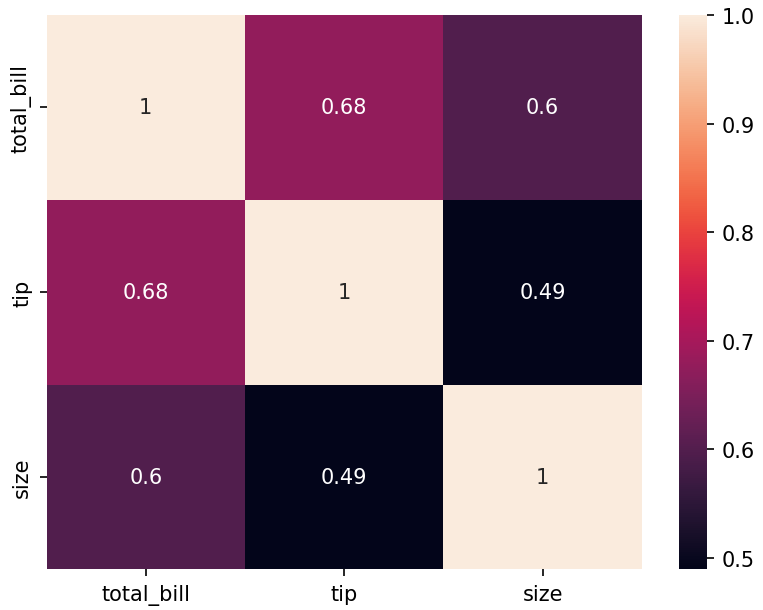


```
sns.boxplot(tips.total_bill)
```

✓ 0.3s


```
<Axes: ylabel='total_bill'>
```

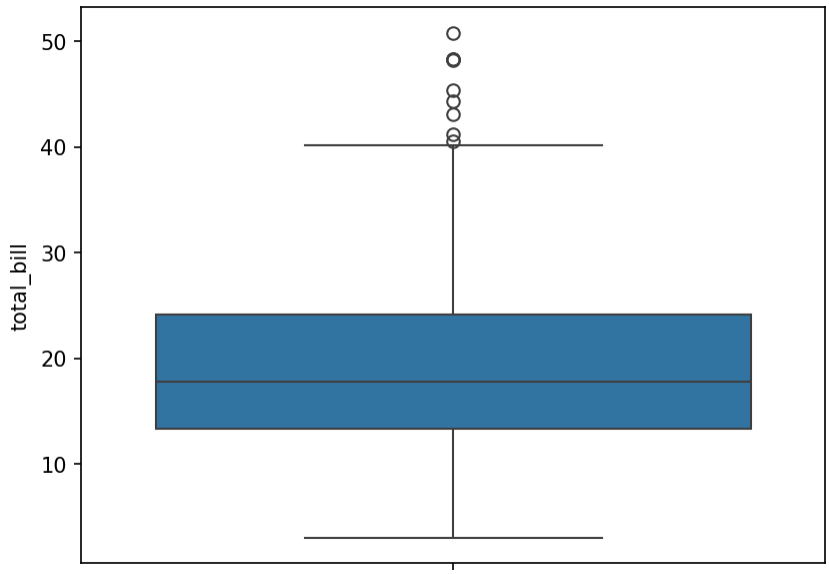

```
sns.boxplot(tips.tip)
```

✓ 0.1s


```
<Axes: ylabel='tip'>
```

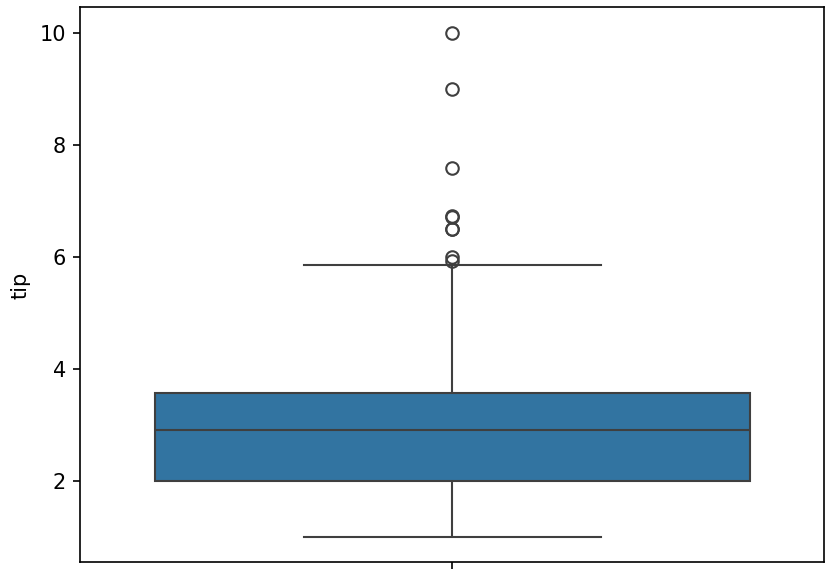


```
sns.countplot(tips.day)
```

✓ 0.1s


```
<Axes: xlabel='count', ylabel='day'>
```

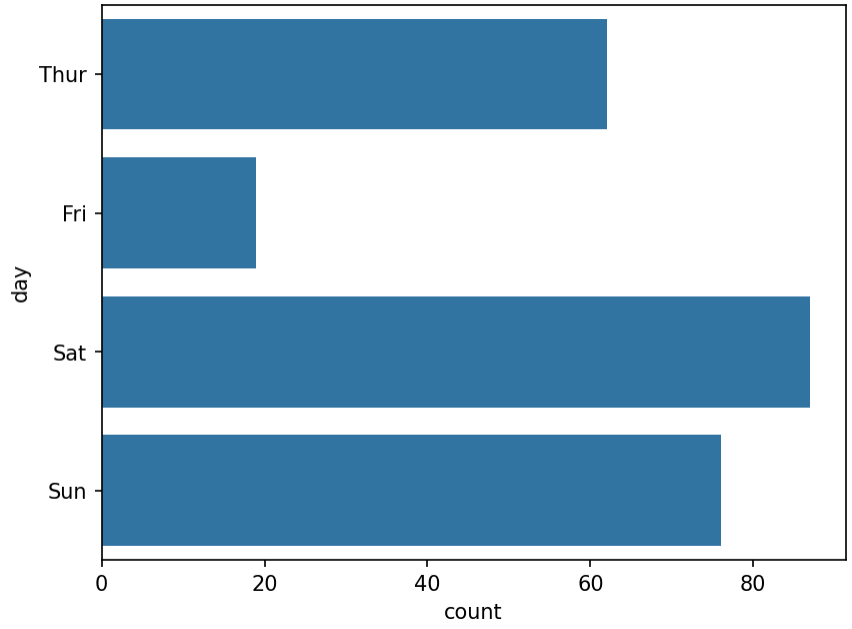

```
sns.countplot(tips.sex)
```

✓ 0.1s


```
<Axes: xlabel='count', ylabel='sex'>
```

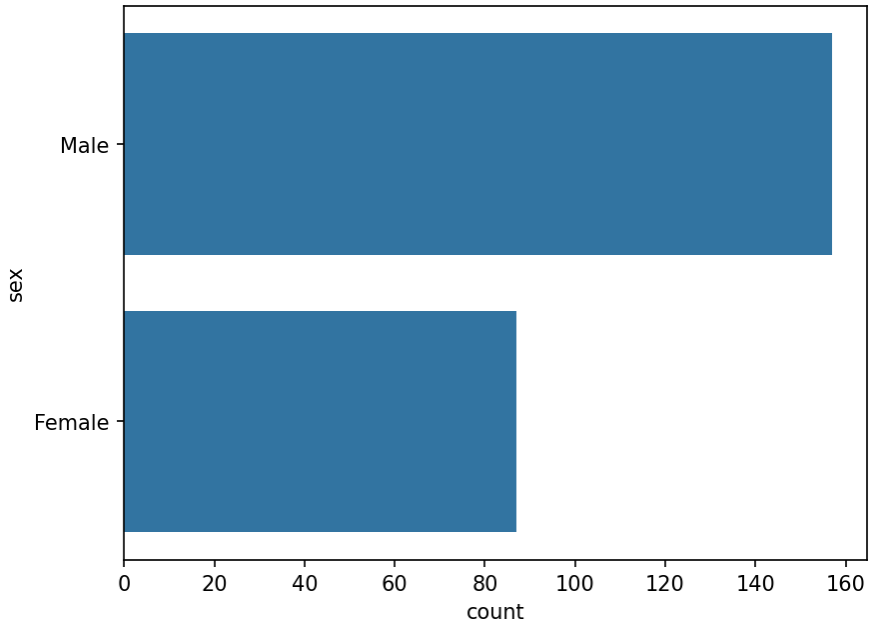


```
tips.sex.value_counts().plot(kind='pie')
```

✓ 0.1s


```
<Axes: >
```

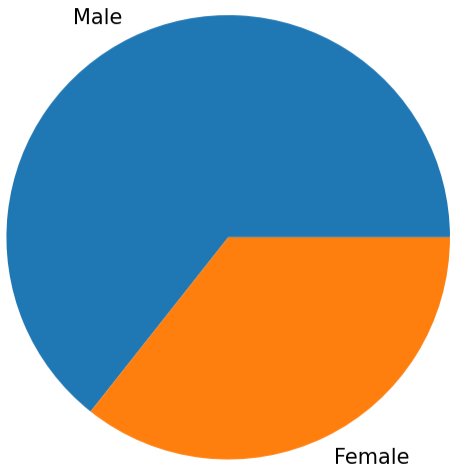

```
tips.sex.value_counts().plot(kind='bar')
```

✓ 0.1s

```
<Axes: xlabel='sex'>
```

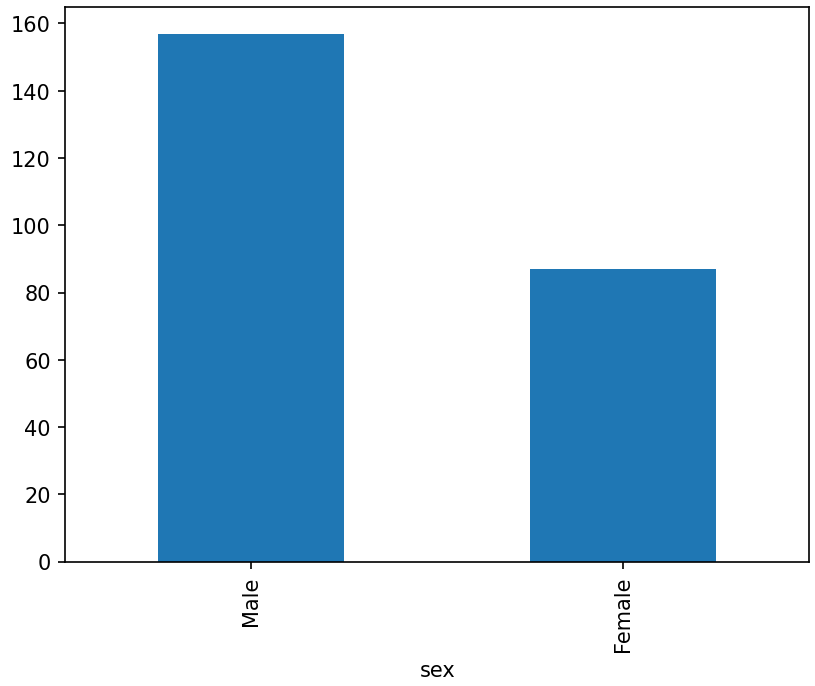


```
sns.countplot(tips[tips.time=='Dinner']['day'])
```

✓ 0.2s

```
<Axes: xlabel='count', ylabel='day'>
```

