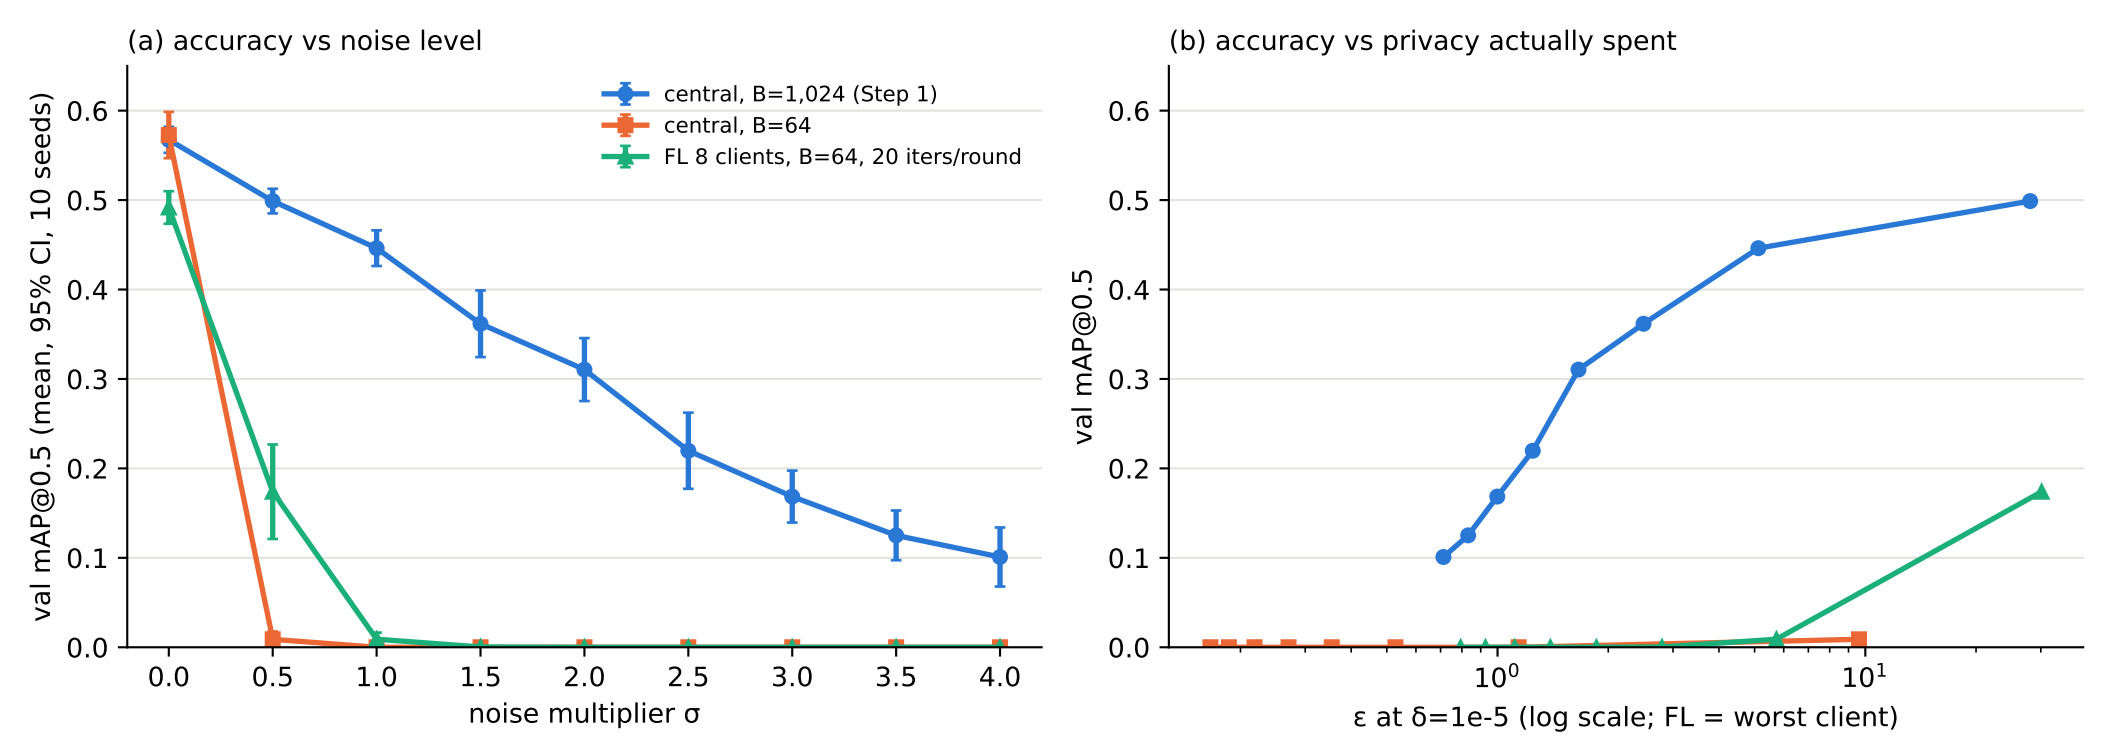
(a) accuracy vs noise level
central, B=1,024 (Step 1)
central, B=64
FL 8 clients, B=64, 20 iters/round
val mAP@0.5 (mean, 95% CI, 10 seeds)
noise multiplier σ
(b) accuracy vs privacy actually spent
val mAP@0.5
ε at δ=1e-5 (log scale; FL = worst client)