

MzM Bot Desktop

User Guide - Features from P1 to P7

How to use bots, chat, skills, routines, memory, connectors, trust, Shell/box, and computer use.

DeepSeek Harness · 2026-09-28 · Screenshots from real Desktop UI

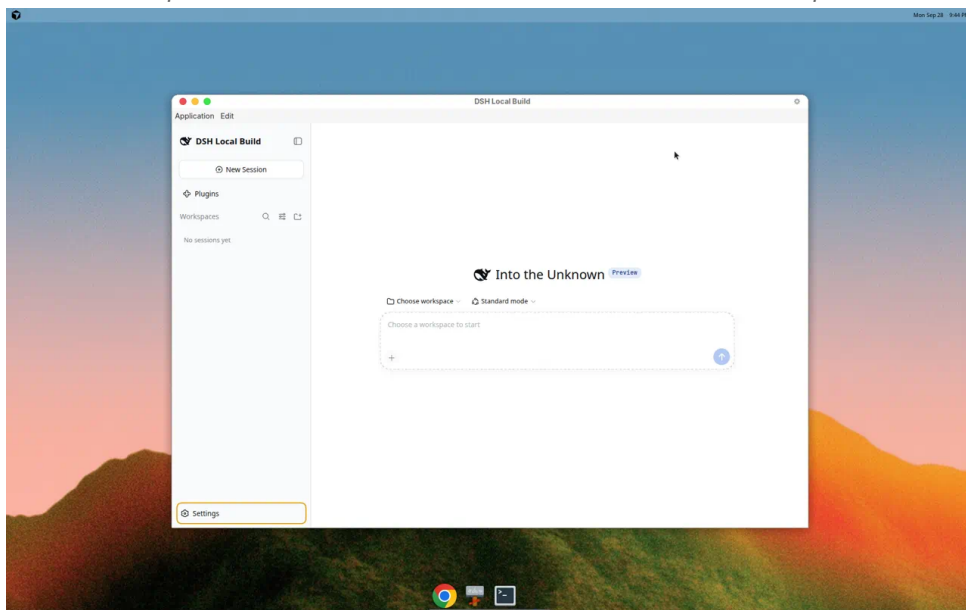


Figure - Home / New Session


1. What this app is

MzM Bot is a Desktop agent workspace. You create bots, chat with them, attach skills, schedule routines, store memory, connect external tools, and run sandboxed Shell plus computer-use helpers when readiness allows.


Day-to-day tip: the Electron window is thin chrome. Bot state, tools, Shell readiness, and Computer settings live on the local Desktop Host.

2. Getting started

- Launch Desktop (pnpm run start:desktop from a built checkout, or your packaged app).
- On the home screen, pick a workspace and click New Session.
- Type a task in the composer and send. Progress and the final answer stay in-session.

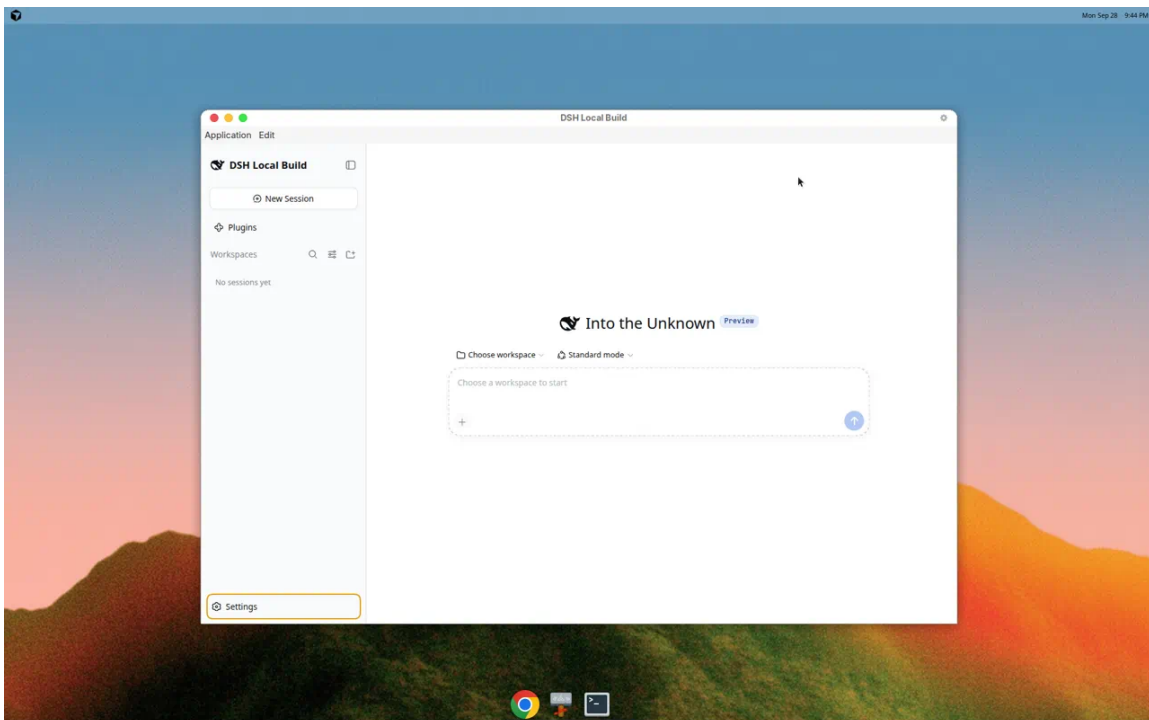

Home - choose workspace and start a New Session

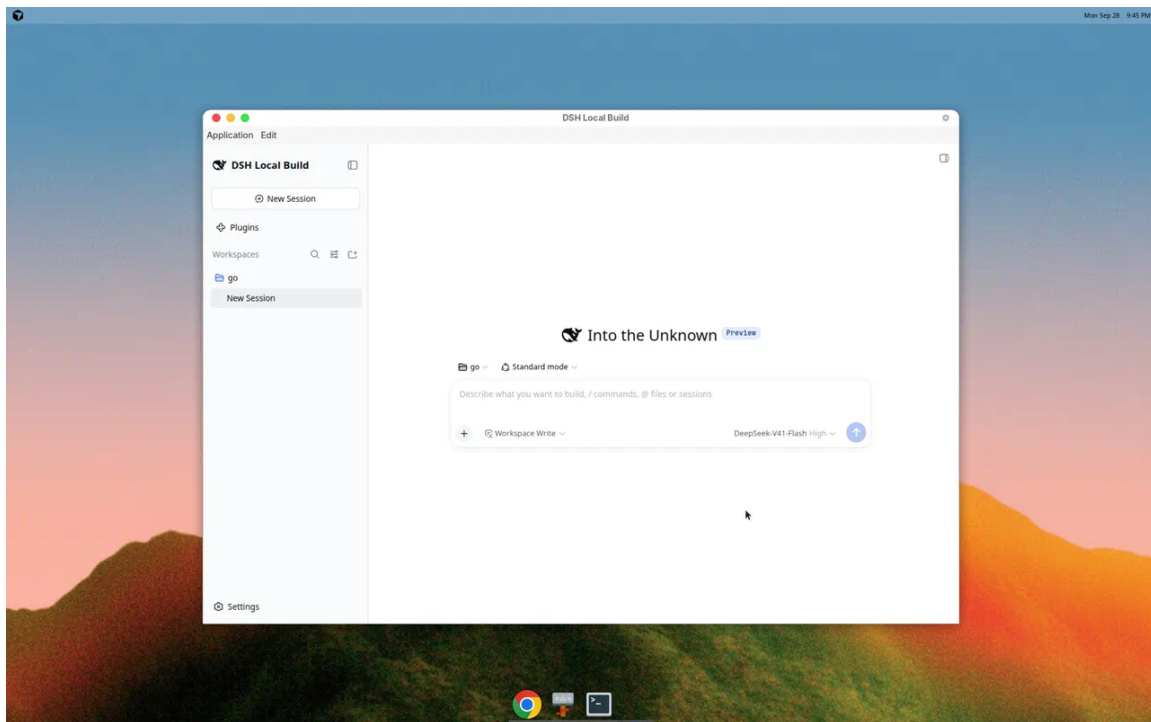

Session - composer ready for a task


3. Bots & chat (P1-P2)

What you get


- Create bots from Agent Team / bots UI
- Different models per bot
- Persona: name, job, voice, anti-jobs, avatar, sidebar section
- Delete with confirmation
- Chat with progress updates and a final result

How


- Open Agent Team / bots from the sidebar or Plugins.
- Create a bot, set model + persona, save.
- Start a session and message the bot (or a small team).

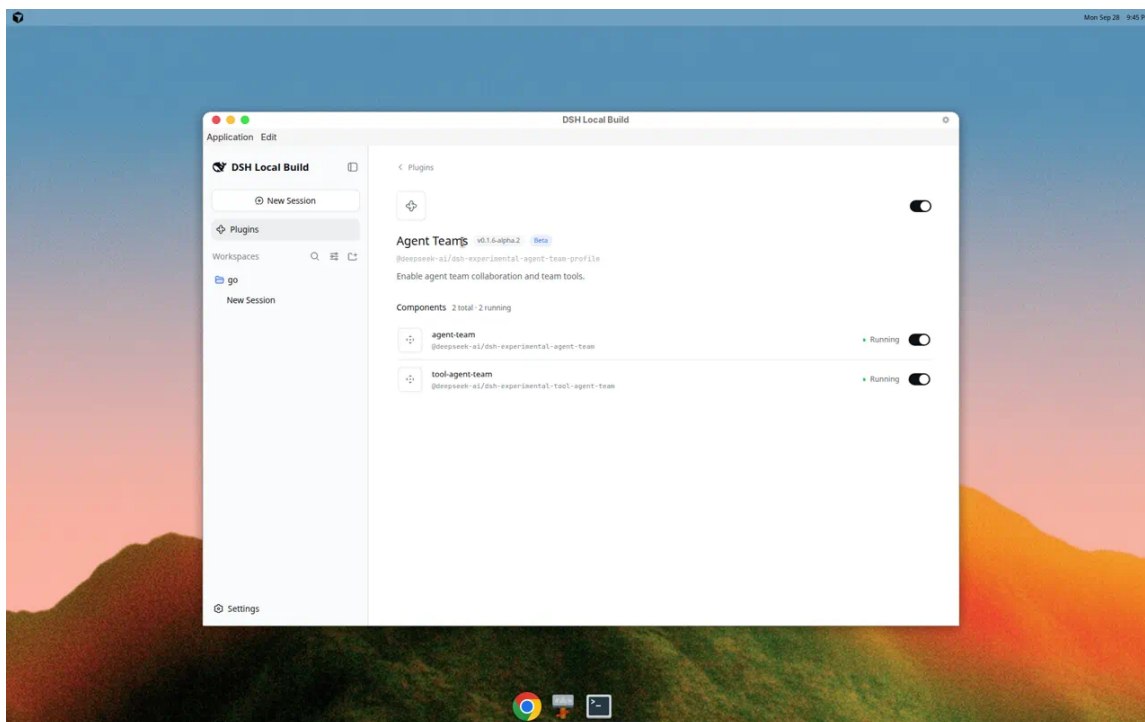

Agent Team / bots surface

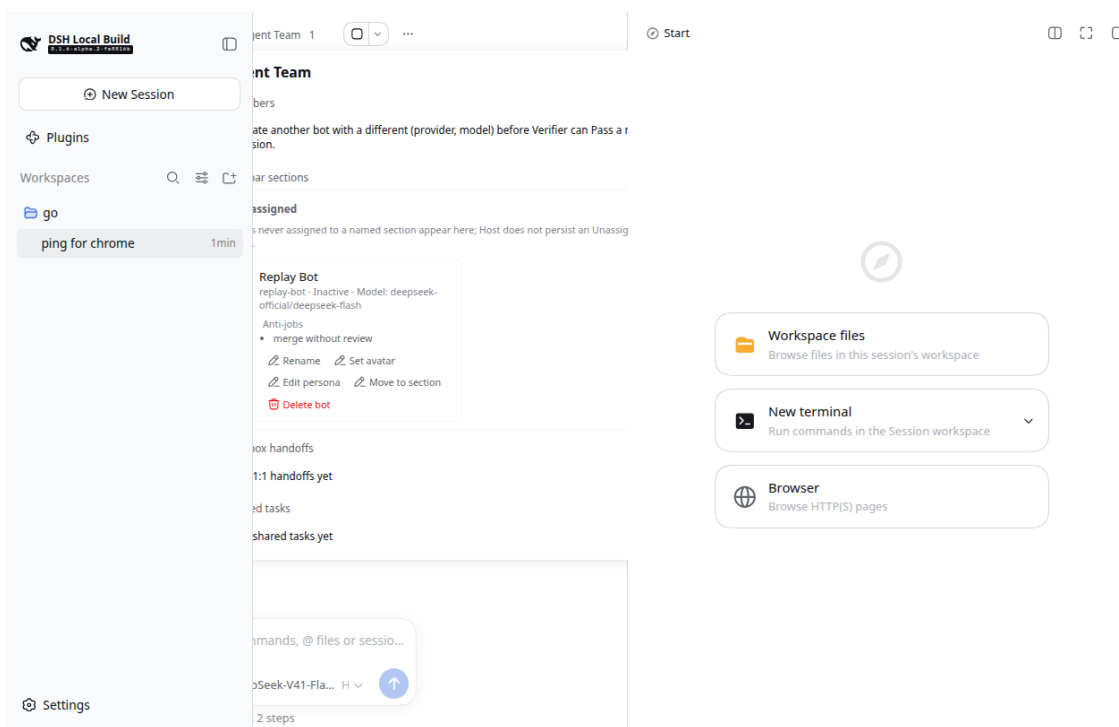

Persona fields saved on a bot

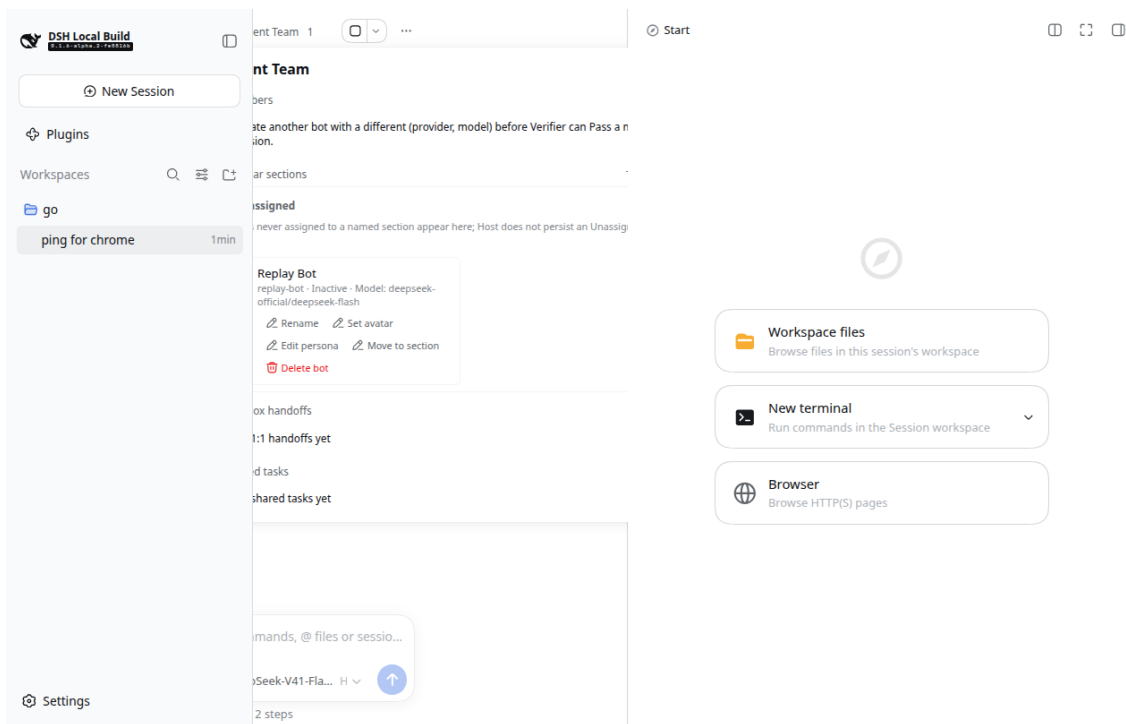


New bot created in the team

4. Skills (P3)

- Discover a thin managed skill pack
- Attach a skill to one bot (does not auto-attach to others)
- Author a simple skill (name + body) and run it

How

- Open skills discovery for a bot.
- Attach a managed skill - it stays on that bot.
- Or author -> save -> run from the bot.

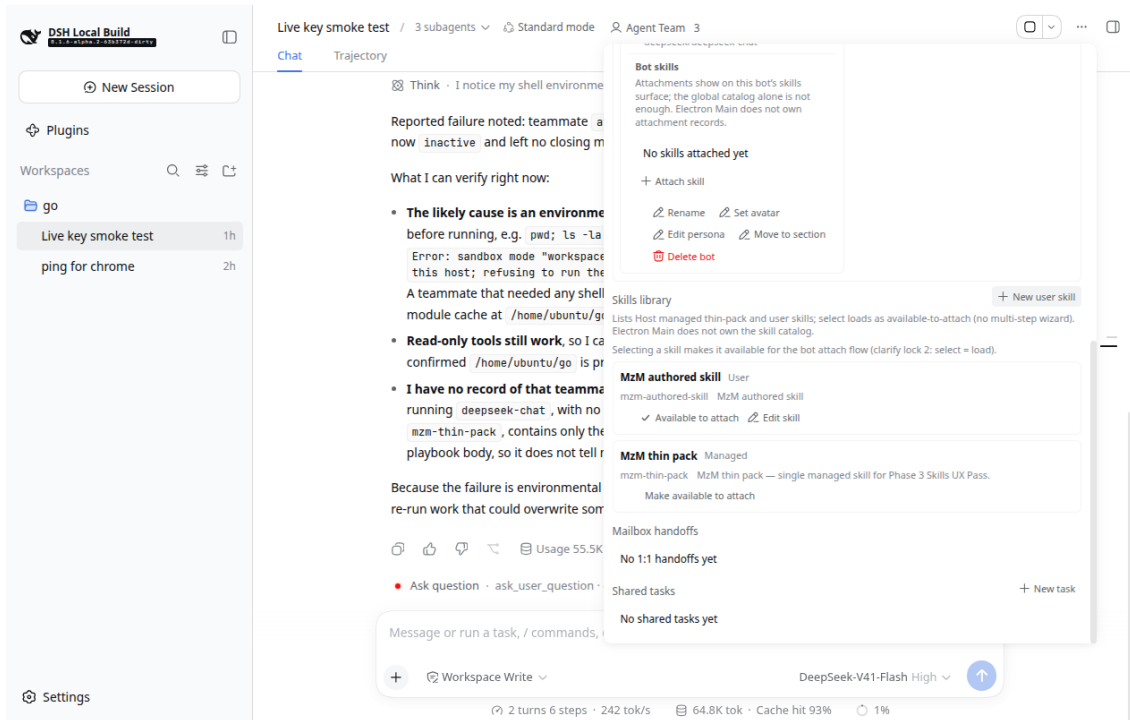

Skills discovery - managed pack

DSH Local Build

New Session

Plugins

Workspaces

go

Live key smoke test 1h

ping for chrome 2h

Settings

Live key smoke test / 3 subagents Standard mode Agent Team 3

Chat Trajectory

Think · I notice my shell environment

Reported failure noted: teammate a now inactive and left no closing m

What I can verify right now:

- The likely cause is an environment before running, e.g. `pwd; ls -la`
Error: sandbox mode "workspace this host; refusing to run the A teammate that needed any shell module cache at `/home/ubuntu/go`
- Read-only tools still work, so I ca confirmed `/home/ubuntu/go` is pr
- I have no record of that teammate running `deepseek-chat`, with no `mzm-thin-pack`, contains only the playbook body, so it does not tell r

Because the failure is environmental re-run work that could overwrite som

Usage 55.5K

Ask question · ask_user_question ·

Message or run a task, / commands,

Workspace Write

DeepSeek-V41-Flash High

2 turns 6 steps · 242 tok/s · 64.8K tok · Cache hit 93% · 1%

Sidebar sections

Unassigned

Bots never assigned to a named section appear here; Host does not persist an Unassigned catalog row.

Attach Demo Bot
attach-demo-bot · Inactive · Model: deepseek/deepseek-chat

Bot skills
Attachments show on this bot's skills surface; the global catalog alone is not enough. Electron Main does not own attachment records.

MzM thin pack Attached Run
Attached skills bind into this bot's instruction assembly for subsequent turns; run/active does not require matching LLM reply text.

+ Attach skill

Rename Set avatar Edit persona Move to section Delete bot

Sc2 Bot A
sc2-bot-a · Inactive · Model: deepseek/deepseek-chat

Bot skills
Attachments show on this bot's skills surface; the global catalog alone is not enough. Electron Main does not own attachment records.

MzM thin pack Attached Run
Attached skills bind into this bot's instruction assembly for subsequent turns; run/active does not require matching LLM reply text.

+ Attach skill

Rename Set avatar Edit persona Move to section Delete bot

Sc2 Bot B
sc2-bot-b · Inactive · Model: deepseek/deepseek-chat

Bot skills
Attachments show on this bot's skills surface; the global catalog alone is not enough. Electron Main does not own

Attach a skill to Bot A

DSH Local Build

New Session

Plugins

Workspaces

go

Live key smoke test 1h

ping for chrome 2h

Settings

Live key smoke test / 3 subagents Standard mode Agent Team 3

Chat Trajectory

Think · I notice my shell environment

Reported failure noted: teammate a now inactive and left no closing m

What I can verify right now:

- The likely cause is an environment before running, e.g. `pwd; ls -la`
Error: sandbox mode "workspace this host; refusing to run the A teammate that needed any shell module cache at `/home/ubuntu/go`
- Read-only tools still work, so I ca confirmed `/home/ubuntu/go` is pr
- I have no record of that teammate running `deepseek-chat`, with no `mzm-thin-pack`, contains only the playbook body, so it does not tell r

Because the failure is environmental re-run work that could overwrite som

Usage 55.5K

Ask question · ask_user_question ·

Message or run a task, / commands,

Workspace Write

DeepSeek-V41-Flash High

2 turns 6 steps · 242 tok/s · 64.8K tok · Cache hit 93% · 1%

Sidebar sections

Unassigned

Bots never assigned to a named section appear here; Host does not persist an Unassigned catalog row.

Attach Demo Bot
attach-demo-bot · Inactive · Model: deepseek/deepseek-chat

Bot skills
Attachments show on this bot's skills surface; the global catalog alone is not enough. Electron Main does not own attachment records.

MzM thin pack Attached Run
Attached skills bind into this bot's instruction assembly for subsequent turns; run/active does not require matching LLM reply text.

+ Attach skill

Rename Set avatar Edit persona Move to section Delete bot

Sc2 Bot A
sc2-bot-a · Inactive · Model: deepseek/deepseek-chat

Bot skills
Attachments show on this bot's skills surface; the global catalog alone is not enough. Electron Main does not own attachment records.

MzM thin pack Attached ✓ Active
Attached skills bind into this bot's instruction assembly for subsequent turns; run/active does not require matching LLM reply text.

+ Attach skill

Rename Set avatar Edit persona Move to section Delete bot

Sc2 Bot B
sc2-bot-b · Inactive · Model: deepseek/deepseek-chat

Bot skills
Attachments show on this bot's skills surface; the global catalog alone is not enough. Electron Main does not own


Skill run active on the bot

5. Routines - cron (P4)

- Create cron routines listed in a pane
- Pause / resume without losing the definition
- See fire / last-run status in the UI

How

- Open the Routines pane from Agent Team.
- Create a cron routine with a clear schedule.
- Pause for silence; resume when you want fires again.

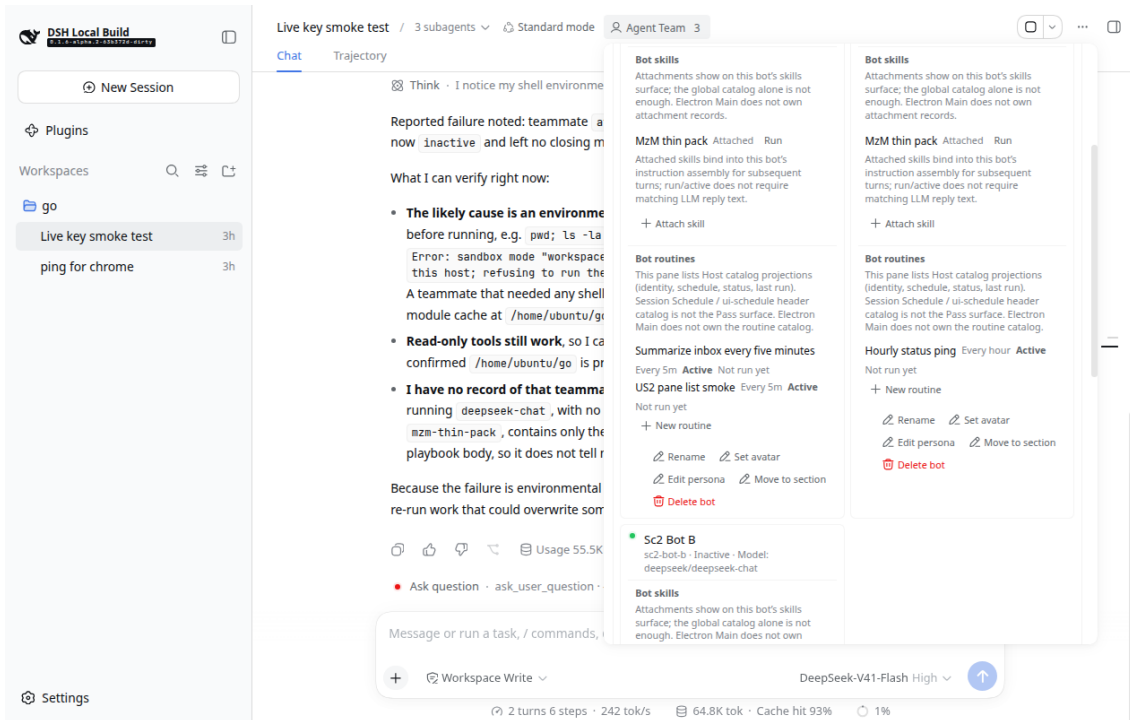

Routines pane

DSH Local Build

New Session

Plugins

Workspaces

go

Live key smoke test 5h

ping for chrome 5h

Settings

Live key smoke test / 3 subagents Standard mode Agent Team 3

Chat Trajectory

re-run work that could overwrite some

Usage 55.5K

Ask question ask_user_question

System prompt

Context injection subagent-settle

Context injection skill-catalog

Think A second subagent just failed

Skill mzm-authorized-skill

Context injection subagent-settle

Think We need to investigate the

Bash Inspect workspace state with

Deep diving... 17m 35s

Waiting for approval

escalate sandbox to danger-full-usable backend and already den without a wider mode.

pwd; ls -la; echo "---- git --ead

No skills attached yet

Attach skill

Bot routines

This pane lists Host catalog projections (identity, schedule, status, last-run / fire indicator). Session Schedule / ui-schedule header catalog is not the Pass surface. Electron Main does not own the routine catalog.

Last-run / fire indicator projects Host RoutineProjection.lastRunAt after cron fire commit. Refresh the panel to reload Host projection; Electron Main does not own fire timestamps.

Check inbox Every 5m Active

Not run yet Pause

New routine

Rename Set avatar

Edit persona Move to section

Delete bot

Skills library

Lists Host managed thin-pack and user skills; select loads as available-to-attach (no multi-step wizard). Electron Main does not own the skill catalog.

Selecting a skill makes it available for the bot attach flow (clarify lock 2: select = load).

MzM authorized skill User

mzm-authorized-skill MzM authorized skill

Make available to attach Edit skill

MzM thin pack Managed

Reject Allow once

Routine created and listed active

DSH Local Build

New Session

Plugins

Workspaces

go

Live key smoke test 4h

ping for chrome 4h

Settings

Live key smoke test / 3 subagents Standard mode Agent Team 3

Chat Trajectory

Think I notice my shell environme

Reported failure noted: teammate a now inactive and left no closing m

What I can verify right now:

The likely cause is an environme before running, e.g. pwd; ls -la Error: sandbox mode "workspace this host; refusing to run the A teammate that needed any shell module cache at /home/ubuntu/gi

Read-only tools still work, so I ca confirmed /home/ubuntu/go is pr

I have no record of that teammate running deepseek-chat, with no mzm-thin-pack, contains only the playbook body, so it does not tell r

Because the failure is environmental re-run work that could overwrite some

Usage 55.5K

Ask question ask_user_question

Message or run a task, / commands,

Workspace Write

DeepSeek-V41-Flash High

Agent Team

Members

New bot

Create another bot with a different (provider, model) before Verifier can Pass a multi-model session.

Sidebar sections

New section

Unassigned

Bots never assigned to a named section appear here; Host does not persist an Unassigned catalog row.

Attach Demo Bot

attach-demo-bot - Inactive - Model: deepseek/deepseek-chat

Bot skills

Attachments show on this bot's skills surface; the global catalog alone is not enough. Electron Main does not own attachment records.

MzM thin pack Attached Run

Attached skills bind into this bot's instruction assembly for subsequent turns; run/active does not require matching LLM reply text.

Attach skill

Bot routines

This pane lists Host catalog projections (identity, schedule, status, last run). Session Schedule / ui-schedule header catalog is not the Pass surface. Electron Main does not own the routine catalog.

Summarize inbox every five minutes

Every 5m Active Not run yet Pause

Sc2 Bot A

sc2-bot-a - Inactive - Model: deepseek/deepseek-chat

Bot skills

Attachments show on this bot's skills surface; the global catalog alone is not enough. Electron Main does not own attachment records.

MzM thin pack Attached Run

Attached skills bind into this bot's instruction assembly for subsequent turns; run/active does not require matching LLM reply text.

Attach skill

Bot routines

This pane lists Host catalog projections (identity, schedule, status, last run). Session Schedule / ui-schedule header catalog is not the Pass surface. Electron Main does not own the routine catalog.

Hourly status ping Every hour Active

Not run yet Pause

Pause / resume controls

6. Memory (P5)


- Write profile, log, and note facts
- Recall after leave/return or restart
- Agent-layer vs user-layer memory (project ADR)

How


- Open the Memory surface for a bot / team.
- Add a profile fact, log line, or note.
- Leave and return - recall should still show them.

The screenshot displays the MzM Bot Desktop interface. On the left is a sidebar with a 'DSH Local Build' header, a 'New Session' button, and a 'Plugins' section. Below this is a 'Workspaces' list with items like 'What is triage in bug rep...' (14min), 'ping for chrome' (30min), and 'Live key smoke test' (18h). The central area shows a chat conversation titled 'What is triage in bug reports' with a 'Trajectory' tab. The chat text includes: 'another session, tell me what it was supposed no action is needed.', 'Thought for a while >', 'Second one. Same situation: I did not spawn a prompt, or write scope to associate with either', 'Two possibilities, and I can't distinguish them', a numbered list of two points about orphaned subagents, and a concluding sentence about triage. The right-hand panel is titled 'Memory' and contains several sections: 'calls listMemories. Browse filter distinguishes Agent vs User layers. Electron Main does not own the memory catalog.', 'Browse / recall re-projects the Host catalog via listMemories (kinds and layers stay distinguishable after restart). Optional inject / apply indicator appears only when Host projects one. Electron Main does not own recall or inject state.', 'Filter Agent (this bot) or User (account-wide) rows; labels come from Host projection. Bot B does not list As agent rows as B's agent memory. Electron Main does not own layer filter state.', 'Note: Agent (this bot) SC-005 agent-scoped note exclusive to bot A — must not appear as B agent memory', 'No memories written yet', 'Skills library', 'MzM authored skill' (User), and 'MzM thin pack' (Managed). At the bottom, there's a status bar showing '4 turns 7 steps · 216 tok/s', '161K tok · Cache hit 84%', and '4%'.

Memory surface

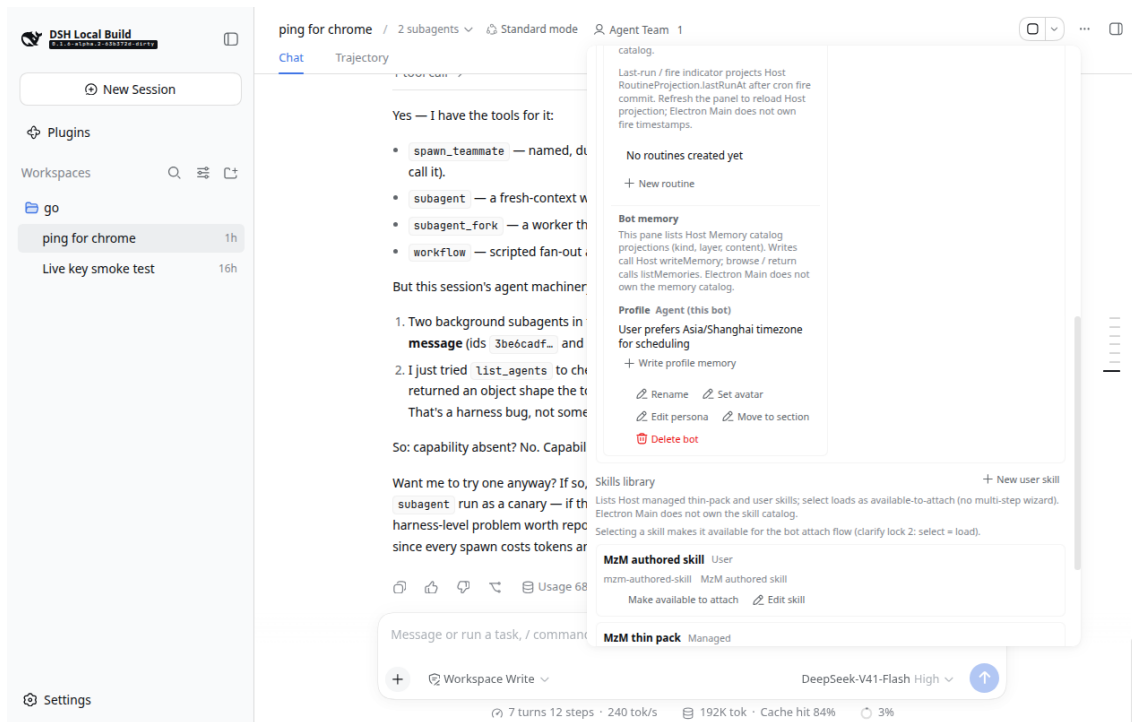

Profile facts listed

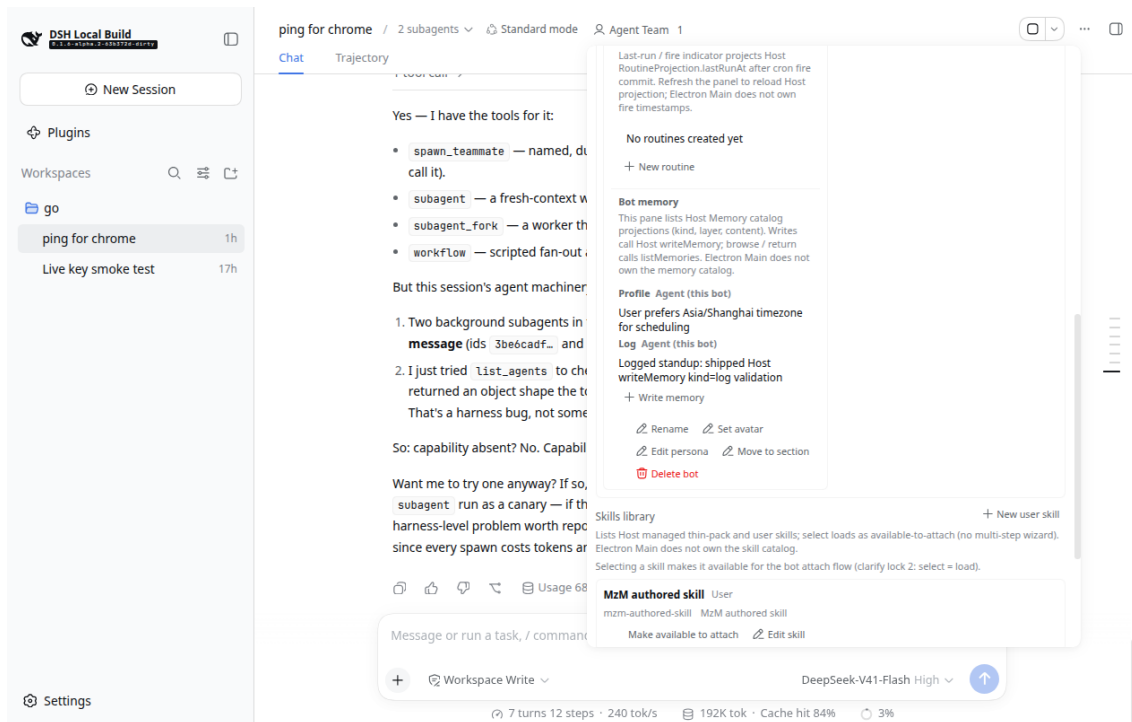


Log entries listed


7. Connectors, event routines & trust (P6)

Connectors


- Open Connectors catalog -> Install -> Auth until Ready.
- Run a tool call and confirm success in the UI.
- Secrets stay out of session dumps.

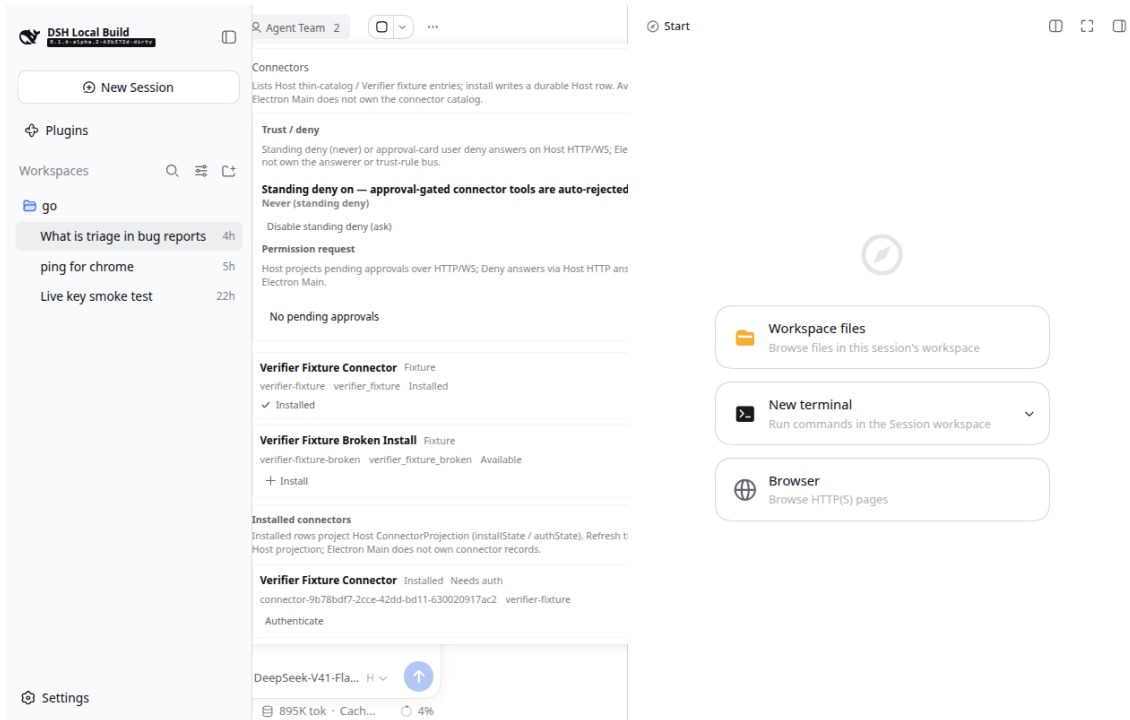

Connector catalog

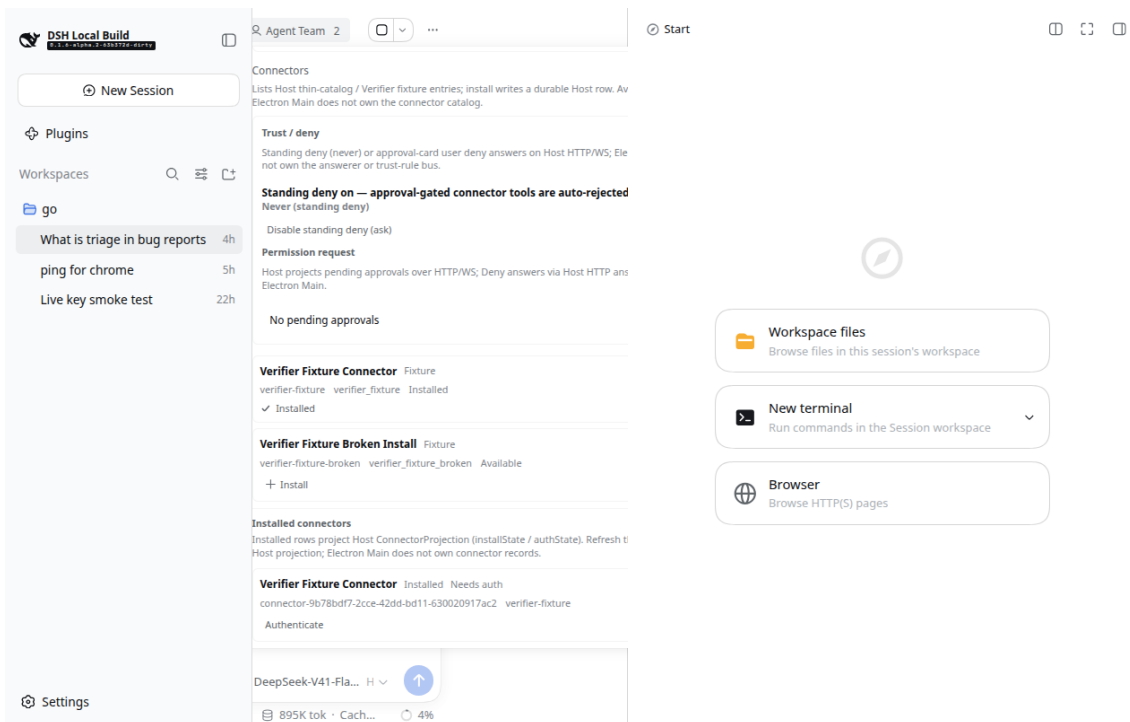


Connector installed

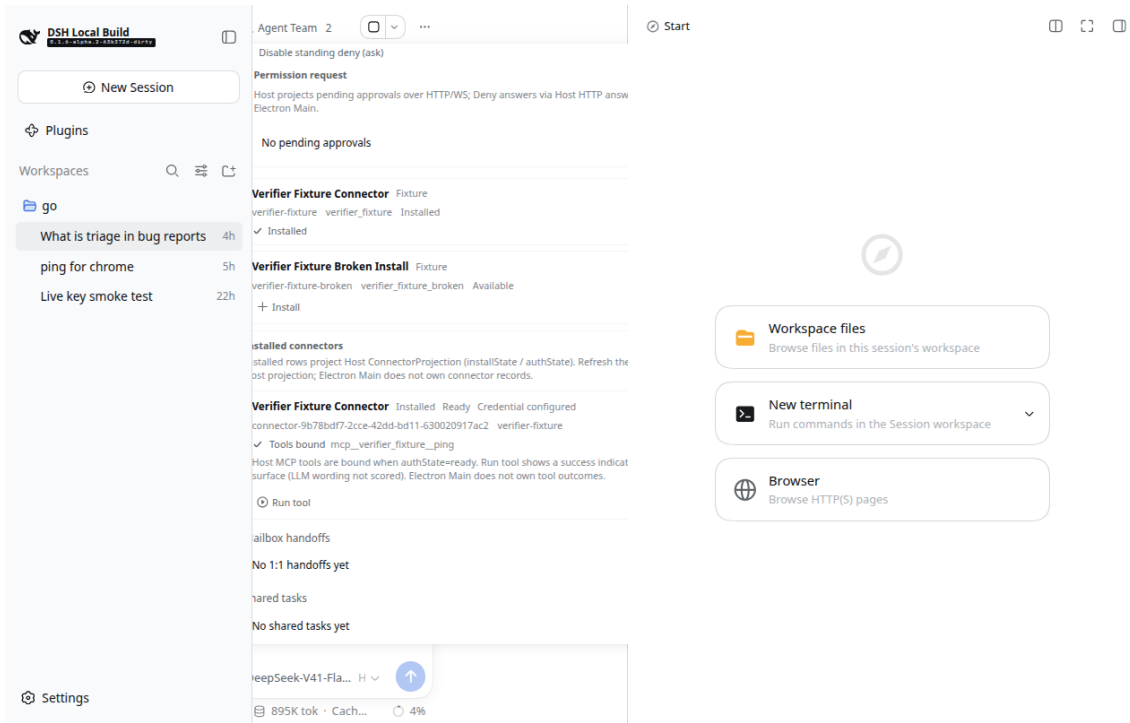


Auth Ready

Trust deny

- When a permission gate appears, Deny blocks the tool.
- Denied is a real blocked state - not a silent allow.

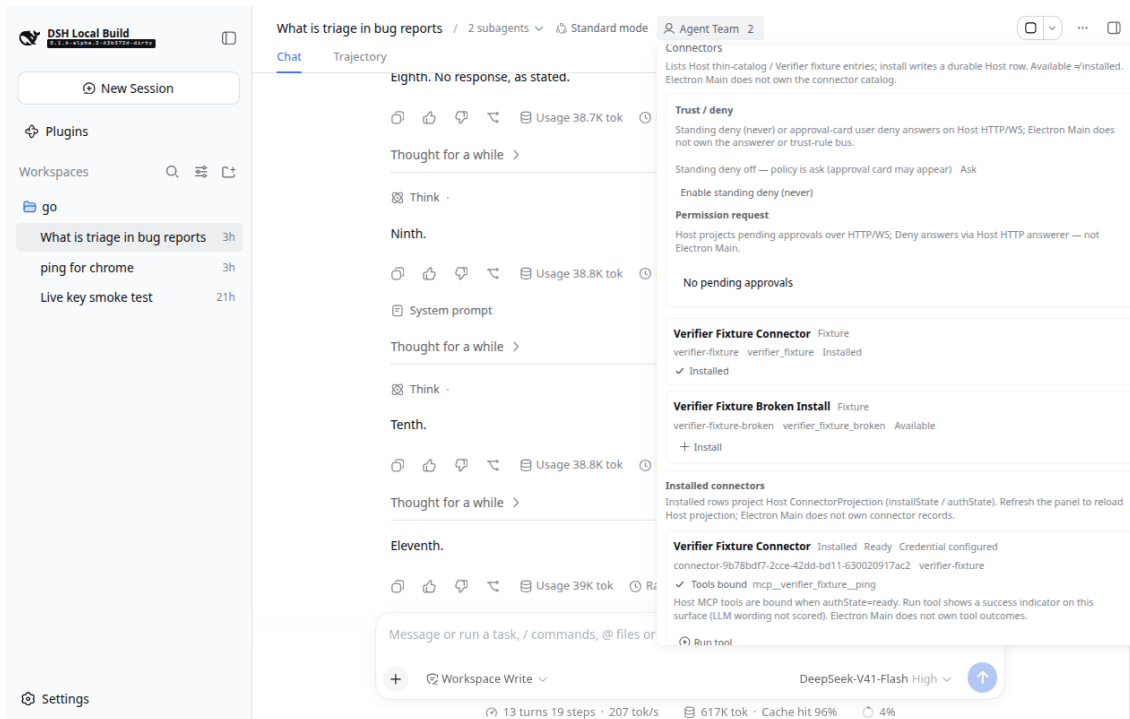


Permission gate

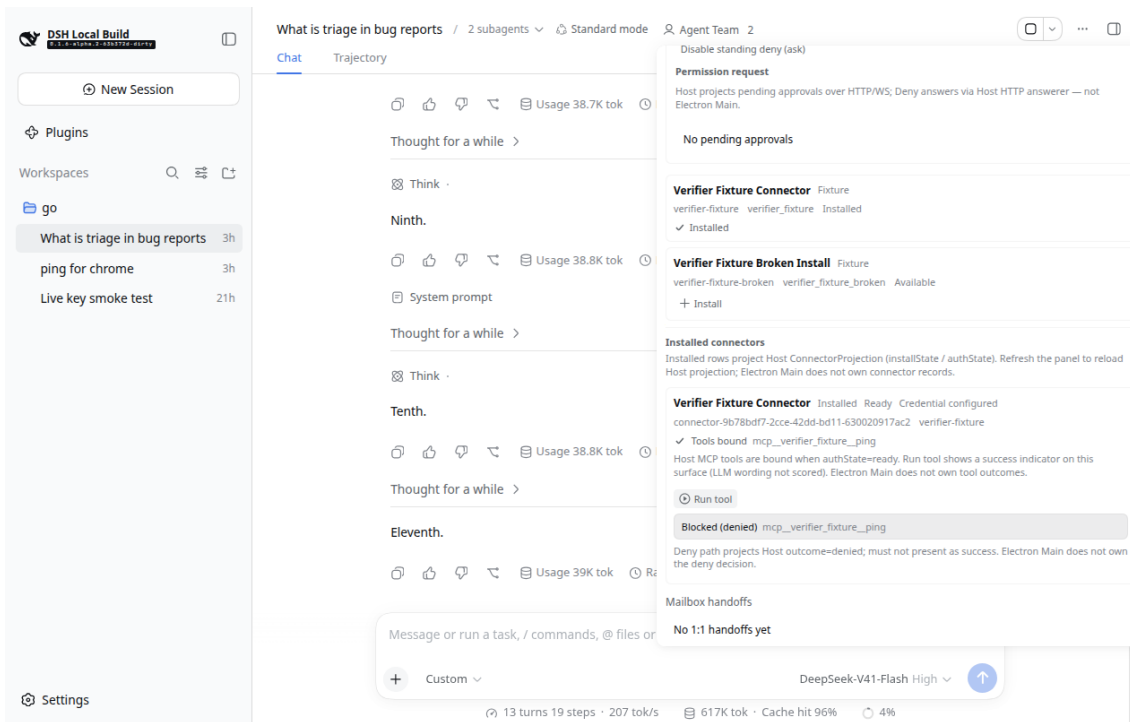

Denied / blocked

Event routines

- Create an event-triggered routine (beyond cron).
- Confirm it lists; pause still suppresses fires.

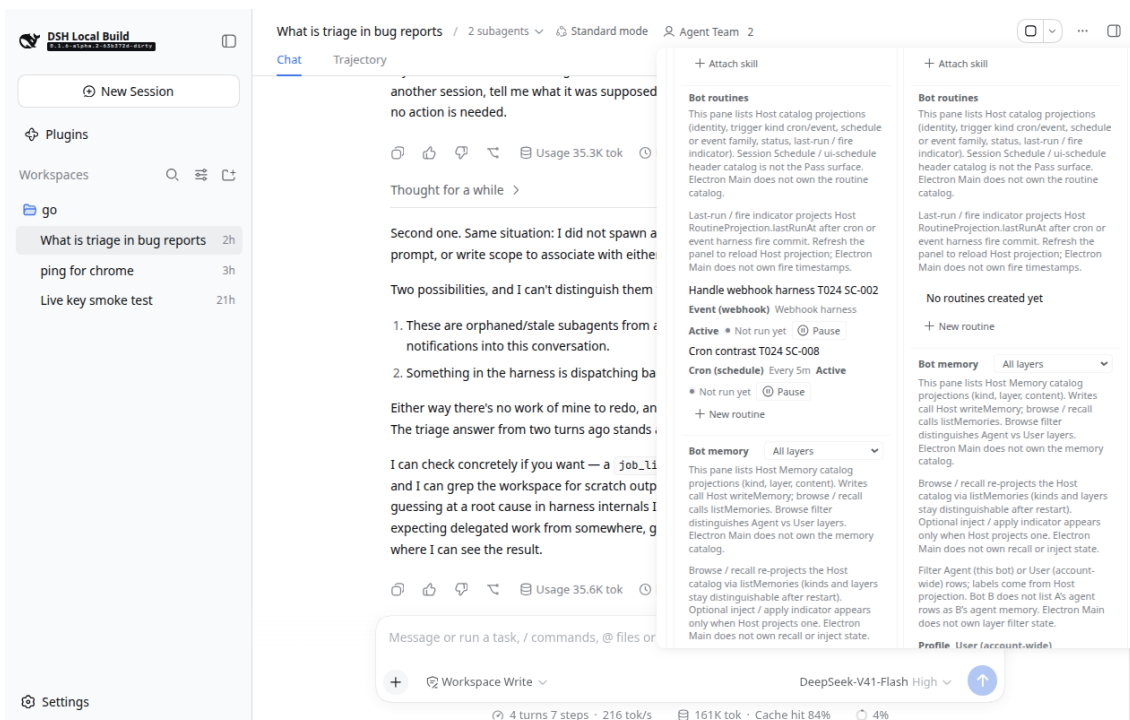


Event routine created

8. Computer, Shell & computer use (P7)


Global Settings -> Computer exposes Shell readiness and Computer use. Chrome alone is not proof the tool paths work - check Ready and a real tool result.

Settings -> Computer

- Open Settings (gear) -> Computer.
- Read Shell readiness (not-ready / starting / Ready).
- Toggle Computer use when you want that path available.

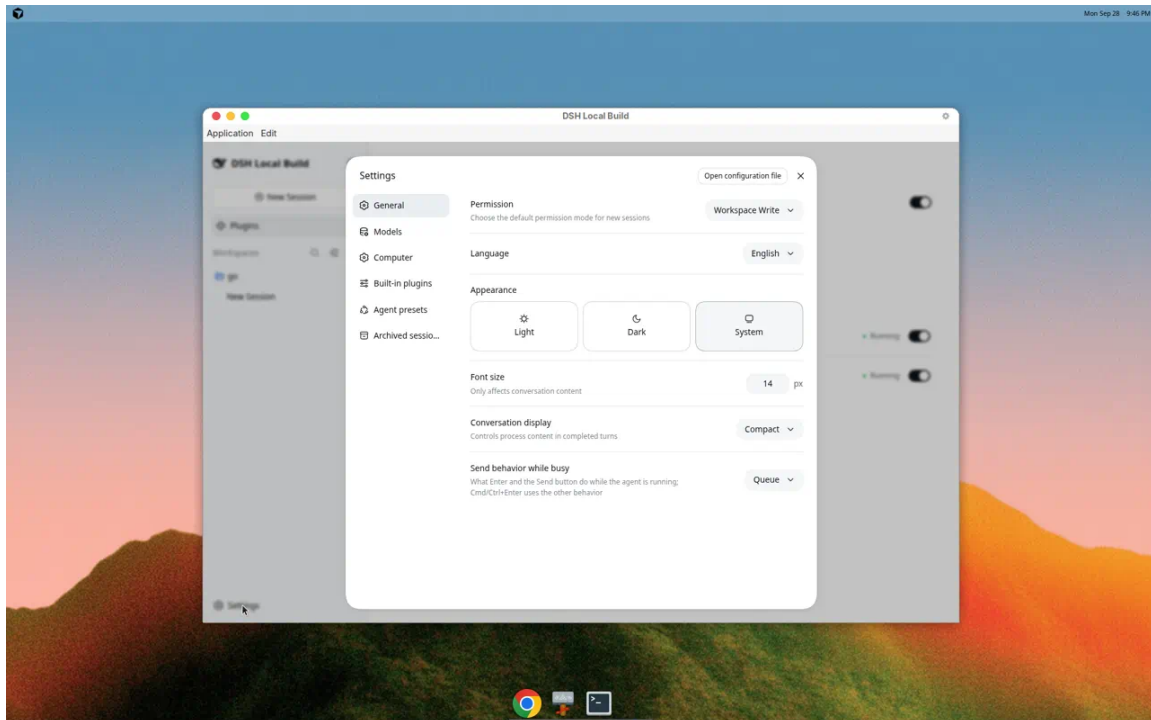


Settings - General overview

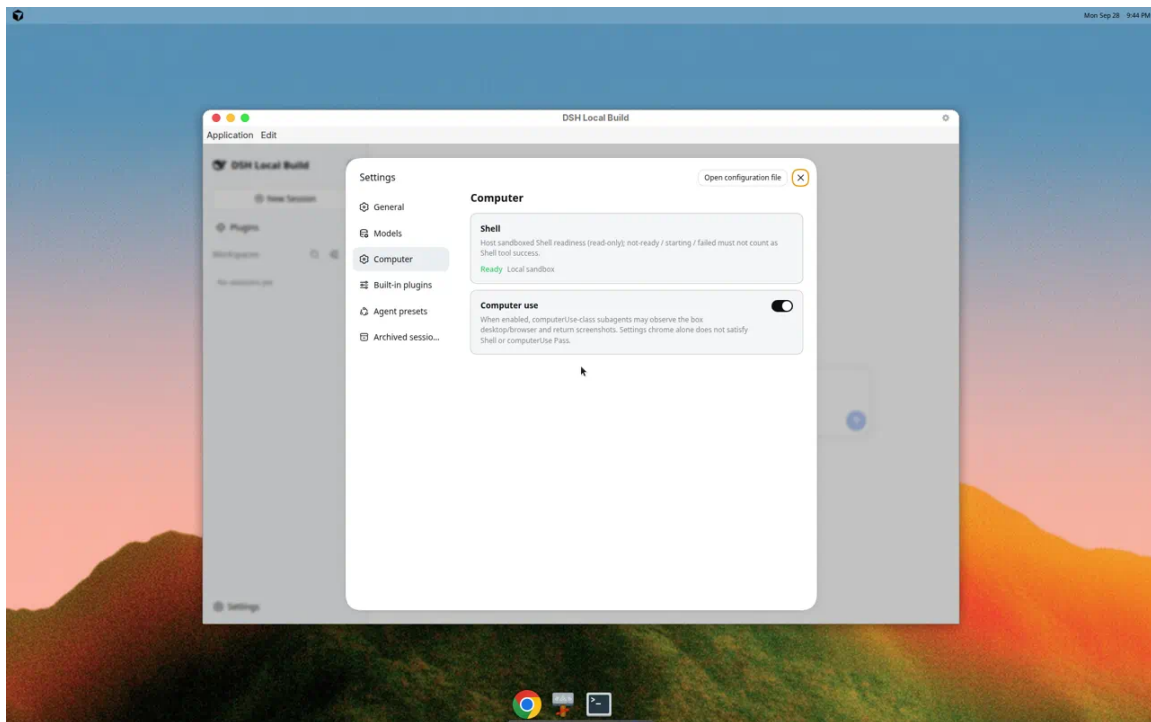


Settings -> Computer (Shell + Computer use)

Shell / box

- Wait until Shell shows Ready (local sandbox).
- Ask a bot for a local shell task.
- Success appears in the tool card - not while status is not-ready/starting.

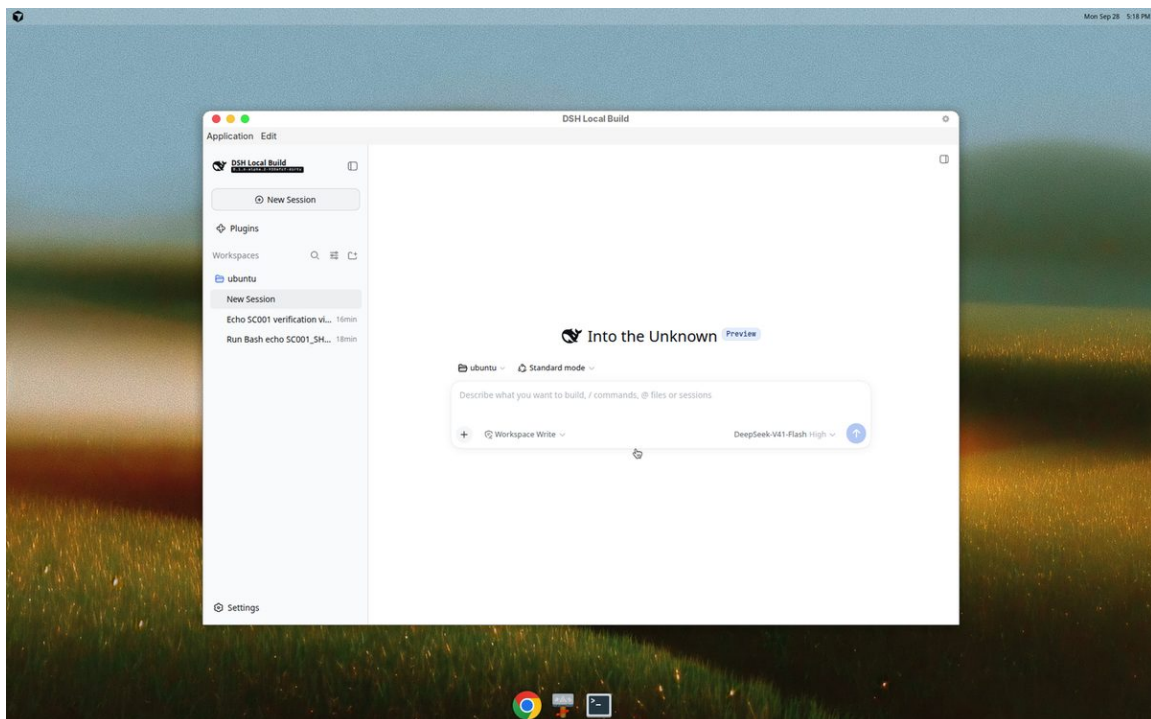


Shell Ready - local sandbox path

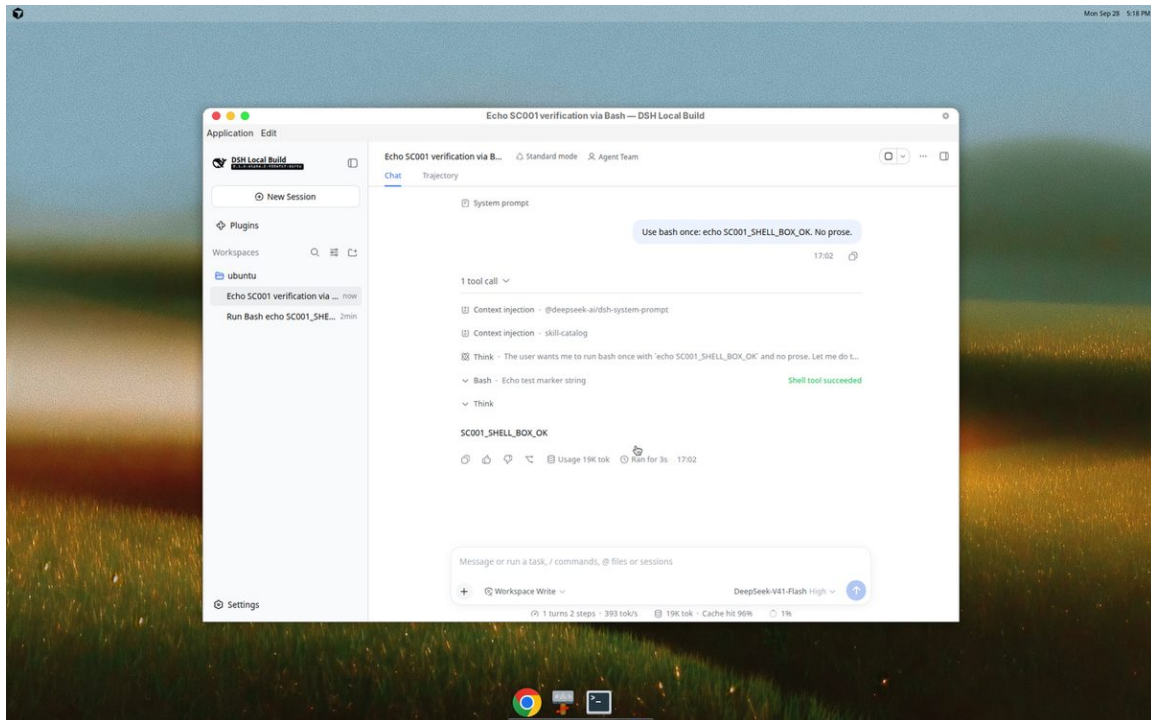

Shell/box tool success

Computer use

- Enable Computer use in Settings -> Computer.
- Ask for a computerUse-class observation (screenshot).
- Expect a parent handoff; interactive browser is not required for this path.

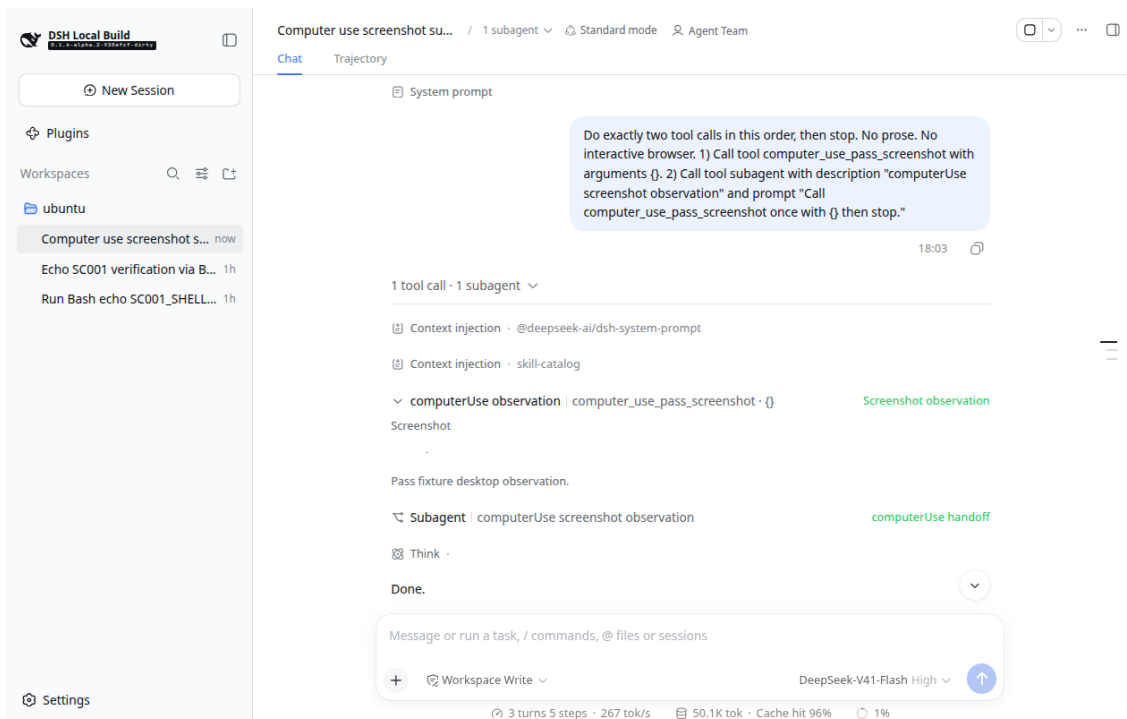

computerUse observation

The screenshot displays the MzM Bot Desktop interface. On the left is a sidebar with a 'DSH Local Build' header, a 'New Session' button, and sections for 'Plugins', 'Workspaces', and 'ubuntu'. The 'ubuntu' section lists 'Computer use screenshot s...' as the active workspace, with sub-items 'Echo SC001 verification via B...' and 'Run Bash echo SC001_SHELL...'. A 'Settings' button is at the bottom of the sidebar.

The main chat window is titled 'Computer use screenshot su...' and shows a conversation with a subagent. At the top, a system message states: 'screensnot observauon and prompt. Can computer_use_pass_screenshot once with {} then stop.' The chat history includes:


- '1 tool call - 1 subagent' header.
- 'Context injection · @deepseek-ai/dsh-system-prompt'.
- 'Context injection · skill-catalog'.
- 'computerUse observation | computer_use_pass_screenshot · {}' with a green 'Screenshot observation' label.
- 'Screenshot'.
- 'Pass fixture desktop observation.'
- 'Subagent | computerUse screenshot observation' with a green 'computerUse handoff' label.
- 'Think ·'.
- 'Done.'
- Usage and time statistics: 'Usage 29.3K tok · Ran for 4s 18:04'.
- 'Thought for a while ·'.
- A confirmation message from 'Subagent 8440cc6b': 'confirmed: one screenshot call, blank 1x1px result, no further actions.'

 The bottom of the chat window features a text input field with a placeholder 'Message or run a task, / commands, @ files or sessions', a 'Workspace Write' button, and a 'DeepSeek-V41-Flash High' model selector. At the very bottom, performance metrics are shown: '3 turns 5 steps · 267 tok/s · 50.1K tok · Cache hit 96% · 1%'.

Parent handoff

9. Plugins

The Plugins page lists Host-backed capabilities (Agent Teams, Shell, Subagent, Web search, and more). Enabling a plugin wires Host behavior; it does not replace Settings -> Computer readiness.

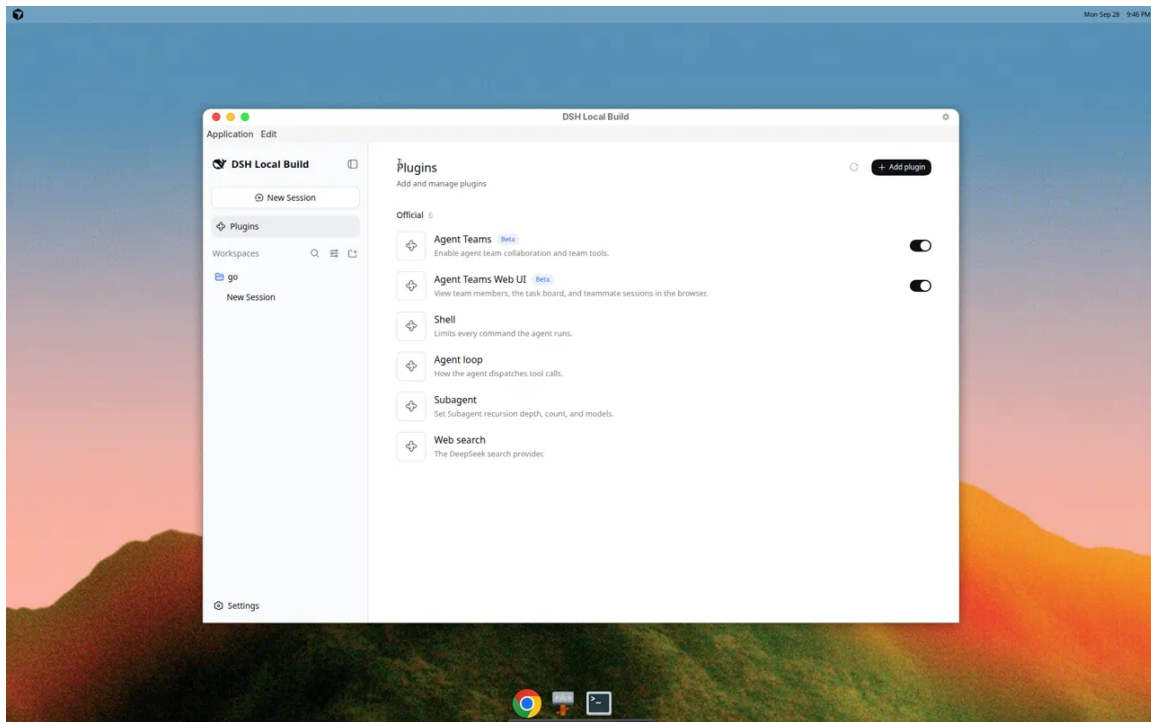

Plugins list

10. What is not in this build

- Voice
- Draft-first send-on-behalf
- Group channels
- User machines
- Learn-from-demo
- Billing chrome
- Full skill pack / pixel Grok catalog

These stay out until a later named phase amends the plan.

11. Troubleshooting

- Shell tools fail immediately -> Settings -> Computer -> Shell != Ready.
- No computerUse observation -> Computer use On; Host provider registered.
- Connector stuck -> Auth Ready; do not paste secrets into chat.
- Routine never fires -> not paused; cron vs event matches how you created it.
- Memory missing after restart -> confirm profile/log/note was written on Memory surface.

12. Screenshot sources

Fresh Desktop captures (2026-09-28): home, session, bots sidebar, Settings, Computer, Plugins. Phase Verifier Pass evidence (committed product UI): persona, skills, routines, memory, connectors/trust, Shell, computerUse.