

## Getting Started

In this discussion, don't use a Python interpreter to run code until you are confident your solution is correct. Figure things out and check your work by *thinking* about what your code will do. Not sure? Talk to your group!

[**Note**] Recursion takes practice. Please don't get discouraged if you're struggling to write recursive functions. Instead, every time you do solve one (even with help or in a group), make note of what you had to realize to make progress. Students improve through practice and reflection.

[**For Fun**] This emoticon of a guy in a cowboy hat is valid Python: `o[:-D]`

```
>>> o = [2, 0, 2, 4]
>>> [ o[:-D] for D in range(1,4) ]
[[2, 0, 2], [2, 0], [2]]
```

## Tree Recursion

For the following questions, don't start trying to write code right away. Instead, start by describing the recursive case in words. Some examples: - In `fib` from lecture, the recursive case is to add together the previous two Fibonacci numbers. - In `double_eights` from lab, the recursive case is to check for double eights in the rest of the number. - In `count_partitions` from lecture, the recursive case is to partition `n-m` using parts up to size `m` **and** to partition `n` using parts up to size `m-1`.

In case you need a refresher on Tree Recursion, you can use the section below (dropdown if you're on the website)

A tree recursive function is a recursive function that makes more than one call to itself, resulting in a tree-like series of calls.

For example, this is the [Virahanka-Fibonacci](#) sequence: 0, 1, 1, 2, 3, 5, 8, 13, ....


Each term is the sum of the previous two terms. This tree-recursive function calculates the `n`th Virahanka-Fibonacci number.

```
def virfib(n):
    if n == 0 or n == 1:
        return n
    return virfib(n - 1) + virfib(n - 2)
```

Calling `virfib(6)` results in a call structure that resembles an upside-down tree (where `f` is `virfib`):

Each recursive call `f(i)` makes a call to `f(i-1)` and a call to `f(i-2)`. Whenever we reach an `f(0)` or `f(1)` call, we can directly return 0 or 1 without making more recursive calls. These calls are our base cases.

A base case returns an answer without depending on the results of other calls. Once we reach a base case, we can go back and answer the recursive calls that led to the base case.

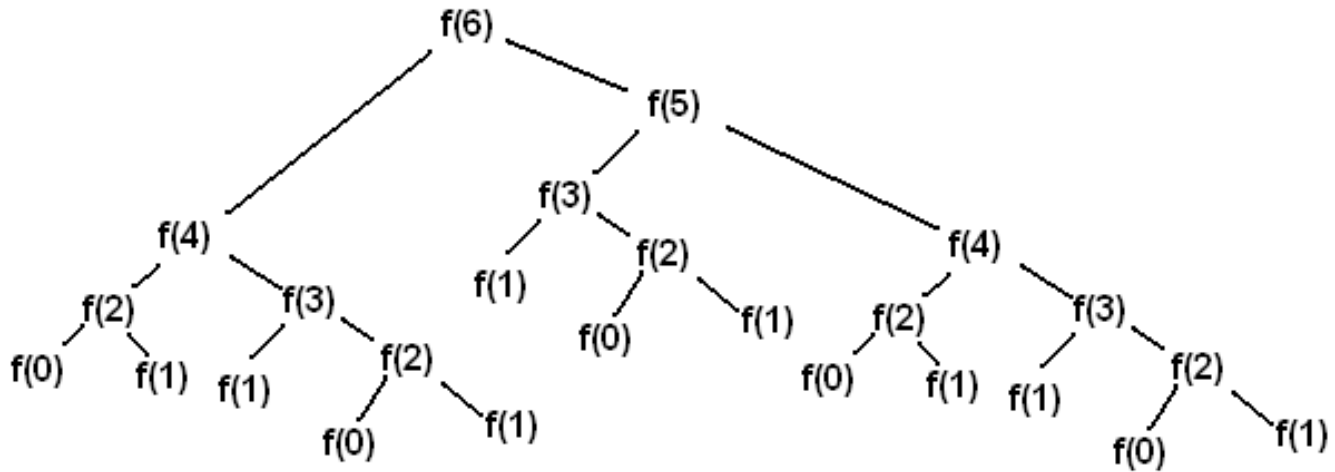


Virahanka-Fibonacci tree.

As we will see, tree recursion is often effective for problems with branching choices. In these problems, you make a recursive call for each branching choice.

### Q1: Insect Combinatorics

An insect is inside an  $m$  by  $n$  grid. The insect starts at the bottom-left corner  $(1, 1)$  and wants to end up at the top-right corner  $(m, n)$ . The insect can only move up or to the right. Write a function `paths` that takes the height and width of a grid and returns the number of paths the insect can take from the start to the end. (There is a [closed-form solution](#) to this problem, but try to answer it with recursion.)

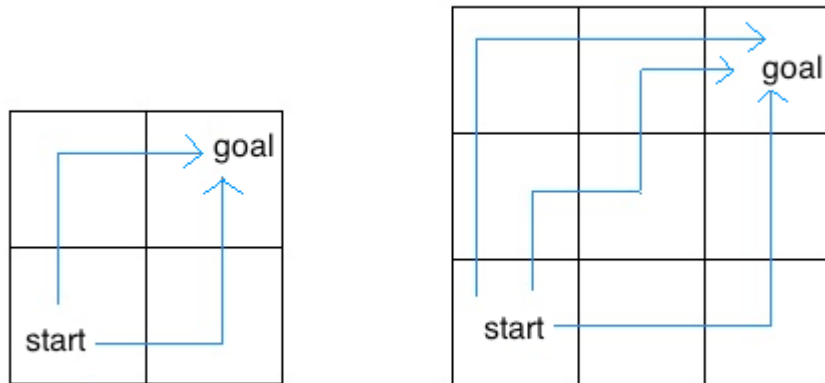

Insect grids.

In the 2 by 2 grid, the insect has two paths from the start to the end. In the 3 by 3 grid, the insect has six paths (only three are shown above).

**Hint:** What happens if the insect hits the upper or rightmost edge of the grid?

```
def paths(m, n):  
    """Return the number of paths from one corner of an  
    M by N grid to the opposite corner.  
  
    >>> paths(2, 2)  
    2  
    >>> paths(5, 7)  
    210  
    >>> paths(117, 1)  
    1  
    >>> paths(1, 157)  
    1  
    """  
    "*** YOUR CODE HERE ***"
```

# Lists

Some of you already know list operations that we haven't covered yet, such as **append**. Don't use those today. All you need are list literals (e.g., `[1, 2, 3]`), item selection (e.g., `s[0]`), list addition (e.g., `[1] + [2, 3]`), **len** (e.g., `len(s)`), and slicing (e.g., `s[1:]`). Use those! There will be plenty of time for other list operations when we introduce them next week.

The most important thing to remember about lists is that a non-empty list `s` can be split into its first element `s[0]` and the rest of the list `s[1:]`.

A list comprehension describes the elements in a list and evaluates to a new list containing those elements.

There are two forms:

```
[<expression> for <element> in <sequence>]
[<expression> for <element> in <sequence> if <conditional>]
```

Here's an example that starts with `[1, 2, 3, 4]`, picks out the even elements 2 and 4 using `if i % 2 == 0`, then squares each of these using `i*i`. The purpose of `for i` is to give a name to each element in `[1, 2, 3, 4]`.

```
>>> [i*i for i in [1, 2, 3, 4] if i % 2 == 0]
[4, 16]
```

This list comprehension evaluates to a list of:

- The value of `i*i`
- For each element `i` in the sequence `[1, 2, 3, 4]`
- For which `i % 2 == 0`

In other words, this list comprehension will create a new list that contains the square of every even element of the original list `[1, 2, 3, 4]`.

We can also rewrite a list comprehension as an equivalent `for` statement, such as for the example above:

```
>>> result = []
>>> for i in [1, 2, 3, 4]:
...     if i % 2 == 0:
...         result = result + [i*i]
>>> result
[4, 16]
```

```
>>> s = [2, 3, 6, 4]
>>> s[0]
2
>>> s[1:]
[3, 6, 4]
```

**Q2: Even weighted**

Write a function that takes a list `s` and returns a new list that keeps only the even-indexed elements of `s` and multiplies them by their corresponding index. First approach this problem with a normal `for` loop (without list comprehension).

```
def even_weighted_loop(s):
    """
    >>> x = [1, 2, 3, 4, 5, 6]
    >>> even_weighted_loop(x)
    [0, 6, 20]
    """
    "*** YOUR CODE HERE ***"
```

Now that you've done it with a `for` loop, try it with a list comprehension!


```
def even_weighted_comprehension(s):
    """
    >>> x = [1, 2, 3, 4, 5, 6]
    >>> even_weighted_comprehension(x)
    [0, 6, 20]
    """
    return [_____]
```

If you get stuck, ask for help!

# Trees

A path is a sequence of trees in which each is the parent of the next.

A **tree** is a data structure that represents a hierarchy of information. A file system is a good example of a tree structure. For example, within your **cs61a** folder, you have folders separating your **projects**, **lab** assignments, and **homework**. The next level is folders that separate different assignments, **hw01**, **lab01**, **hog**, etc., and inside those are the files themselves, including the starter files and **ok**. Below is an incomplete diagram of what your **cs61a** directory might look like.

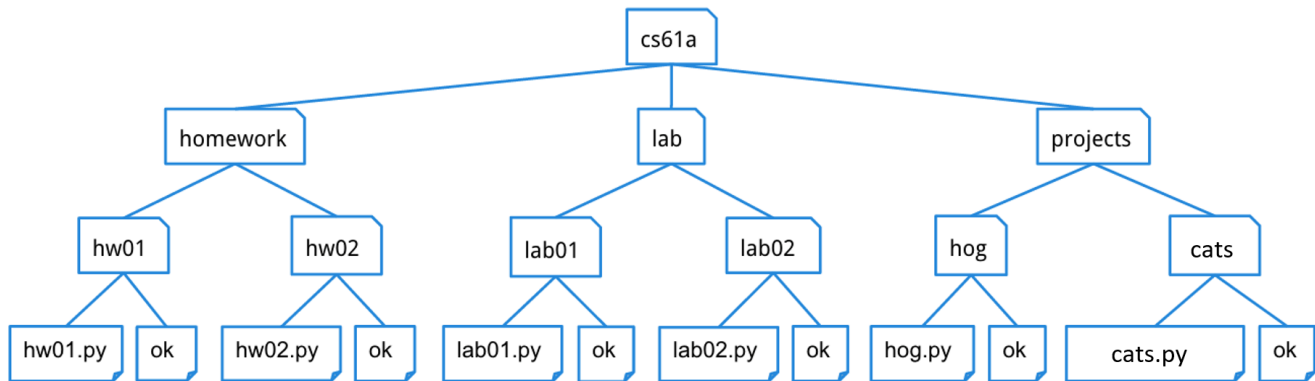


**cs61a\_tree**

As you can see, unlike trees in nature, the tree abstract data type is drawn with the root at the top and the leaves at the bottom.

For a tree **t**: - Its root label can be any value, and **label(t)** returns it. - Its branches are trees, and **branches(t)** returns a list of branches. - An identical tree can be constructed with **tree(label(t), branches(t))**. - You can call functions that take trees as arguments, such as **is\_leaf(t)**. - That's how you work with trees. No **t == x** or **t[0]** or **x in t** or **list(t)**, etc. - There's no way to change a tree (that doesn't violate an abstraction barrier).

Here's an example tree **t1**, for which its branch **branches(t1)[1]** is **t2**.

```
t2 = tree(5, [tree(6), tree(7)])
t1 = tree(3, [tree(4), t2])
```

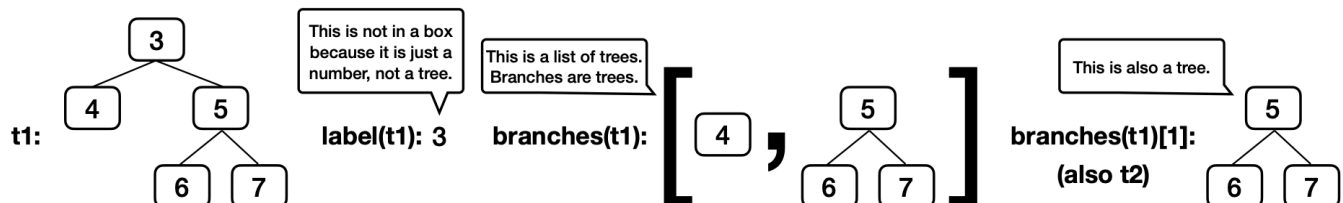

You don't need to know how **tree**, **label**, and **branches** are implemented in order to use them correctly, but here is the implementation from lecture.

```
def tree(label, branches=[]):
    for branch in branches:
        assert is_tree(branch), 'branches must be trees'
    return [label] + list(branches)

def label(tree):
    return tree[0]

def branches(tree):
    return tree[1:]

def is_leaf(tree):
    return not branches(tree)

def is_tree(tree):
    if type(tree) != list or len(tree) < 1:
        return False
    for branch in branches(tree):
        if not is_tree(branch):
            return False
    return True
```

**Q3: Has Path**

Implement `has_path`, which takes a tree `t` and a list `p`. It returns whether there is a path from the root of `t` with labels `p`. For example, `t1` has a path from its root with labels `[3, 5, 6]` but not `[3, 4, 6]` or `[5, 6]`.

**Important:** Before trying to implement this function, discuss these questions from lecture about the recursive call of a tree processing function: - What recursive calls will you make? - What type of values do they return? - What do the possible return values mean? - How can you use those return values to complete your implementation?

If you get stuck, you can view our answers to these questions by clicking the hint button below, but *please* don't do that until your whole group agrees.

**What recursive calls will you make?**

As you usual, you will call `has_path` on each branch `b`. You'll make this call after comparing `p[0]` to `label(t)`, and so the second argument to `has_path` will be the rest of `p`: `has_path(b, p[1:])`.

**What type of values do they return?**

`has_path` always returns a `bool` value: `True` or `False`.

**What do the possible return values mean?**

If `has_path(b, p[1:])` returns `True`, then there is a path through branch `b` for which `p[1:]` are the node labels.

**How can you use those return values to complete your implementation?**

If you have already checked that `label(t)` is equal to `p[0]`, then a `True` return value means there is a path through `t` with labels `p` using that branch `b`. A `False` value means there is no path through that branch, but there might be path through a different branch.

```
def has_path(t, p):
    """Return whether tree t has a path from the root with labels p.

    >>> t2 = tree(5, [tree(6), tree(7)])
    >>> t1 = tree(3, [tree(4), t2])
    >>> has_path(t1, [5, 6])          # This path is not from the root of t1
    False
    >>> has_path(t2, [5, 6])          # This path is from the root of t2
    True
    >>> has_path(t1, [3, 5])          # This path does not go to a leaf, but that's ok
    True
    >>> has_path(t1, [3, 5, 6])       # This path goes to a leaf
    True
    >>> has_path(t1, [3, 4, 5, 6])   # There is no path with these labels
    False
    """
    if p == ____: # when len(p) is 1
        return True
    elif label(t) != ____:
        return False
    else:
        """ YOUR CODE HERE """
```



If your group needs some guidance, you can click on the hints below, but please talk with your group first before reading the hints.

The first base case should check whether `p` is a list of length one with the label of `t` as its only element. The second base case should check if the first element of `p` matches the label of `t`.

When entering the recursive case, your code should already have checked that `p[0]` is equal to `label(t)`, and so all that's left to check is that `p[1:]` contains the labels in a path through one of the branches. One way is with this template:

```
for ____:
    if ____:
        return True
return False
```

**Discussion Time!** Can the `else` case of `has_path` be written in just one line? Why or why not? You can ignore how fast the function will run.

**Q4: Find Path**

Implement `find_path`, which takes a tree `t` with unique labels and a value `x`. It returns a list containing the labels of the nodes along a path from the root of `t` to a node labeled `x`.

If `x` is not a label in `t`, return `None`. Assume that the labels of `t` are unique.

First talk through how to make and use the recursive call. (Try it yourselves; don't just click the hint button. That's how you learn.)

**What recursive calls will you make?**

`find_path(b, x)` on each branch `b`.

**What type of values do they return?**

Each recursive call will either return `None` or a non-empty list of node labels.

**What do the possible return values mean?**

If `find_path(b, x)` returns `None`, then `x` does not appear in `b`. If `find_path(b, x)` returns a list, then it contains the node labels for a path through `b` that ends with the node labeled `x`.

**How can you use those return values to complete your implementation?**

If a list is returned, then it contains all of the labels in the path except `label(t)`, which must be placed at the front.

```
def find_path(t, x):
    """
    >>> t2 = tree(5, [tree(6), tree(7)])
    >>> t1 = tree(3, [tree(4), t2])
    >>> find_path(t1, 5)
    [3, 5]
    >>> find_path(t1, 4)
    [3, 4]
    >>> find_path(t1, 6)
    [3, 5, 6]
    >>> find_path(t2, 6)
    [5, 6]
    >>> print(find_path(t1, 2))
    None
    """
    if ____:
        return ____
    ____:
        path = ____
        if path:
            return ____
    return None
```

Please don't view the hints until you've discussed with your group and can't make progress.

If `x` is the label of `t`, then return a list with one element that contains the label of `t`.

Assign `path` to the result of a recursive call to `find_path(b, x)` so that you can both check whether it's `None` and extend it if it's a list.


For a list `path` and a value `v`, the expression `[v] + path` creates a longer list that starts with `v` and then has the elements of `path`.

**Description Time!** When your group has completed this question, it's time to describe why this function does not have a base case that uses `is_leaf`. Come up with an explanation as a group and pick someone to present your answer.

**Q5: Sprout Leaves**

Define a function `sprout_leaves` that takes in a tree, `t`, and a list of leaf labels, `leaves`. It produces a new tree that is identical to `t`, but where each old leaf node has new branches, for each label in `leaves`.

For example, suppose we have the tree `t = tree(1, [tree(2), tree(3, [tree(4)])])`. Calling `sprout_leaves(t, [5, 6])` produces the following tree:

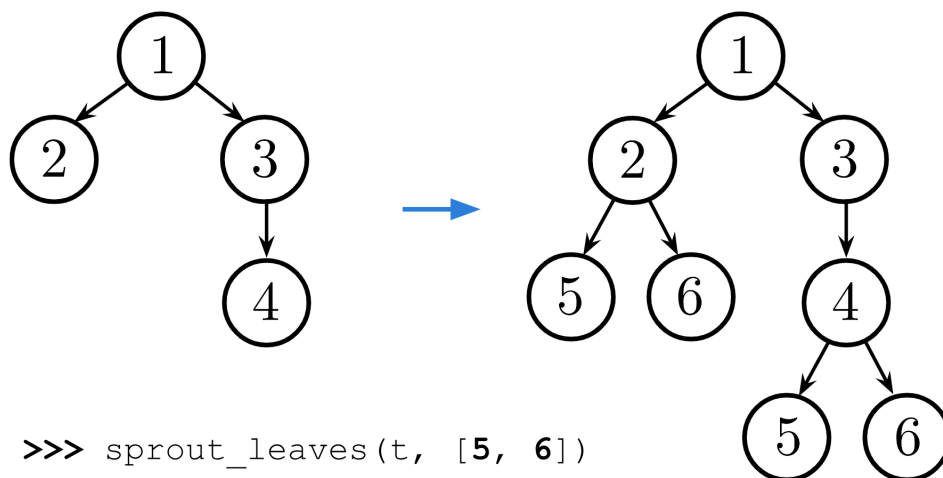

**Example Tree**

```

def sprout_leaves(t, leaves):
    """Sprout new leaves containing the labels in leaves at each leaf of
    the original tree t and return the resulting tree.

    >>> t1 = tree(1, [tree(2), tree(3)])
    >>> print_tree(t1)
    1
      2
      3
    >>> new1 = sprout_leaves(t1, [4, 5])
    >>> print_tree(new1)
    1
      2
        4
        5
      3
        4
        5

    >>> t2 = tree(1, [tree(2, [tree(3)])])
    >>> print_tree(t2)
    1
      2
        3
    >>> new2 = sprout_leaves(t2, [6, 1, 2])
    >>> print_tree(new2)
    1
      2
        3
          6
          1
          2

    """
    "*** YOUR CODE HERE ***"

```

## Submit Attendance

You're done! Excellent work this week. Please be sure to ask your section TA for the attendance form link and fill it out for credit. (one submission per person per section).

# Extra Practice

## Q6: Tree Deciphering

What value is bound to `result`?

```
result = label(min(branches(max([t1, t2], key=label)), key=label))
```

How convoluted! (That's a big word.)

Here's a quick refresher on how `key` functions work with `max` and `min`,

`max(s, key=f)` returns the item `x` in `s` for which `f(x)` is largest.

```
>>> s = [-3, -5, -4, -1, -2]
>>> max(s)
-1
>>> max(s, key=abs)
-5
>>> max([abs(x) for x in s])
5
```

Therefore, `max([t1, t2], key=label)` returns the tree with the largest label, in this case `t2`.

In case you're wondering, this expression does not violate an abstraction barrier. `[t1, t2]` and `branches(t)` are both lists (not trees), and so it's fine to call `min` and `max` on them.