OCTOBER 17, 2026

GOOGLE OAUTH 2.0

CONFIGURATION & TOKEN GENERATION

S. M. MOKDUM RASHID
DRIVEBRIDGE APEX

Table of Contents

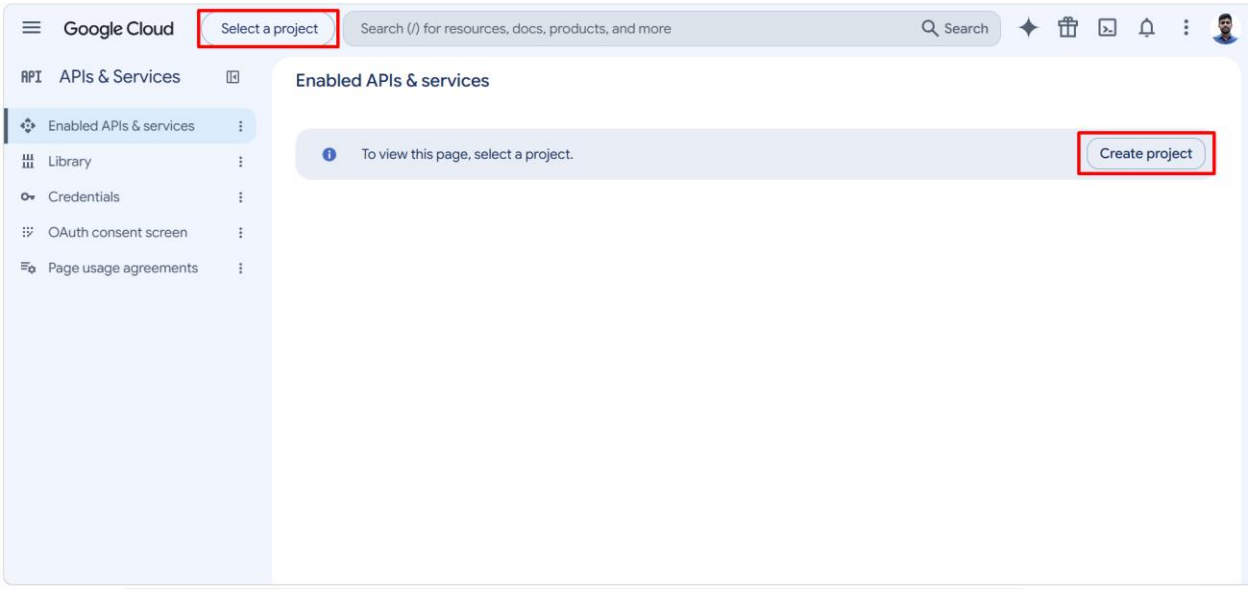
Google OAuth 2.0 Configuration & Token Generation 2
Step 1: Create or Select a Google Cloud Project 2
Step 2: Enable the Google Drive API 3
Step 3: Configure the OAuth Consent Screen 4
Step 4: Create OAuth Client ID and Client Secret 6
Step 5: Open Google OAuth 2.0 Playground & Generate Refresh Token 9

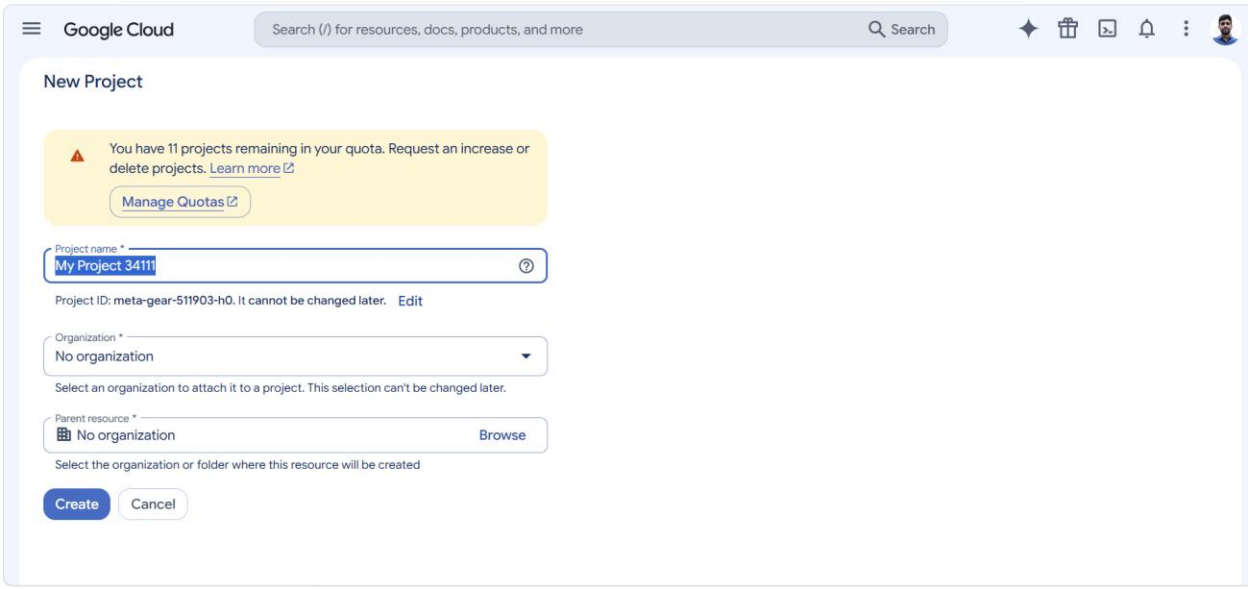
Google OAuth 2.0 Configuration & Token Generation

This document describes the step-by-step process for configuring Google OAuth 2.0 and generating the credentials required to integrate Google Drive with Oracle APEX.

Step 1: Create or Select a Google Cloud Project

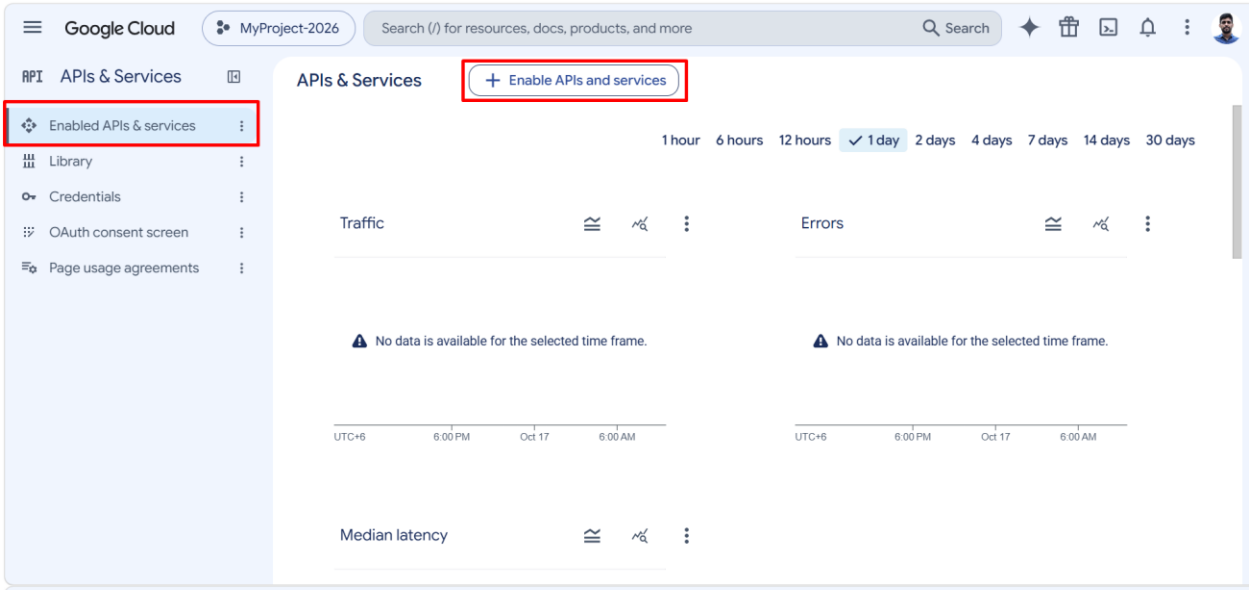
1. Open the Google Cloud Console (https://console.developers.google.com/).
2. Sign in with your Google account.
3. Create a new project or select an existing project.
4. Enter a project name if creating a new project.
5. Select Create and wait for the project to be created.

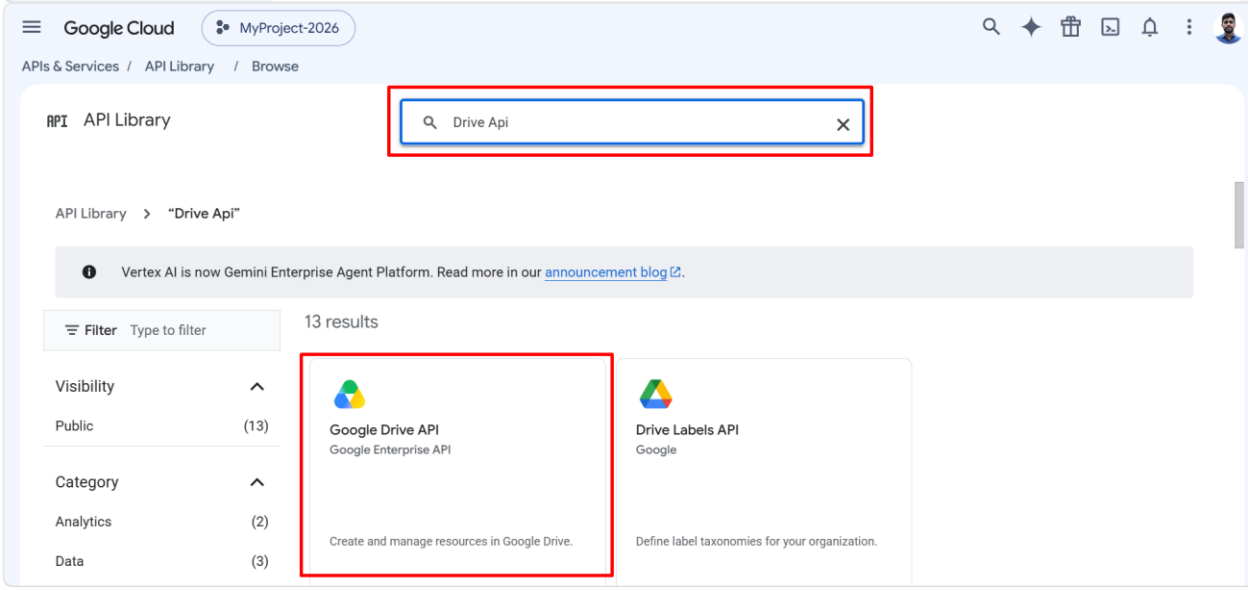


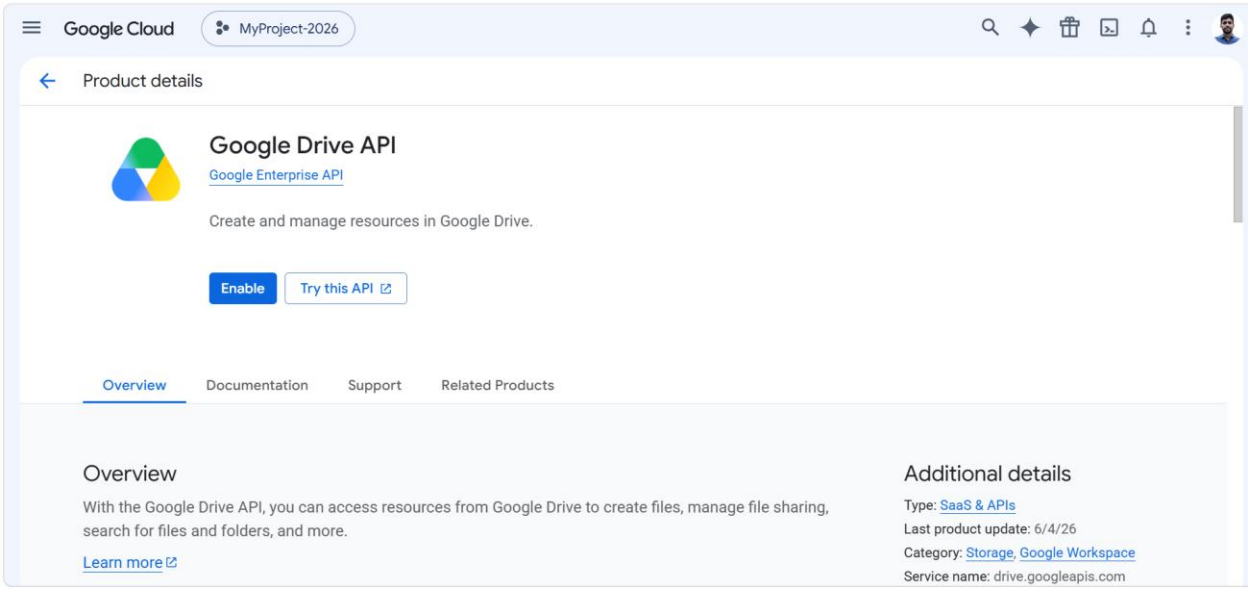


Step 2: Enable the Google Drive API

1. Navigate to APIs & Services.
2. Search for Google Drive API.
3. Select Google Drive API from the search results.
4. Click Enable.
5. Verify that the API is enabled for your selected project.

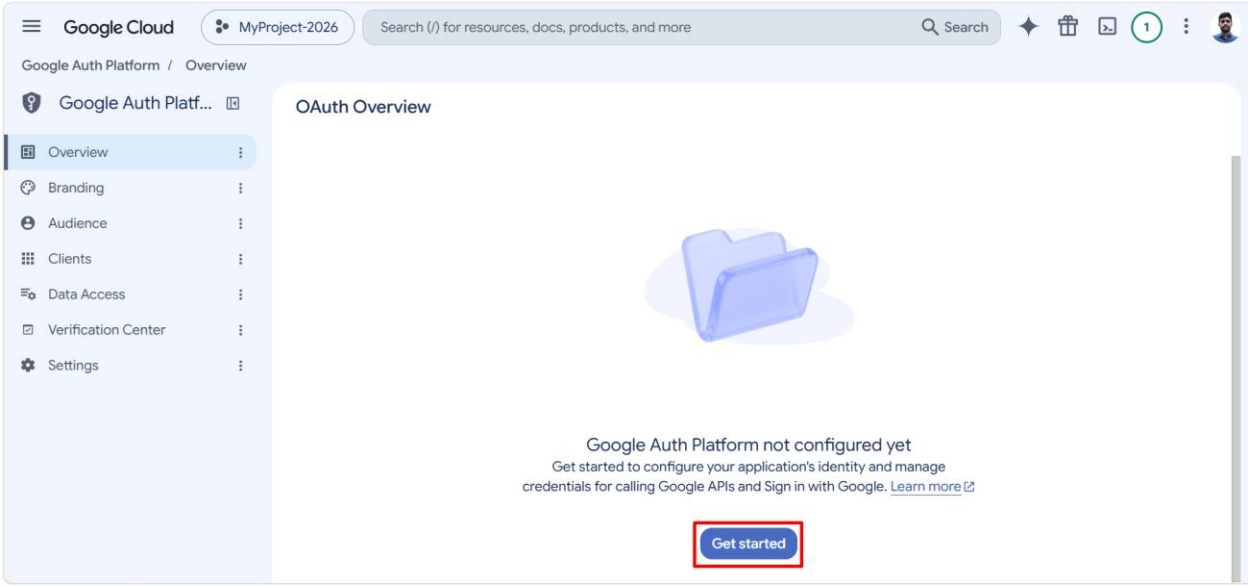


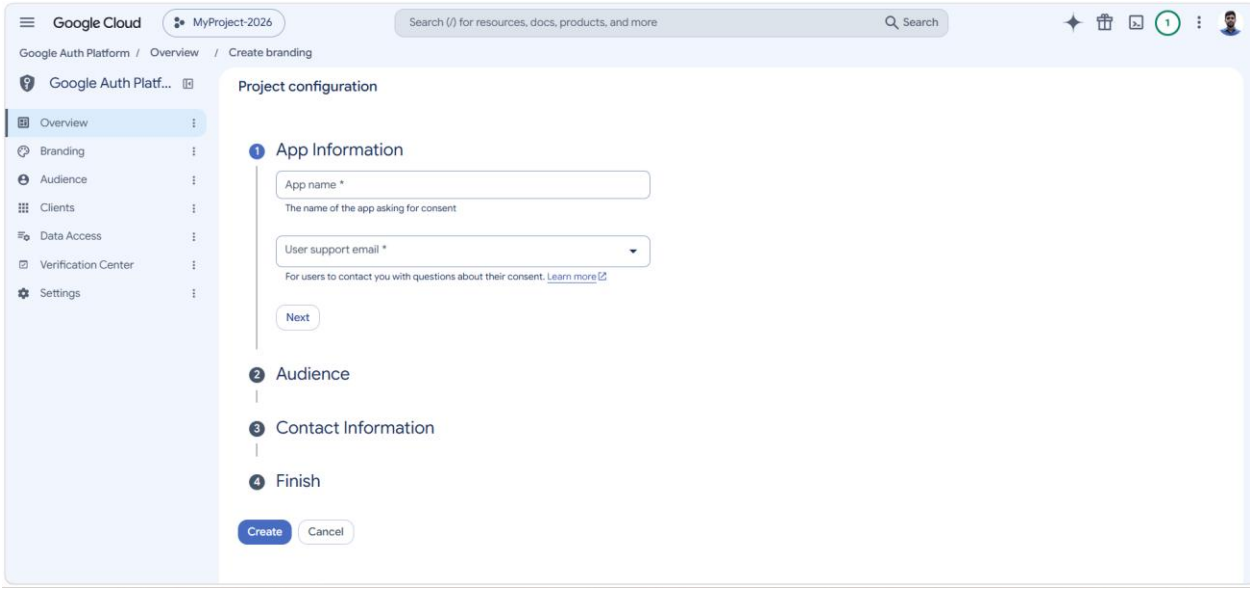


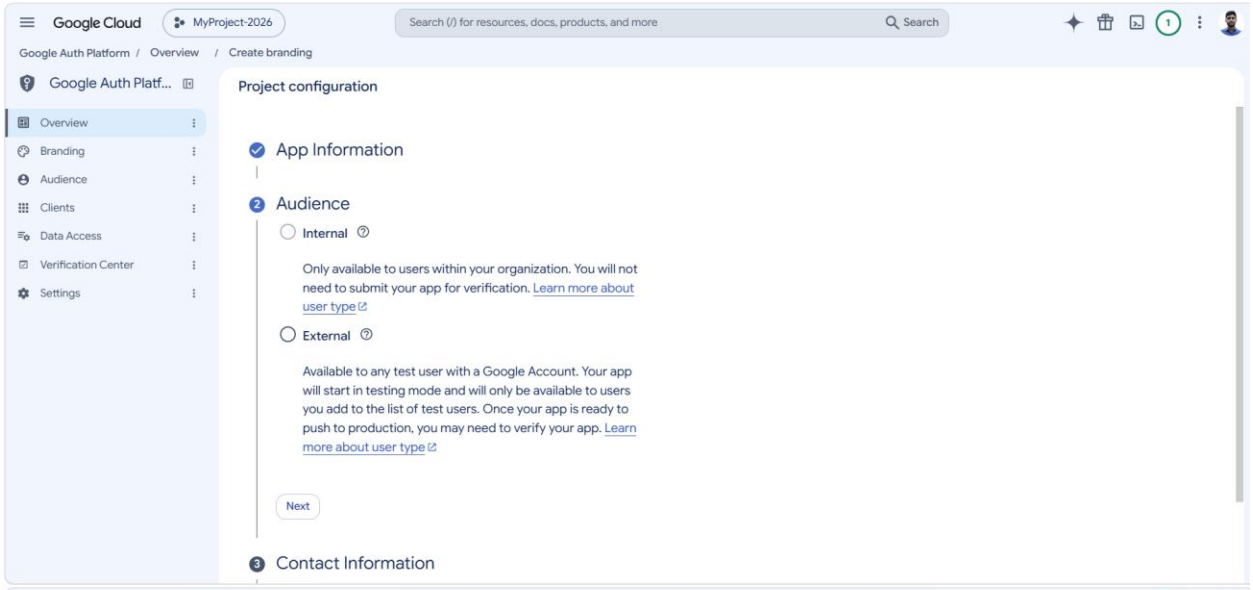


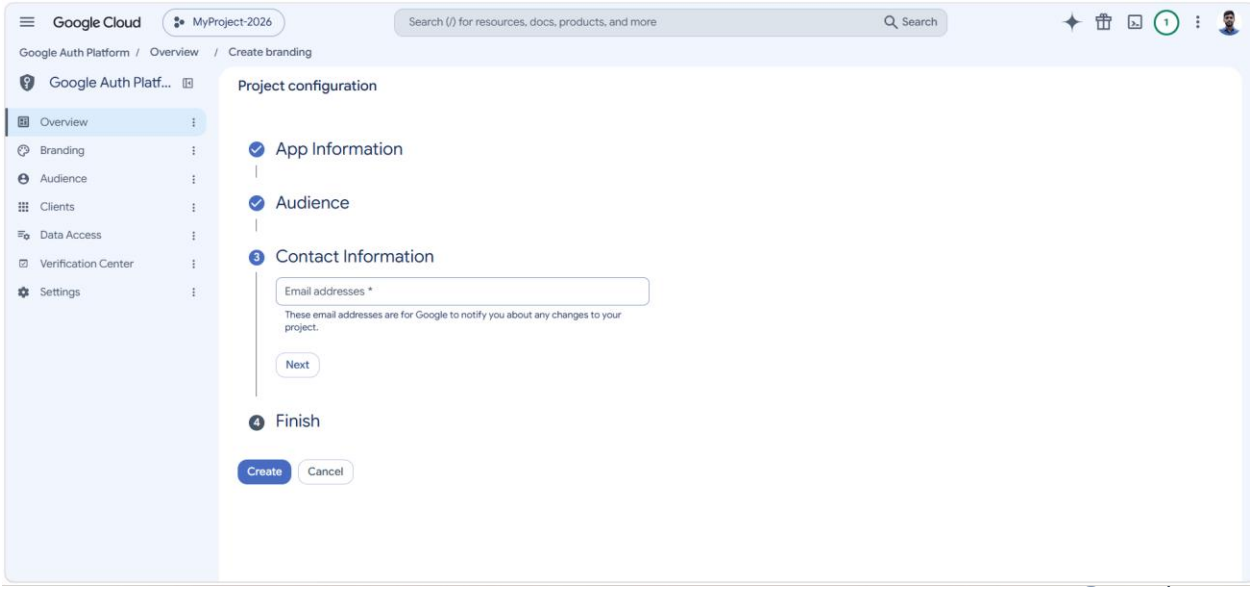
Step 3: Configure the OAuth Consent Screen

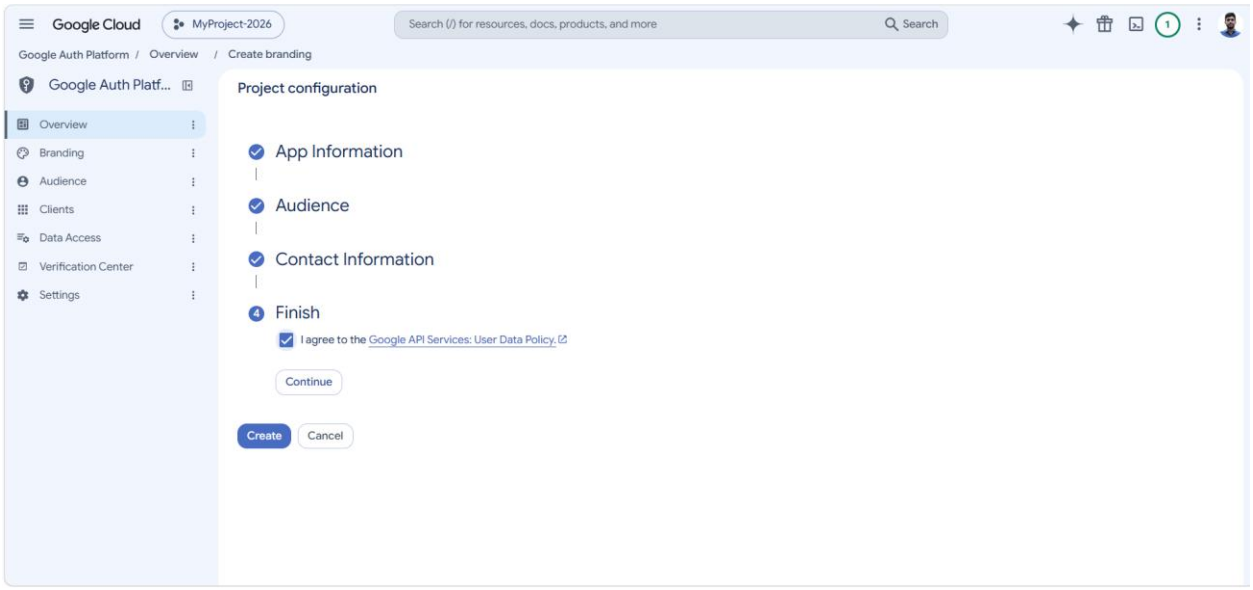
1. Navigate to Google Auth Platform => OAuth consent screen in the Cloud Console.
2. Enter the application name.
3. Provide the support email address.
4. Configure the required application information.
5. Save the configuration.

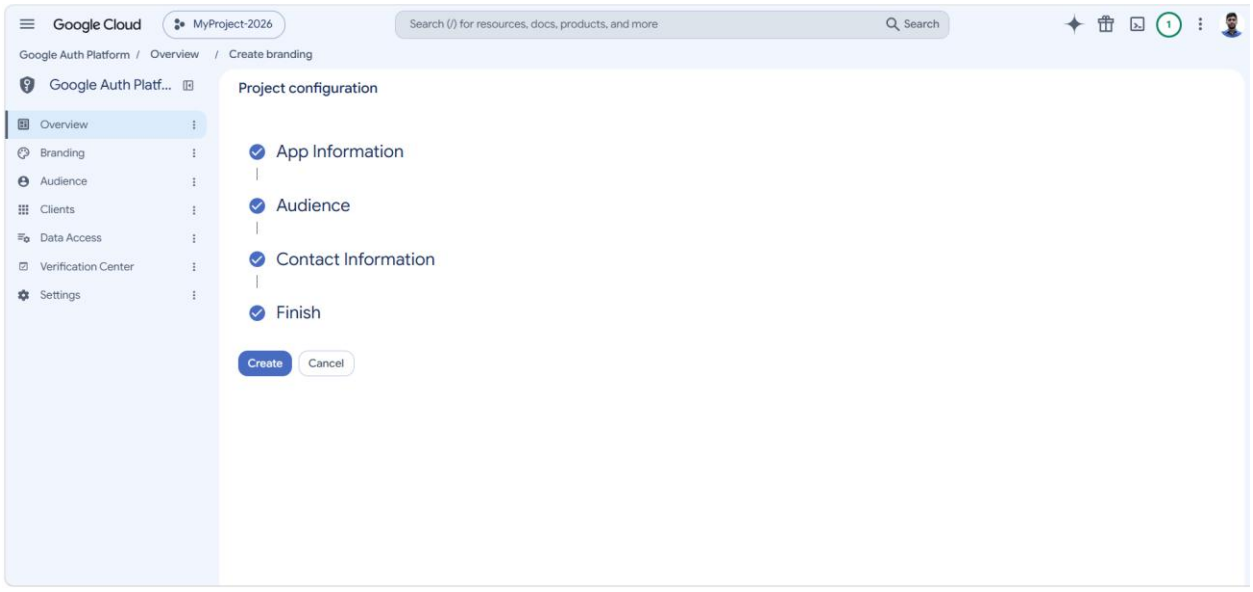



Google Cloud
MyProject-2026
Search (/) for resources, docs, products, and more
Search
Google Auth Platform / Overview / Create branding
Google Auth Platf...
Overview
Branding
Audience
Clients
Data Access
Verification Center
Settings
Project configuration
1 App Information
App name *
The name of the app asking for consent
User support email *
For users to contact you with questions about their consent. Learn more
Next
2 Audience
3 Contact Information
4 Finish
Create
Cancel


Google Cloud
MyProject-2026
Search (/) for resources, docs, products, and more
Search
Google Auth Platform / Overview / Create branding
Google Auth Platf...
Overview
Branding
Audience
Clients
Data Access
Verification Center
Settings
Project configuration
App Information
2 Audience
Internal
Only available to users within your organization. You will not need to submit your app for verification. Learn more about user type
External
Available to any test user with a Google Account. Your app will start in testing mode and will only be available to users you add to the list of test users. Once your app is ready to push to production, you may need to verify your app. Learn more about user type
Next
3 Contact Information

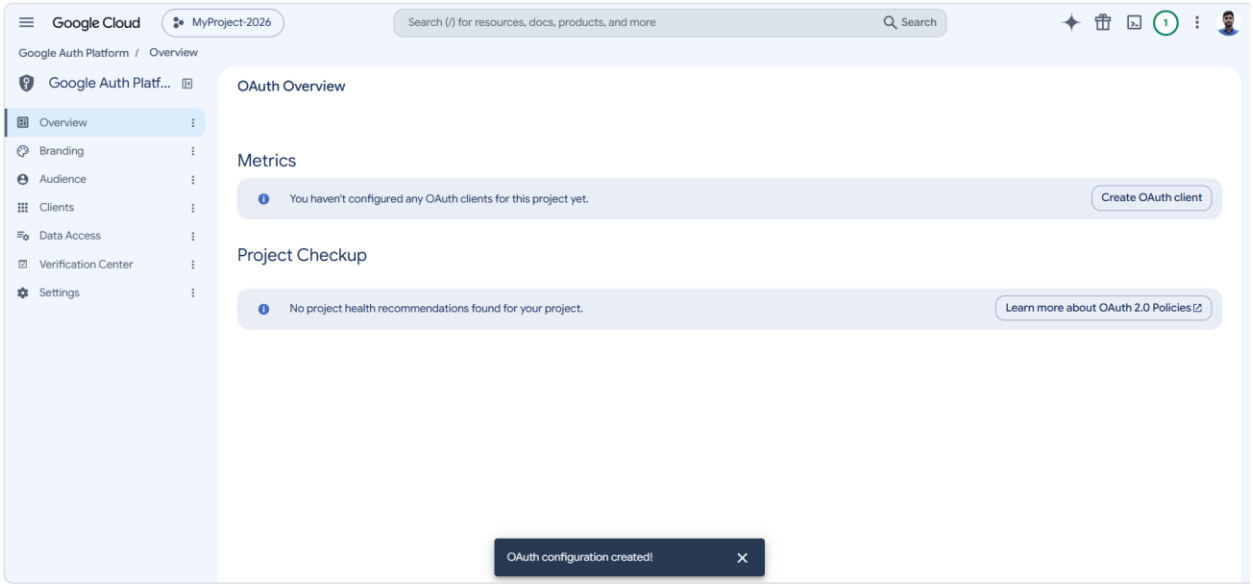

Google Cloud
MyProject-2026
Search (/) for resources, docs, products, and more
Search
Google Auth Platform / Overview / Create branding
Google Auth Platf...
Overview
Branding
Audience
Clients
Data Access
Verification Center
Settings
Project configuration
App Information
Audience
3 Contact Information
Email addresses *
These email addresses are for Google to notify you about any changes to your project.
Next
4 Finish
Create
Cancel

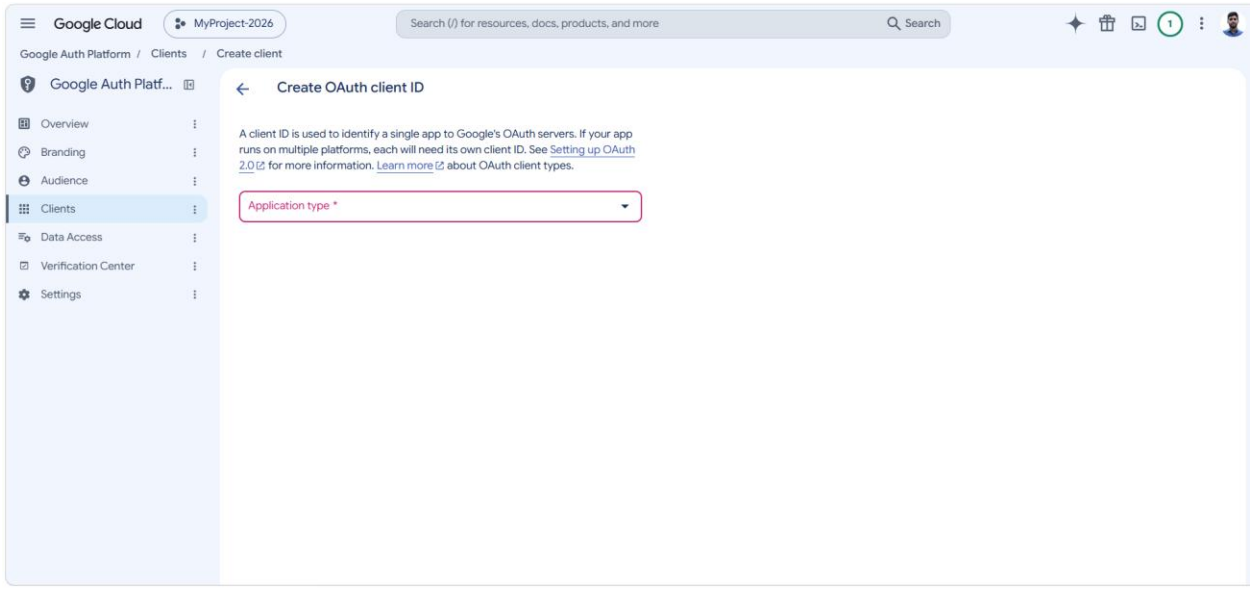


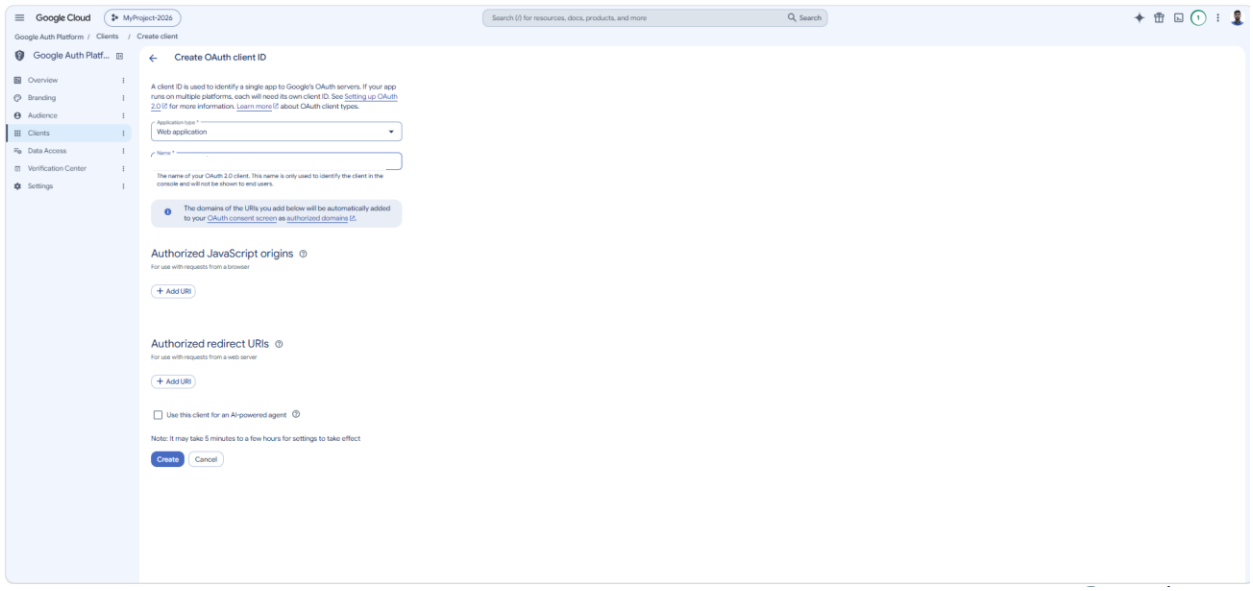


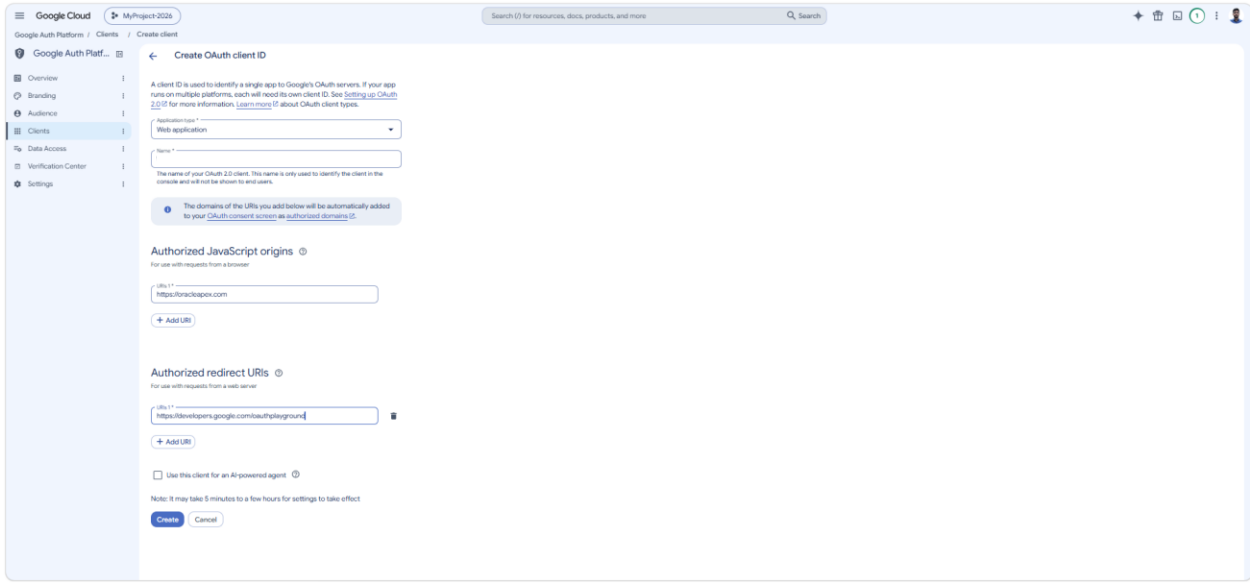
Step 4: Create OAuth Client ID and Client Secret

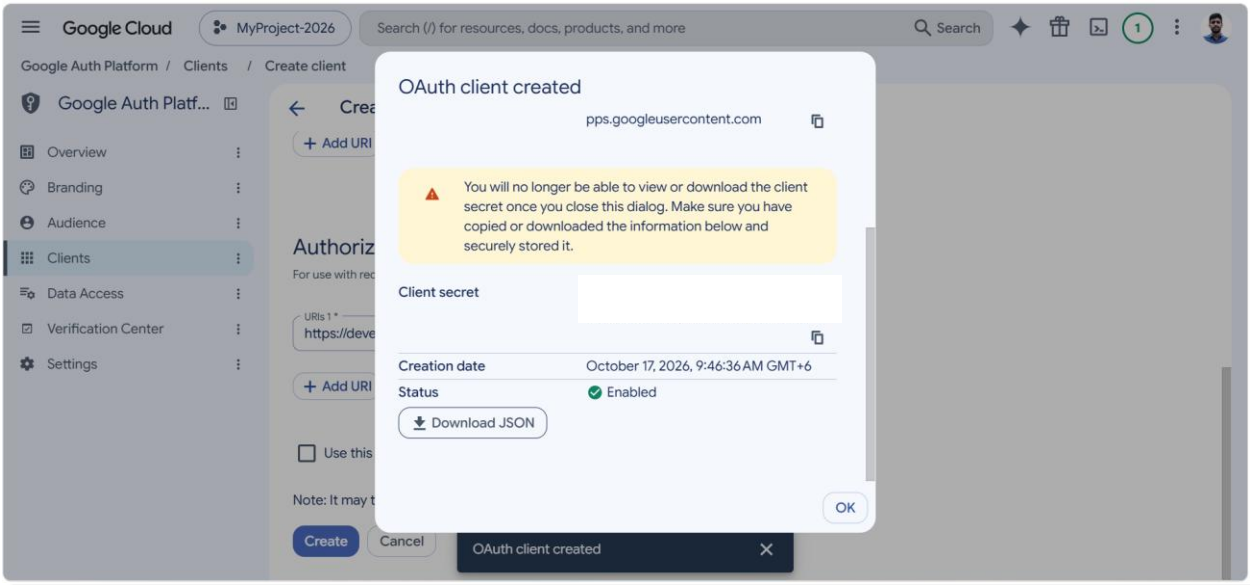
1. Navigate to Google Auth Platform → Clients.
2. Click Create Client.
3. Select Web application as the application type.
4. Enter a descriptive name for the OAuth client.
5. Under Authorized redirect URIs, add the redirect URI required for the Google OAuth Playground: **https://developers.google.com/oauthplayground**
6. Click Create.
7. Copy the generated Client ID and Client Secret.
8. Store these credentials securely for use in the following steps.

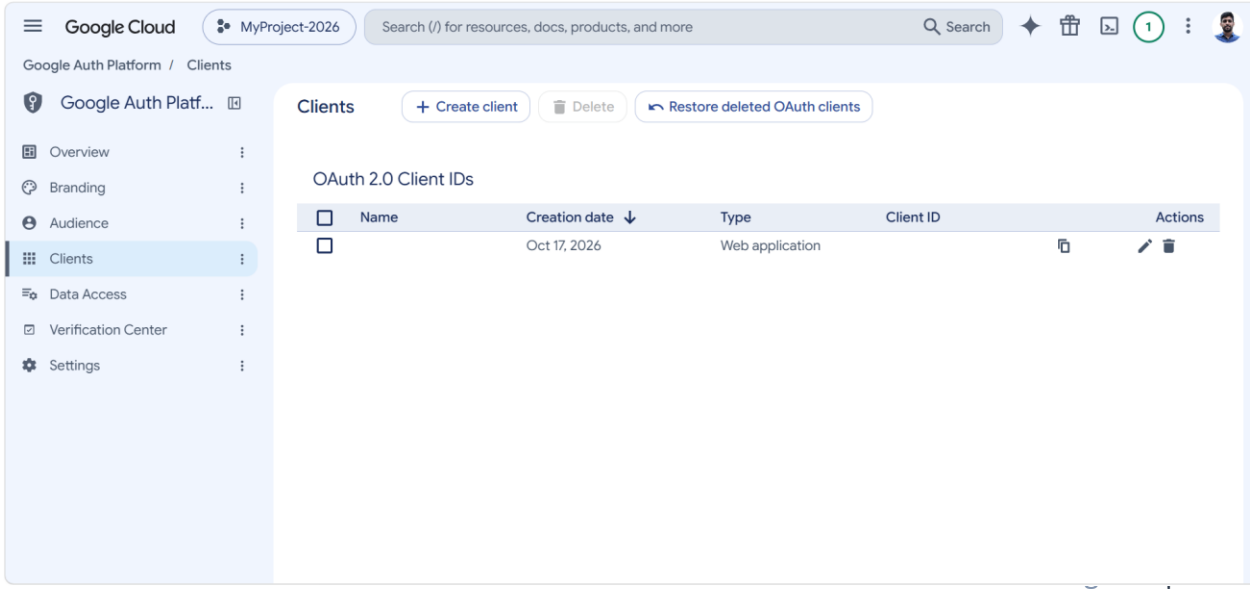

Google Cloud
MyProject-2026
Search (/) for resources, docs, products, and more
Search
Google Auth Platform / Overview
Google Auth Platf...
Overview
Branding
Audience
Clients
Data Access
Verification Center
Settings
OAuth Overview
Metrics
You haven't configured any OAuth clients for this project yet.
Create OAuth client
Project Checkup
No project health recommendations found for your project.
Learn more about OAuth 2.0 Policies
OAuth configuration created!


Google Cloud
MyProject-2026
Search (/) for resources, docs, products, and more
Search
Google Auth Platform / Clients / Create client
Google Auth Platf...
Overview
Branding
Audience
Clients
Data Access
Verification Center
Settings
Create OAuth client ID
A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See Setting up OAuth 2.0 for more information. Learn more about OAuth client types.
Application type *


Google Cloud
MyProject-2026
Google Auth Platform / Clients / Create client
Google Auth Platf...
Create OAuth client ID
A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See Setting up OAuth 2.0 for more information. Learn more about OAuth client types.
Application type *
Web application
Name *
The name of your OAuth 2.0 client. This name is only used to identify the client in the console and will not be shown to end users.
The domains of the URIs you add below will be automatically added to your OAuth consent screen as authorized domains.
Authorized JavaScript origins
For use with requests from a browser
+ Add URI
Authorized redirect URIs
For use with requests from a web server
+ Add URI
Use this client for an AI-powered agent
Note: It may take 5 minutes to a few hours for settings to take effect
Create
Cancel

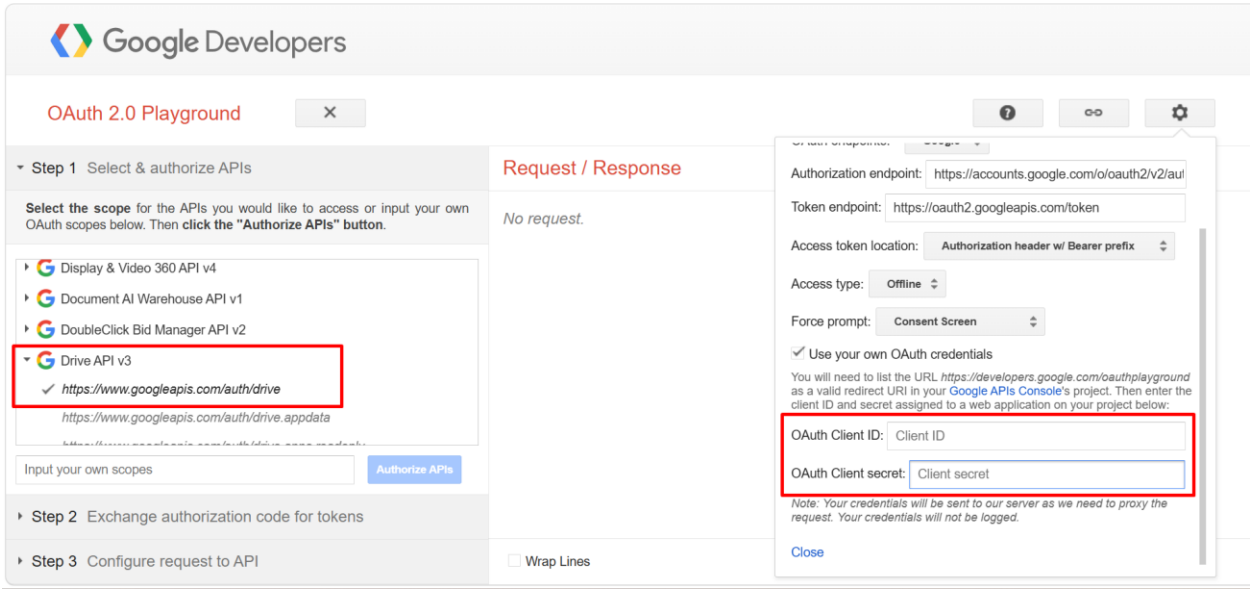

Google Cloud
MyProject-2026
Search (/) for resources, docs, products, and more
Search
Google Auth Platform / Clients / Create client
Google Auth Platf...
Create OAuth client ID
Overview
Branding
Audience
Clients
Data Access
Verification Center
Settings
A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See Setting up OAuth 2.0 for more information. Learn more about OAuth client types.
Application type *
Web application
Name *
The name of your OAuth 2.0 client. This name is only used to identify the client in the console and will not be shown to end users.
The domains of the URIs you add below will be automatically added to your OAuth consent screen as authorized domains.
Authorized JavaScript origins
For use with requests from a browser
URIs 1 *
https://oracleapex.com
+ Add URI
Authorized redirect URIs
For use with requests from a web server
URIs 1 *
https://developers.google.com/oauthplayground
+ Add URI
Use this client for an AI-powered agent
Note: It may take 5 minutes to a few hours for settings to take effect
Create
Cancel

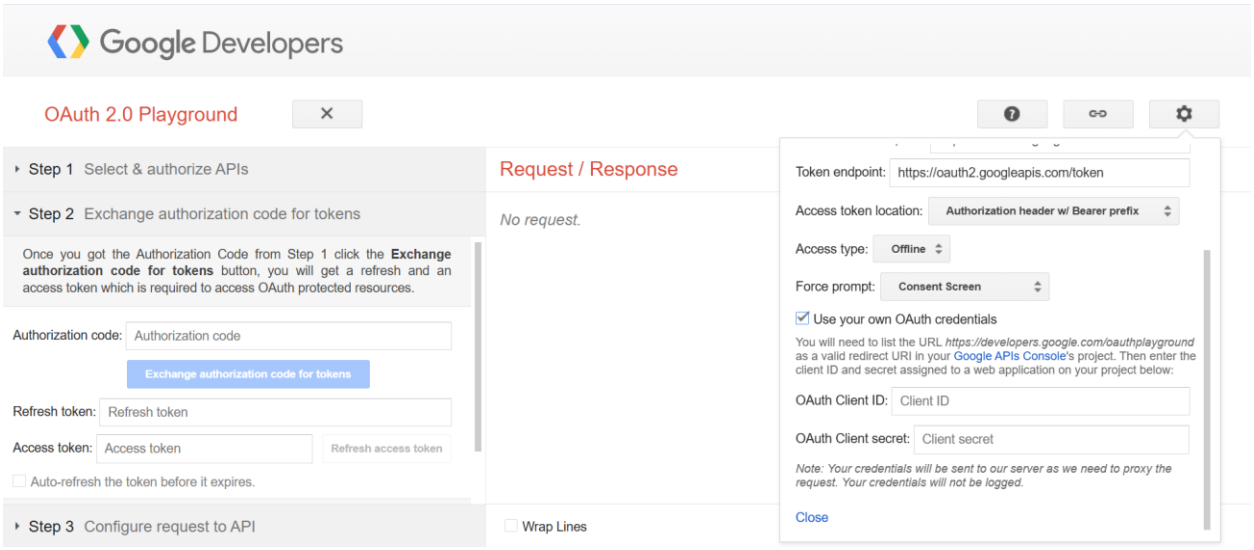

Google Cloud
MyProject-2026
Search (/) for resources, docs, products, and more
Search
Google Auth Platform / Clients / Create client
Google Auth Platf...
Overview
Branding
Audience
Clients
Data Access
Verification Center
Settings
+ Add URI
+ Add URI
Use this
Note: It may t
Create
Cancel
OAuth client created
OAuth client created
pps.googleusercontent.com
You will no longer be able to view or download the client secret once you close this dialog. Make sure you have copied or downloaded the information below and securely stored it.
Client secret
Creation date
October 17, 2026, 9:46:36 AM GMT+6
Status
Enabled
Download JSON
OK


Google Cloud
MyProject-2026
Search (/) for resources, docs, products, and more
Search
Google Auth Platform / Clients
Google Auth Platf...
Overview
Branding
Audience
Clients
Data Access
Verification Center
Settings
Clients
+ Create client
Delete
Restore deleted OAuth clients
OAuth 2.0 Client IDs
Name
Creation date
Type
Client ID
Actions
Oct 17, 2026
Web application

Step 5: Open Google OAuth 2.0 Playground & Generate Refresh Token

1. Open the Google OAuth 2.0 Playground (**https://developers.google.com/oauthplayground**).
2. Click the Settings icon in the upper-right corner.
3. Check Use your own OAuth credentials.
4. Enter the Client ID and Client Secret generated in Step 4.
5. In the OAuth Playground, locate the Select & authorize APIs section.
6. Enter or select the following Google Drive scope:
   `https://www.googleapis.com/auth/drive`
7. Click Authorize APIs.
4. Sign in using the Google account that will authorize access to Google Drive.
5. Review the requested permissions.
6. Click Allow to authorize access.
7. After authorization, the OAuth Playground displays an authorization code.
8. Click Exchange authorization code for tokens.
9. The Playground generates the following tokens:
   - Access Token: Used to make authorized Google Drive API requests. It expires after a limited period.
   - Refresh Token: Used to obtain a new access token when the current access token expires.
10. Copy the refresh token and store it securely.




Google Developers
OAuth 2.0 Playground
Step 1 Select & authorize APIs
Step 2 Exchange authorization code for tokens
Once you got the Authorization Code from Step 1 click the Exchange authorization code for tokens button, you will get a refresh and an access token which is required to access OAuth protected resources.
Authorization code: Authorization code
Exchange authorization code for tokens
Refresh token: Refresh token
Access token: Access token
Refresh access token
Auto-refresh the token before it expires.
Step 3 Configure request to API
Request / Response
No request.
Wrap Lines
Token endpoint: https://oauth2.googleapis.com/token
Access token location: Authorization header w/ Bearer prefix
Access type: Offline
Force prompt: Consent Screen
Use your own OAuth credentials
You will need to list the URL https://developers.google.com/oauthplayground as a valid redirect URI in your Google APIs Console's project. Then enter the client ID and secret assigned to a web application on your project below:
OAuth Client ID: Client ID
OAuth Client secret: Client secret
Note: Your credentials will be sent to our server as we need to proxy the request. Your credentials will not be logged.
Close