



Web Development

Web Development



ADEL AHMED ALHAJJ


example@gmail.com

`([a-zA-Z0-9_+~]+)@[a-zA-Z0-9_+~]+\.[a-zA-Z0-9_+~]+`



Web Development

Regular Expressions in PHP

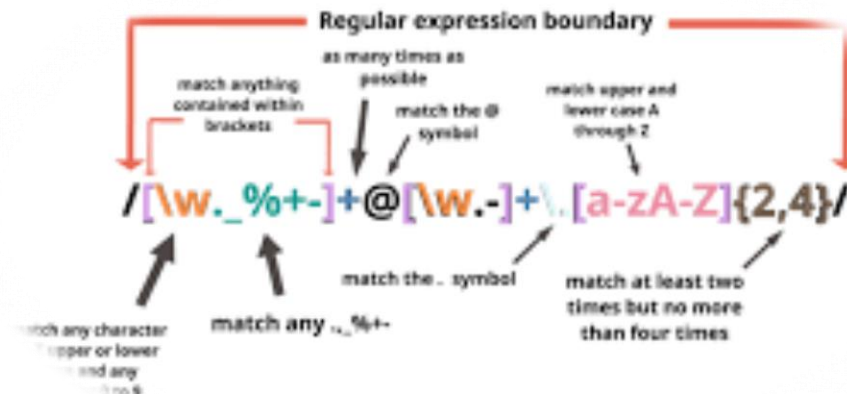

ADEL AHMED ALHAJJ



Define Regular Expression

- **Regular Expression** is used for matching a particular character pattern.
- Regular expressions are used whenever a user needs to find some repeating pattern or do a data validation or even for checking data formatting.

□ يتم استخدام **التعبير القياسي (العالمي)** لمطابقة نمط حرف معين.

□ يتم استخدام التعبيرات القياسية عندما يحتاج المستخدم إلى العثور على نمط متكرر أو إجراء التحقق من صحة البيانات أو حتى للتحقق من تنسيق البيانات.



Uses of Regular Expression

- Validating a String whether it matches with another String or not.
- Replacing text with another string or expression.
- Extracting substring from a string.
- Validating a form in an application.
- Searching for a specific text.
- التحقق من صحة سلسلة سواء كانت تتطابق مع سلسلة أخرى أم لا.
- استبدال النص بسلسلة أو تعبير آخر.
- استخراج سلسلة فرعية من سلسلة.
- التحقق من صحة نموذج في التطبيق.
- البحث عن نص معين.

Regex Class

- **Regex Class** is used in *C#* to perform regex operations. It contains several different methods that can be used to perform different operations related to regex.

□ **Regex Class** يحتوي على العديد من الدوال المختلفة والرموز العديدة التي يمكن استخدامها لأداء عمليات مختلفة متعلقة بالتعبير القياسي.

- 1- **preg_match()** - this function is used to perform pattern matching in PHP on a string.

It returns true if a match is found and false if a match is not found.

- Note >> Or Returns 1 if the pattern was found in the string and 0 if not

تستخدم دالة **preg_match()** لمعرفة ما إذا كان التعبير النمطي المعطى يطابق سلسلة الإدخال أم لا.

يعطينا ناتجًا منطقيًا. أي من أجل مطابقة النمط على السلسلة. يعود صحيحًا إذا تم العثور على تطابق وخطأ

إذا لم يتم العثور على تطابق

- 2- **preg_replace()** this function is used to perform a pattern match on a string and then replace the match with the specified text.

تُستخدم دالة **preg_replace()** لاستبدال السلاسل والسماح بتعديل نص الإدخال أي أنها تطابق نمط على سلسلة ثم استبدال التطابق بالنص المحدد.

- 3- **preg_match_all()** - This function matches all the occurrences of pattern in the string returns the number of times the pattern was found in the string, which may also be 0

تُستخدم دالة **preg_match_all()** لمطابقة جميع تكرارات النمط في السلسلة أي أنها تعمل على إرجاع عدد المرات التي تم فيها العثور على النمط في السلسلة ، والتي قد تكون أيضًا 0

Regular Expression Modifiers

- Modifiers can change how a search is performed.

Modifier	Description
i	Performs a case-insensitive search
m	Performs a multiline search (patterns that search for the beginning or end of a string will match the beginning or end of each line) يُجري بحثًا متعدد الأسطر (الأنماط التي تبحث عن بداية سلسلة أو نهايتها ستطابق بداية كل سطر أو نهايته)
u	Enables correct matching of UTF-8 encoded patterns

Regular Expression Patterns

- Brackets are used to find a range of characters

يتم استخدام الأقواس للعثور على مجموعة من الأحرف

Expression	Description
[abc]	Find one character from the options between the brackets
[^abc]	Find any character NOT between the brackets
[0-9]	Find one character from the range 0 to 9
[a-z]	It matches any lowercase character from a to z.
[A-Z]	It matches any uppercase character from A to Z.
[a-Z]	It matches any character from lowercase a to uppercase Z

Regular Expression **Metacharacters**

- Metacharacters are characters with a special meaning

Metacharacters	Description
	Find a match for any one of the patterns separated by as in: cat dog fish
^	Finds a match as the beginning of a string as in: ^Hello
\$	Finds a match at the end of the string as in: World\$
\D	is used to match non-digit characters.
\d	Find a digit
\s	is used to match white spaces.
\S	is used to match non-white space.
\w	Matches for a word character such as - a-z, A-Z, 0-9, _

Regular Expression Quantifiers

- Every special character has a specific meaning. The given symbols `+`, `*`, `?`, `$`, and `{int range}` flags all follow a character sequence.

Quantifiers	Description
n^+	Matches any string that contains at least one n يتطابق مع أي سلسلة تحتوي على n واحد على الأقل
n^*	It matches any string that contains one or more n . يتطابق مع أي سلسلة تحتوي على n أو أكثر.

Quantifiers	Description
$n\{2,3\}$	It matches any string that has a sequence of two or three n . إنه يتطابق مع أي سلسلة لها تسلسل من اثنين أو ثلاثة n .
$n\{2, \}$	It matches any string that contains atleast two n . يتطابق مع أي سلسلة تحتوي على الأقل على حرفين n .
$p\{N\}$	It matches any string that has a sequence of N p 's. إنها تتطابق مع أي سلسلة لها تسلسل من P n .
$n\$$	It matches any string that contains n at the end of it. إنها تطابق أي سلسلة تحتوي على n في نهايتها.
n	It matches any string that has n at the start of it. إنها تتطابق مع أي سلسلة بها n في بدايتها.

Regex Expression Syntax

Regular Expression Syntax

- The syntax for a regular expression function such as PHP preg_match(), PHP preg_split() or PHP preg_replace().

```
<?php    function_name ( '/pattern/', subject ) ;    ?>
```

- **function_name ()** is either PHP preg_match(), PHP preg_split() or PHP preg_replace().
- **/.../** The forward slashes denote the beginning and end of our PHP regex tester function
- **pattern** is the pattern that we need to matched
- **subject** is the text string to be matched against

```
1 <?php
2 $str = "Visit GOOGLE WEB SITE";
3
4 $pattern = "/google/i";
5
6 echo preg_match($pattern, $str); // Outputs 1
7 ?>
```

```
1 <?php
2 $str = "The rain in SPAIN falls mainly on the plains.";
3
4 $pattern = "/ain/i";
5
6 echo preg_match_all($pattern, $str); // Outputs 4
7 ?>
```

Regex >> Example 3

```
1 <?php
2 $str = "Visit Microsoft!";
3
4 $pattern = "/microsoft/i";
5
6 echo preg_replace($pattern, "GOOGLE", $str); // Outputs "Visit GOOGLE!"
7 ?>
```


Regex >> Example 4

```
1 <?php
2 $str = "Apples and bananas.";
3
4 $pattern = "/ba(na){2}/i";
5
6 echo preg_match($pattern, $str); // Outputs 1
7 ?>
```

Regex >> Example 5

```
1 <?php
2 $my_url = "www.VisualStudio.com";
3
4 if (preg_match("/code/", $my_url))
5 {
6     echo "the url $my_url contains code";
7 }
8 else
9 {
10     echo "the url <b> $my_url</b> does not contain code";
11 }
12 ?>
```

the url **www.VisualStudio.com** does not contain code

Regex >> Example 6

```
1 <?php
2
3 $text = "We at learnPHP strive to make quality education affordable to the masses. learnPHP.com";
4
5 $text = preg_replace("/learn/", '<span style="background:yellow">Exercises</span>', $text);
6
7 echo $text;
8
9 ?>
```

We at ExercisesPHP strive to make quality education affordable to the masses. ExercisesPHP.com

Regex >> Example 7

Note:-

- Only uppercase **or** lowercase letters are allowed here

Please input User Name:

Enter Your Name	Adel
check	

Username valid

Please input User Name:

Enter Your Name	Adel22
check	

Username not valid

Regex >> Example 7

```
<html>
  <body>
    <form action="basic.php" method="post">
      <h2>Please input User Name:</h2>
      <table border=2 bgcolor=pink>
        <tr>
          <td>Enter Your Name</td>
          <td><input type="text" name="username"/></td>
        </tr>
        <tr>
          <td colspan="2" align="center">
            <input type="submit" name="save" value="check"/></td>
          </tr>
        </table>
      </form> </body> </html>
```

input.php

Regex >> Example 7

Note:- * This means that you can enter **or** not enter anything

```
1 <?php
2 $s1 = $_POST['username'];
3
4 if(preg_match("/^[a-zA-Z ]*$/", $s1))
5
6     { echo "<h3 style='color:blue'> Username valid </h3>"; }
7 else
8     { echo "<h3 style='color:Red'>Username not valid</h3>"; }
```

basic.php

Regex >> Example 8

Note:-

- It is allowed to enter the first letter in uppercase **and** the rest in lowercase

Please input User Name:

Enter Your Name	adel
check	

Username not valid

Please input User Name:

Enter Your Name	Adel
check	

Username valid

Regex >> Example 8

Note:- + This means that you must enter at least one lowercase letter

```
1 <?php
2 $s1 = $_POST['username'];
3
4 if(preg_match("/^[A-Z][a-z]+$/", $s1))
5
6 { echo "<h3 style='color:blue'> Username valid </h3>"; }
7 else
8 { echo "<h3 style='color:Red'>Username not valid</h3>";}
9 ?>
```

basic.php

Regex >> Example 9

- Note:- it is allowed to enter first UpperCase letter and after that LowerCase letters and One WhiteSpaces

Please input User Name:

Enter Your Name	Adel
check	

the Name Adel Contains first a UpperCase letter and after that LowerCase letters and WhiteSpaces

Regex >> Example 9

- Note:- \s This means that you must enter **one whitespaces**

```
1 <?php
2 $s1 = $_POST['username'];
3
4 if (preg_match("/^[A-Z][a-z]+\s$/", $s1))
5
6     {
7         echo "<i><h3 style='color:blue'>the Name <u>$s1</u>Contains
8             first a UpperCase letter and after that LowerCase letters
9             and WhiteSpaces</h3></i>";
10    }
11    else
12    {
13        echo "<h3 style='color:Red'>the Name <u>$s1 does not</u> Contains
14            first a UpperCase letter and after that LowerCase letters
15            and WhiteSpaces</h3>";
16    }
17 ?>
```

basic.php

Regex >> Example 10

- Note:- it is allowed to enter >>>
- **First name >>** (you must enter first UpperCase letter **and** after that LowerCase letters)
- After that you must enter **One WhiteSpaces**
- **Last name >>** (you must enter first UpperCase letter **and** after that LowerCase letters)

Please input User Name:

Enter Your Name	Adel alhajj
check	

Username not valid

Regex >> Example 10

```
1 <?php
2 $s1 = $_POST['username'];
3
4 if (preg_match( "/^[A-Z][a-z]+\s[A-Z][a-z]+$/" , $s1))
5
6     { echo "<h3 style='color:blue'>Username valid</h3>";}
7 else
8     { echo "<h3 style='color:Red'>Username not valid</h3>"; }
9 ?>
```

basic.php

Regex >> Example 11

- Note:- it is allowed to enter >>>
- **First name >>** (you must enter first UpperCase letter **and** after that LowerCase letters)
- After that you must enter **One WhiteSpaces**
- **Last name >>** (you must enter first UpperCase letter **and** after that LowerCase letters)

Note :- Here you can enter more than name

Please input User Name:

Enter Your Name	Adel Ahmed Alhajj
check	

Username valid

Regex >> Example 11

```
1  <?php
2  $s1 = $_POST['username'];
3
4
5  if (preg_match("/^[A-Z][a-z]+(\s[A-Z][a-z]+)*$/", $s1))
6
7      { echo "<h3 style='color:blue'>Username valid</h3>"; }
8  else
9      { echo "<h3 style='color:Red'>Username not valid</h3>"; }
10 ?>
```

basic.php

Regex >> Example 12

- Note:- it is allowed to enter >>>
- you must enter LowerCase letters and only one underscore
- And you must enter only numbers at least 3 to 7 numbers

Please input User Name:

Enter Your Name	Adel_12
check	

the Name >>> Adel_12 not valid

Regex >> Example 12

```
1 <?php
2 $s1 = $_POST['username'];
3
4 if (preg_match("/^[a-z]+\d{3,7}$/", $s1))
5
6     { echo "<i><h3 style='color:blue'>the Name >>> $s1 is correct</h3></i>";}
7     else
8     { echo "<h3 style='color:Red'>the Name >>> $s1 not valid</h3>";}
9 ?>
```

basic.php

Regex >> Example 13

- Note:- it is allowed to enter >>>
- you must enter first UpperCase letter and after that only 4 LowerCase letters
- And you must enter . (dot)
- And you must enter LowerCase letters at least 2 to 5 letters
- And you must enter only one underscore
- And you must enter only 5 numbers

Please input User Name:

Enter Your Name	Aabcd.adel_12345
check	

Username valid

Regex >> Example 13

```
1 <?php
2 $s1 = $_POST['username'];
3
4 if (preg_match( "/^[A-Z][a-z]{4}.[a-z]{2,5}_\d{5}$/", $s1))
5
6 { echo "<h3 style='color:blue'>Username valid</h3>"; }
7 else
8 { echo "<h3 style='color:Red'>Username not valid</h3>"; }?>
9 ?>
```

basic.php

Regex >> Example 14

Please input User E-mail:

Enter Your E-mail

adel.aa12@gmail.com

check

adel.aa12@gmail.com is a valid email address

```
1 <?php
2 $s1 = $_POST['username'];
3
4 if (preg_match( "/^[a-zA-Z0-9._-]+@[a-zA-Z0-9-]+\.[a-zA-Z]{2,5}$/" , $s1))
5
6     { echo "<h3 style='color:blue'> $s1 is a valid email address</h3>";}
7     else
8     { echo "<h3 style='color:Red'>$s1 is NOT a valid email address</h3>"; }?>
```

basic.php

Regular Expression with Numbers

- **Regex** يتعامل مع النص فقط وليس الأرقام ولا يتعرف على نظام العد ايضاً أي انه لا يمكنهم فهم **[1-100]** يعني أي رقم من 1 إلى 100
- مثل على ذلك النطاق **[0-255]** سيتطابق مع **5،2،1،0** يبحث اولا على النطاق **0-2** الموجود في فئة الأحرف سيتطابق مع **2،1،0** و **5** سيتطابقها مرتين ،
- أبسط تطابق للأرقام هو التطابق الحرفي. مثال لمطابقة **3** ببساطة اكتب **/3/** أو لمطابقة **99** اكتب **/99/** وبشكل مشابه لمطابقة **2022** اكتب **/2022/** وهي مطابقة حرفية للأرقام.
- لذلك يجب الانتباه أثناء التعامل مع الأرقام ونطاقات الأرقام أو النطاقات الرقمية في مطابقة **Regex** أو البحث أو التحقق من صحة أو استبدال العمليات.

Regex with Numbers >> Example 15

Please input Mobile Number:

Enter Your Mobile Number 77234

check

Mobile Number not valid

```
1 <?php
2 $s1 = $_POST['username'];
3
4 if (preg_match( "/^\d{9}$/" , $s1))
5
6 { echo "<h3 style='color:blue'> Mobile Number valid</h3>";}
7 else
8 { echo "<h3 style='color:Red'> Mobile Number not valid</h3>"; } ?>
```

basic.php

Regex with Numbers >> Example 16

Please input Mobile Number:

Enter Your Mobile Number

770-123-456

check

Mobile Number valid

```
1 <?php
2 $s1 = $_POST['username'];
3
4 if (preg_match( "/^77\d{1}-\d{3}-\d{3}$/" , $s1))
5
6 { echo "<h3 style='color:blue'> Mobile Number valid</h3>";}
7 else
8 { echo "<h3 style='color:Red'> Mobile Number not valid</h3>"; } ?>
```

basic.php

Regex with Numbers >> Example 17

- Note:- it is allowed to enter Numbers **between 1 to 10**

Please input Numbers betwwen 1 to 10:

Enter Your Number	15
check	

Number not valid

```
1 <?php
2 $s1 = $_POST['username'];
3
4 if (preg_match( "/^([1-9]|10)$/" , $s1))
5
6 { echo "<h3 style='color:blue'> Number valid</h3>";}
7 else
8 { echo "<h3 style='color:Red'> Number not valid</h3>"; } ?>
```

basic.php

Regex with Numbers >> Example 18

- Note:- it is allowed to enter Numbers **between 1 to 16**

Please input Numbers between 1 to 16:

Enter Your Number	16
check	

Number valid

- **[1-9]** between 1 to 9
- **| Or**
- **1[0-6]** between 10 to 16

```
1 <?php
2 $s1 = $_POST['username'];
3
4 if (preg_match( "/^([1-9]|1[0-6])$/", $s1))
5
6 { echo "<h3 style='color:blue'> Number valid</h3>";}
7 else
8 { echo "<h3 style='color:Red'> Number not valid</h3>"; } ?>
```

basic.php

Regex with Numbers >> Example 19

- Note:- it is allowed to enter Numbers **between 1 to 100**

Please input Numbers between 1 to 100:

Enter Your Number	100
check	

Number valid

Input Number between 0 to 255

Input Number between 1 to 1000

- [1-9] **between 1 to 9**

- | **Or**

- [1-9][0-90]

between 10 to 99

- | **Or**

- 100

```
1 <?php
2 $s1 = $_POST['username'];
3
4 if (preg_match( "/^([1-9]|[1-9][0-9]|100)$/" , $s1))
5
6 { echo "<h3 style='color:blue'> Number valid</h3>";}
7 else
8 { echo "<h3 style='color:Red'> Number not valid</h3>"; } ?>
```


basic.php



Web Development

PHP Filter

ADEL AHMED ALHAJJ

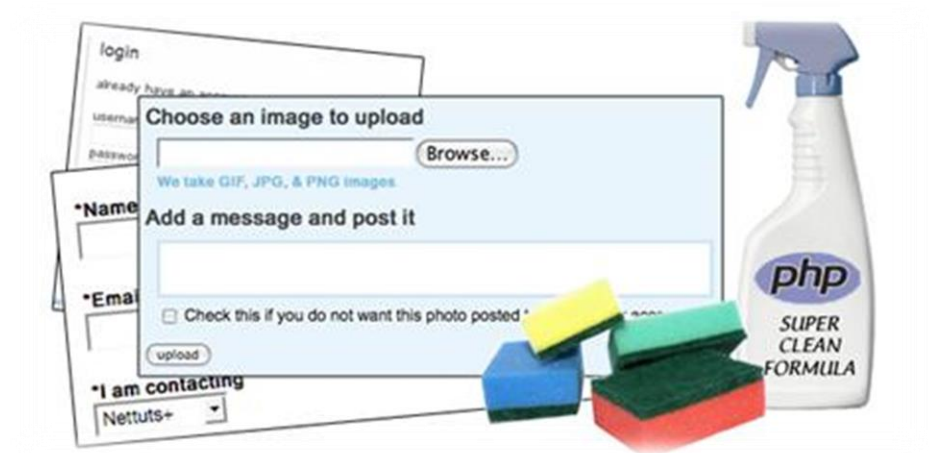

PHP Filters | PHP Filter

- A PHP Filter is used to validate and filter data coming from insecure sources.
- To test, validate, and filter user input or custom data is an important part of any web application.
- Input filtering is one of the most important application security issues.
- The PHP filter extension is designed to make data filtering easier and quicker.
- يتم استخدام عامل تصفية **PHP** للتحقق من صحة البيانات الواردة من مصادر غير آمنة وتصفيتها.
- يعد اختبار مدخلات المستخدم أو البيانات المخصصة والتحقق منها وتصفيتها جزءًا مهمًا من أي تطبيق ويب.
- تعد تصفية المدخلات من أهم مشكلات أمان التطبيقات.
- تم تصميم مرشح **PHP** لجعل تصفية البيانات أسهل وأسرع.



PHP Filters | Filter_var() Function

- The **filter_var()** function is used to sanitize and validate the user input data.

□ الدالة **filter_var()** تستخدم لتصفية وتعقيم البيانات التي تم إدخال من قبل المستخدم والتحقق من صحتها.

□ يمكننا استخدام الدالة للتحقق من صحة البيانات وتعقيمها مثل البريد الإلكتروني وعنوان **IP** وغيرها.

- It has the following basic syntax.

```
<?php
filter_var($field, SANITIZATION TYPE);
?>
```

PHP Filters | Filter_var() Function

- **Validation** means to check if the data entered by the user is in the proper format or not. For example, when validating an email we can check if '@' is present or not.

Validation can be performed on integers, float, string, URL, e-mail, etc.

- **التحقق من الصحة** يعني التحقق مما إذا كانت البيانات التي أدخلها المستخدم بالتنسيق الصحيح أم لا. على سبيل المثال ، عند التحقق من صحة بريد إلكتروني يمكننا التحقق مما إذا كان "@" موجودًا أم لا. يمكن إجراء التحقق من الصحة على الأعداد الصحيحة ، والكسرية ، والنصوص ، وعنوان URL ، والبريد الإلكتروني ، إلخ.

- **Sanitization** means to remove unnecessary or illegal characters from the data.

Sanitization helps us in removing illegal characters entered by the user.

- **التعقيم** يعني إزالة الأحرف غير الضرورية أو غير القانونية من البيانات. يساعدنا التعقيم في إزالة الأحرف غير القانونية التي أدخلها المستخدم.



PHP Filters | SANITIZATION TYPE

- SANITIZATION TYPE is the type of sanitization to be performed on the field such as
- **1-FILTER_VALIDATE_EMAIL** - filter validates an e-mail address.
- it returns true for valid email addresses and false for invalid email addresses.

□ يقوم عامل التصفية بالتحقق من صحة عنوان البريد الإلكتروني.

□ تعيد **True** لعناوين البريد الإلكتروني الصالحة و **False** لعناوين البريد الإلكتروني غير الصالحة.

```
1 <?php
2     $email = "adel11@gmailcom";
3
4     if (filter_var($email, FILTER_VALIDATE_EMAIL)) {
5
6         echo("$email is a valid email address");}
7     else {
8         echo("$email is not a valid email address");}
9 ?>
```

adel11@gmailcom is not a valid email address

PHP Filters | SANITIZATION TYPE

- ❑ **2-FILTER_SANITIZE_EMAIL** - it sanitization an e-mail address.
- ❑ Deletes all illegal characters from an email address.

❑ يقوم بتعقيم عنوان البريد الإلكتروني ويحذف جميع الأحرف الغير صحيحة (غير القانونية) من عنوان البريد الإلكتروني. مثال اذا تم كتابتها بشكل هذا **info\@domain.(com)** تعيد كتابتها بشكل الصحيح

info@domain.com

```
1 <?php
2 $myemail = "abc@demo//|.com";
3
4 $myemail = filter_var($myemail, FILTER_SANITIZE_EMAIL);
5 echo $myemail;
6 ?>
```

abc@demo.com

PHP Filters | SANITIZATION TYPE

- Example Sanitizing and Validating email address

```
1 <?php
2 $a = 'joe@example.org';
3 $b = 'php - at - example dot org';
4 $c = '(phpc@example.org)';
5
6 $sanitized_a = filter_var($a, FILTER_SANITIZE_EMAIL);
7 if (filter_var($sanitized_a, FILTER_VALIDATE_EMAIL)) {
8     echo "<b>This (a) sanitized email address is considered valid.</b><br>";
9 }
10
```


PHP Filters | SANITIZATION TYPE

□ Example Sanitizing and Validating email address

```

11 $sanitized_b = filter_var($b, FILTER_SANITIZE_EMAIL);
12 if (filter_var($sanitized_b, FILTER_VALIDATE_EMAIL))
13     { echo "This sanitized email address is considered valid.";}
14     else { echo "<font color=red><b>This (b) sanitized email address is considered invalid
15             </b></font><br>";}
16
17 $sanitized_c = filter_var($c, FILTER_SANITIZE_EMAIL);
18 if (filter_var($sanitized_c, FILTER_VALIDATE_EMAIL)) {
19     echo "<b>This (c) sanitized email address is considered valid.</b><br>";
20     echo "Before: $c<br>";
21     echo "After:  $sanitized_c<br>";
22 }
23 ?>

```

Example Sanitizing and Validating (Input email address by User) ??

This (a) sanitized email address is considered valid.
This (b) sanitized email address is considered invalid.
 This (c) sanitized email address is considered valid.
 Before: (phpc@example.org)
 After: phpc@example.org

PHP Filters | SANITIZATION TYPE

- 3-FILTER_VALIDATE_IP - The FILTER_VALIDATE_IP filter validates an IP address.

```
1 <?php
2 $ip = "122.10.12.1";
3
4 if (filter_var($ip, FILTER_VALIDATE_IP))
5
6     { echo("$ip is a valid IP address");}
7 else
8     { echo("$ip is not a valid IP address");} ?>
```

122.10.12.1 is a valid IP address

PHP Filters | SANITIZATION TYPE

- 4-FILTER_SANITIZE_URL -The FILTER_VALIDATE_URL filter validates an URL.

```
1 <?php
2 $url = "example.com";
3
4 if (filter_var($url, FILTER_VALIDATE_URL))
5
6     { echo("$url is a valid URL");}
7 else
8     { echo("$url is not valid URL");} ?>
```

example.com is not valid URL

PHP Filters | SANITIZATION TYPE

- ❑ **4-FILTER_SANITIZE_URL** -The FILTER_VALIDATE_URL filter validates an URL.
- ❑ **Flags**
- ❑ **FILTER_FLAG_HOST_REQUIRED** - URL must include host name.
- ❑ **FILTER_FLAG_PATH_REQUIRED** -URL must have a path after the domain name.
- ❑ **FILTER_FLAG_QUERY_REQUIRED** -URL must have a query string.

PHP Filters | SANITIZATION TYPE

□ FILTER_FLAG_HOST_REQUIRED

```
1 <?php
2 $url = "http://www.example.com";
3
4 if (filter_var($url, FILTER_VALIDATE_URL , FILTER_FLAG_HOST_REQUIRED))
5
6 { echo("$url is a valid URL<br>");} else { echo("$url is not valid URL<br>");}
7
```

□ FILTER_FLAG_PATH_REQUIRED

```
8 $url_path = "http://www.example.com/adel/to/dir/";
9
10 if (filter_var($url_path, FILTER_VALIDATE_URL , FILTER_FLAG_PATH_REQUIRED))
11
12 { echo("$url_path have a path after domain name<br>");}
13 else { echo("$url_path does not path after domain name.<br>");}
14
```

PHP Filters | SANITIZATION TYPE

□ FILTER_FLAG_QUERY_REQUIRED

```
15 $url_query = "http://www.example.com/adel/to/dir/index.php?test=y";
16
17 if (filter_var($url_query, FILTER_VALIDATE_URL , FILTER_FLAG_QUERY_REQUIRED))
18
19 { echo("$url_query have a Query String.<br>");}
20 else { echo("$url_query does not a Query String.<br>");} ?>
```

http://www.example.com is a valid URL

http://www.example.com/adel/to/dir/ have a path after domain name

http://www.example.com/adel/to/dir/index.php?test=y have a Query String.

PHP Filters | SANITIZATION TYPE

5-FILTER SANITIZE URL

```

1 <?php
2 $url = "https://www.plus 2 net .com ";
3
4 $url2="http://www.LEARNPHPلعلعåøls.coøm";
5
6 echo $url;
7 $url= filter_var($url, FILTER_SANITIZE_URL);
8 echo "<br> After Using FILTER_SANITIZE_URL : $url <br><br> ";
9
10 echo $url2;
11 $url2= filter_var($url2, FILTER_SANITIZE_URL);
12 echo "<br> After Using FILTER_SANITIZE_URL : $url2 "; ?>

```

Example Sanitizing and Validating (Input URL by User) ??

https://www.plus 2 net .com


After Using FILTER_SANITIZE_URL : https://www.plus2net.com

http://www.LEARNPHPلعلعåøls.coø,m

After Using FILTER_SANITIZE_URL : http://www.LEARNPHPls.com



END PART



8



ADEL AHMED ALHAJJ

