
Include file diagram layout.

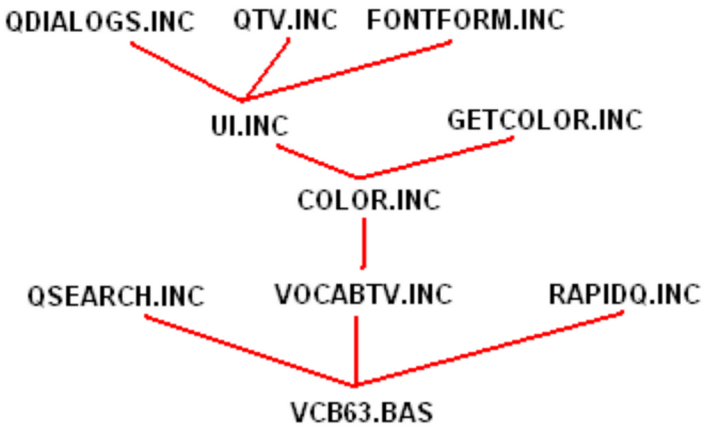

Variables

SUBs

FUNCTIONs

QTV.INC

CONST	**CONFIG_EDITORFONTA** **CONFIG_EDITORFONTB** **CONFIG_TREEVIEWFONT** **WORDWRAP_ON_OFF** **SCROLLBARS_ON_OFF** **EDITOR_OR_VIEWER**
QTV	**QTREEVIEW and QSTRINGLIST embedded together.**
slst	**QSTRINGLIST, never used except for options (for now)**
filename	**STRING, stores the name of the file loaded.**
onlyfilename(filename)	**FUNCTION AS STRING, returns only the filename without c:\directorylocation\. This is ONLY used in the QTV class.**
gennumber(number)	**FUNCTION AS STRING, returns a two byte string of an integer. This is used ONLY in the QTV class.**
insertitem(position, item)	**SUB, Inserts item at position.**
additem(item)	**SUB, adds item to end of treeview and list.**
addchilditem(position, item)	**SUB, adds a child item at position.**
delitem(position)	**SUB, delete item at position.**
itemtext(position)	**FUNCTIONI AS STRING, returns RICHEDIT filename at position.**
itemtext(position, text)	**FUNCTIONI AS STRING, writes RICHEDIT filename at position.**
optionitem(position)	**FUNCTIONI AS STRING, returns option item at**

	position.
optionitem(position, item)	FUNCTIONI AS STRING, inserts an option item at position.
getnameofitem(position)	FUNCTION AS STRING, returns the text for QTREEVIEW, ONLY used in QTV.
setupTV	SUB, sets up QTREEVIEW after a file has been loaded, ONLY used in QTV.
clean	SUB, clears both QTREEVIEW and QSTRINGLIST and adds empty options to QSTRINGLIST.
loadfromfile(filename)	SUB, loads file to QTV.
savetofile(filename)	SUB, saves QTV to file.
edited(index%, BYREF s$)	EVENT SUB, changes name of item when user edits QTREEVIEW. ONLY used in QTV.

UI.INC

treeviewfont	QFONT
richeditfont	QFONT
fdlg	QFONTDIALOG
dlg	QDIALOGS
whichfontisused	Remember which font is being currently used.
textfileloaded	Remember the name of the file loaded in
myform	EXTENDS QFORM, just adds button to QFORM
vocabform	myform
vocabtv	QTV
vocabedit	QRICHEDIT

QRICHEDIT

vocabresize	Internal, Only used to resize the window.
SUB vocabmousedown(button%, x%, y%, shift%)	Again, only used for resizing the form and moving bar betwen richedit and tree view.
SUB vocabmouseup(button%, x%, y%, shift%)	Same as above.
SUB vocabmousemove(x%, y%, shift%)	Same as above
SUB copytoclipboard	Saves richedit text to clipboard
SUB pastefromclipboard	Pastes to richedit from clipboard
SUB cuttoclipboard	Cuts text from richedit and copies it to clipboard
SUB editorfont	Changes editor font A and sets it as the current font. GLOBALS USED: whichfontisused

CALLS TO:
vocabtv.optionitem()
vocabtv.optionitem(,)
fdlg
vocabedit.selattributes
changefont CONFIG_EDITORFONTA, fdlg.name, fdlg.size

SUB editorfont2

Changes editor font B and sets it as the current font.
GLOBALS USED:
whichfontisused
CALLS TO:
vocabtv.optionitem()
vocabtv.optionitem(,)
fdlg
vocabedit.selattributes
changefont CONFIG_EDITORFONTB, fdlg.name, fdlg.size

SUB treefont

Changes QTREEVIEW font.
GLOBALS USED:
whichfontisused
CALLS TO:
vocabtv.optionitem()
vocabtv.optionitem(,)
fdlg
vocabedit.selattributes
changefont CONFIG_TREEVIEWFONT, fdlg.name, fdlg.size

SUB setdelfontstyle(styles AS INTEGER)

Sets or deletes font styles.
CALLS TO:
richeditfont.addstyles
richeditfont.delstyles

SUB keyup(key AS WORD, shift AS INTEGER)

For quick access to certain options. *(I WILL NOT DISCUSS THE VARIABLES/CALLS IN THIS FOR THERE ARE JUST WAY TOO MANY, AND THEY ARE NOT THAT IMPORTANT. but I will discuss the ones used outside of the keyboard trapping routines.)*

SUB rightjustify

sets justification of QRICHEDIT, does not work at the moment.

SUB centerjustify
SUB leftjustify

CALLS TO:
vocabedit.alignment

SUB initfont

Initializes the current font at the QRICHEDIT cursor position.
GLOBALS USED:
whichfontisused
CALLS TO:
editorfontmenu.caption
editorfontmenu2.caption

setfont CONFIG_EDITORFONTA, richeditfont
setfont CONFIG_EDITORFONTB, richeditfont

SUB wordwraponoff

Changes word wrap on or off.
CALLS TO:
editorwordwraponoffmenu.caption
vocabedit.wordwrap
vocabtv.slst.item(WORDWRAP_ON_OFF)

SUB scrollbarsonoff

Changes scroll bars on or off.
CALLS TO:
editorscrollbarsonoffmenu.caption
vocabedit.scrollbars
vocabtv.slst.item(SCROLLBARS_ON_OFF)

SUB editororviewer

Changes the program to run with the QRICHEDIT unable to be edited.
CALLS TO:
editoreditororviewermenu.caption
vocabedit.readonly
vocabtv.slst.item(EDITOR_OR_VIEWER)

SUB mousebuttonup(Button%, X%, Y%, Shift%)

When mouse button is clicked on the richedit, then the current cursor position is set to the current font.
CALLS TO:
initfont

SUB changefont(wchfnt AS BYTE, fntnm AS STRING, fntsz AS INTEGER)

Changes font at position wchfnt in QSTRINGLIST.
CALLS TO:
vocabtv.optionitem()
vocabtv.optionitem(,)

SUB setfont(wchfnt AS BYTE, thefnt AS QFONT)

Sets QFONT to QSTRINGLIST font name and size.
CALLS TO:
vocabtv.optionitem()
vocabtv.optionitem(,)

SUB setupoptions

Used at load/startup to setup options from file.
CALLS TO:
vocabtv.slst.item()
editoreditororviewermenu.caption
vocabedit.readonly
editorscrollbarsonoffmenu.caption
vocabedit.scrollbars
editorwordwraponoffmenu.caption
vocabedit.wordwrap

VOCABTV.INC

GLOBALS CREATED:
filename STRING
CALLS TO:

newmenu.onclick
openmenu.onclick
saveasmenu.onclick

newlessonpm.onclick
insertlessonpm.onclick
newsublessonpm.onclick
deletelessonpm.onclick

SUBs:

openfile	**Opens or Creates a VCB file.** **HOOK = newmenu** **CALLS TO:** **dlg.openfile(,)** **vocabtv.filename** **dlg.yesnodlg()** **dlg.savedlg(,)** **vocabtv.savetofile()** **vocabtv.loadfromfile()** **vocabtv.itemtext()** **vocabedit.loadfromfile()** **dlg.dir** **setupoptions**
savefile	**Only used to save a working copy of the loaded VCB file.** **HOOK = saveasmenu** **CALLS TO:** **dlg.savedlg(,)** **dlg.yesnodlg()** **vocabtv.savetofile()** **dlg.dir**
addlesson	**Adds a lesson to the QTV.** **HOOK = newlessonpm** **CALLS TO:** **vocabtv.additem()**
insertlesson	**Inserts a lesson to the QTV** **HOOK = insertlessonpm** **CALLS TO:** **vocabtv.insertitem(,)**
addchildlesson	**Inserts and adds a child item to QTV.** **HOOK = newsublessonpm** **CALLS TO:** **vocabtv.addchilditem(,)**
deletelesson	**Deletes item and data from QTV.** **HOOK = deletelessonpm** **CALLS TO:** **vocabtv.delitem()**
createnewlesson	**Creates a new lesson plan.**

HOOK = newmenu
CALLS TO:
vocabtv.filename
dlg.yesnocanceldlg()
dlg.savedlg(,)
vocabtv.savetofile()
savefile
vocabtv.clean
vocabtv.additem

VCB61.BAS

searchstringlist — QSTRINGLIST, Used for using QSEARCHDLG.

vocabtv.ondblclick = lessonselected
edittextfilepm.onclick = lessonselected
changetextfilepm.onclick

vocabform.onclose = exitprogram
exitmenu.onclick = exitprogram
searchmenu.onclick = startsearch

COMMAND$(1) — Returns command line arguments, ONLY the file name.

CALLS TO:
vocabtv.loadfromfile
vocabtv.itemtext()
vocabedit.loadfromfile

CALLS TO:
setdelfontstyle
vocabform.showmodal

SUBs

changetextfile — Changes or adds an RTF file to the selected item.
HOOK = changetextfilepm
GLOBALS USED:
textfileloaded
CALLS TO:
vocabtv.itemtext()
dlg.yesnodlg()
dlg.opendlg(,)
vocabedit.savetofile()
vocabtv.itemtext(,)
vocabtv.itemindex
vocabedit.loadfromfile()
vocabtv.itemtext()
initfont

exitprogram — Closes and ends the program.
HOOK = vocabform
HOOK = exitmenu
GLOBALS USED:
textfileloaded

CALLS TO:
vocabedit.savetofile()
vocabtv.filename
vocabtv.savetofile()
vocabform.close

lessonselected — **When a user double clicks on a lesson, then the associating RTF file is opened in the editor.**
HOOK = vocabtv
HOOK = edittextfilepm
GLOBALS USED:
textfileloaded
CALLS TO:
vocabtv.itemtext()
vocabedit.savetofile()
dlg.opendlg(,)
vocabtv.item().text
vocabtv.itemindex
vocabedit.clear
vocabedit.loadfromfile()
vocabtv.itemtext(,)
initfont

THE LAST 3 SUBS AND FUNCTIONS I WILL NOT DISCUSS FOR NOW. THEY MAY BE CHANGED IN THE FUTURE.

startsearch

FUNCTIONs

searchstringcount(searchstring AS STRING) AS STRING
getstringfromsearch(searchstring AS STRING, stringindex AS INTEGER) AS STRING

VCB62.BAS

SUB

edittextlesson — **Only added SUB to VCB61.BAS. Changed lessonselected to allow the user not necessarily to make the level into a file.**
HOOK = edittexfilepm

NEW FONT FILE DATA

FONTFORM.INC

Only needed subs/functions will be shown here...

fontform.showmodal — **Show the window.**

fontbox — **Font a will be in this box.**
fontboxb — **Font B will be in this box.**
treeviewfontbox — **Treeview font will show in this box.**

fontokbutton **Click this and all fonts will change...**

NOTE:::::::::THE LAST 4 NEED onclick AND onchange CREATED IN MAIN PROGRAM.

SUBs

setfont(QFONT, fontname, fontstringofattributes)
Sets QFONT with attributes.

FUNCTIONs

genfontattrstr$(fontsize, bold, italic, underline, strike)
Returns a string with font attributes.