

UT9. Compulsory task - mysqldump

1- Crea una còpia de seguretat de totes les bases de dades del teu servidor MySQL.

```
C:\Users\yanad>"C:\Program Files\MySQL\MySQL Server 8.0\bin\mysqldump.exe" -u root -p --all-databases > backup.sql
Enter password: *****

C:\Users\yanad>
```

2- Crea una còpia de seguretat de les dades (no l'estructura) de la base de dades sakila.

```
C:\Users\yanad>"C:\Program Files\MySQL\MySQL Server 8.0\bin\mysqldump.exe" -u root -p --no-create-info --skip-triggers s
akila > sakila_datos.sql
Enter password: *****

C:\Users\yanad>
```

3- Crea una còpia de seguretat completa de les bases de dades sakila i hospitaldb.

```
C:\Users\yanad>"C:\Program Files\MySQL\MySQL Server 8.0\bin\mysqldump.exe" -u root -p --databases sakila hospitaldb > s
akila_hospital.sql
Enter password: *****

C:\Users\yanad>
```

4- Crea una còpia de seguretat de només les dades de la taula film.

```
C:\Users\yanad>"C:\Program Files\MySQL\MySQL Server 8.0\bin\mysqldump.exe" -u root -p --no-create-info sakila film > fil
m_datos.sql
Enter password: *****


C:\Users\yanad>
```

5- Crea una còpia de seguretat de l'estructura i dades de les taules rental i payment.

```
C:\Users\yanad>"C:\Program Files\MySQL\MySQL Server 8.0\bin\mysqldump.exe" -u root -p sakila rental payment > rental_pay
ment.sql
Enter password: *****

C:\Users\yanad>
```

6- Elimina el contingut de la base de dades SAKILA i restaura la còpia feta a l'exercici 2. Fes un petit vídeo (no és necessari àudio) que mostri el funcionament d'aquest exercici

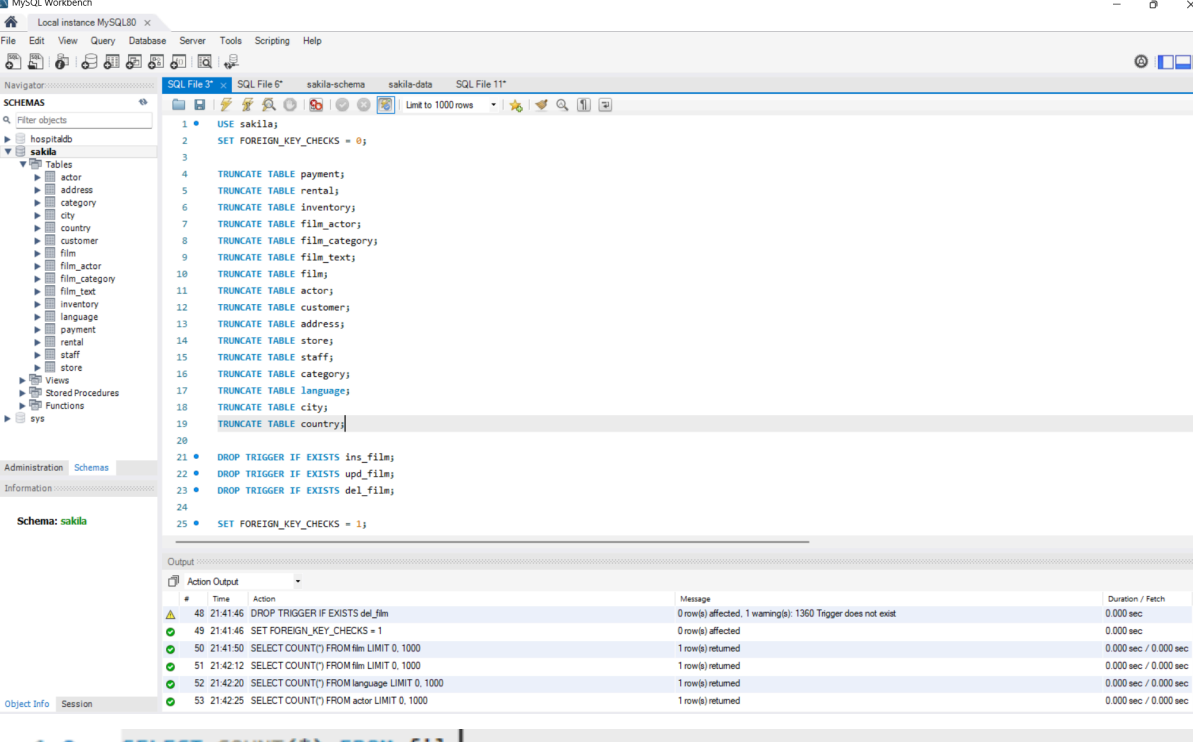


The screenshot shows the MySQL Workbench interface. The left sidebar displays the 'SCHEMAS' tree with 'sakila' selected. The main editor shows a series of SQL queries to truncate tables and drop triggers. The 'Output' pane at the bottom shows the execution results of these queries.

```

1 • USE sakila;
2 SET FOREIGN_KEY_CHECKS = 0;
3
4 TRUNCATE TABLE payment;
5 TRUNCATE TABLE rental;
6 TRUNCATE TABLE inventory;
7 TRUNCATE TABLE film_actor;
8 TRUNCATE TABLE film_category;
9 TRUNCATE TABLE film_text;
10 TRUNCATE TABLE film;
11 TRUNCATE TABLE actor;
12 TRUNCATE TABLE customer;
13 TRUNCATE TABLE address;
14 TRUNCATE TABLE store;
15 TRUNCATE TABLE staff;
16 TRUNCATE TABLE category;
17 TRUNCATE TABLE language;
18 TRUNCATE TABLE city;
19 TRUNCATE TABLE country;
20
21 • DROP TRIGGER IF EXISTS ins_film;
22 • DROP TRIGGER IF EXISTS upd_film;
23 • DROP TRIGGER IF EXISTS del_film;
24
25 • SET FOREIGN_KEY_CHECKS = 1;
  
```

#	Time	Action	Message	Duration / Fetch
48	21:41:46	DROP TRIGGER IF EXISTS del_film	0 row(s) affected, 1 warning(s): 1360 Trigger does not exist	0.000 sec
49	21:41:46	SET FOREIGN_KEY_CHECKS = 1	0 row(s) affected	0.000 sec
50	21:41:50	SELECT COUNT(*) FROM film LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
51	21:42:12	SELECT COUNT(*) FROM film LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
52	21:42:20	SELECT COUNT(*) FROM language LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
53	21:42:25	SELECT COUNT(*) FROM actor LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec

Below the screenshot, the SQL query `SELECT COUNT(*) FROM film;` is shown in a code editor.

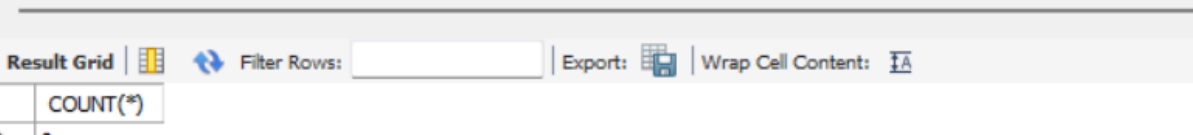

The screenshot shows the 'Result Grid' in MySQL Workbench. It displays the result of the `COUNT(*)` query, which is 0.

COUNT(*)
0

```

C:\Users\yanad>"C:\Program Files\MySQL\MySQL Server 8.0\bin\mysql.exe" -u root -p sakila < sakila_datos.sql
Enter password: *****

C:\Users\yanad>
  
```

1 • `SELECT COUNT(*) FROM film;`

Result Grid 



Filter Rows:

Export: 

Wrap Cell Content: 

	COUNT(*)
--	----------

▶	1000
---	------