


UT9. Compulsory task - mysqldump

1 Crea una còpia de seguretat de totes les bases de dades del teu servidor MySQL.

```
C:\Program Files\MySQL\MySQL Server 8.0\bin>mysqldump -u root -p --all-databases > backup_tot_mysql.sql
Enter password: *****

C:\Program Files\MySQL\MySQL Server 8.0\bin>
```

 backup_tot_mysql

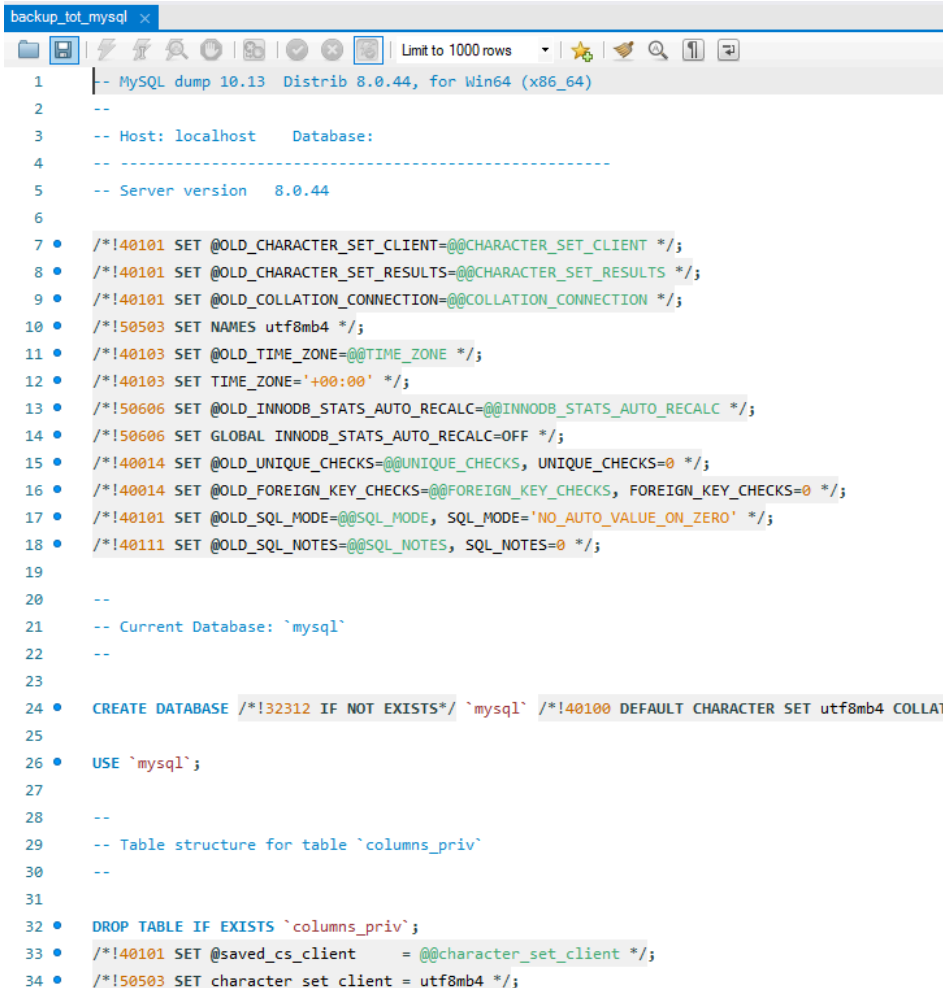

The screenshot shows a text editor window titled 'backup_tot_mysql.sql'. The content is a MySQL dump file. It starts with a header indicating it's a MySQL dump for version 8.0.44 on Windows 64-bit. It then lists various settings like character set, collation, and time zone. The dump includes a 'CREATE DATABASE' statement for 'mysql' and a 'USE' statement. It also shows a 'DROP TABLE' statement for 'columns_priv' and a 'SET' statement for 'character_set_client'.

```
1  -- MySQL dump 10.13  Distrib 8.0.44, for Win64 (x86_64)
2  --
3  -- Host: localhost    Database:
4  --
5  -- Server version  8.0.44
6
7  /*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
8  /*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
9  /*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
10 /*!50503 SET NAMES utf8mb4 */;
11 /*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;
12 /*!40103 SET TIME_ZONE='+00:00' */;
13 /*!50606 SET @OLD_INNODB_STATS_AUTO_RECALC=@@INNODB_STATS_AUTO_RECALC */;
14 /*!50606 SET GLOBAL INNODB_STATS_AUTO_RECALC=OFF */;
15 /*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;
16 /*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
17 /*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
18 /*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;
19
20 --
21 -- Current Database: `mysql`
22 --
23
24 • CREATE DATABASE /*!32312 IF NOT EXISTS*/ `mysql` /*!40100 DEFAULT CHARACTER SET utf8mb4 COLLAT
25
26 • USE `mysql`;
27
28 --
29 -- Table structure for table `columns_priv`
30 --
31
32 • DROP TABLE IF EXISTS `columns_priv`;
33 • /*!40101 SET @saved_cs_client      = @@character_set_client */;
34 • /*!50503 SET character_set_client = utf8mb4 */;
```

Crea una còpia de seguretat de les dades (no l'estructura) de la base de dades sakila.

```
C:\Program Files\MySQL\MySQL Server 8.0\bin>mysqldump -u root -p --no-create-info sakila > sakila_nomes_dades.sql
Enter password: *****
```

 sakila_nomes_dades

24/05/2026 22:39

```
-- MySQL dump 10.13 Distrib 8.0.44, for Win64 (x86_64)
--
-- Host: localhost    Database: sakila
--
-- Server version 8.0.44

/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
/*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
/*!50503 SET NAMES utf8mb4 */;
/*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;
/*!40103 SET TIME_ZONE='+00:00' */;
/*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;
/*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
/*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
/*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;

--
-- Dumping data for table `actor`
--

LOCK TABLES `actor` WRITE;
/*!40000 ALTER TABLE `actor` DISABLE KEYS */;
INSERT INTO `actor` VALUES (1,'PENELOPE','GUINNESS','2006-02-15 03:34:33'),(2,'NICK','WAHLBERG');
/*!40000 ALTER TABLE `actor` ENABLE KEYS */;
UNLOCK TABLES;

--
-- Dumping data for table `address`
--

LOCK TABLES `address` WRITE;
/*!40000 ALTER TABLE `address` DISABLE KEYS */;
INSERT INTO `address` VALUES (1,'47 MySakila Drive',NULL,'Alberta',300,'','','_binary '\0\0\0\0
```

Crea una còpia de seguretat completa de les bases de dades sakila i hospitaldb.

```
C:\Program Files\MySQL\MySQL Server 8.0\bin>mysqldump -u root -p --databases sakila hospitaldb > sakila_hospitaldb_complet.sql
Enter password: *****
C:\Program Files\MySQL\MySQL Server 8.0\bin>
```

 sakila_hospitaldb_complet

24/05/2026 22:42

```
backup_tot_mysql sakila_nomes_dades sakila_hospitaldb_complet x
Limit to 1000 rows
1 -- MySQL dump 10.13 Distrib 8.0.44, for Win64 (x86_64)
2 --
3 -- Host: localhost Database: sakila
4 --
5 -- Server version 8.0.44
6
7 • /*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
8 • /*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
9 • /*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
10 • /*!50503 SET NAMES utf8mb4 */;
11 • /*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;
12 • /*!40103 SET TIME_ZONE='+00:00' */;
13 • /*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;
14 • /*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
15 • /*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
16 • /*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;
17
18 --
19 -- Current Database: `sakila`
20 --
21
22 • CREATE DATABASE /*!32312 IF NOT EXISTS*/ `sakila` /*!40100 DEFAULT CHARACTER SET utf8mb4 COLL
23
24 • USE `sakila`;
25
26 --
27 -- Table structure for table `actor`
28 --
29
30 • DROP TABLE IF EXISTS `actor`;
31 • /*!40101 SET @saved_cs_client = @@character_set_client */;
32 • /*!50503 SET character_set_client = utf8mb4 */;
33 • CREATE TABLE `actor` (
34   `actor_id` smallint unsigned NOT NULL AUTO_INCREMENT,
```

Crea una còpia de segureta de només les dades de la taula film.

```
C:\Program Files\MySQL\MySQL Server 8.0\bin>mysqldump -u root -p --no-create-info sakila film > sakila_film_nomes_dades.sql
Enter password: *****
```

 sakila_film_nomes_dades

24/05/2026 22:43

```
sakila_film_nomes_dades x
Limit to 1000 rows
1  -- MySQL dump 10.13  Distrib 8.0.44, for Win64 (x86_64)
2  --
3  -- Host: localhost    Database: sakila
4  --
5  -- Server version    8.0.44
6
7  /*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
8  /*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
9  /*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
10 /*!50503 SET NAMES utf8mb4 */;
11 /*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;
12 /*!40103 SET TIME_ZONE='+00:00' */;
13 /*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;
14 /*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
15 /*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
16 /*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;
17
18 --
19 -- Dumping data for table `film`
20 --
21
22 LOCK TABLES `film` WRITE;
23 /*!40000 ALTER TABLE `film` DISABLE KEYS */;
24 INSERT INTO `film` VALUES (1,'ACADEMY DINOSAUR','A Epic Drama of a Feminist And a Mad Scientis
25 /*!40000 ALTER TABLE `film` ENABLE KEYS */;
26 UNLOCK TABLES;
27 /*!50003 SET @saved_cs_client      = @@character_set_client */ ;
28 /*!50003 SET @saved_cs_results     = @@character_set_results */ ;
29 /*!50003 SET @saved_col_connection = @@collation_connection */ ;
30 /*!50003 SET character_set_client  = utf8mb4 */ ;
31 /*!50003 SET character_set_results = utf8mb4 */ ;
32 /*!50003 SET collation_connection  = utf8mb4_0900_ai_ci */ ;
33 /*!50003 SET @saved_sql_mode       = @@sql_mode */ ;
34 /*!50003 SET sql_mode              = 'STRICT_TRANS_TABLES,STRICT_ALL_TABLES,NO_ZERO_IN_DATE,NO
```

Crea una còpia de seguretat de l'estructura i dades de les taules rental i payment.

```
C:\Program Files\MySQL\MySQL Server 8.0\bin>mysqldump -u root -p sakila rental payment > sakila_rental_payment_estruc
tura_dades.sql
Enter password: *****
```

sakila_rental_payment_estructura_dades 24/05/2026 22:44

```
sakila_rental_payment_estructur... x
Limit to 1000 rows
1  -- MySQL dump 10.13  Distrib 8.0.44, for Win64 (x86_64)
2  --
3  -- Host: localhost    Database: sakila
4  --
5  -- Server version    8.0.44
6
7  •  /*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
8  •  /*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
9  •  /*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
10 •  /*!50503 SET NAMES utf8mb4 */;
11 •  /*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;
12 •  /*!40103 SET TIME_ZONE='+00:00' */;
13 •  /*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;
14 •  /*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
15 •  /*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
16 •  /*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;
17
18 --
19 -- Table structure for table `rental`
20 --
21
22 •  DROP TABLE IF EXISTS `rental`;
23 •  /*!40101 SET @saved_cs_client      = @@character_set_client */;
24 •  /*!50503 SET character_set_client = utf8mb4 */;
25 •  CREATE TABLE `rental` (
26     `rental_id` int NOT NULL AUTO_INCREMENT,
27     `rental_date` datetime NOT NULL,
28     `inventory_id` mediumint unsigned NOT NULL,
29     `customer_id` smallint unsigned NOT NULL,
30     `return_date` datetime DEFAULT NULL,
31     `staff_id` tinyint unsigned NOT NULL,
32     `last_update` timestamp NOT NULL DEFAULT CURRENT_TIMESTAMP ON UPDATE CURRENT_TIMESTAMP,
33     PRIMARY KEY (`rental_id`),
34     UNIQUE KEY `rental_date` (`rental_date`,`inventory_id`,`customer_id`),
```

Elimina el contingut de la base de dades SAKILA i restaura la còpia feta a l'exercici 2.

```
mysql -u root -p sakila < sakila_nomes_dades.sql
```