



Fibonacci series:

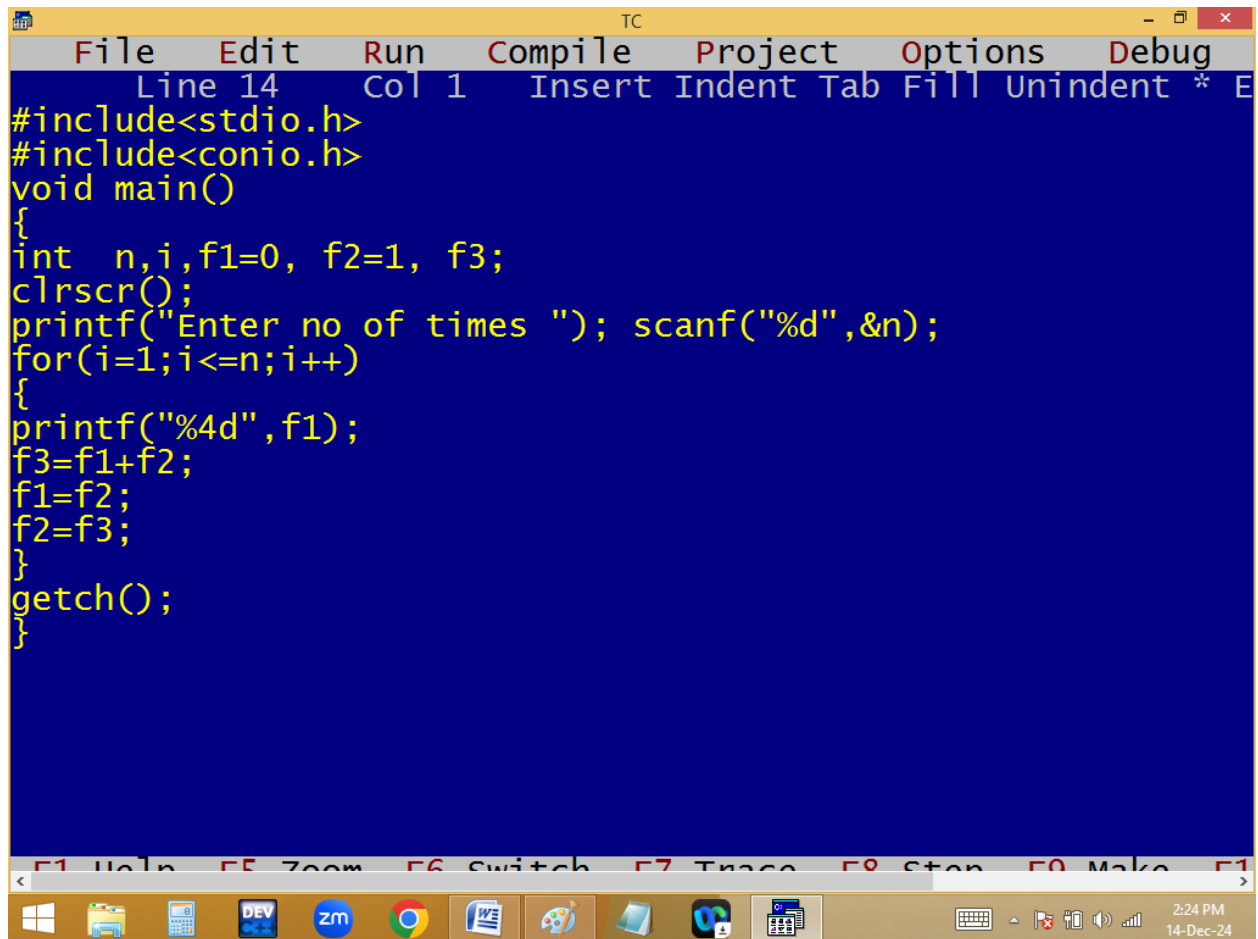

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 14", "Col 1", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int n,i,f1=0, f2=1, f3;
    clrscr();
    printf("Enter no of times "); scanf("%d",&n);
    for(i=1;i<=n;i++)
    {
        printf("%4d",f1);
        f3=f1+f2;
        f1=f2;
        f2=f3;
    }
    getch();
}
```

At the bottom of the window, there is a toolbar with icons for various functions and a status bar showing the time "2:24 PM" and the date "14-Dec-24".

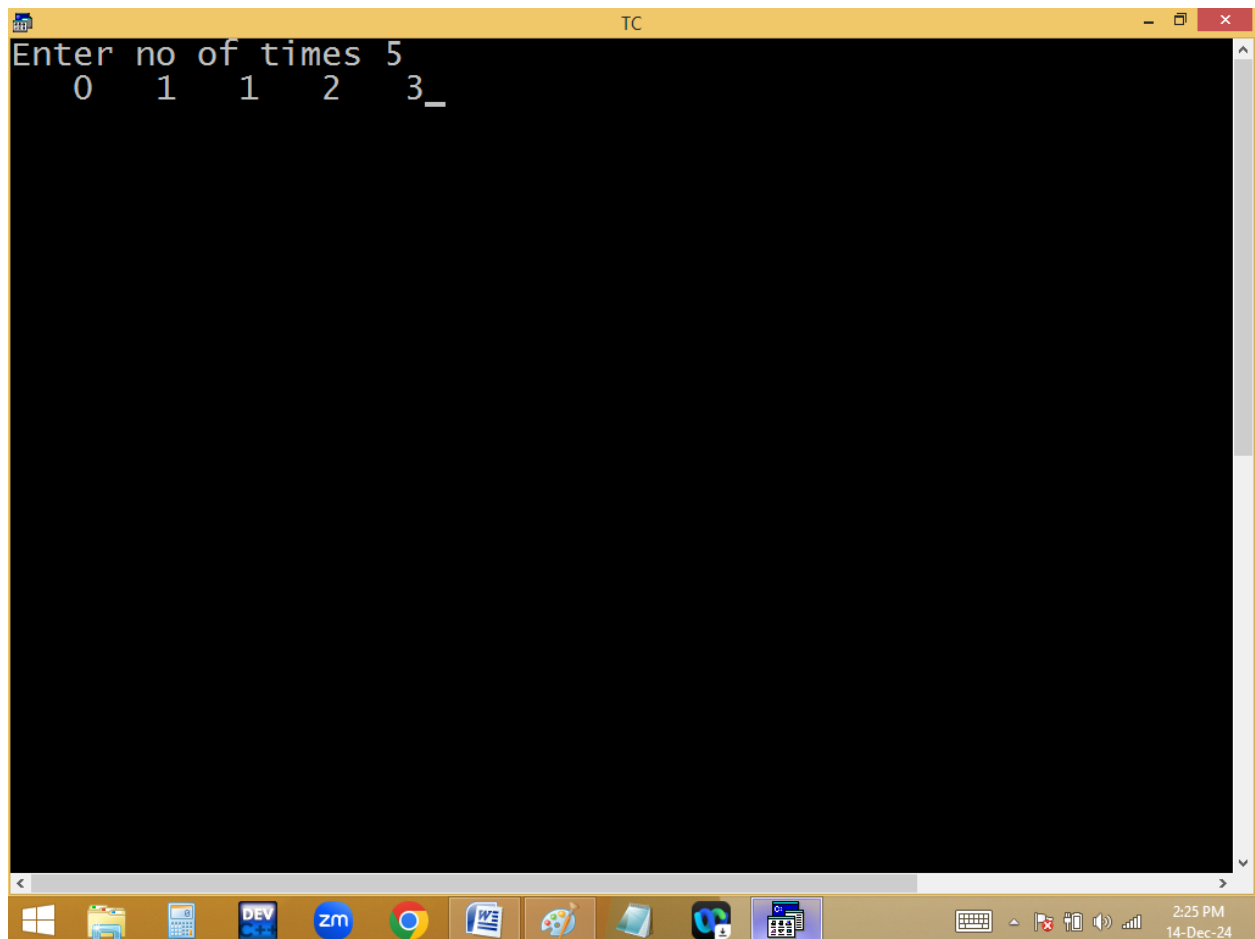

```

for( i=1; i<=5; i++) ✓
{
p(f1); 0 1 1 2 3
f3=f1+f2; ✓
f1=f2; ✓
f2=f3;
}


```

n	i	f1		f2		f3
5	1	✓ 0	+	1	=	1
	2	✓ 1	+	1	=	2
	3	✓ 1	+	2	=	3
	4	✓ 2	+	3	=	5
	5	✓ 3		5		

$$\begin{array}{rclclcl}
 \checkmark & \frac{f1}{0} & + & \frac{f2}{1} & = & \frac{f3}{1} \\
 \checkmark & 1 & + & 1 & = & 2 \\
 \checkmark & 1 & + & 2 & = & 3 \\
 \checkmark & 2 & + & 3 & = & 5 \\
 \checkmark & 3 & & 5 & &
 \end{array}$$

Finding cool no?


When a no is having 2 / 5 only is called cool no.

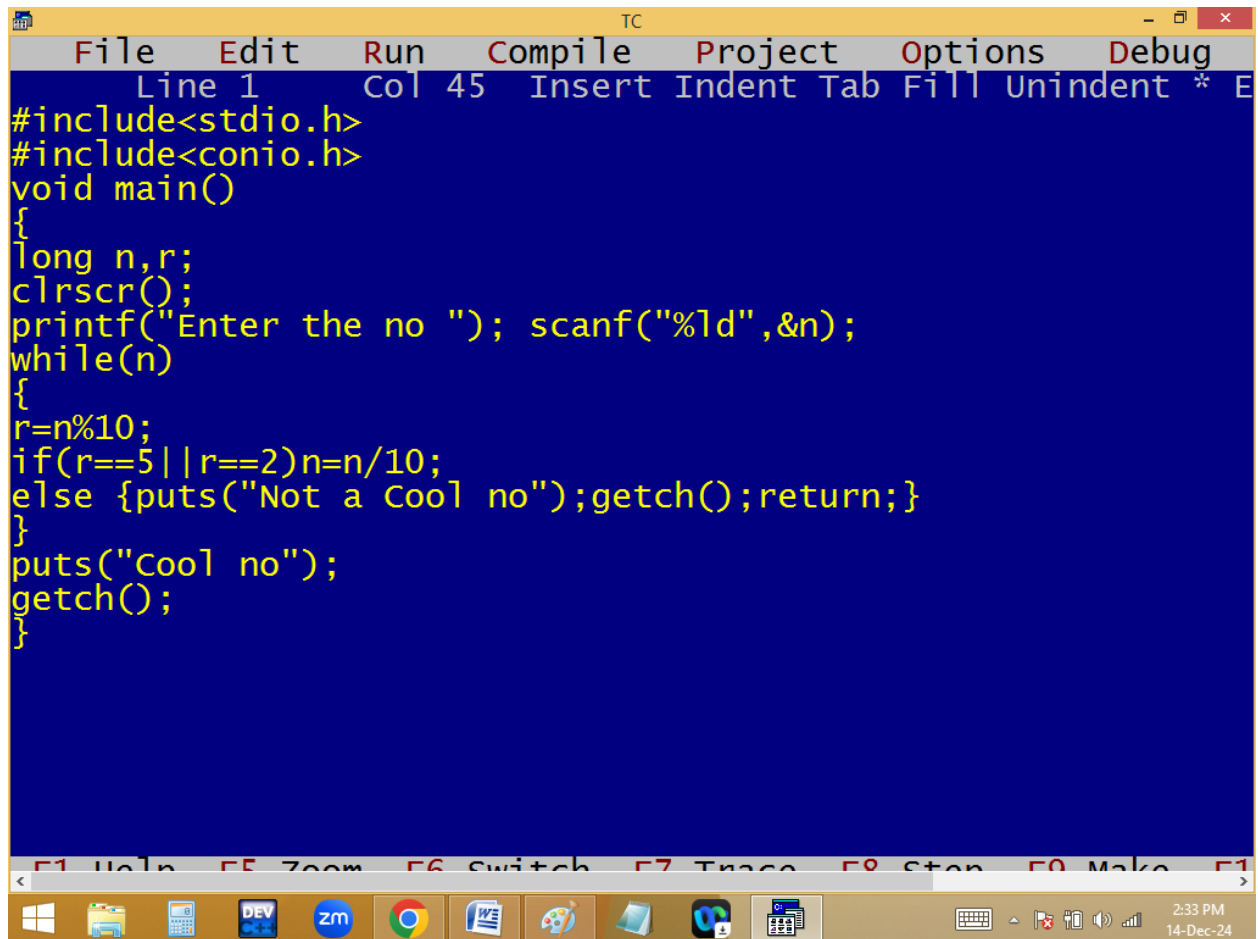



The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 1", "Col 45", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code:


```
#include<stdio.h>
#include<conio.h>
void main()
{
    long n,r;
    clrscr();
    printf("Enter the no "); scanf("%ld",&n);
    while(n)
    {
        r=n%10;
        if(r==5||r==2)n=n/10;
        else {puts("Not a Cool no");getch();return;}
    }
    puts("Cool no");
    getch();
}
```

At the bottom of the window, there is a toolbar with icons for various functions, and a status bar showing the time "2:33 PM" and the date "14-Dec-24".

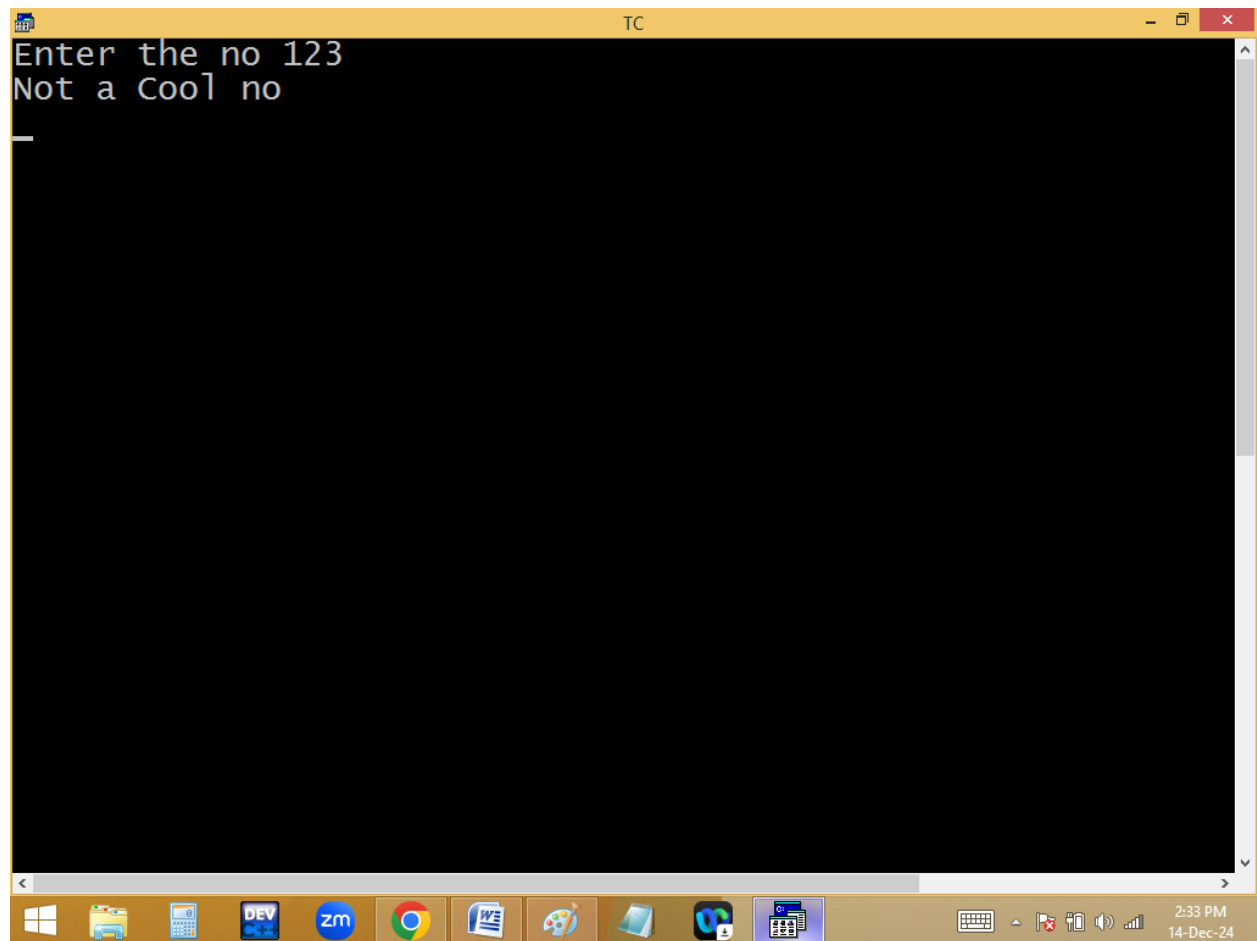

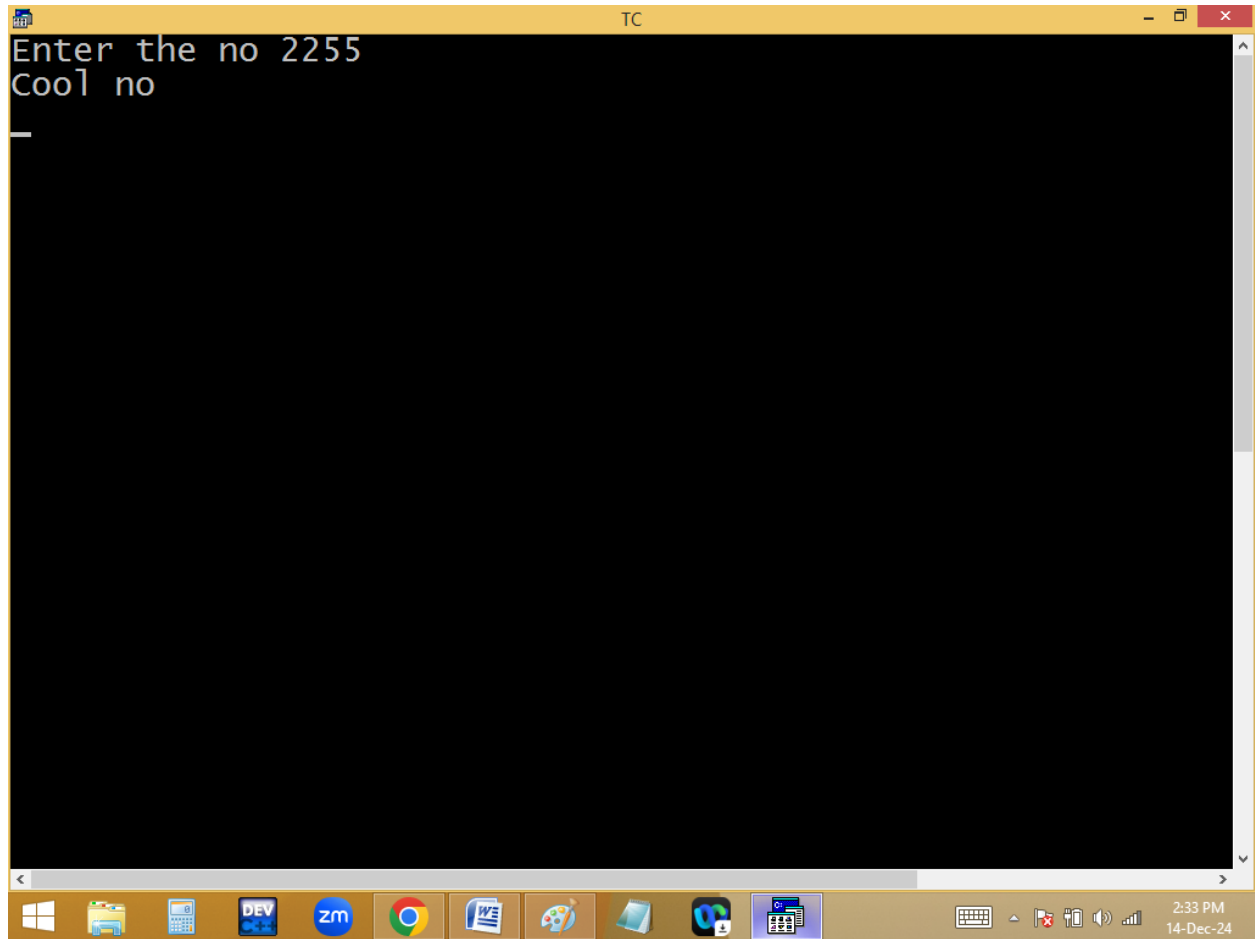

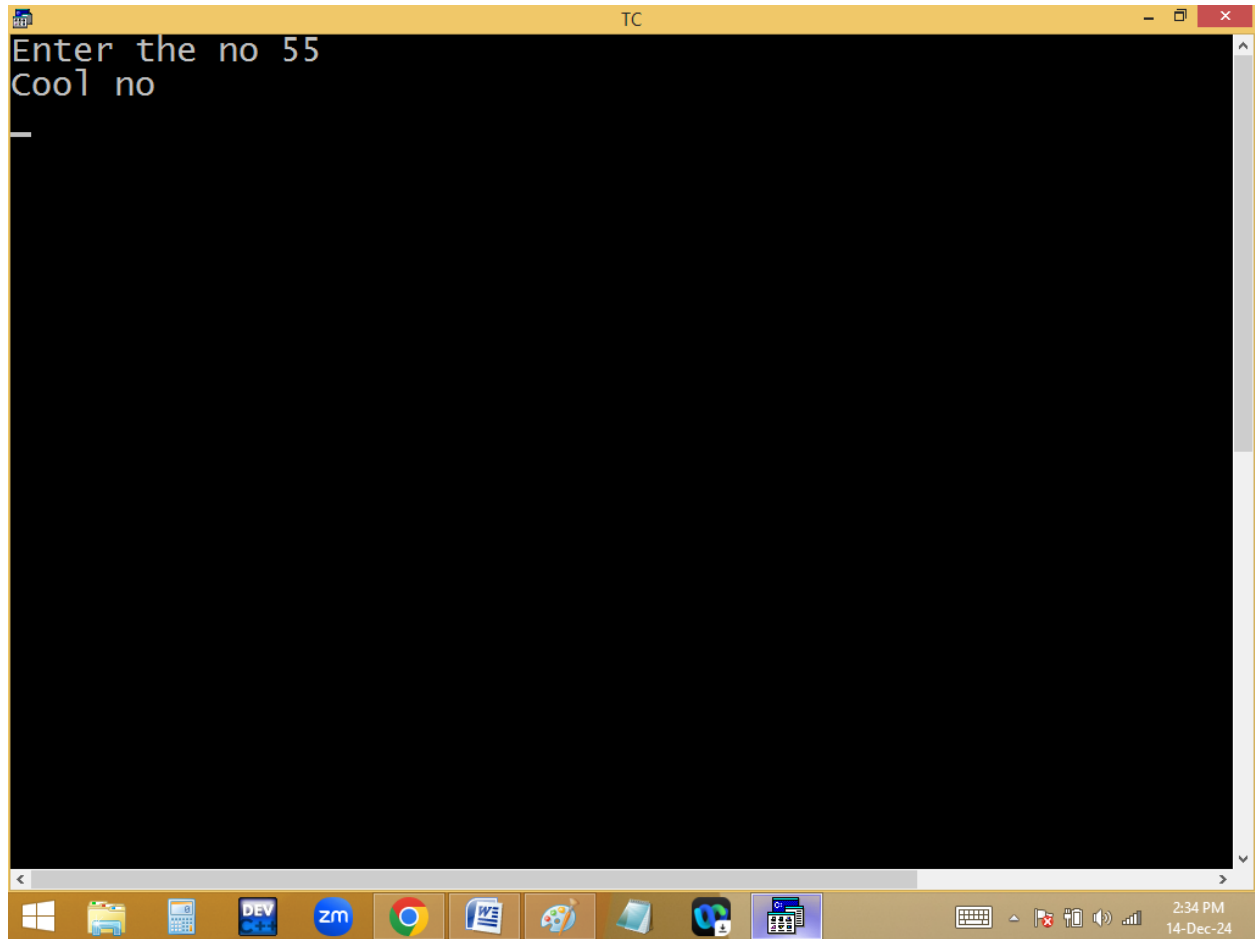

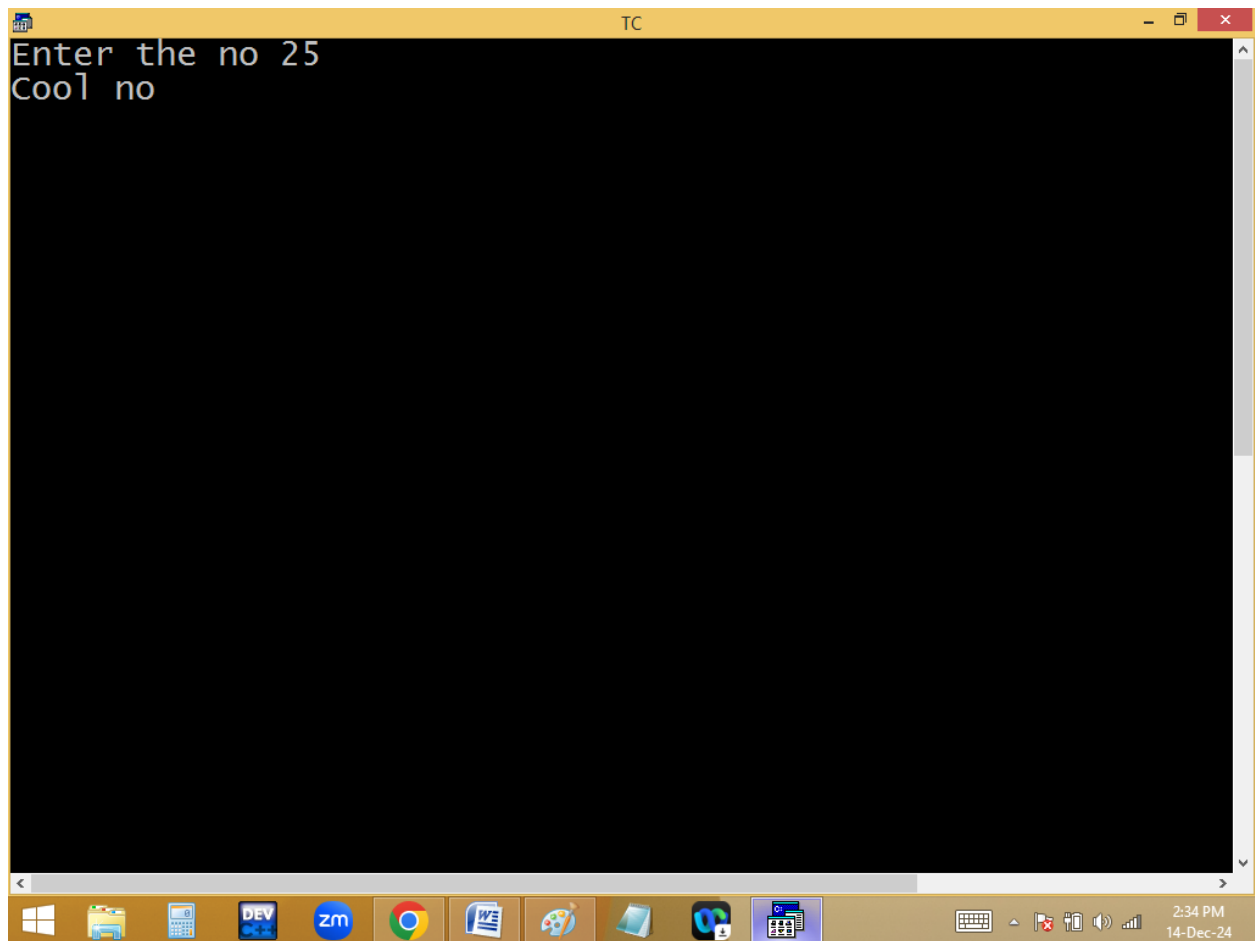

```
while(n!=0)
{
    r=n%10;
    if(r==5 || r==2)n=n/10;
    else p("Not");return;
}
p(collno);
```

$n/10$

$$\begin{array}{r} n \\ \hline 0123456789 \\ 0123456789 \end{array} \% 10 = \underline{\underline{5}} \quad \begin{array}{l} y \\ \hline 5 \\ \hline \end{array}$$

||

$y = 5$

$$2 \% 10 = 2 \rightarrow$$

$$1 \% 10 = 1$$

Finding spy no?

123 digits sum is $1+2+3=6$


123 digits multiplication is $1*2*3=6$

1124 $\rightarrow 1+1+2+4=8$

$1*1*2*4=8$

124 $\rightarrow 1+2+4=7$


$1*2*4=8 \leftarrow$ not a spy no

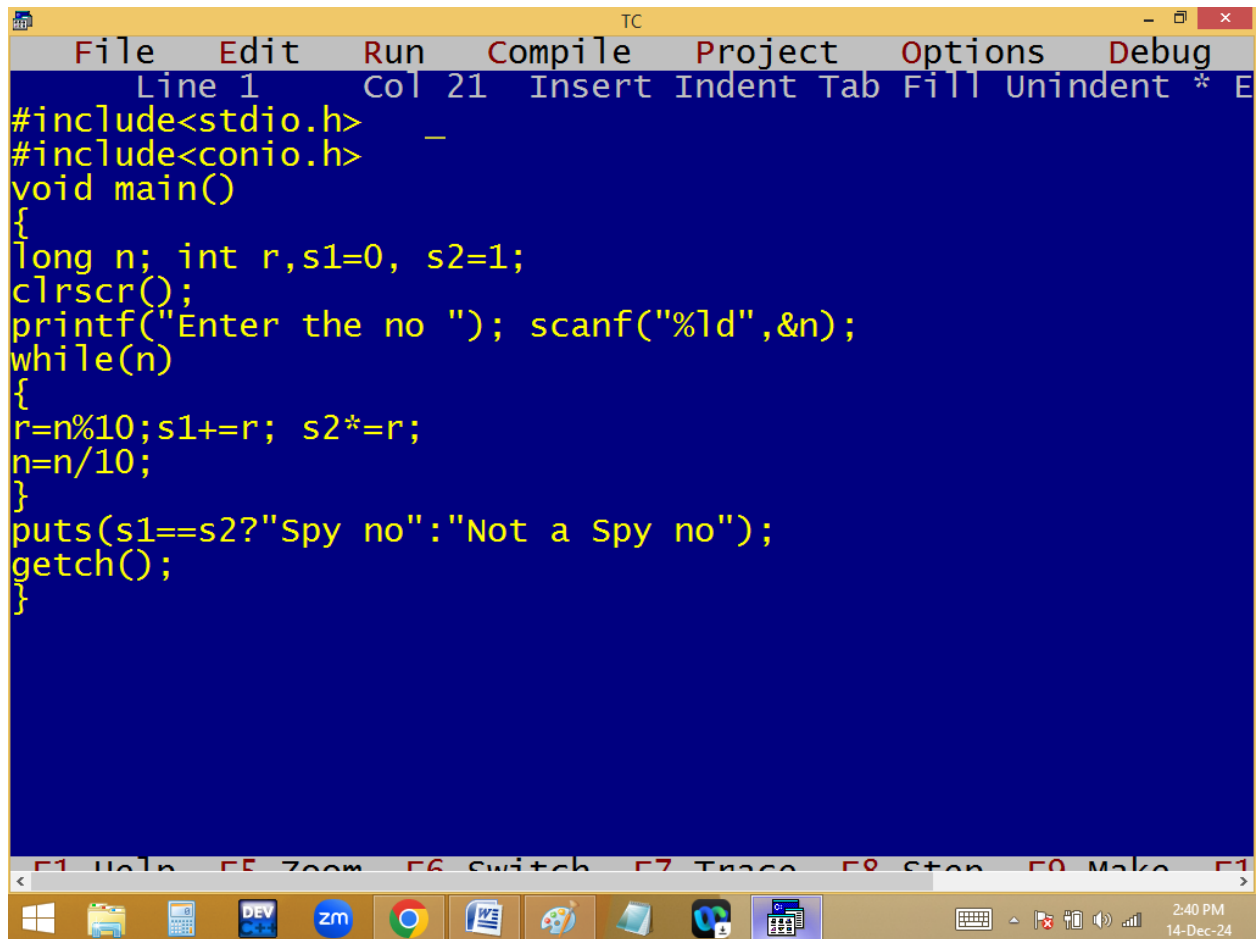



```
TC
File Edit Run Compile Project Options Debug
Line 1 Col 21 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
long n; int r,s1=0, s2=1;
clrscr();
printf("Enter the no "); scanf("%ld",&n);
while(n)
{
r=n%10;s1+=r; s2*=r;
n=n/10;
}
puts(s1==s2?"Spy no":"Not a Spy no");
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

Windows taskbar icons: File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, File Explorer, VS Code, Calculator. System tray: 2:40 PM, 14-Dec-24.

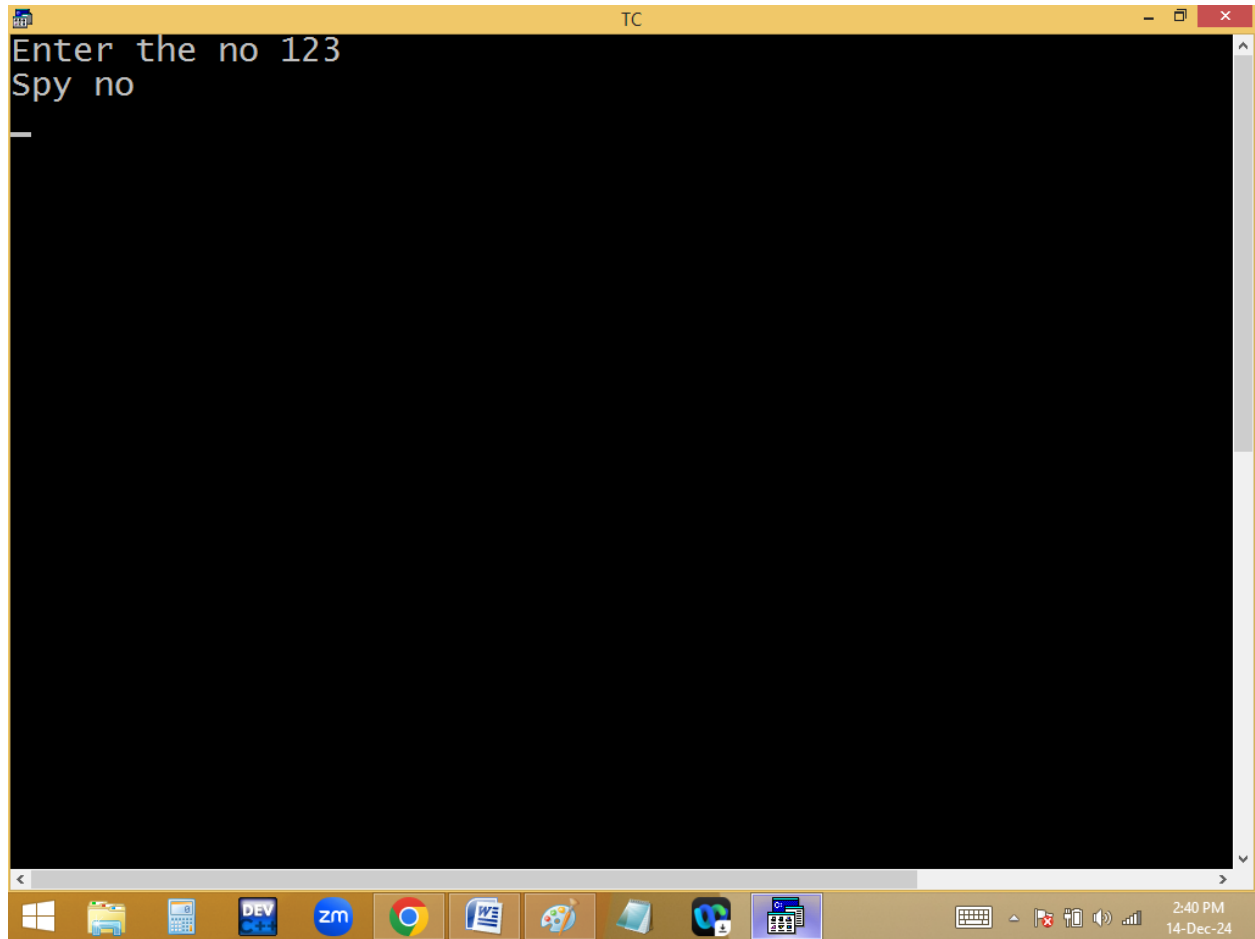

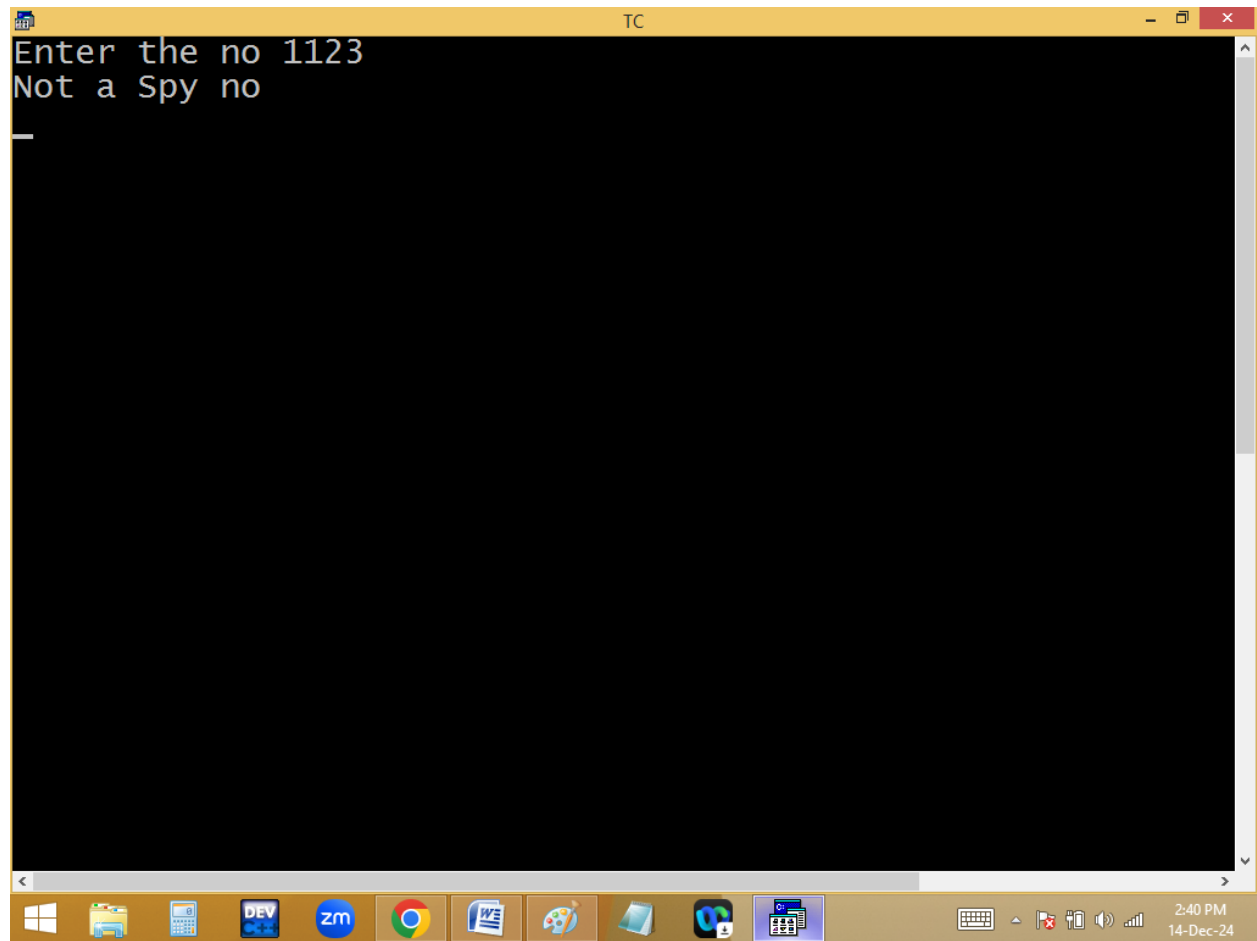

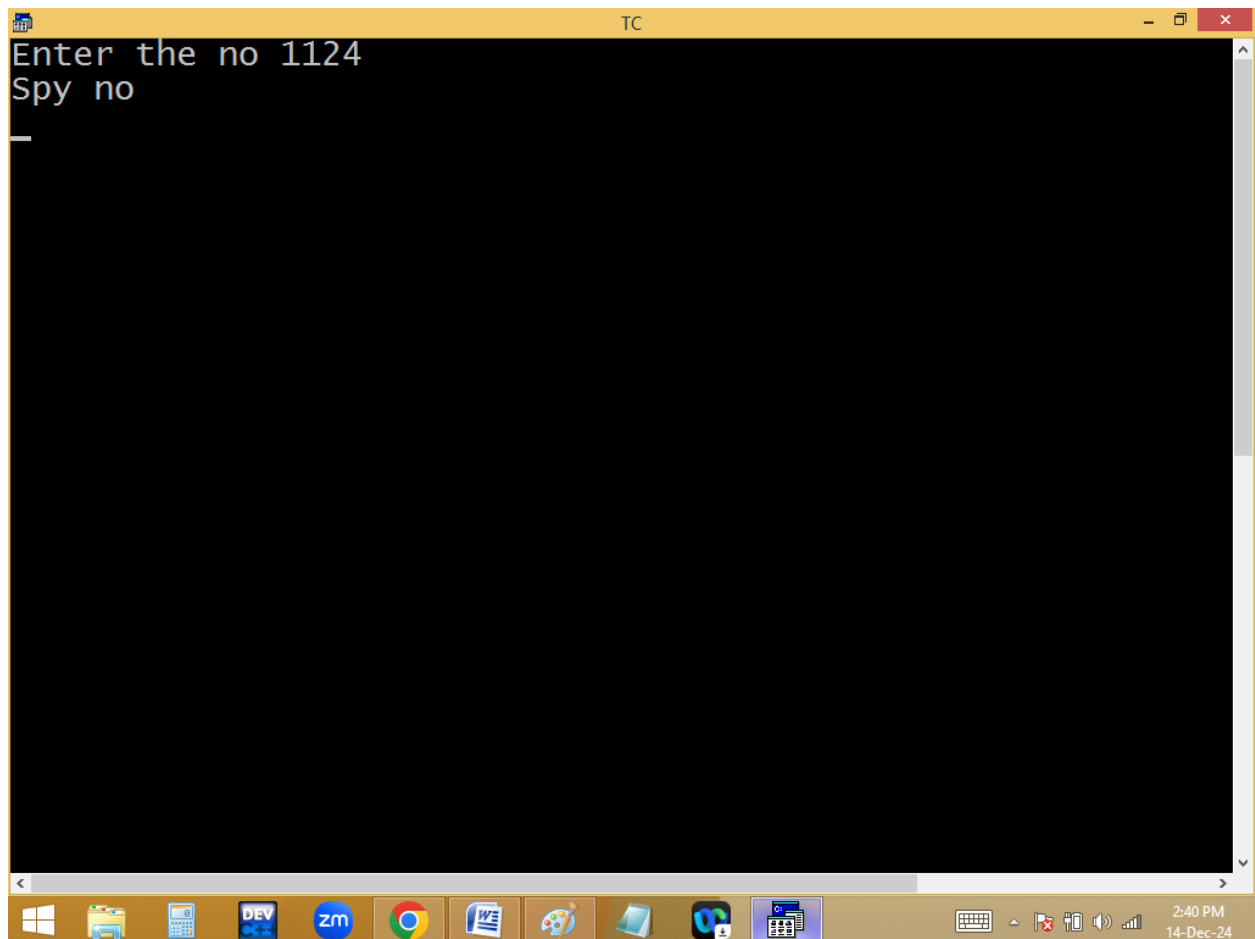

```

while( n!=0 )
{
    r=n%10;
    s1+=r;
    s2*=r;
    n=n/10;
}
puts(s1==s2?"Spy no":"Not");


```

8 8

n	r	$s1$	$s2$
$1124 \div 10 = 4$		$0 + 4$	1×4
$112 \div 10 = 2$		$+ 2$	$\times 2$
$11 \div 10 = 1$		$+ 1$	$\times 1$
$1 \div 10 = 1$		$+ 1$	$\times 1$
		8	8

break:


It is a keyword is used to stop the switch / loop. When break occurred, the program execution jumped to the first statement after the switch / loop.

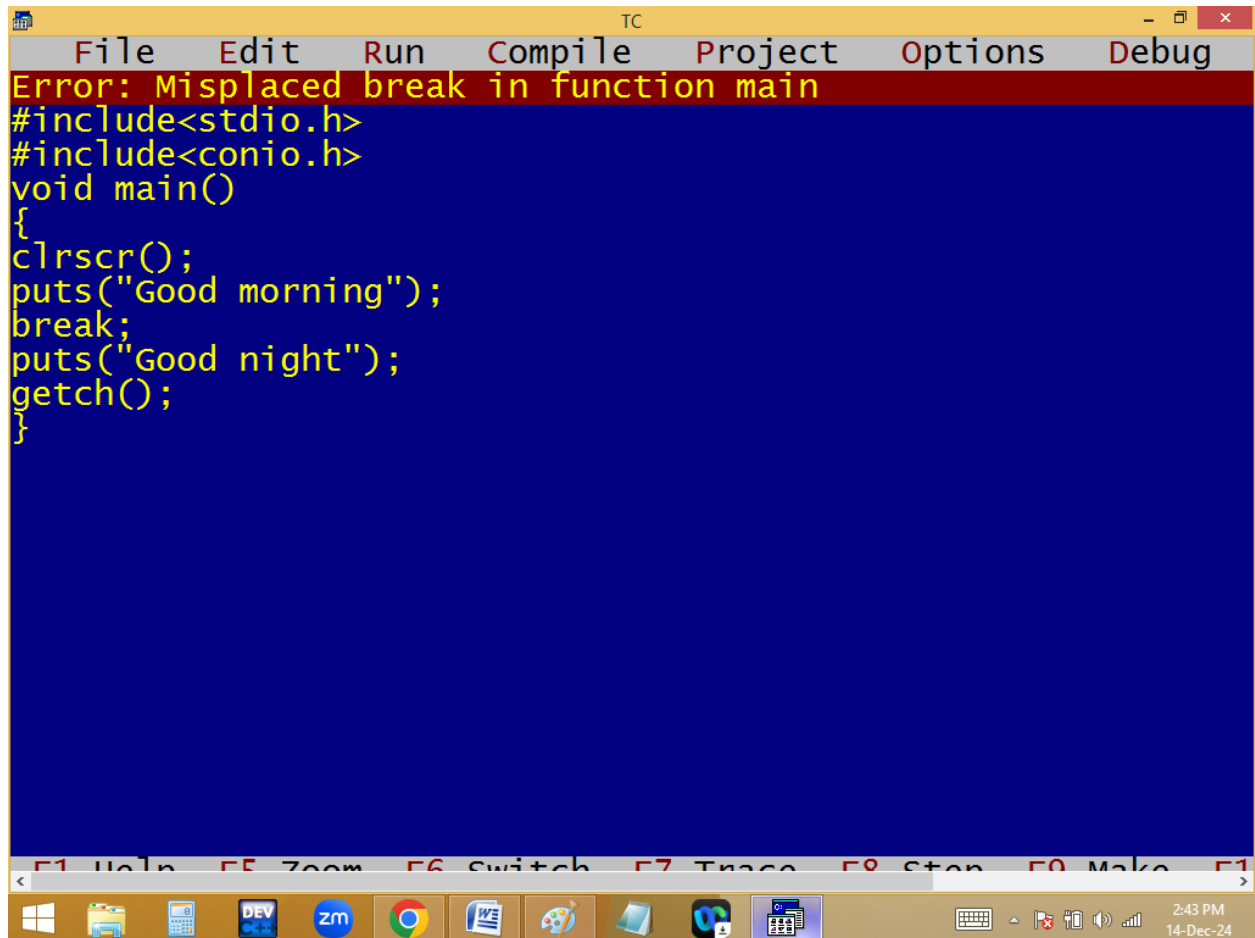

The screenshot shows the Turbo C++ (TC) IDE interface. The menu bar at the top includes File, Edit, Run, Compile, Project, Options, and Debug. A red error message banner at the top of the code editor reads "Error: Misplaced break in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
puts("Good morning");
break;
puts("Good night");
getch();
}
```


Below the code editor, there is a toolbar with function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. The Windows taskbar at the bottom shows various application icons and the system clock indicating 2:43 PM on 14-Dec-24.

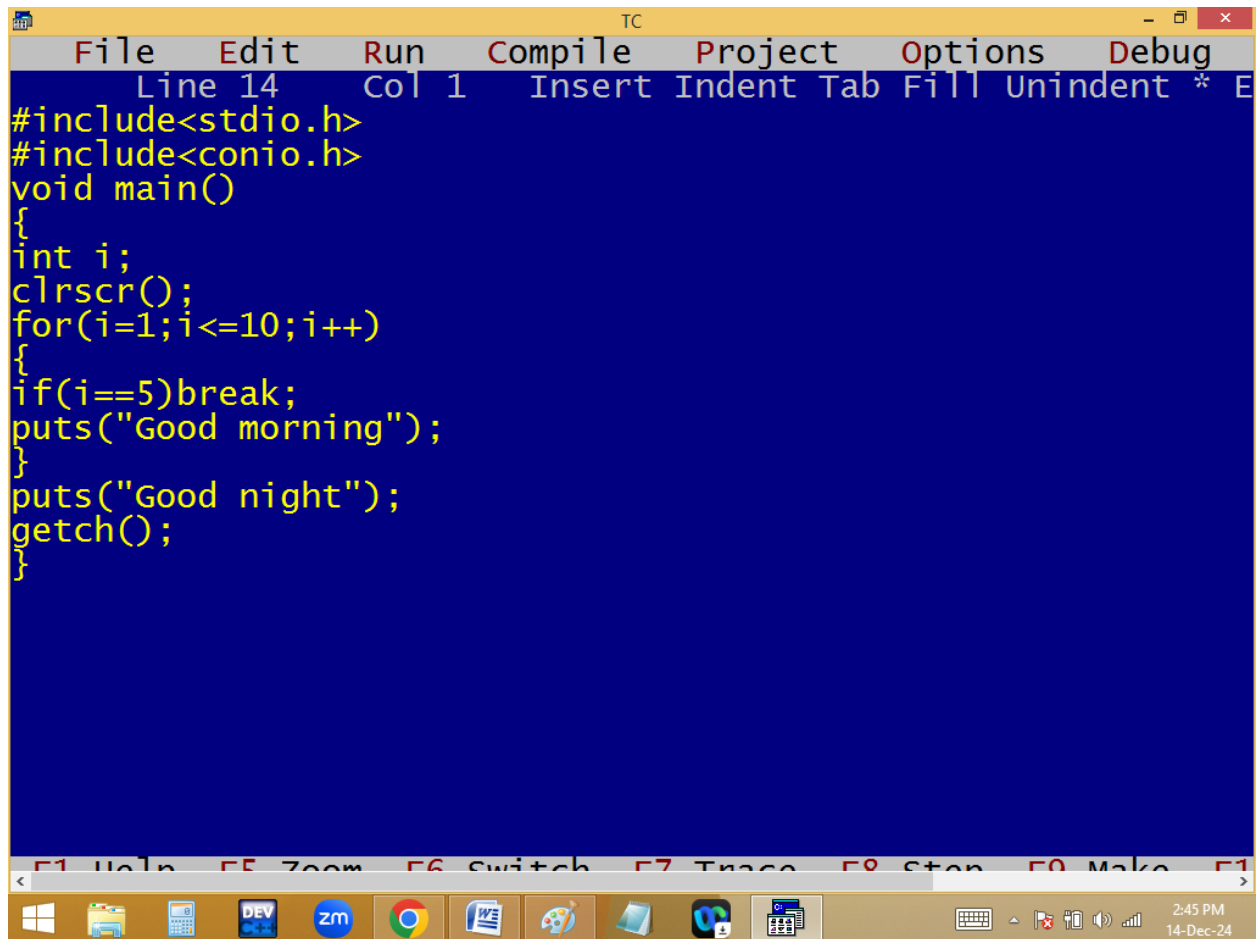


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 14", "Col 1", and "Insert Indent Tab Fill Unindent * E". The code editor contains the following C program:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i;
clrscr();
for(i=1;i<=10;i++)
{
if(i==5)break;
puts("Good morning");
}
puts("Good night");
getch();
}
```

The bottom status bar shows function key shortcuts: "F1 Help", "F5 Zoom", "F6 Switch", "F7 Trace", "F8 Stop", "F9 Make", and "F10". The Windows taskbar at the bottom includes icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and a folder. The system tray on the right shows the time "2:45 PM" and the date "14-Dec-24".

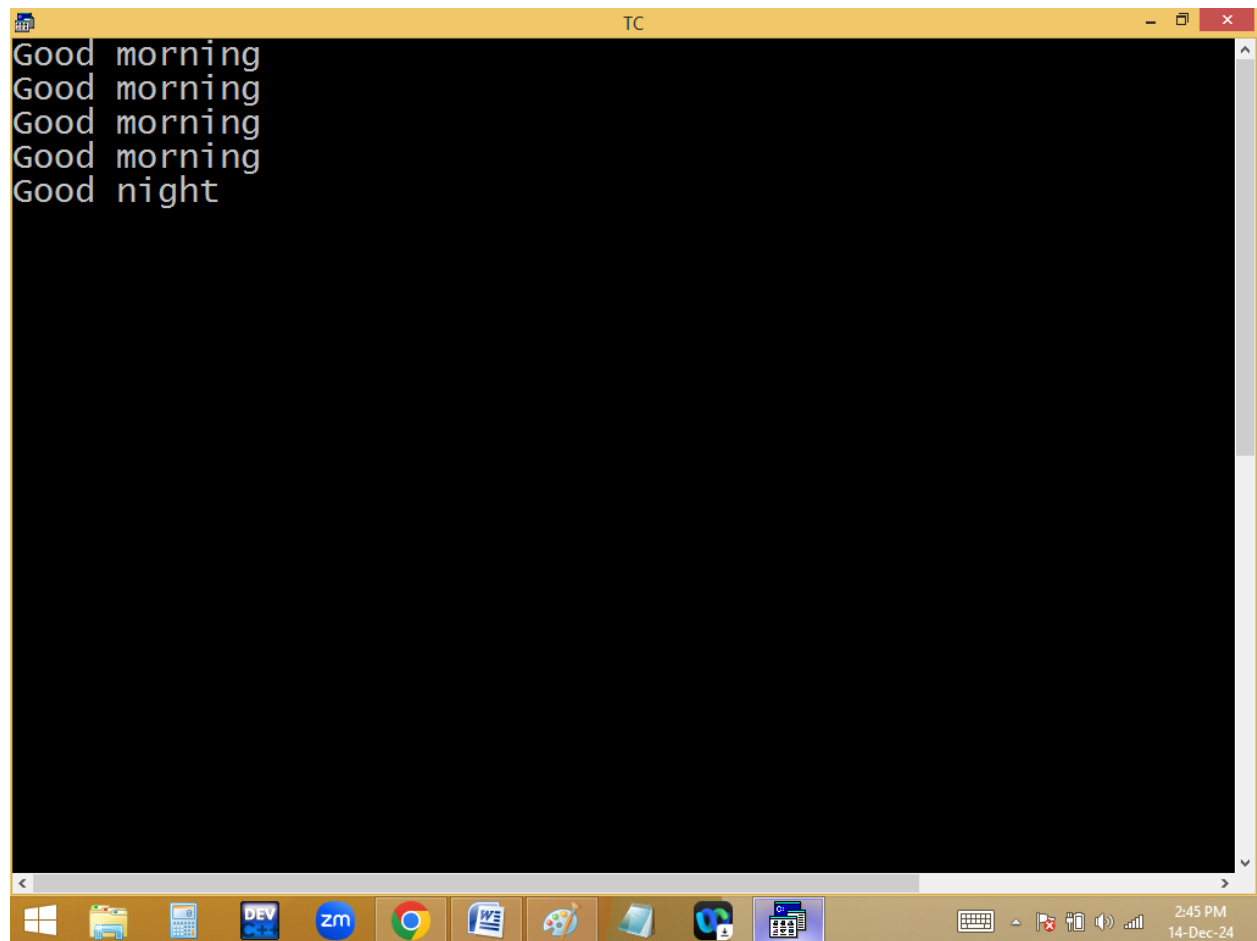


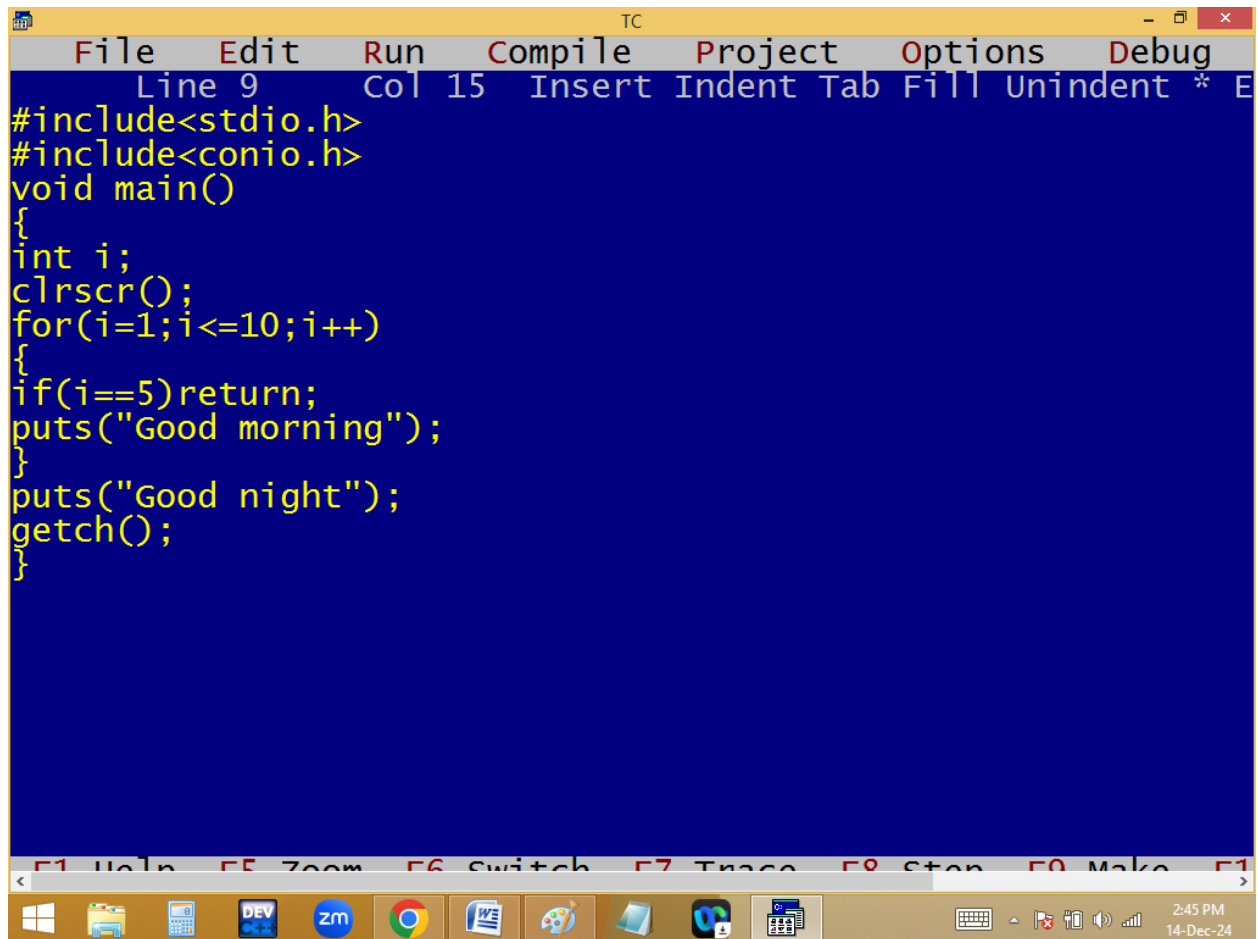


```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 15 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i;
clrscr();
for(i=1;i<=10;i++)
{
if(i==5)return;
puts("Good morning");
}
puts("Good night");
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

2:45 PM 14-Dec-24

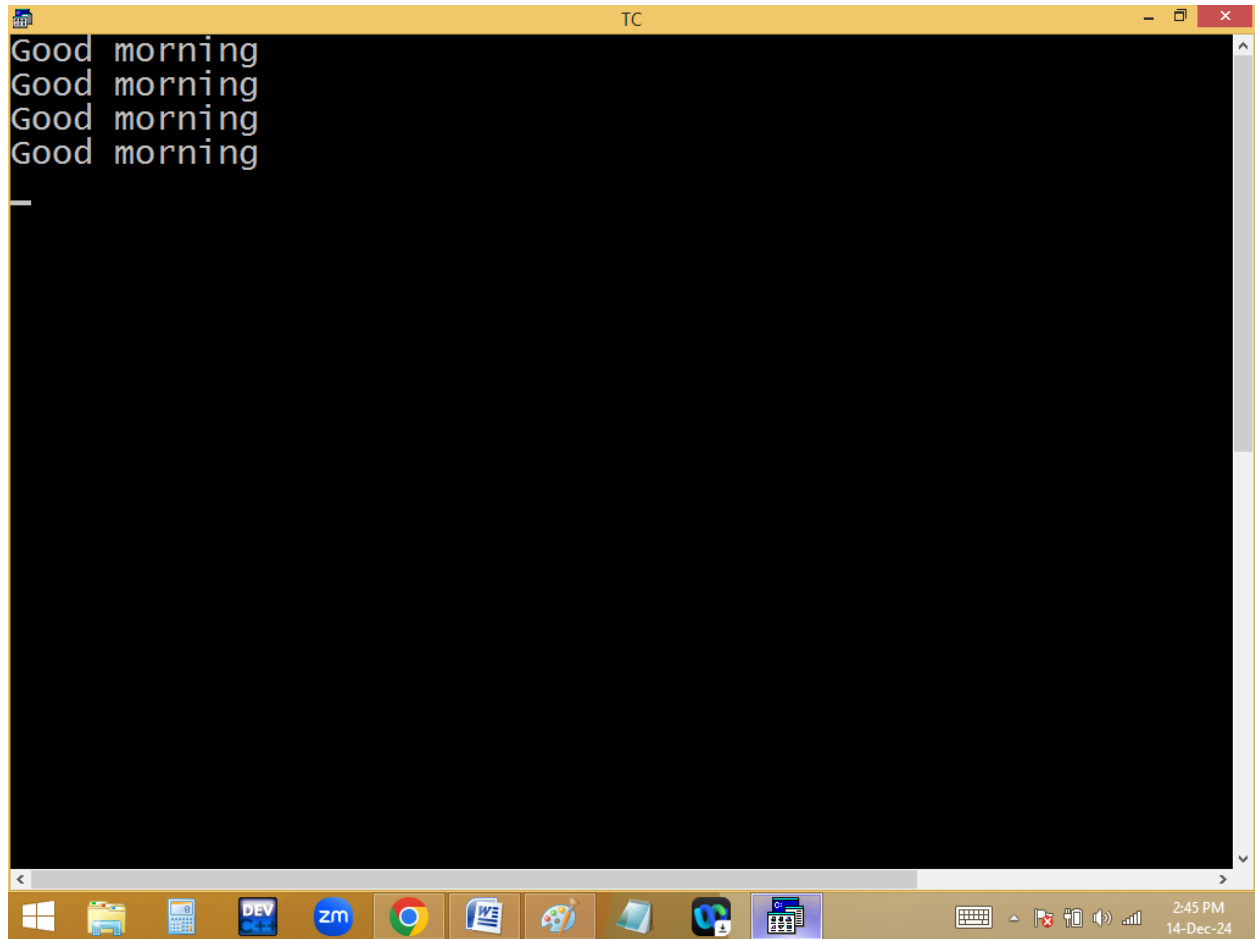


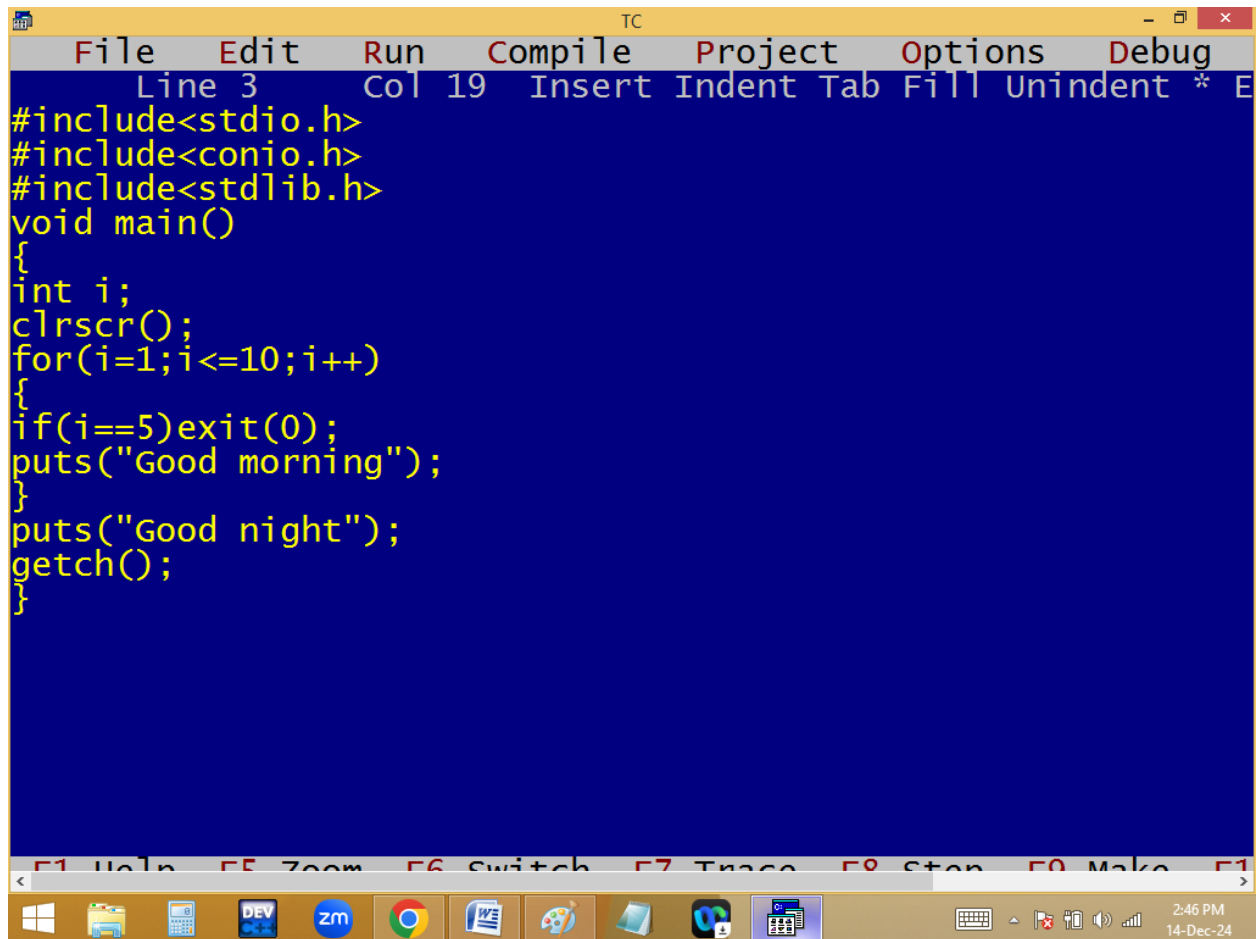


```
TC
File Edit Run Compile Project Options Debug
Line 3 Col 19 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<stdlib.h>
void main()
{
int i;
clrscr();
for(i=1;i<=10;i++)
{
if(i==5)exit(0);
puts("Good morning");
}
puts("Good night");
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10 Run

2:46 PM
14-Dec-24

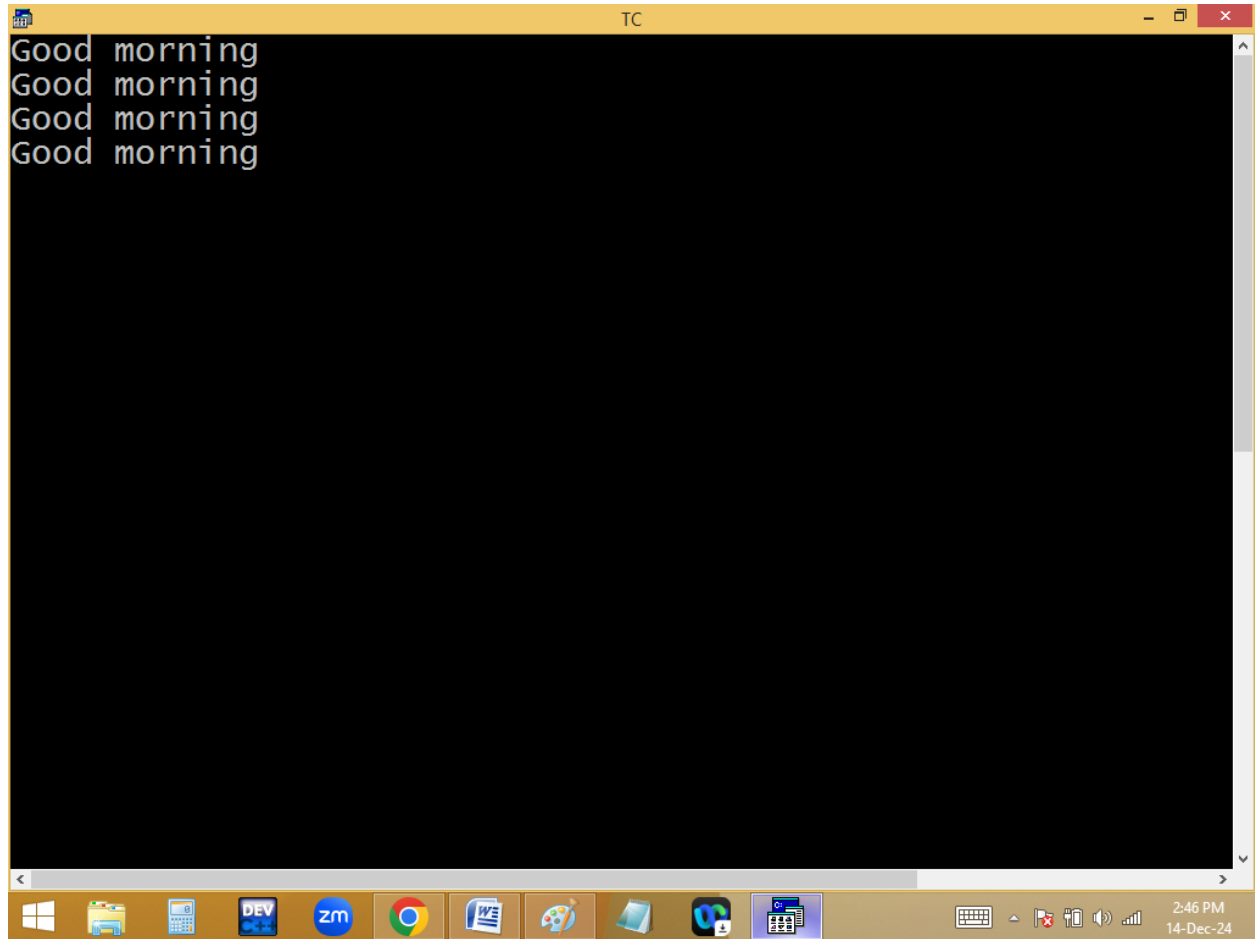


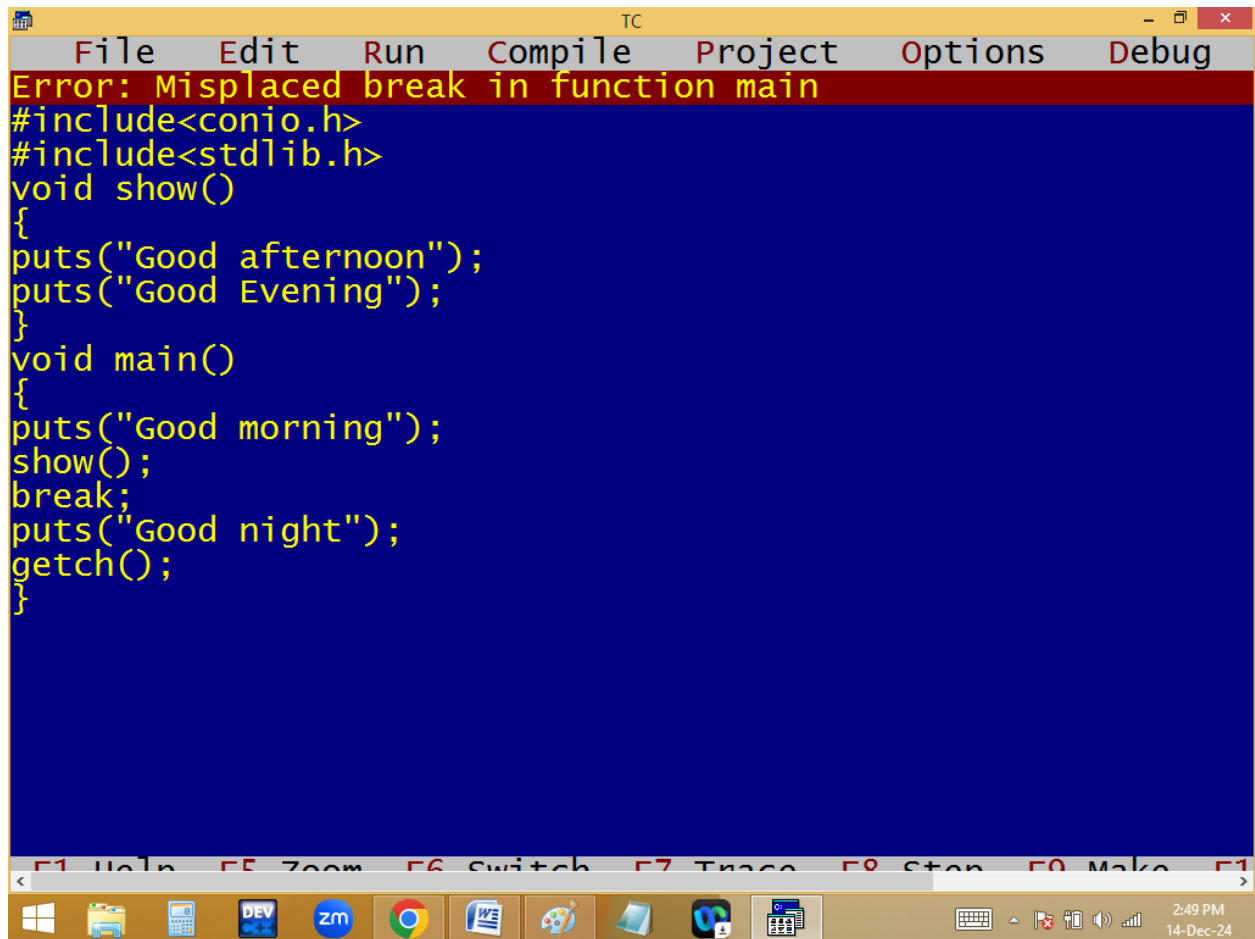

The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error banner at the top of the code editor displays the message: "Error: Misplaced break in function main". The code editor has a dark blue background with yellow text. The code is as follows:

```
#include<conio.h>
#include<stdlib.h>
void show()
{
puts("Good afternoon");
puts("Good Evening");
}
void main()
{
puts("Good morning");
show();
break;
puts("Good night");
getch();
}
```


Below the code editor, there is a toolbar with function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. The Windows taskbar is visible at the bottom, showing icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and a folder. The system tray on the right shows the time as 2:49 PM and the date as 14-Dec-24.

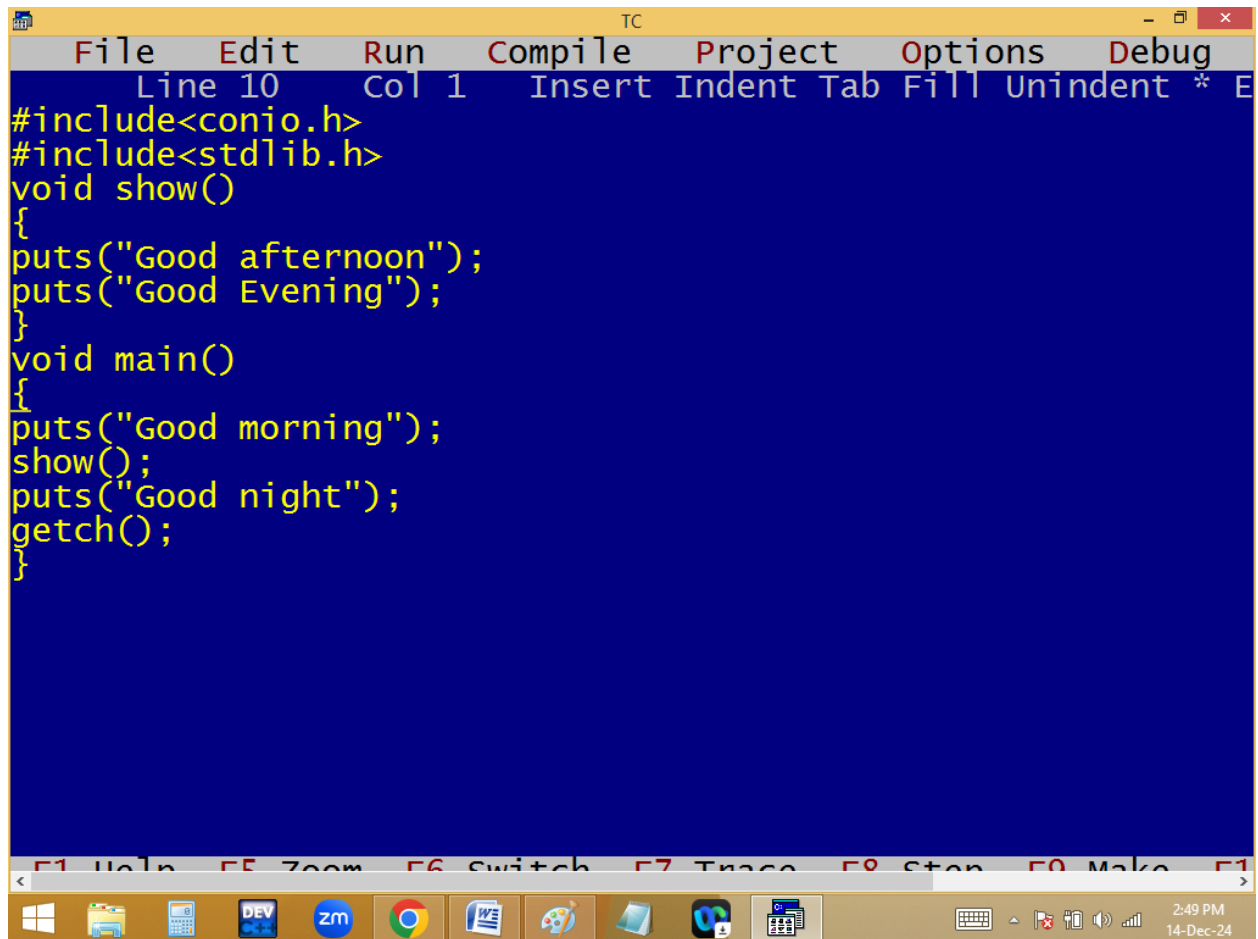


```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 1 Insert Indent Tab Fill Unindent * E
#include<conio.h>
#include<stdlib.h>
void show()
{
puts("Good afternoon");
puts("Good Evening");
}
void main()
{
puts("Good morning");
show();
puts("Good night");
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

2:49 PM
14-Dec-24

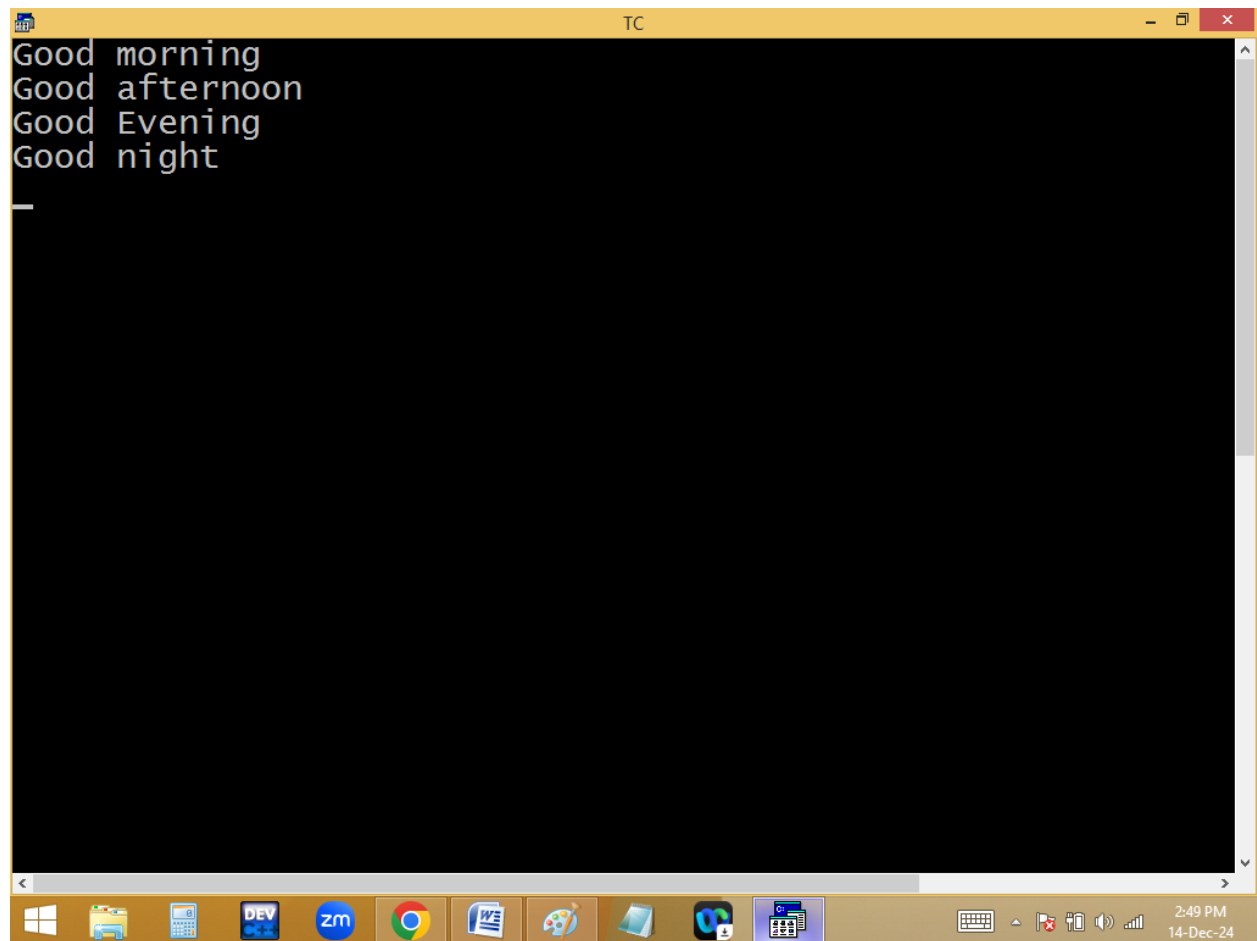


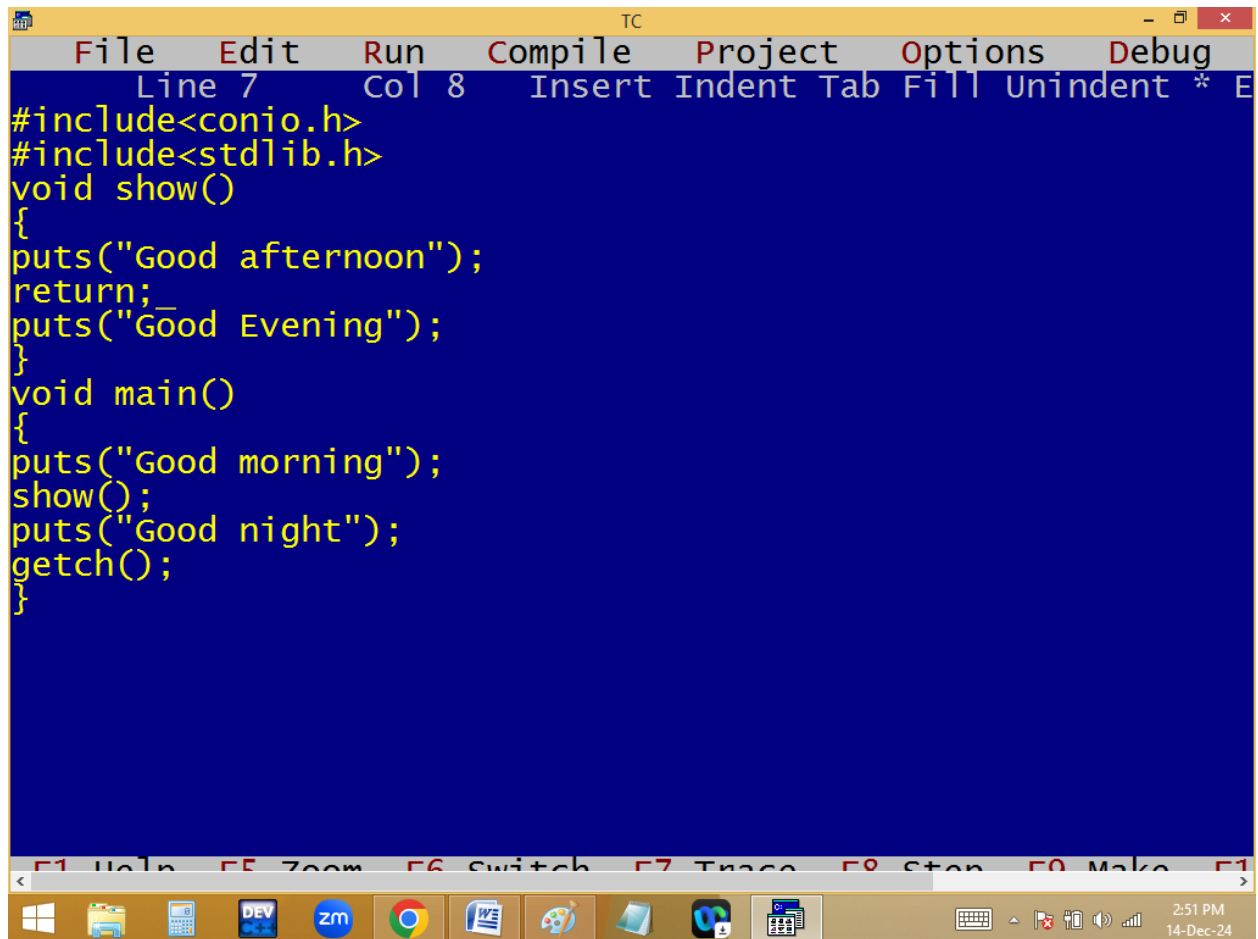


```
File Edit Run Compile Project Options Debug
Line 7 Col 8 Insert Indent Tab Fill Unindent * E
#include<conio.h>
#include<stdlib.h>
void show()
{
puts("Good afternoon");
return;
puts("Good Evening");
}
void main()
{
puts("Good morning");
show();
puts("Good night");
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

2:51 PM
14-Dec-24

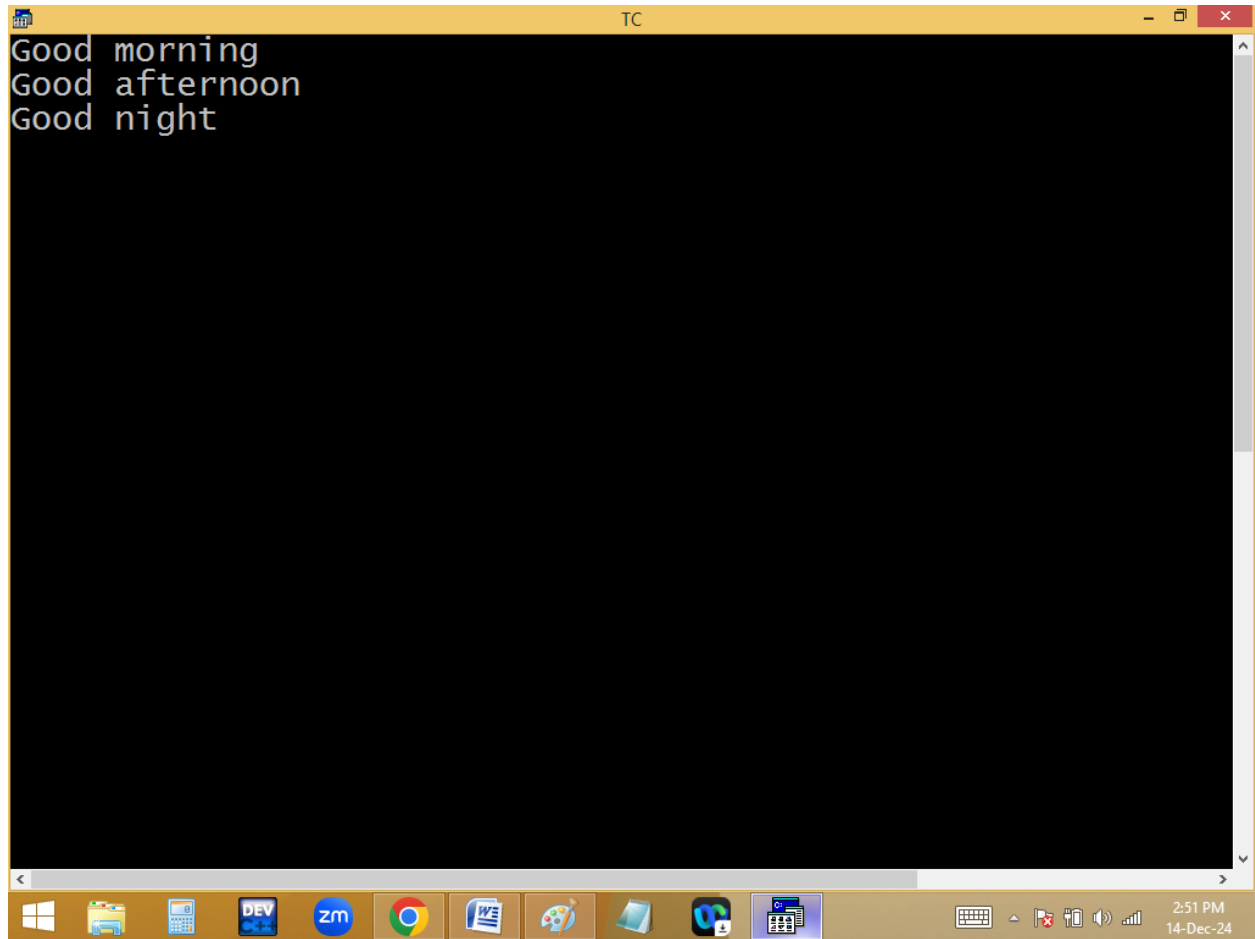


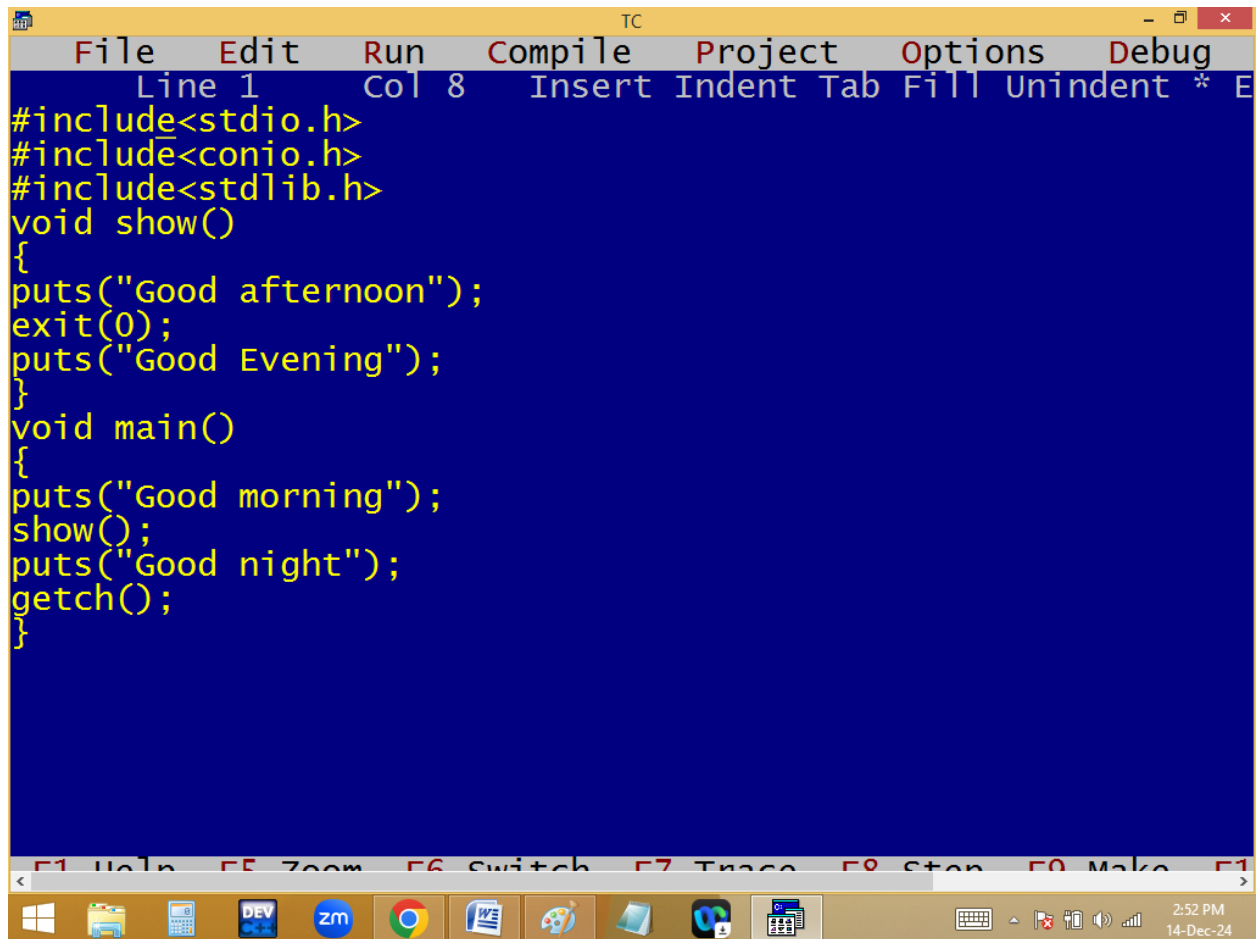

```
TC
File Edit Run Compile Project Options Debug
Line 1 Col 8 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<stdlib.h>
void show()
{
puts("Good afternoon");
exit(0);
puts("Good Evening");
}
void main()
{
puts("Good morning");
show();
puts("Good night");
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10


2:52 PM 14-Dec-24

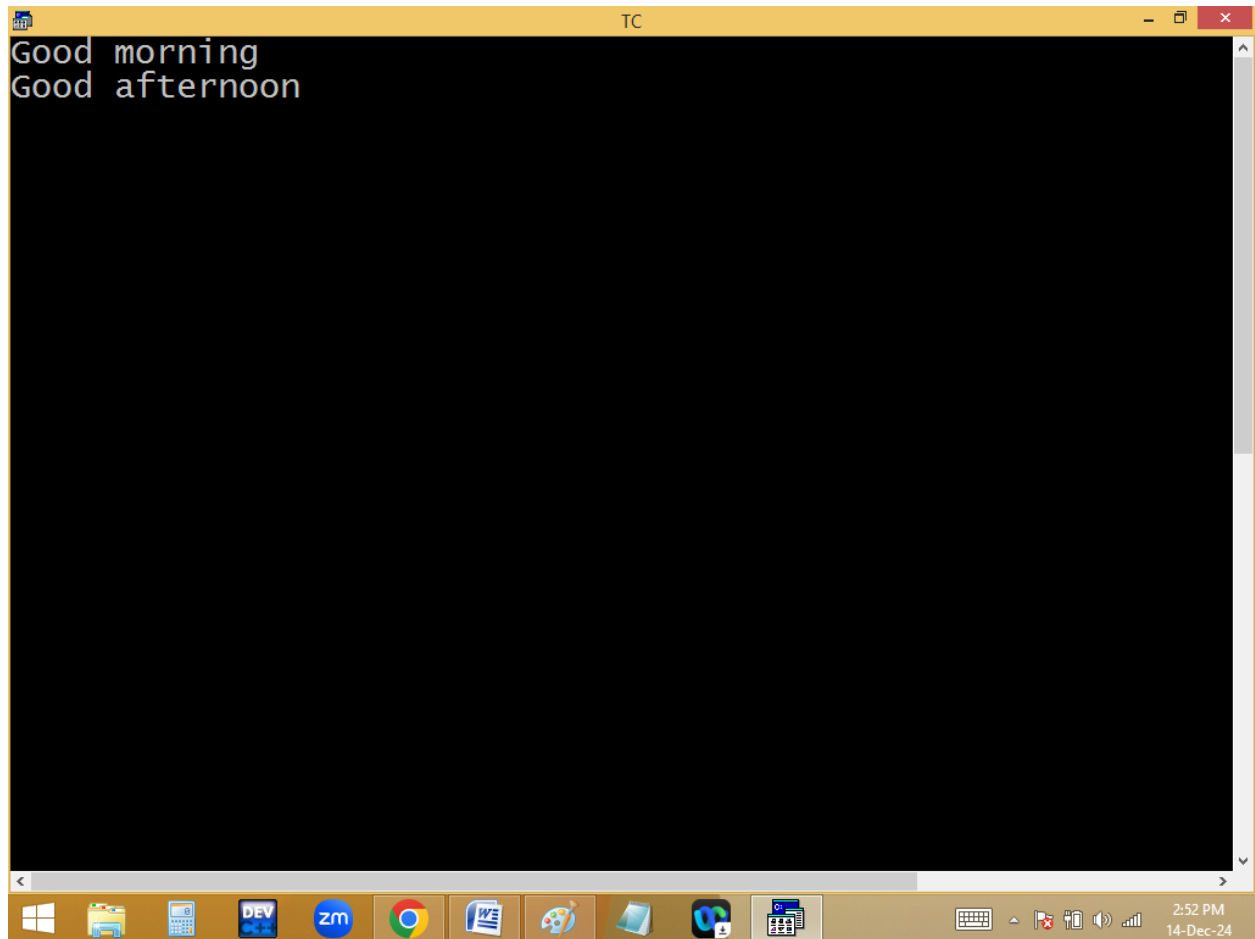

The image shows a screenshot of a Turbo C++ (TC) window. The window title bar says "TC". The main area is a black console with white text that reads "Good morning" on the first line and "Good afternoon" on the second line. The Windows taskbar is visible at the bottom, showing various application icons and the system clock indicating 2:52 PM on 14-Dec-24.

break	exit()	Return
Keyword	Function	Keyword
Header file not required	stdlib.h / process.h required	Header file not required
Terminates switch / loop	Terminates total program	Closes that function only
Should be used within switch/loop	Used any where	Used any where


continue: It is a keyword used within loop. When continue occurred, the program execution jumped to loop ending and later to beginning of loop. Due to this the remaining lines in that loop are skipped.

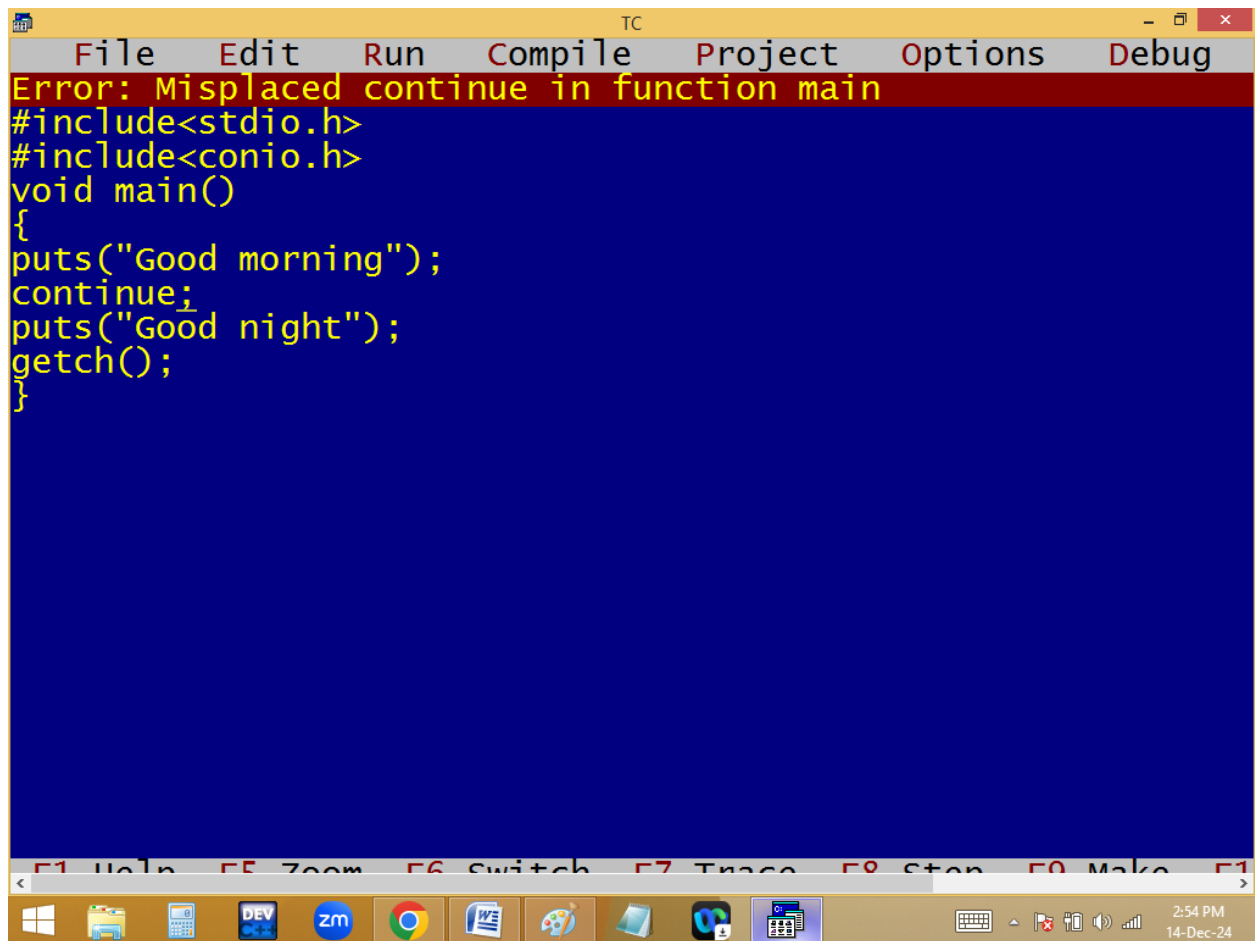

The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". Below it is a menu bar with the following options: File, Edit, Run, Compile, Project, Options, and Debug. A red error message banner spans the width of the window, stating "Error: Misplaced continue in function main". The main editing area has a dark blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
puts("Good morning");
continue;
puts("Good night");
getch();
}
```

At the bottom of the window, there is a toolbar with icons for various functions, each with a corresponding F-key label: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. The Windows taskbar is visible at the very bottom, showing the Start button, several application icons (including File Explorer, Calculator, DEV C++, Zoom, Chrome, Word, and Paint), and system tray icons for keyboard, volume, and network. The system clock in the bottom right corner shows "2:54 PM" and "14-Dec-24".

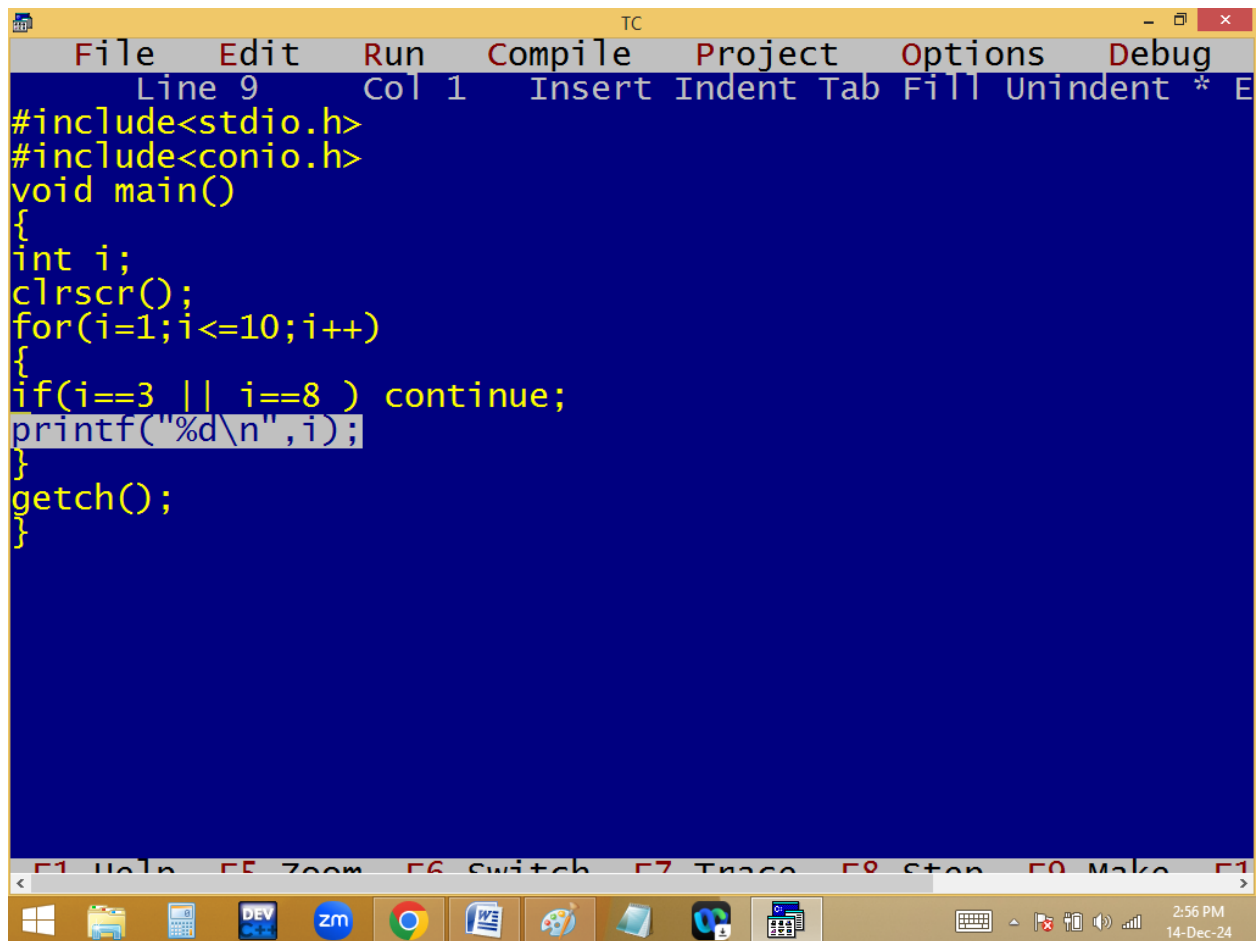


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 9", "Col 1", and "Insert Indent Tab Fill Unindent * E". The code editor contains the following C program:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i;
    clrscr();
    for(i=1;i<=10;i++)
    {
        if(i==3 || i==8 ) continue;
        printf("%d\n",i);
    }
    getch();
}
```

The line `printf("%d\n",i);` is highlighted. The bottom status bar shows keyboard shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. The Windows taskbar at the bottom includes icons for Windows, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and a folder. The system clock shows "2:56 PM" and "14-Dec-24".

```
TC
1
2
4
5
6
7
9
10
_
```

Printing 1..10 even no with continue:

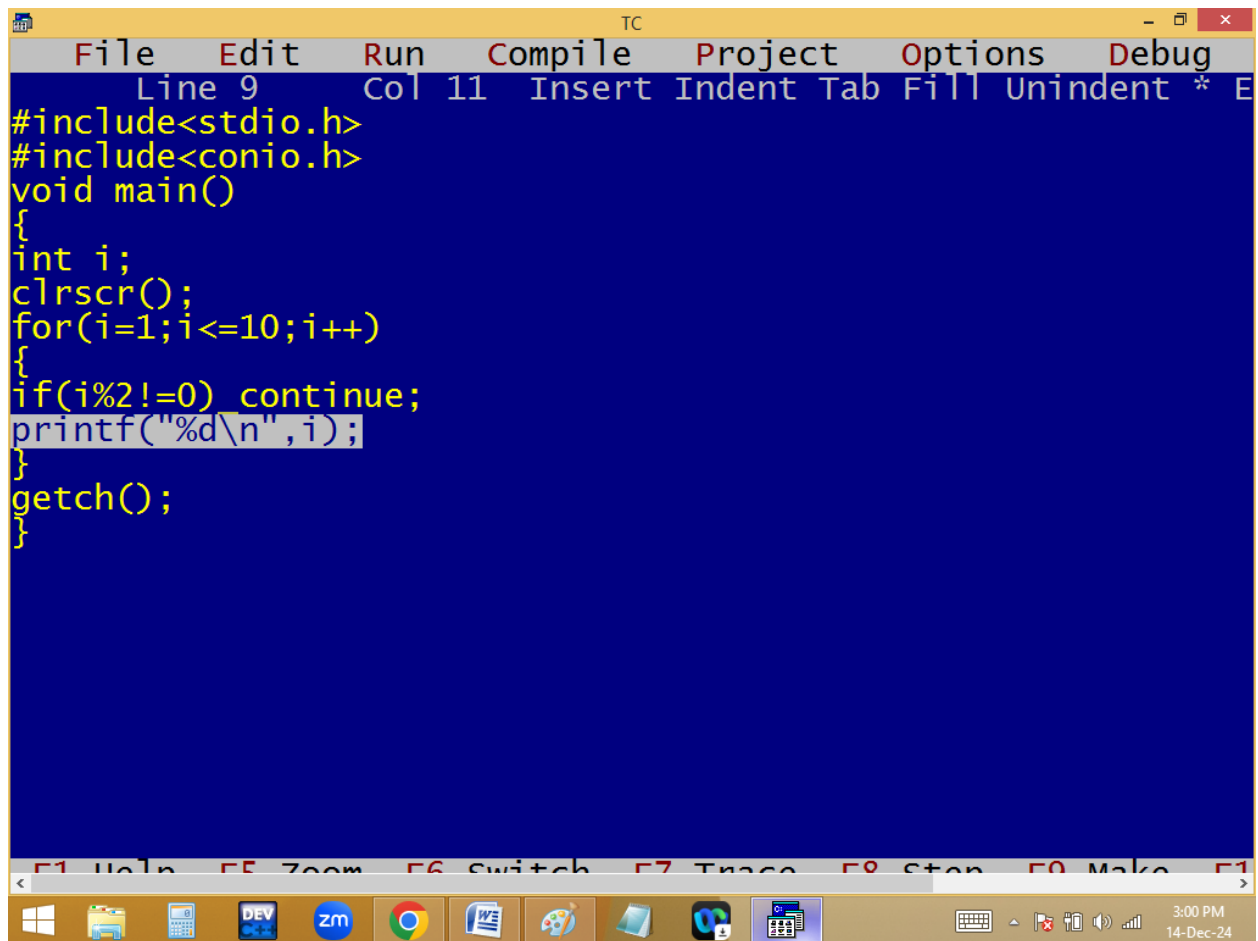


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 9", "Col 11", and "Insert" mode. The code editor has a dark blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i;
    clrscr();
    for(i=1;i<=10;i++)
    {
        if(i%2!=0) continue;
        printf("%d\n",i);
    }
    getch();
}
```

The line `printf("%d\n",i);` is highlighted in white. Below the code editor, there is a toolbar with icons for various functions. The bottom status bar shows the time "3:00 PM" and the date "14-Dec-24".


```
TC
2
4
6
8
10
_
```

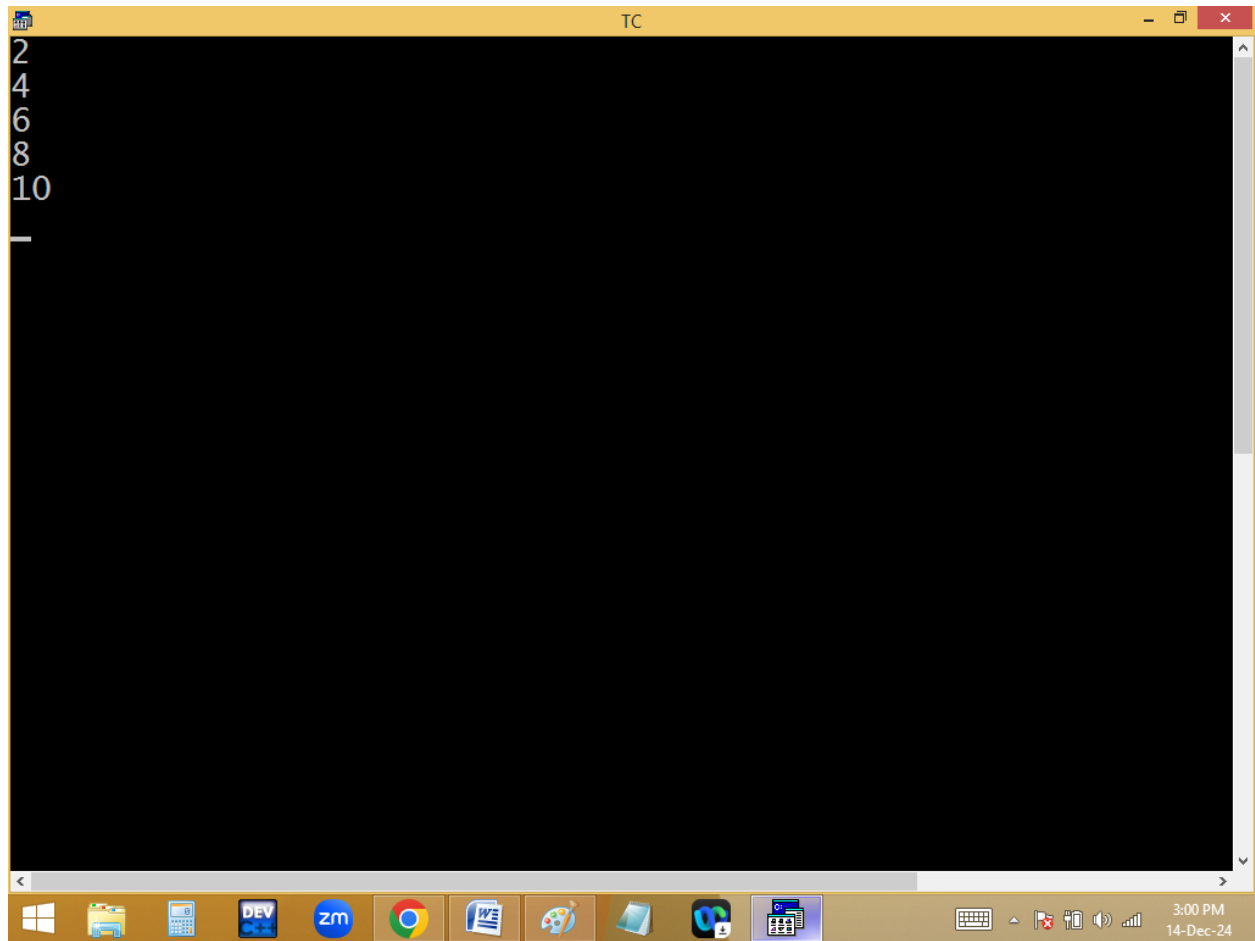


Printing 1..10 odd no's with continue:

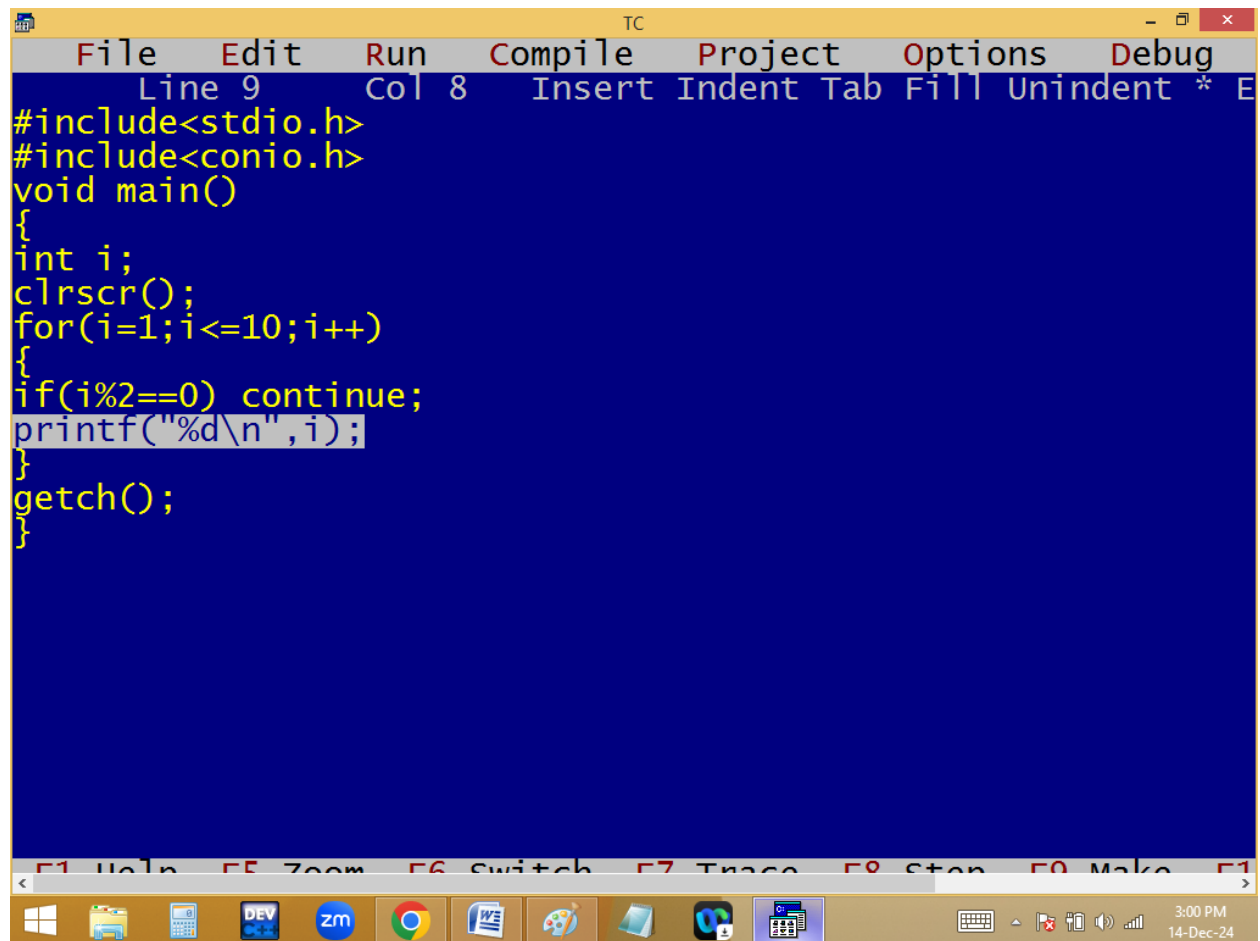


```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 8 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i;
clrscr();
for(i=1;i<=10;i++)
{
if(i%2==0) continue;
printf("%d\n",i);
}
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

3:00 PM
14-Dec-24

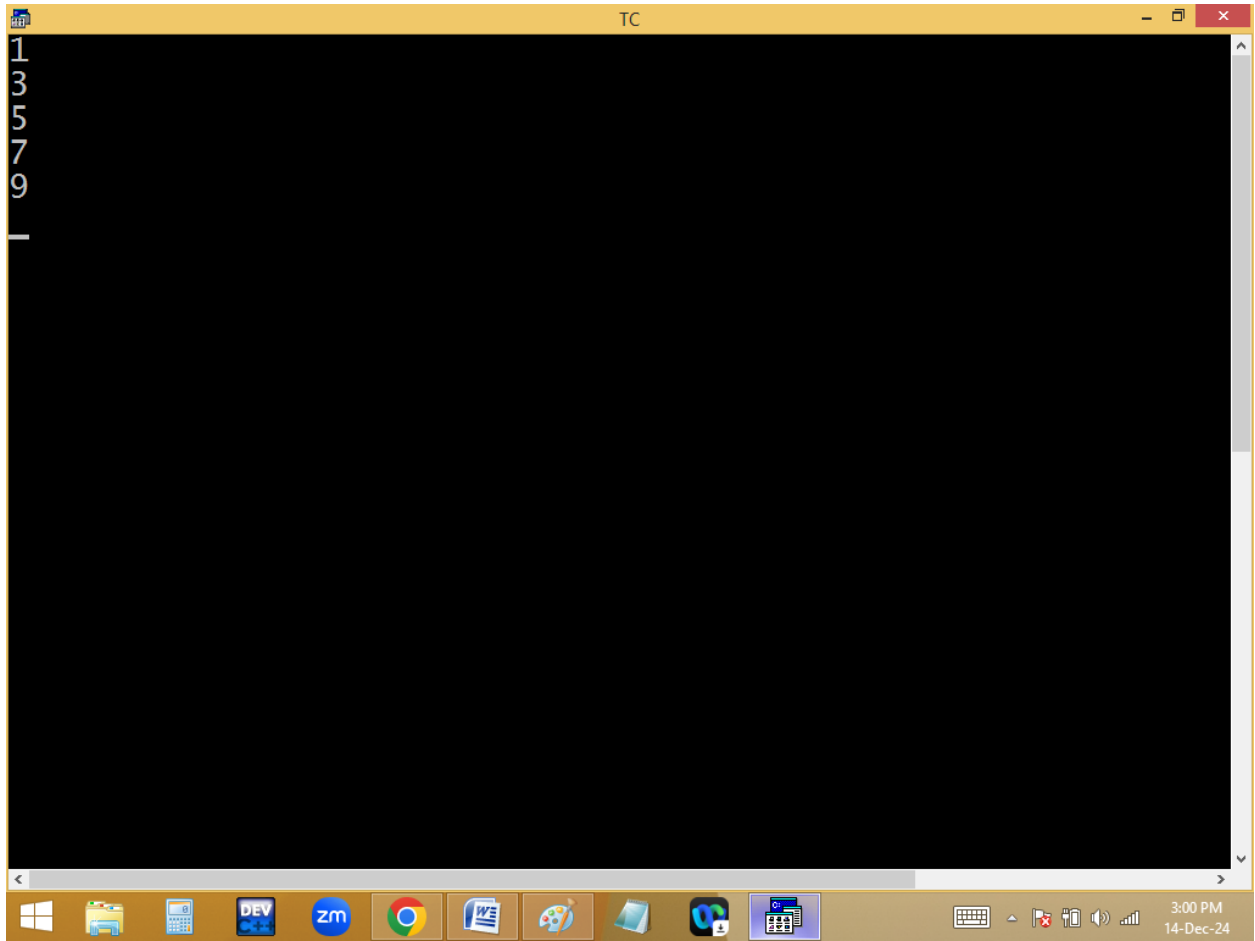


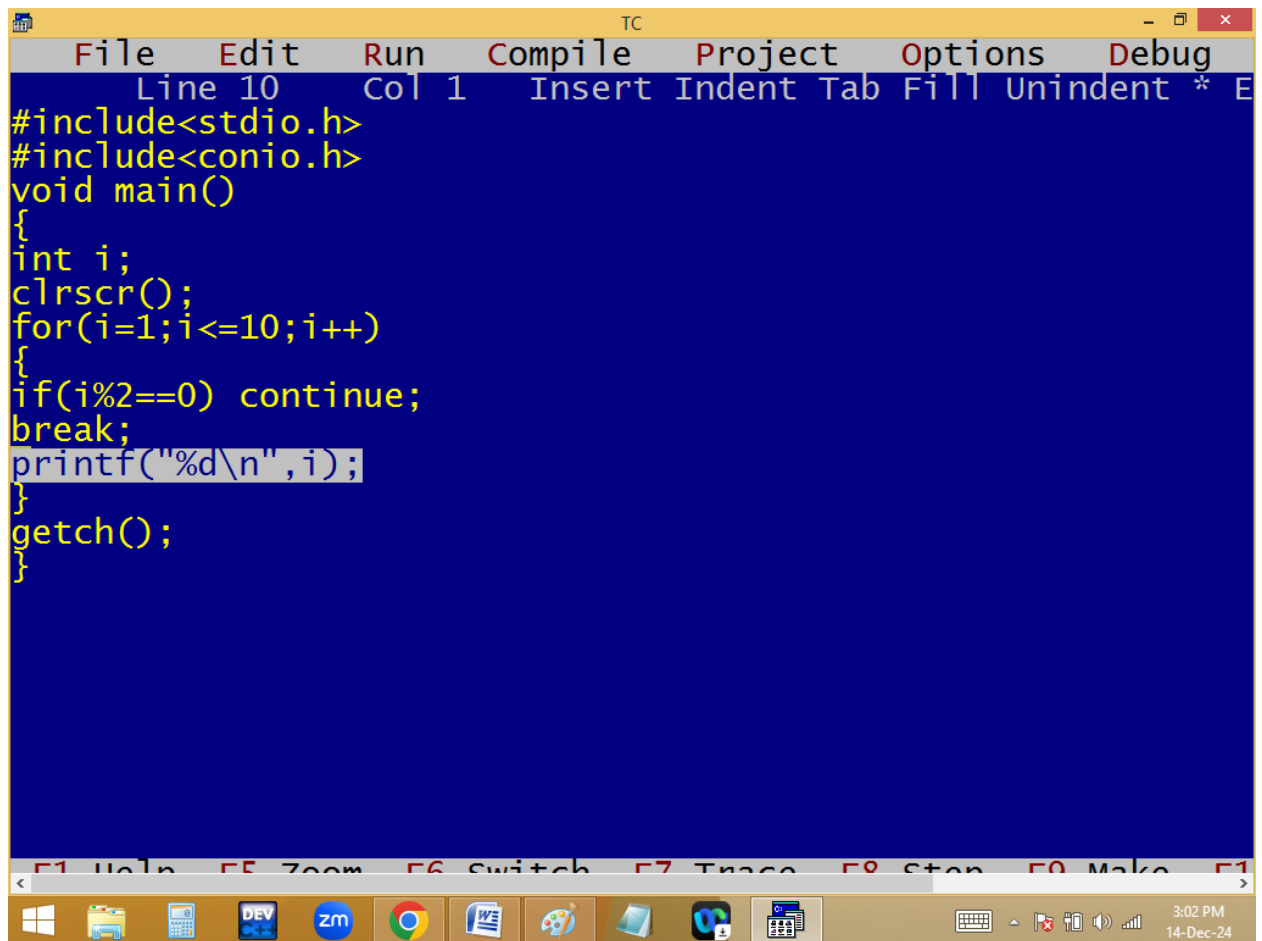


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 10", "Col 1", and "Insert" mode. The code editor contains the following C program:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i;
    clrscr();
    for(i=1;i<=10;i++)
    {
        if(i%2==0) continue;
        break;
        printf("%d\n",i);
    }
    getch();
}
```

The line `printf("%d\n",i);` is highlighted. The bottom status bar shows function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. The Windows taskbar at the bottom displays the Start button and icons for File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and VS Code. The system clock shows 3:02 PM on 14-Dec-24.

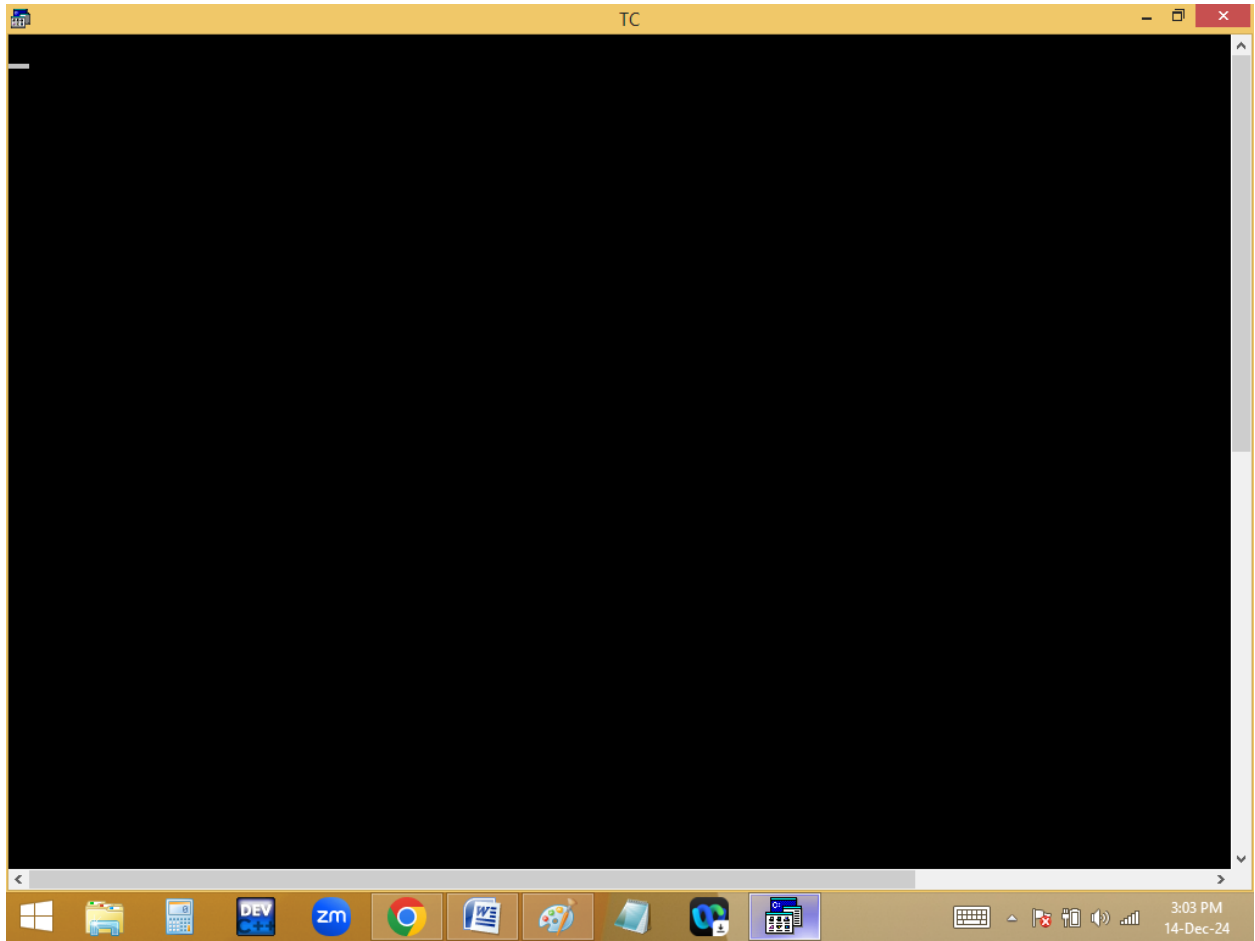


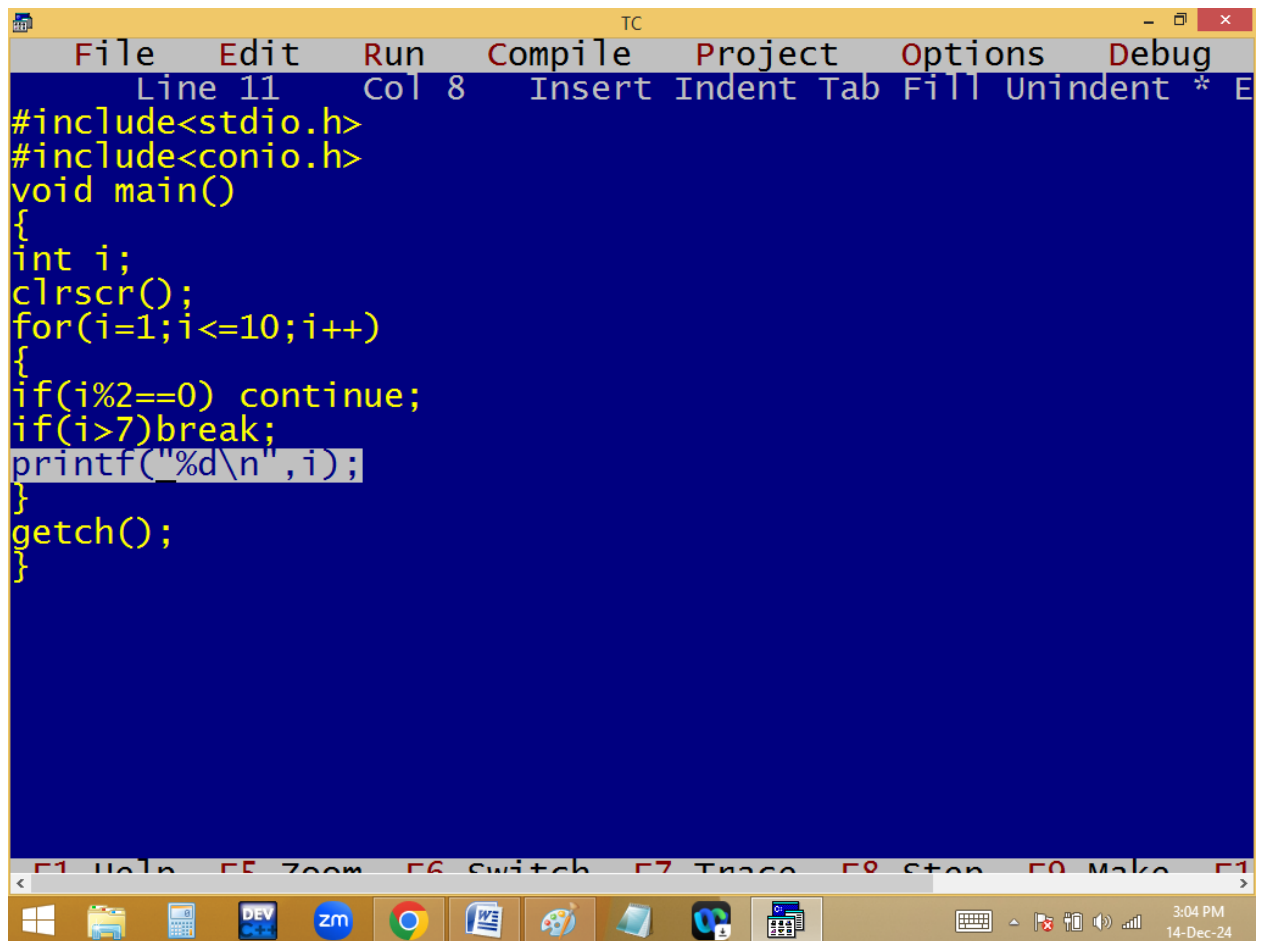


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 11", "Col 8", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The code editor has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i;
    clrscr();
    for(i=1;i<=10;i++)
    {
        if(i%2==0) continue;
        if(i>7)break;
        printf("%d\n",i);
    }
    getch();
}
```

The line containing `printf("%d\n",i);` is highlighted in light blue. The bottom status bar shows function key shortcuts: "F1 Help", "F5 Zoom", "F6 Switch", "F7 Trace", "F8 Stop", "F9 Make", and "F10". The Windows taskbar at the bottom includes icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, File Zilla, and a folder icon. The system clock on the right shows "3:04 PM" and "14-Dec-24".

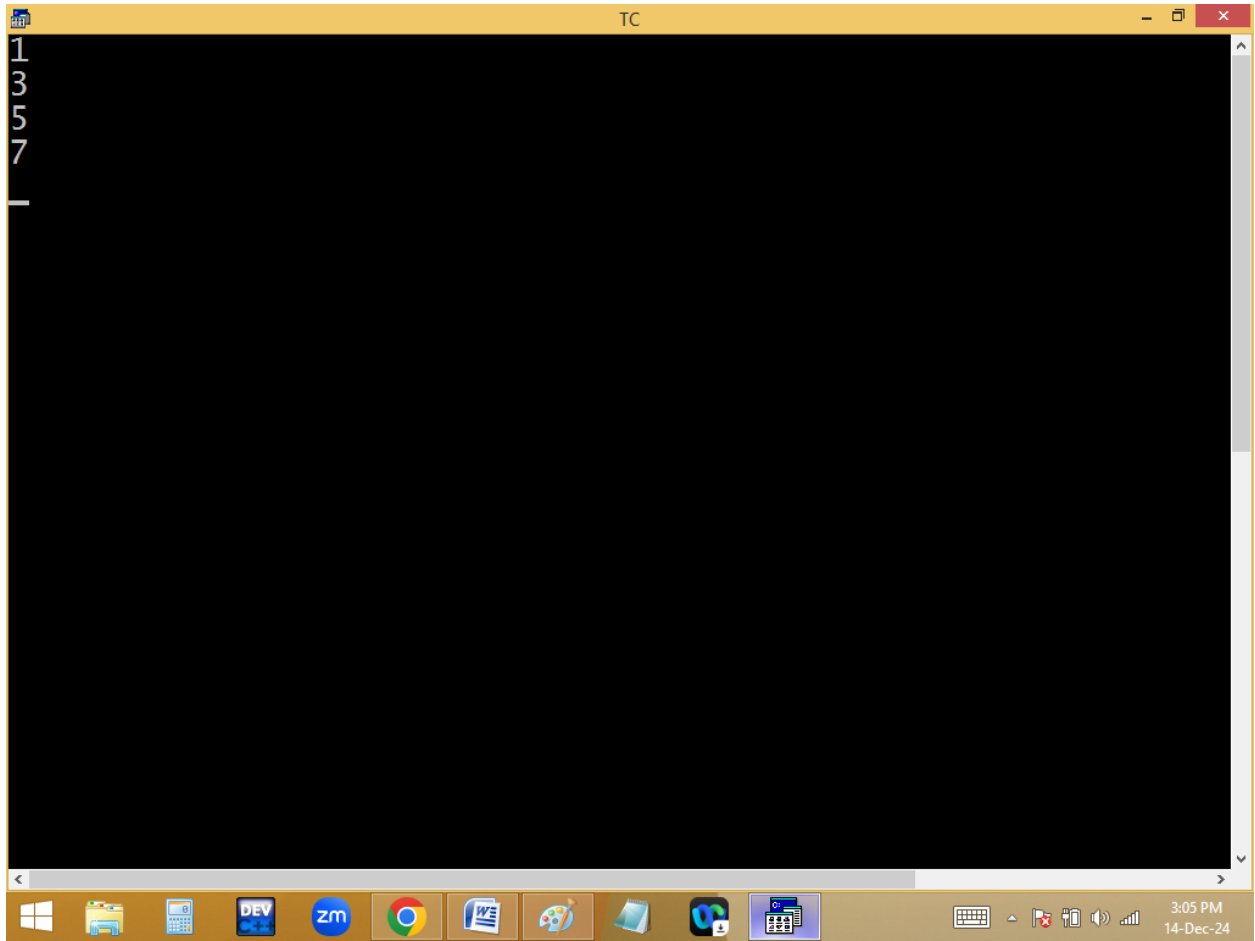


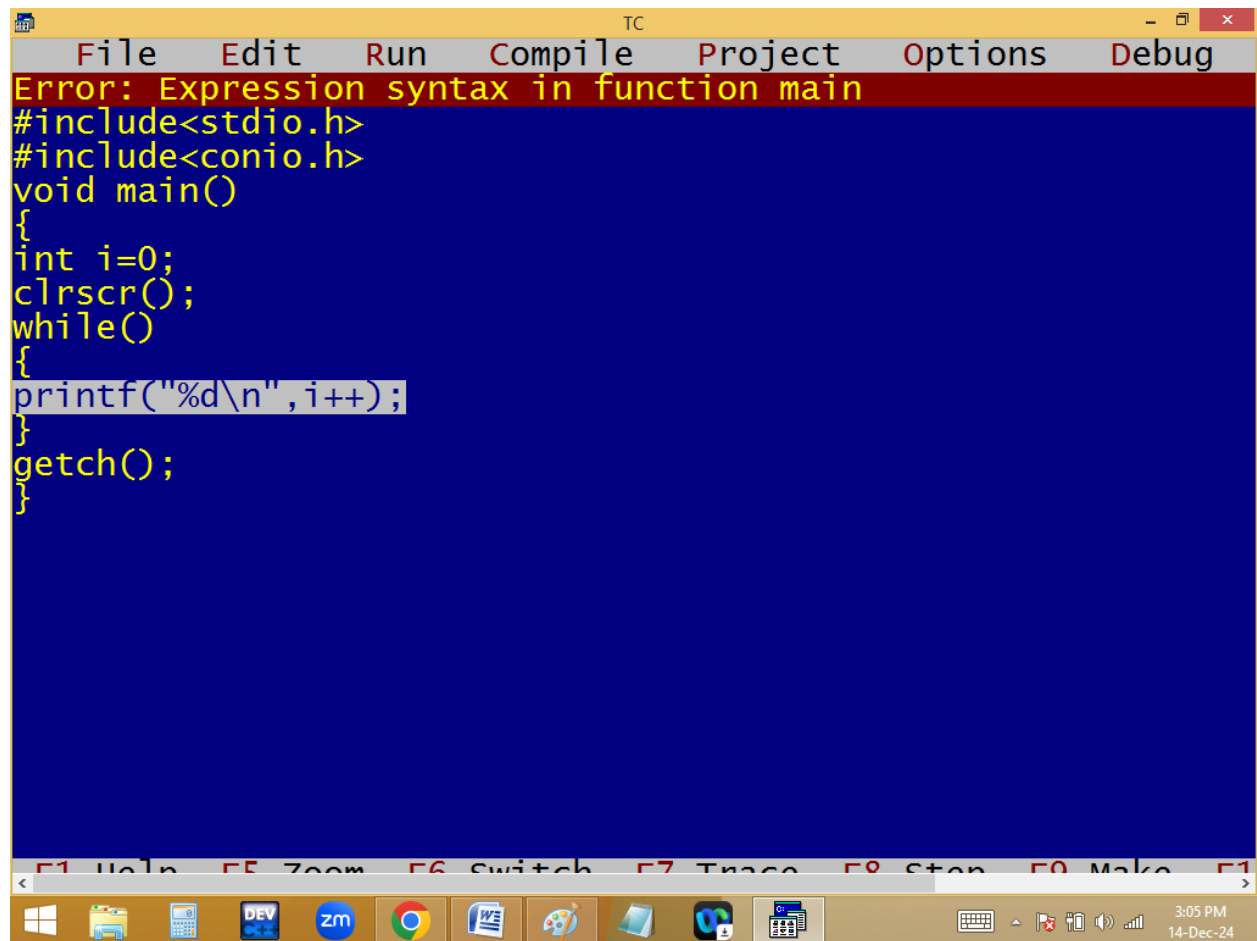

The image shows a screenshot of the Turbo C++ (TC) IDE. The main window has a dark blue background with yellow text for the code. A red error message banner is at the top. The code is a simple C program that prints numbers 0 to 9. The error message "Error: Expression syntax in function main" is displayed in the banner. The code is as follows:


```
File Edit Run Compile Project Options Debug
Error: Expression syntax in function main
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while()
{
printf("%d\n",i++);
}
getch();
}
```

Below the code editor, there is a status bar with function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, F10. The Windows taskbar is visible at the bottom with various application icons and a system clock showing 3:05 PM on 14-Dec-24.

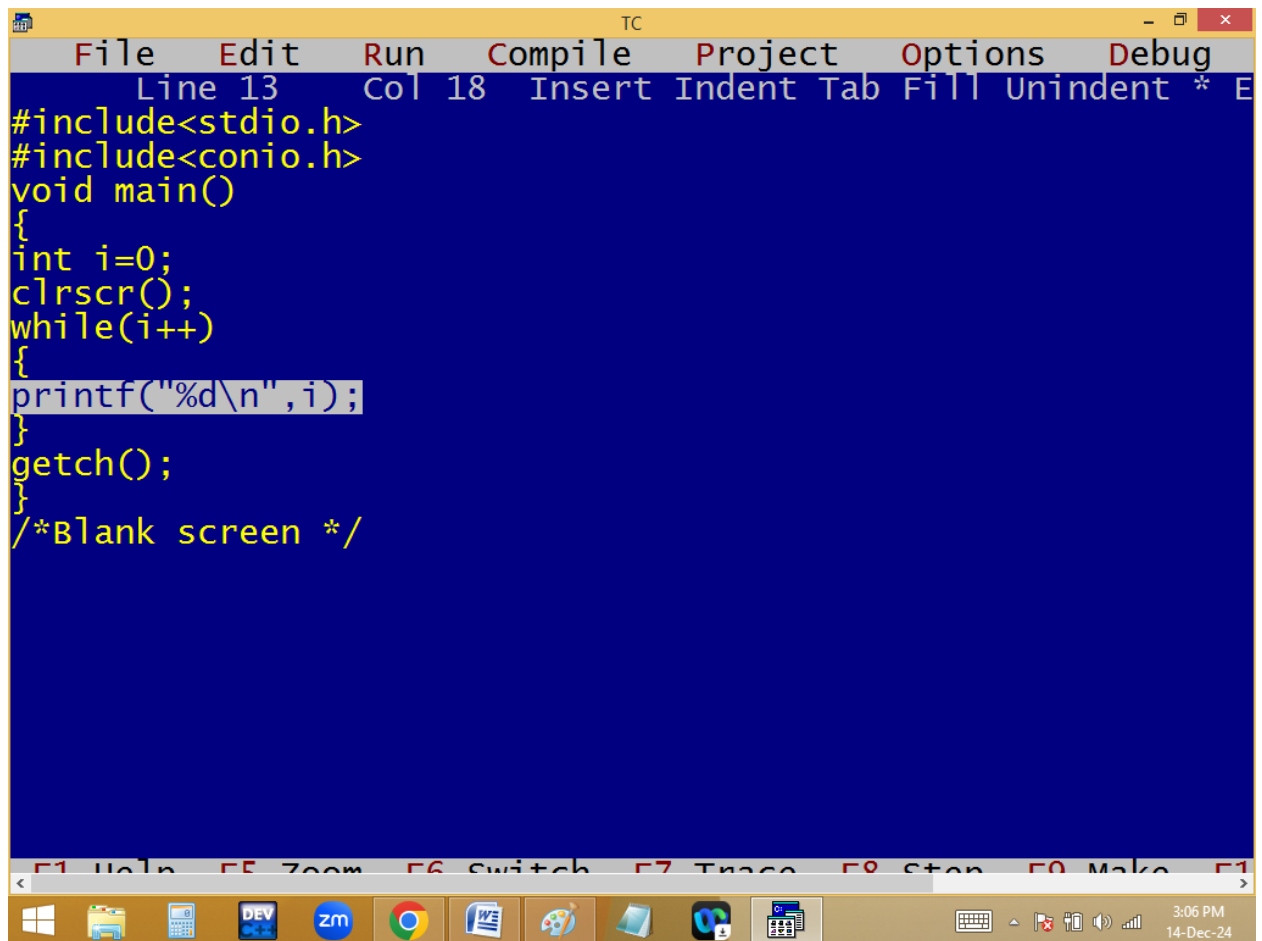


```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 18 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(i++)
{
printf("%d\\n",i);
}
getch();
}
/*Blank screen */

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
3:06 PM
14-Dec-24
```

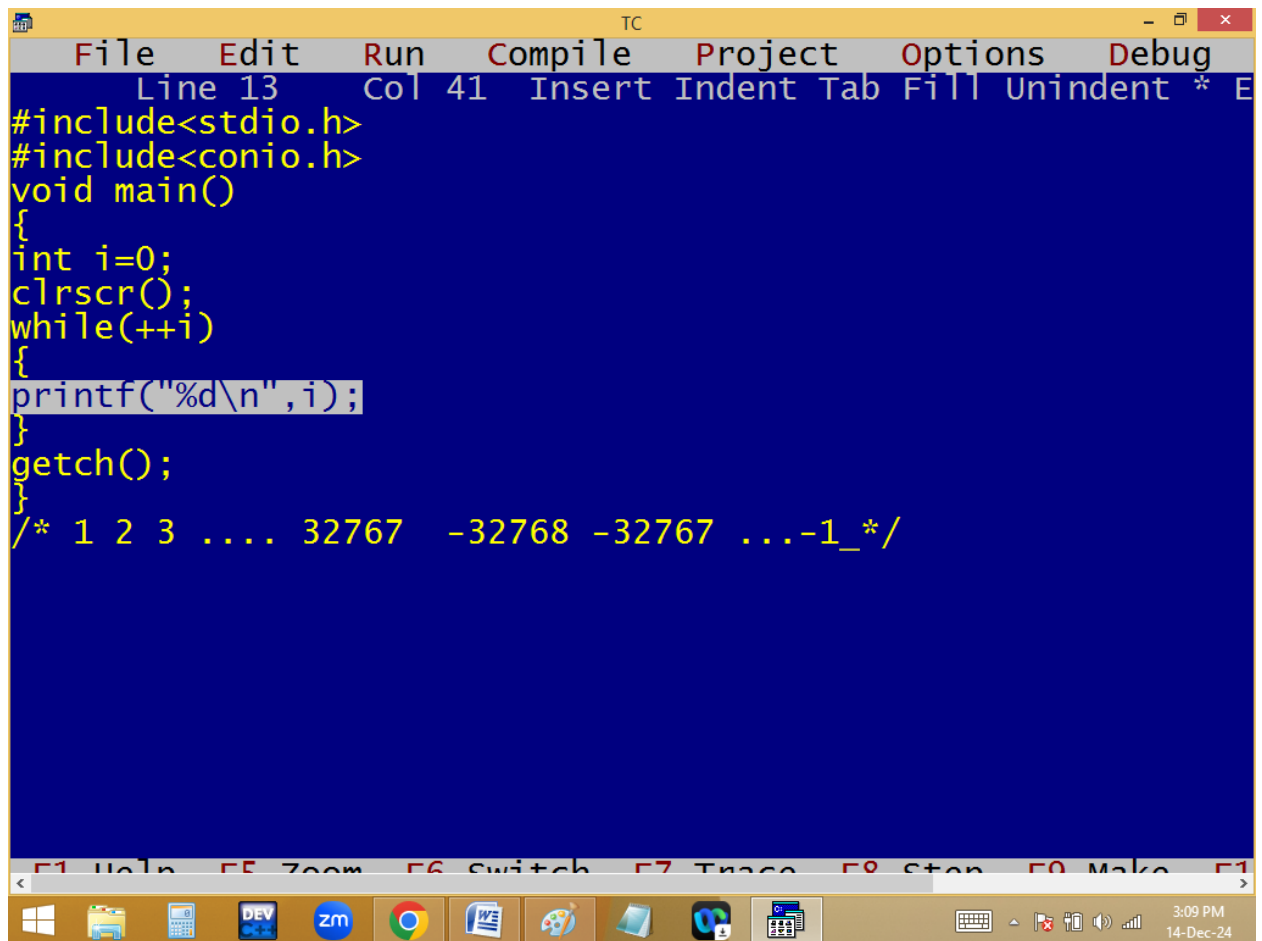


```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 41 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(++i)
{
printf("%d\n",i);
}
getch();
}
/* 1 2 3 .... 32767 -32768 -32767 ...-1_*/

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

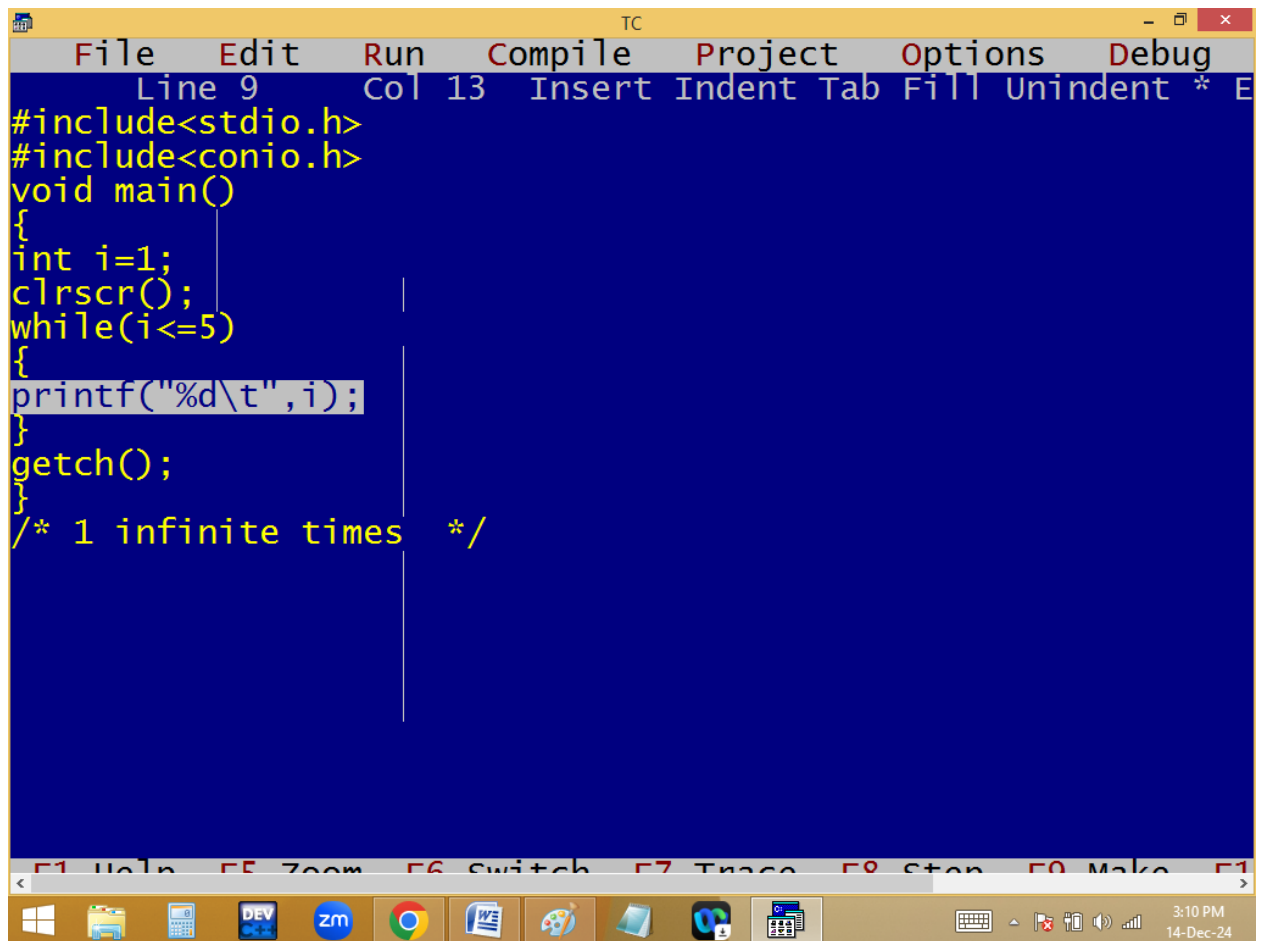

```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 13 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i=1;
clrscr();
while(i<=5)
{
printf("%d\t",i);
}
getch();
}
/* 1 infinite times */


F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

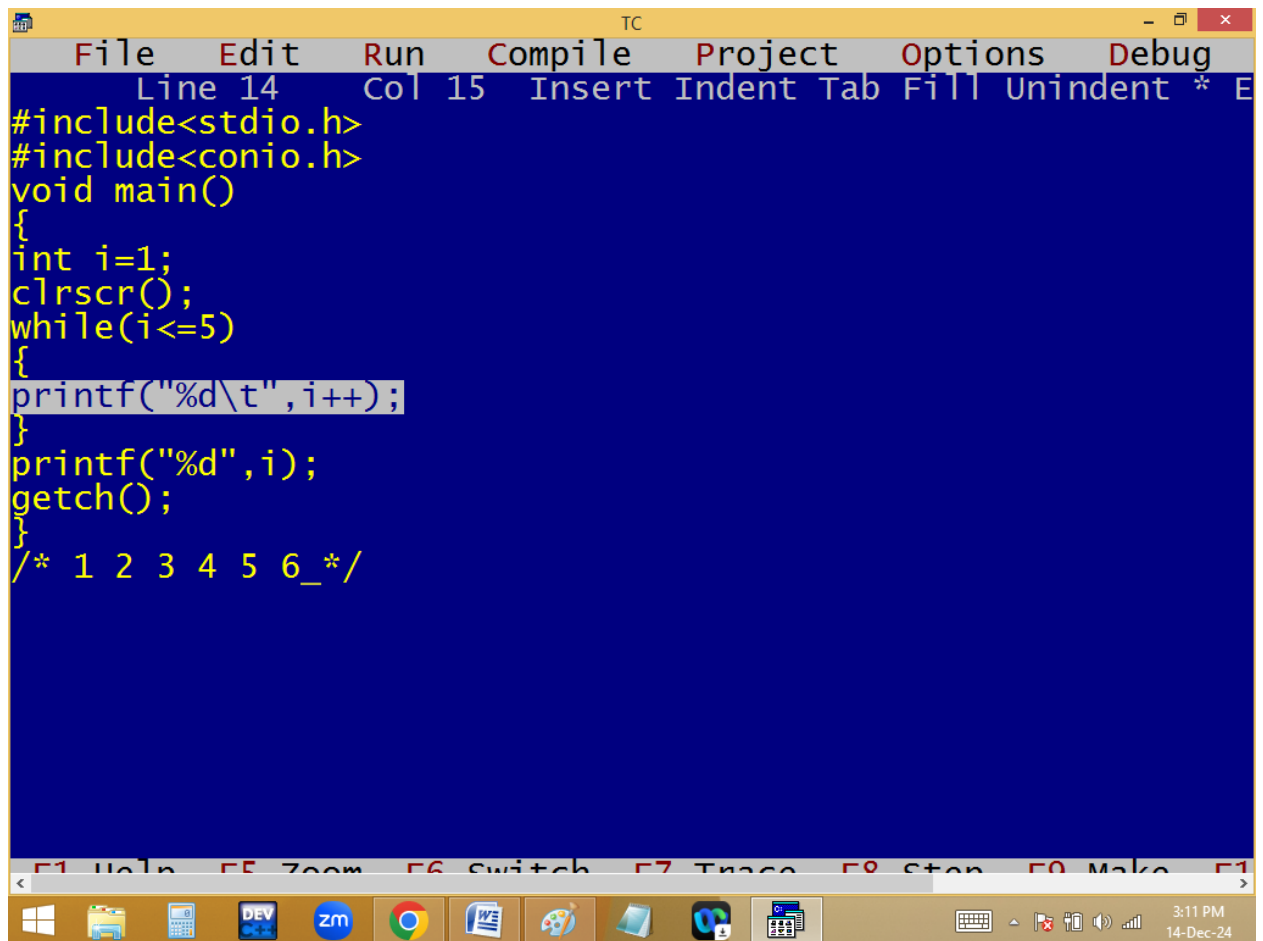

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 14" and "Col 15". The main editing area has a dark blue background with yellow text. The code is a C program that prints a staircase pattern. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=1;
    clrscr();
    while(i<=5)
    {
        printf("%d\t",i++);
    }
    printf("%d",i);
    getch();
}
/* 1 2 3 4 5 6_*/
```

At the bottom of the window, there is a toolbar with icons for various functions, and a status bar showing the time "3:11 PM" and the date "14-Dec-24".

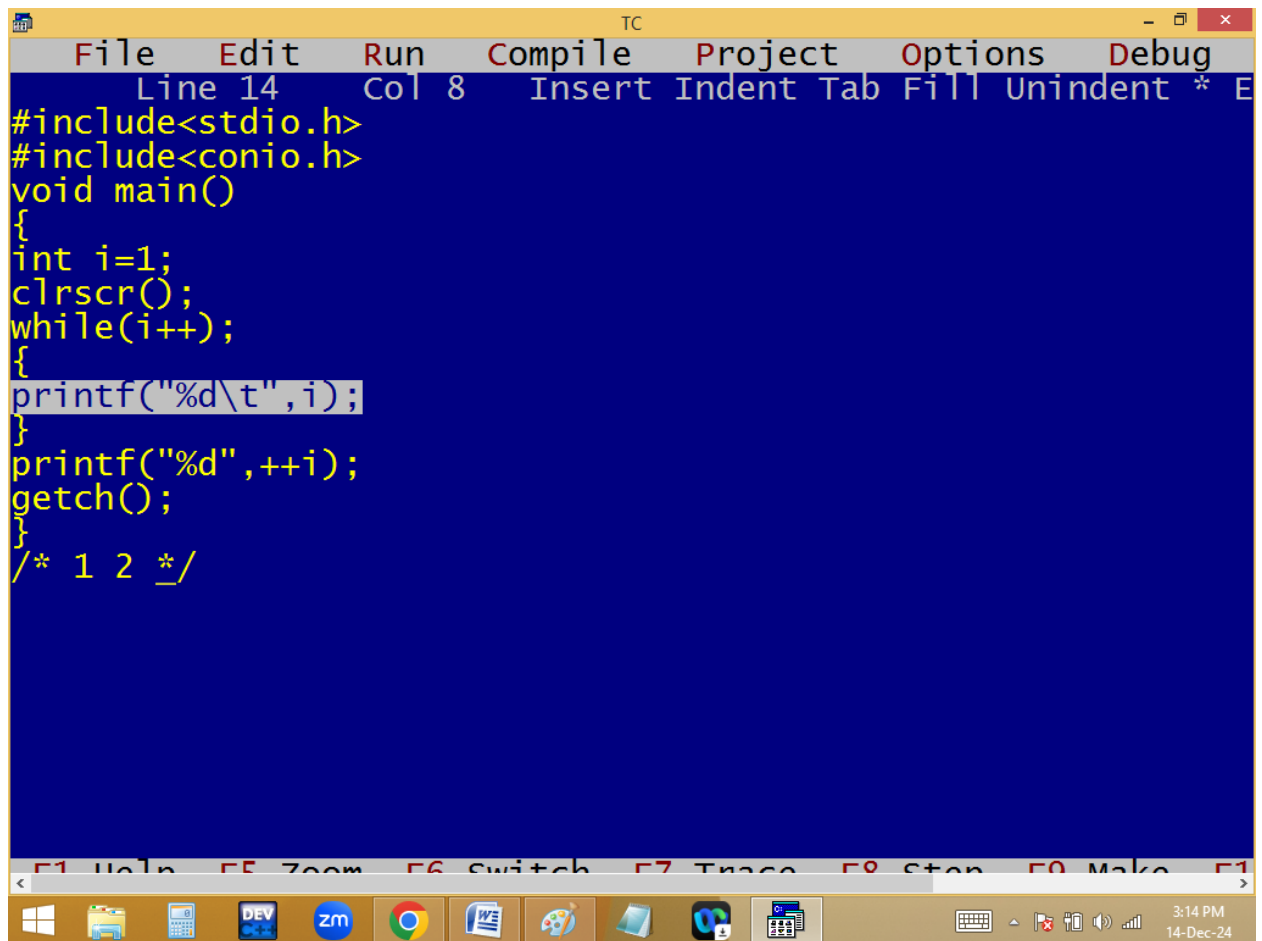


```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 8 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i=1;
clrscr();
while(i++);
{
printf("%d\\t",i);
}
printf("%d",++i);
getch();
}
/* 1 2 */

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

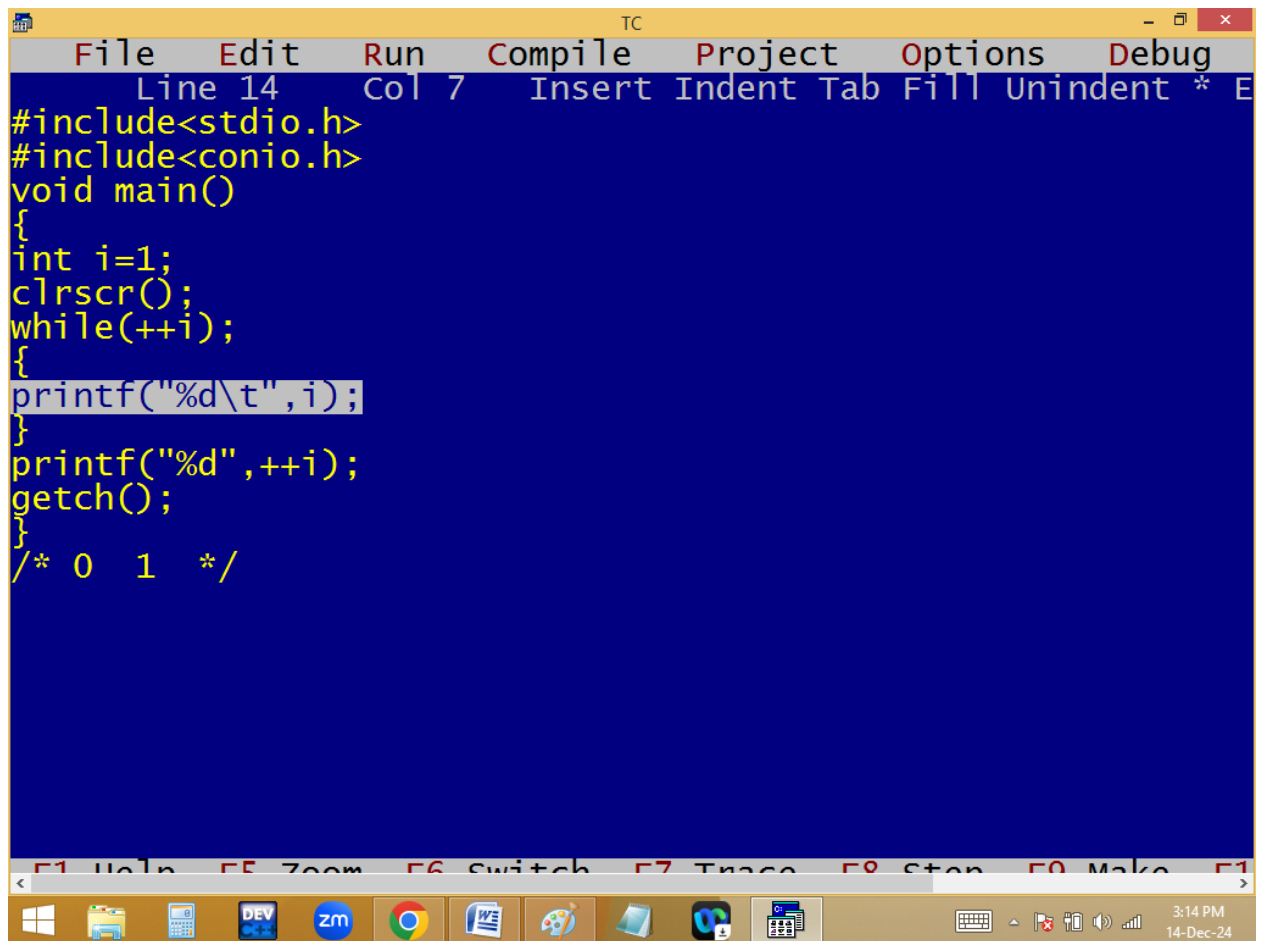


```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 7 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i=1;
clrscr();
while(++i);
{
printf("%d\\t",i);
}
printf("%d",++i);
getch();
}
/* 0 1 */

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

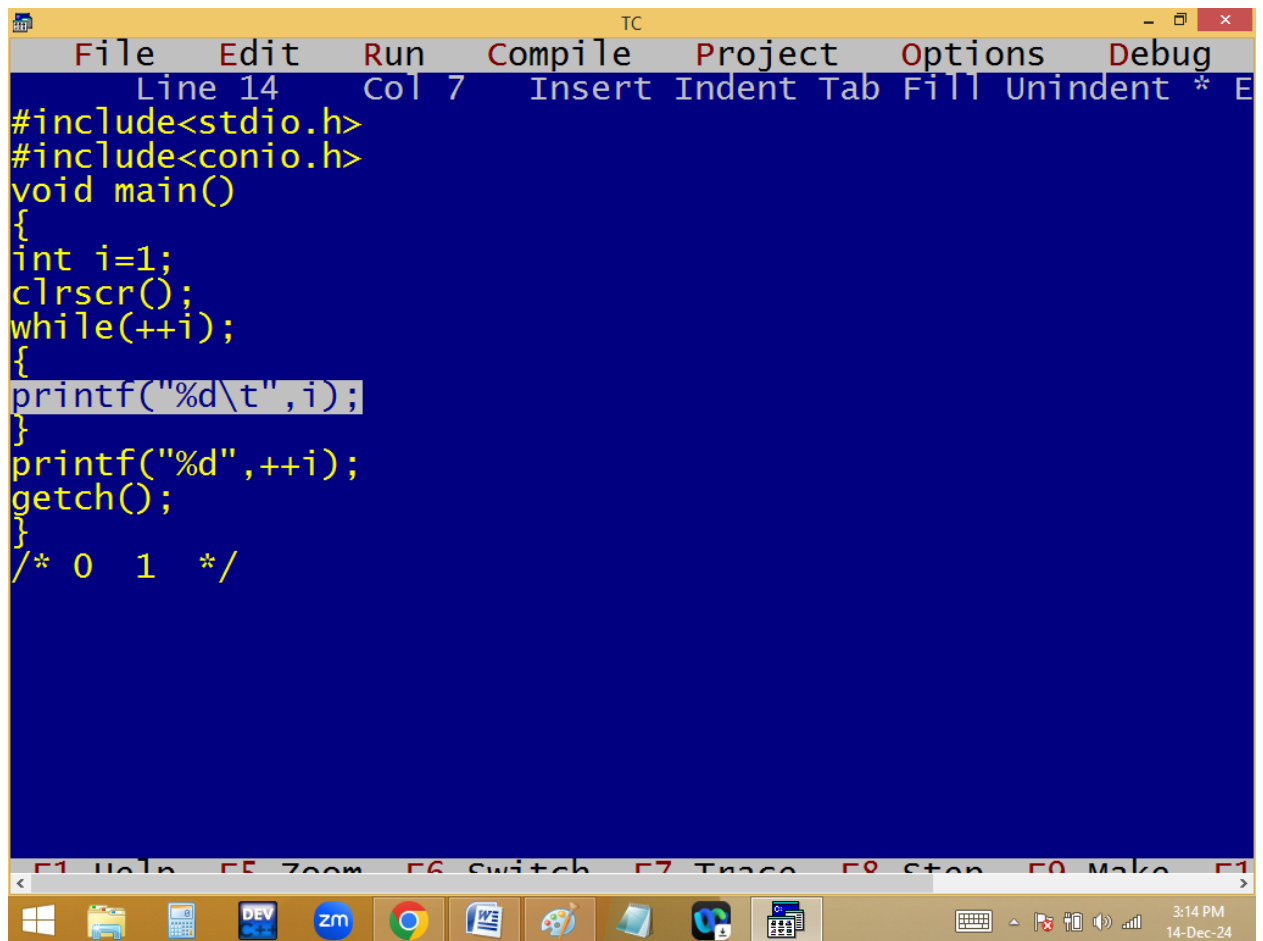


```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 7 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i=1;
clrscr();
while(++i);
{
printf("%d\\t",i);
}
printf("%d",++i);
getch();
}
/* 0 1 */

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

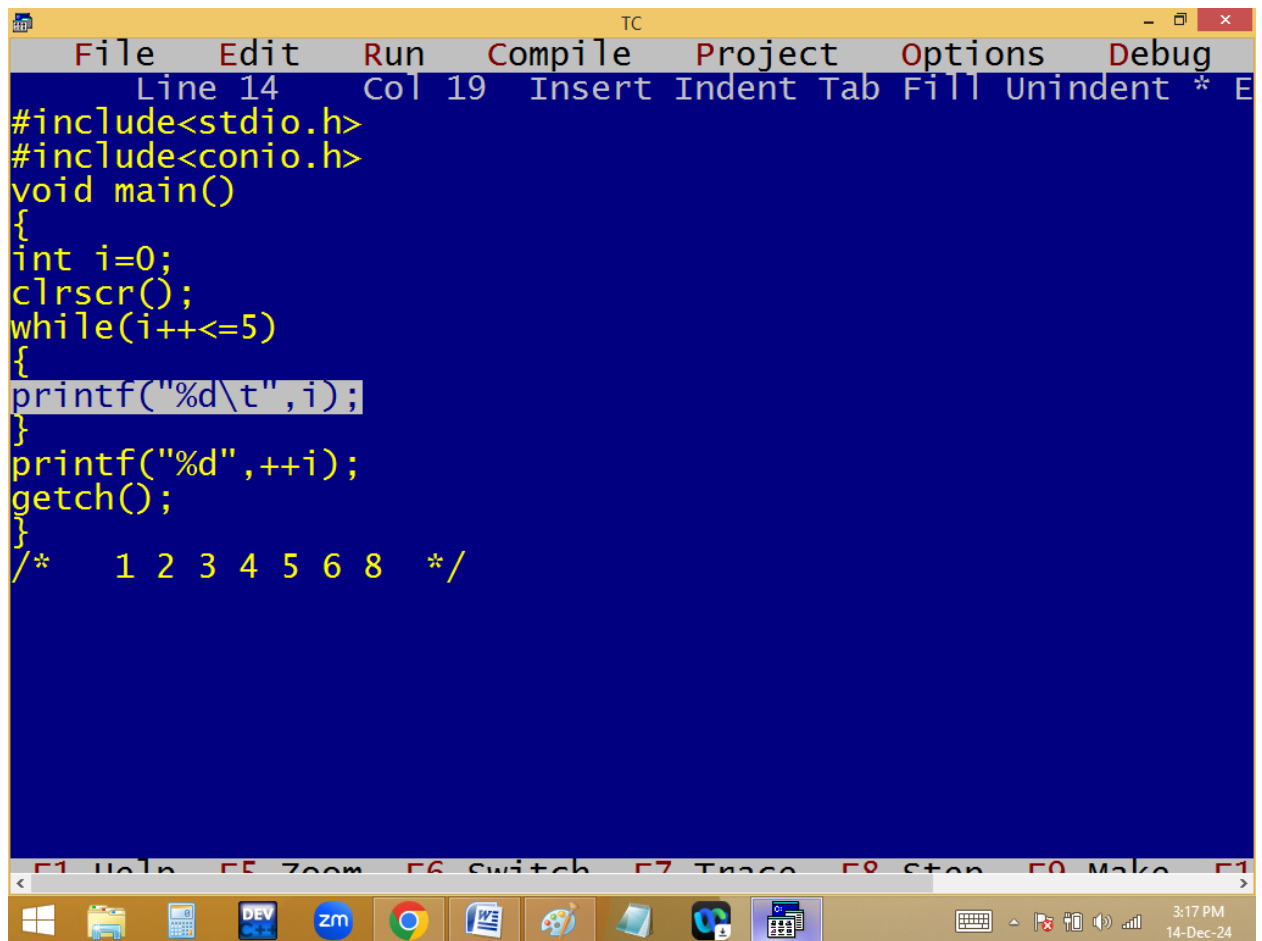

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 19 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(i++<=5)
{
printf("%d\t",i);
}
printf("%d",++i);
getch();
}
/* 1 2 3 4 5 6 8 */


F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

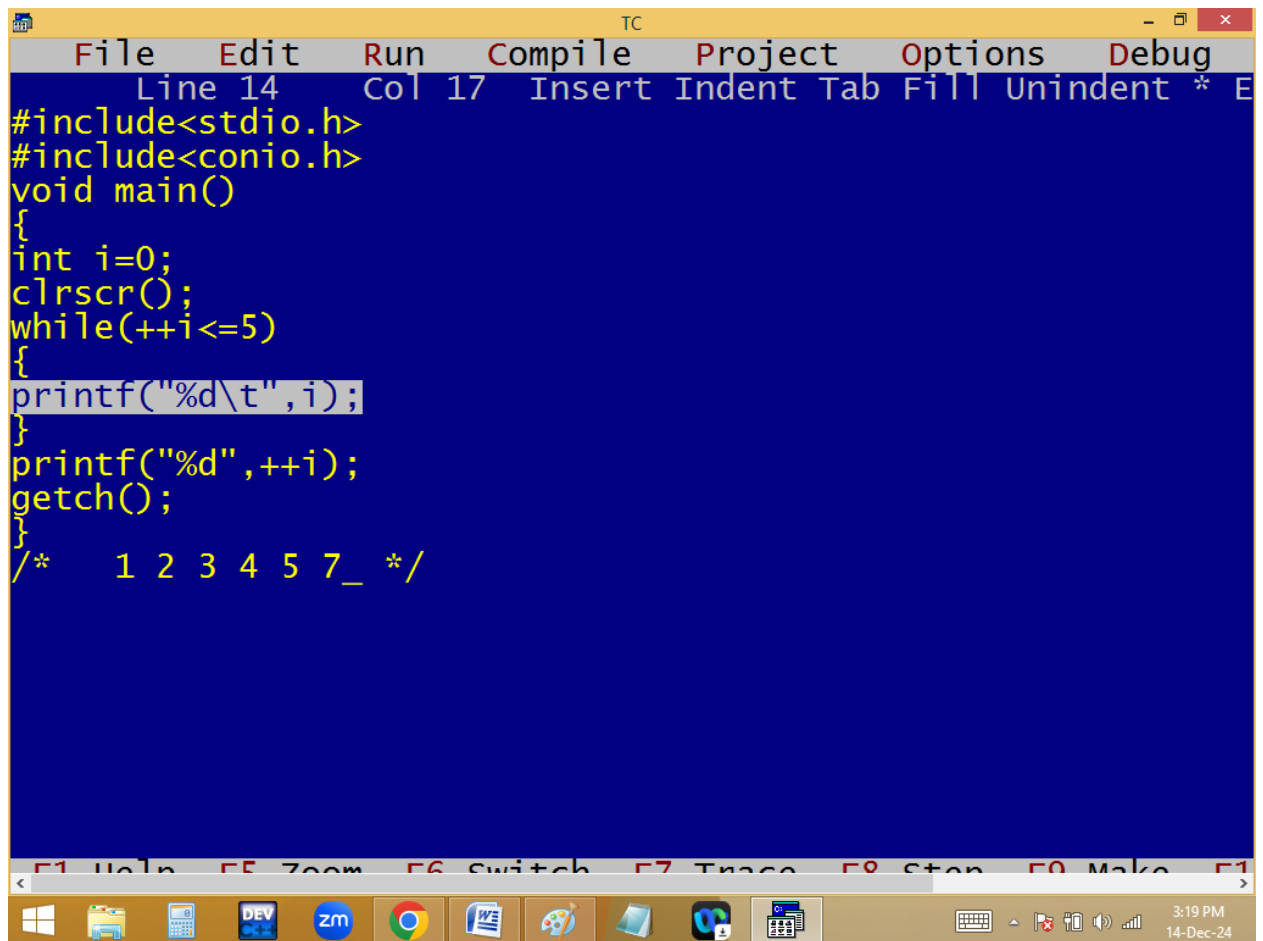The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 14 Col 17" and lists keyboard shortcuts: Insert, Indent, Tab, Fill, Unindent, *, and E. The code editor has a dark blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while(++i<=5)
    {
        printf("%d\t",i);
    }
    printf("%d",++i);
    getch();
}
```

Below the code, there is a comment: `/* 1 2 3 4 5 7_ */`. The bottom status bar shows function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. The Windows taskbar at the bottom includes icons for File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and VS Code. The system clock shows 3:19 PM on 14-Dec-24.

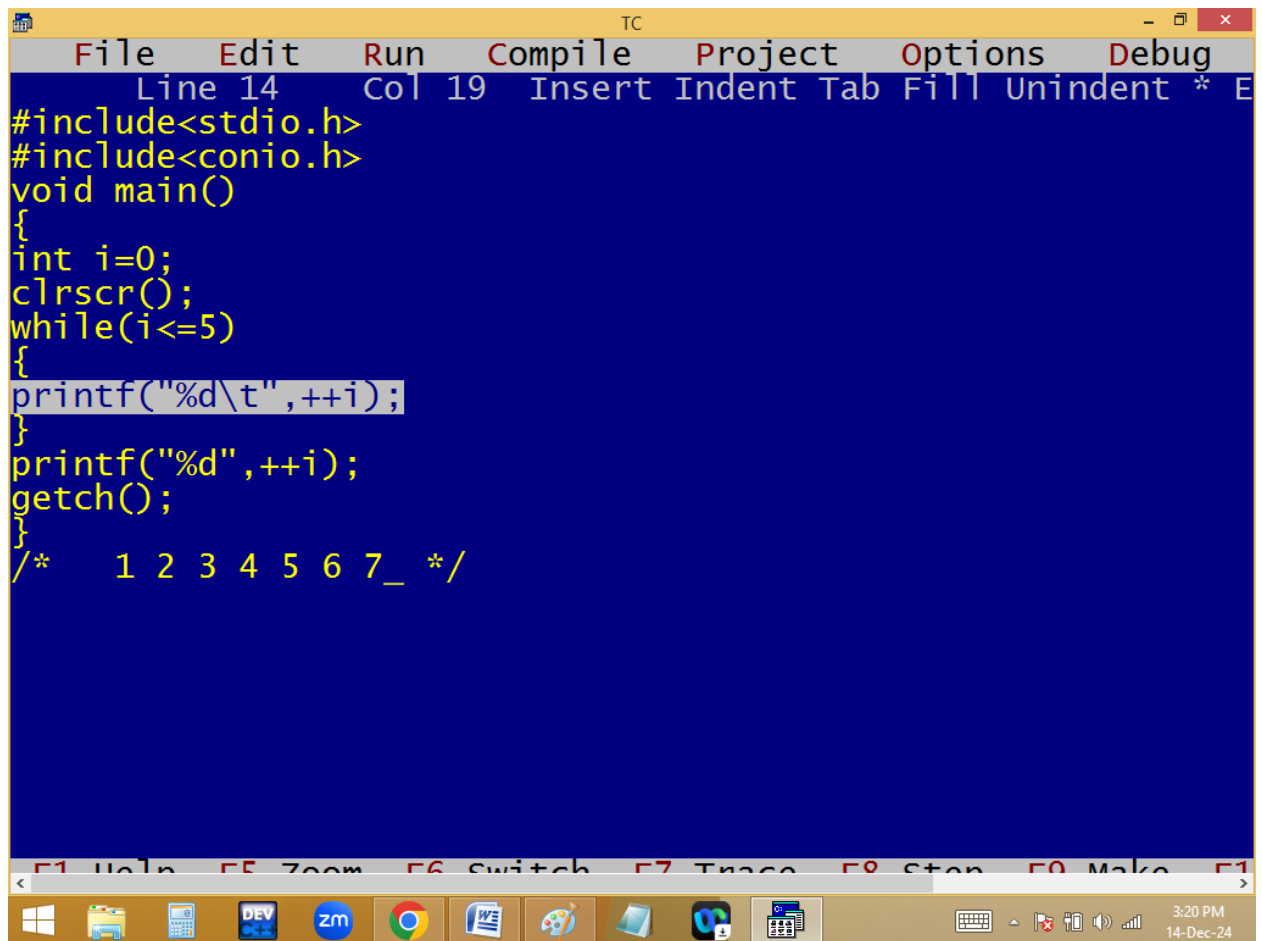

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 19 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(i<=5)
{
printf("%d\t",++i);
}
printf("%d",++i);
getch();
}
/* 1 2 3 4 5 6 7_ */


F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

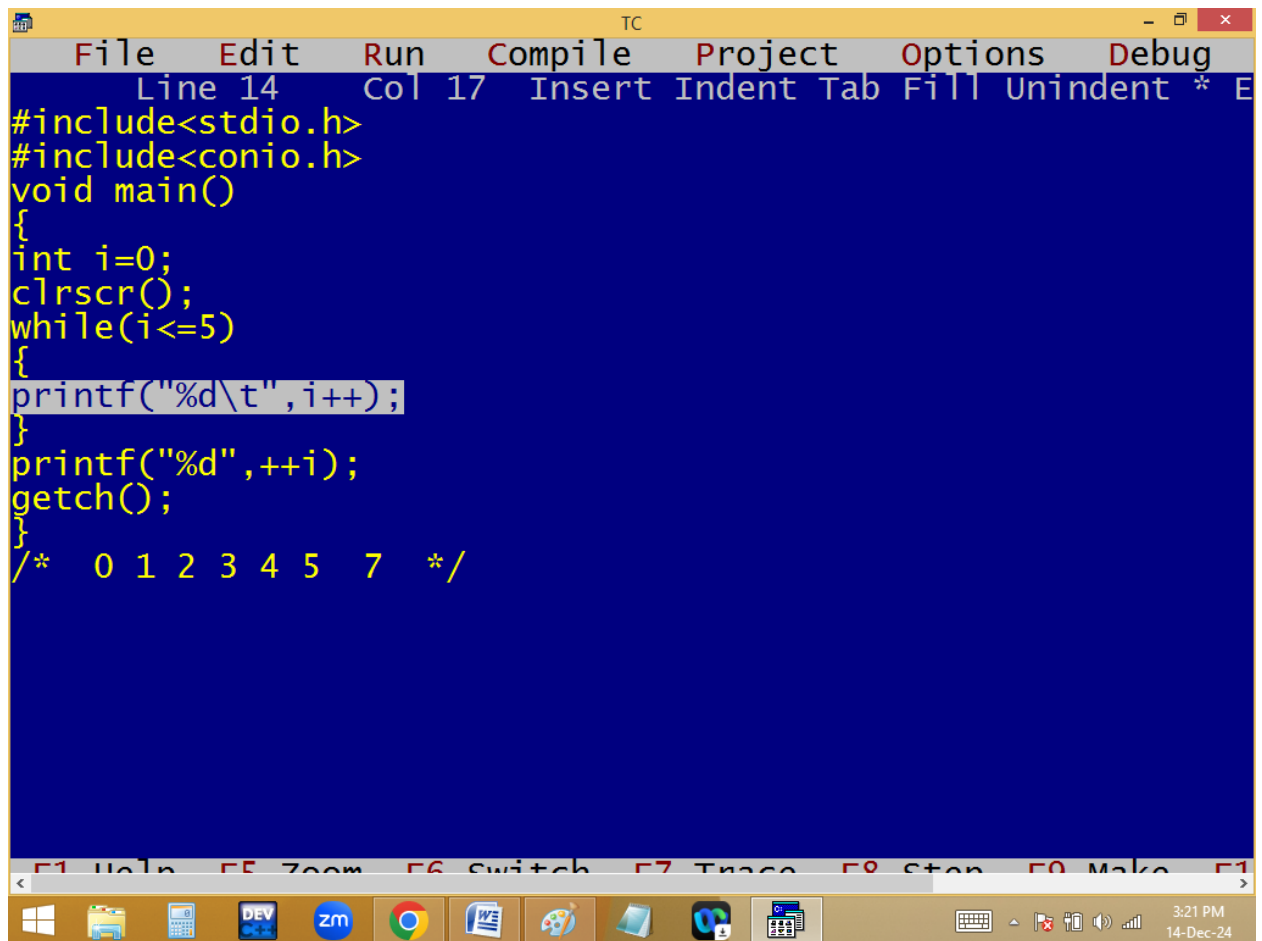

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar indicates "Line 14", "Col 17", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and a function key "F". The main editing area has a dark blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while(i<=5)
    {
        printf("%d\t",i++);
    }
    printf("%d",++i);
    getch();
}
/* 0 1 2 3 4 5 7 */
```

Below the code, a secondary menu bar contains function keys: "F1 Help", "F5 Zoom", "F6 Switch", "F7 Trace", "F8 Stop", "F9 Make", and "F10". The Windows taskbar is visible at the bottom, showing icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, File Zilla, and a folder icon. The system tray on the right shows the time "3:21 PM" and the date "14-Dec-24".

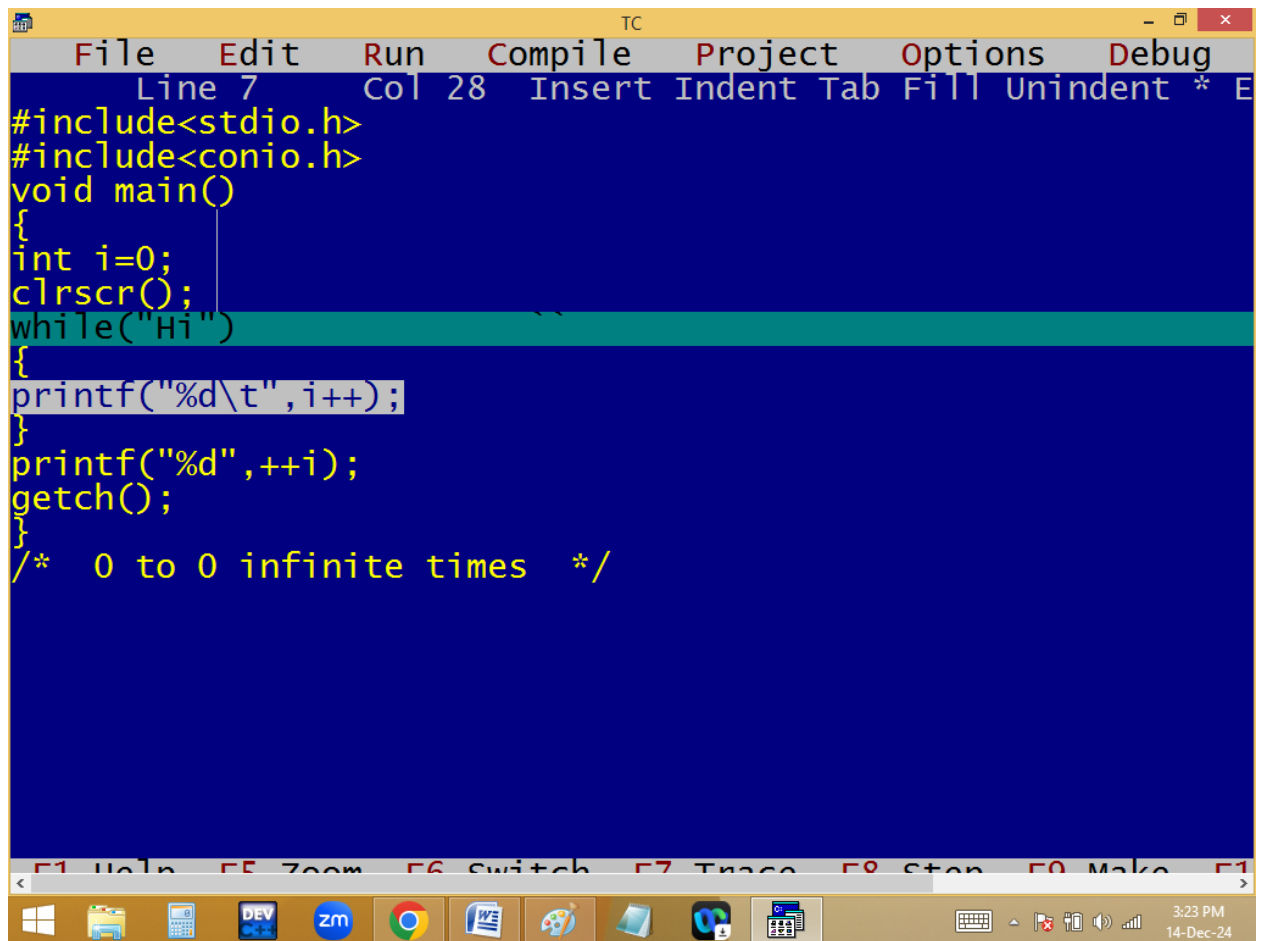

```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 28 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while("Hi")
{
printf("%d\t",i++);
}
printf("%d",++i);
getch();
}
/* 0 to 0 infinite times */


F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

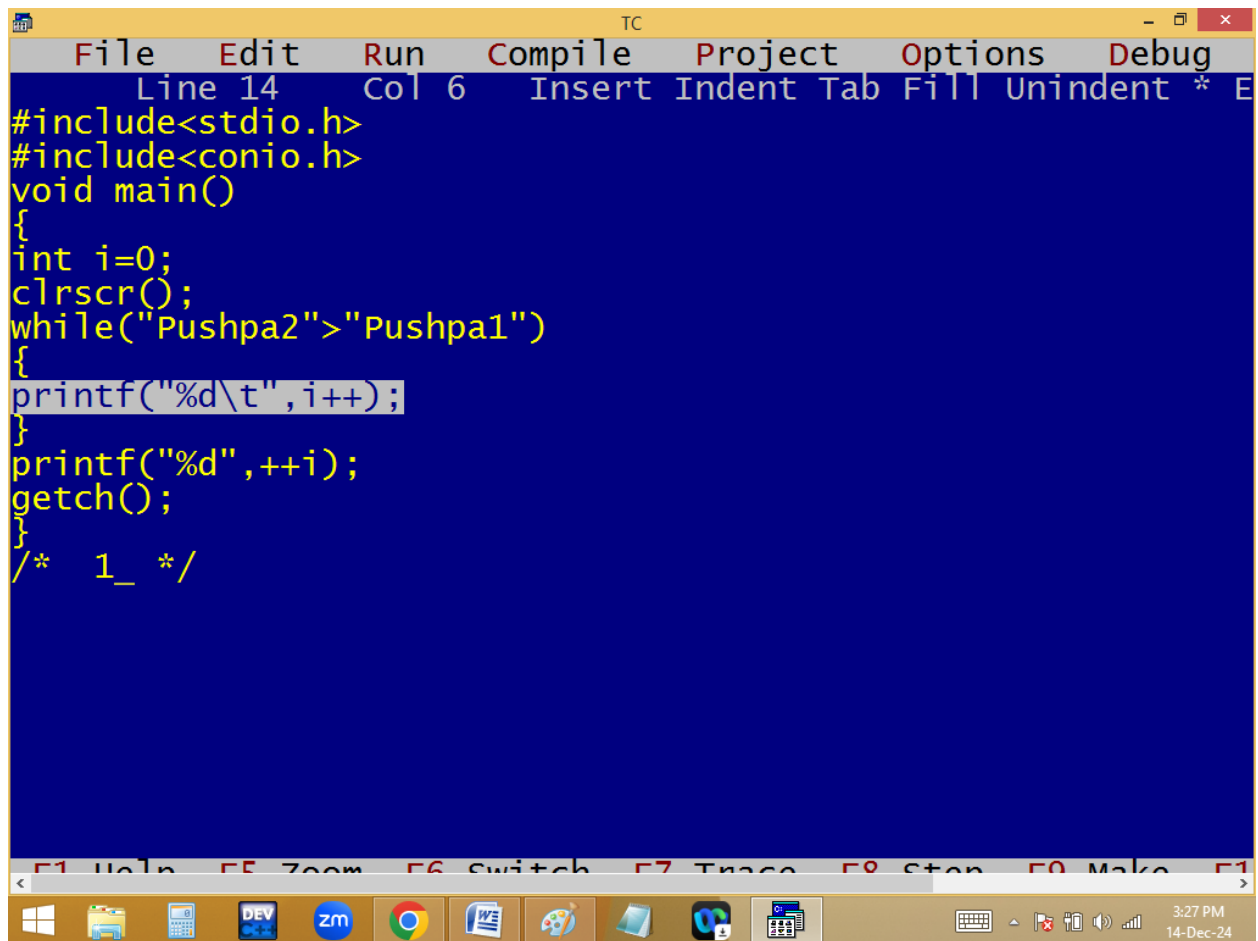

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 6 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while("Pushpa2">"Pushpa1")
{
printf("%d\t",i++);
}
printf("%d",++i);
getch();
}
/* 1_ */

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```


3:27 PM
14-Dec-24

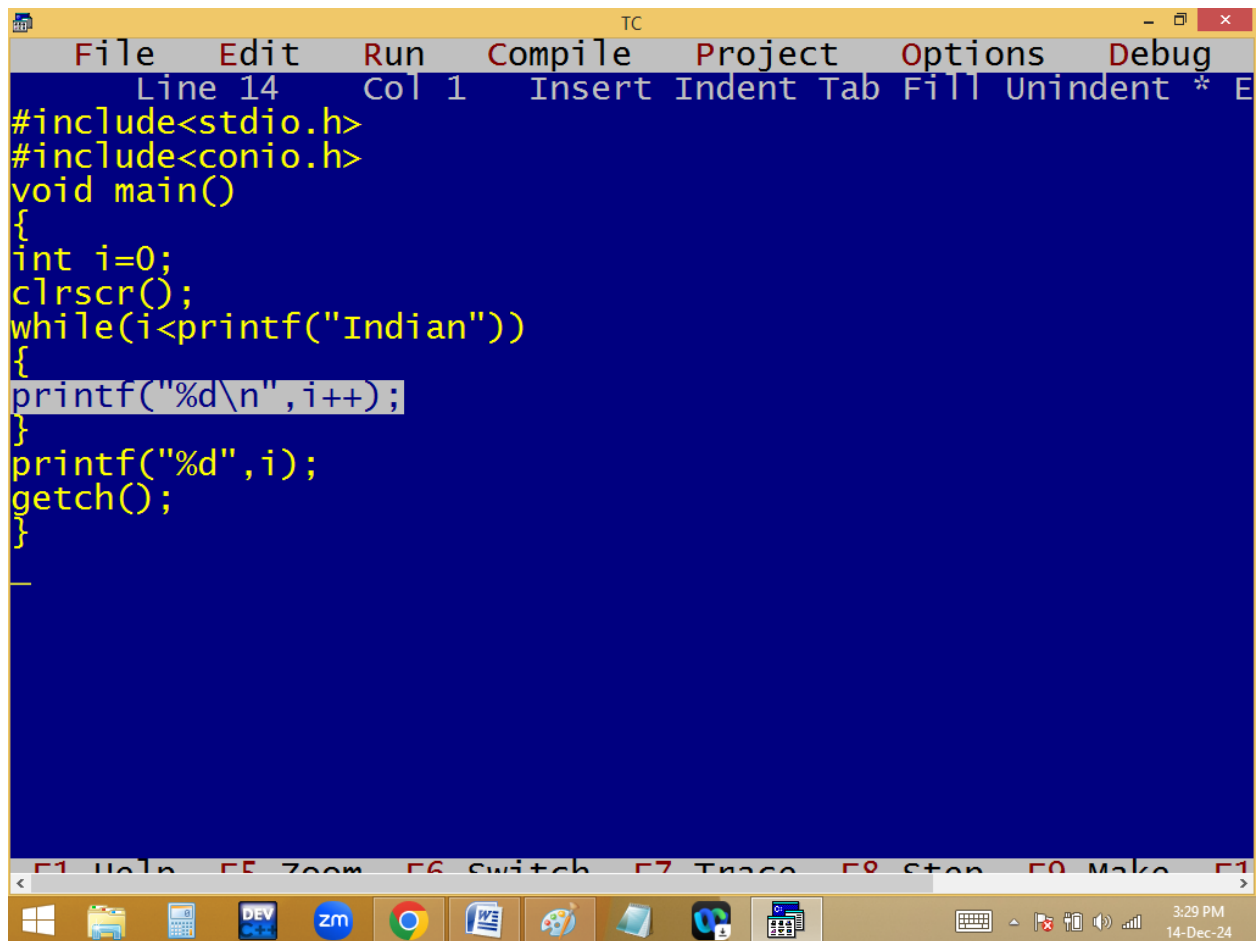


```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 1 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(i<printf("Indian"))
{
printf("%d\n",i++);
}
printf("%d",i);
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

3:29 PM
14-Dec-24

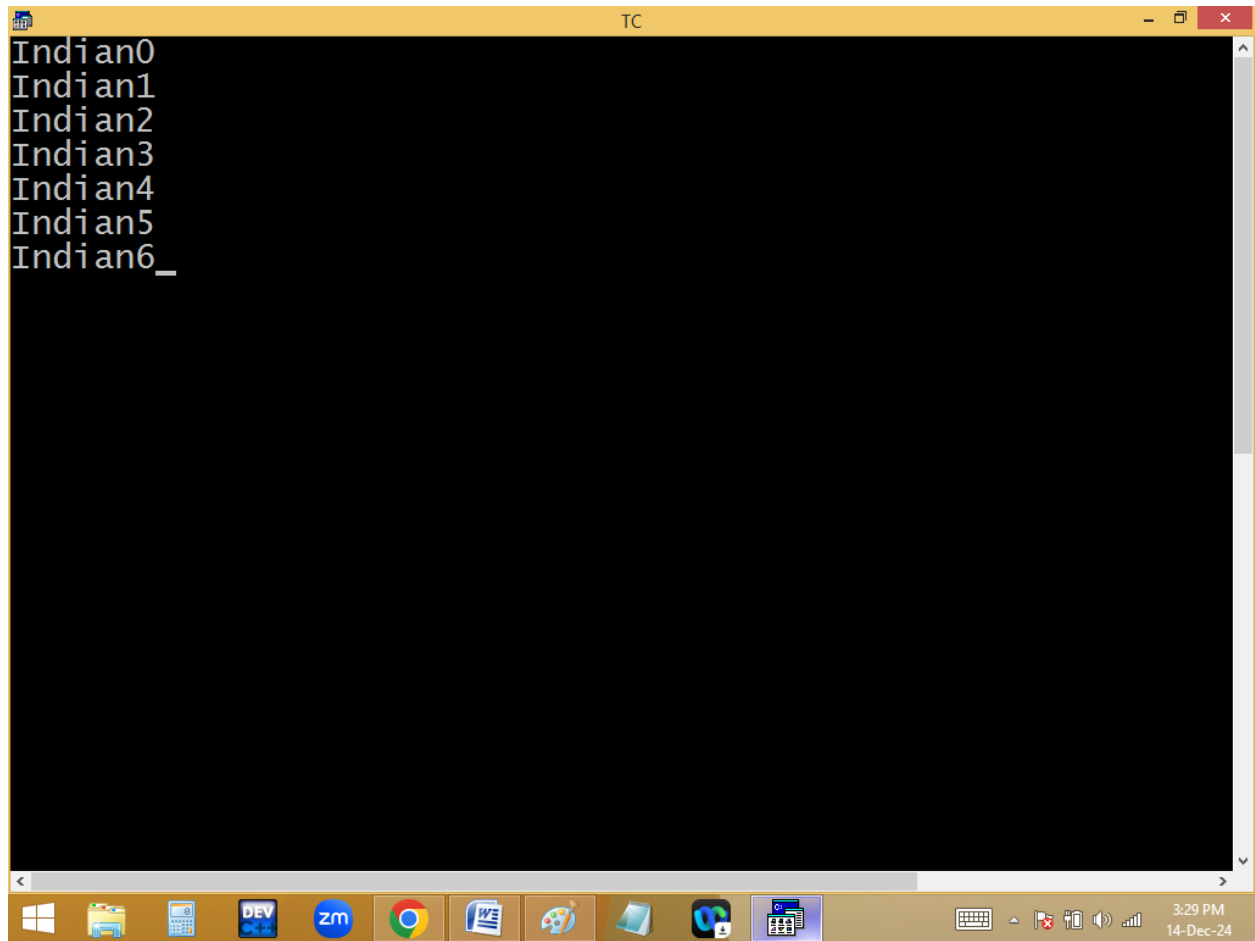


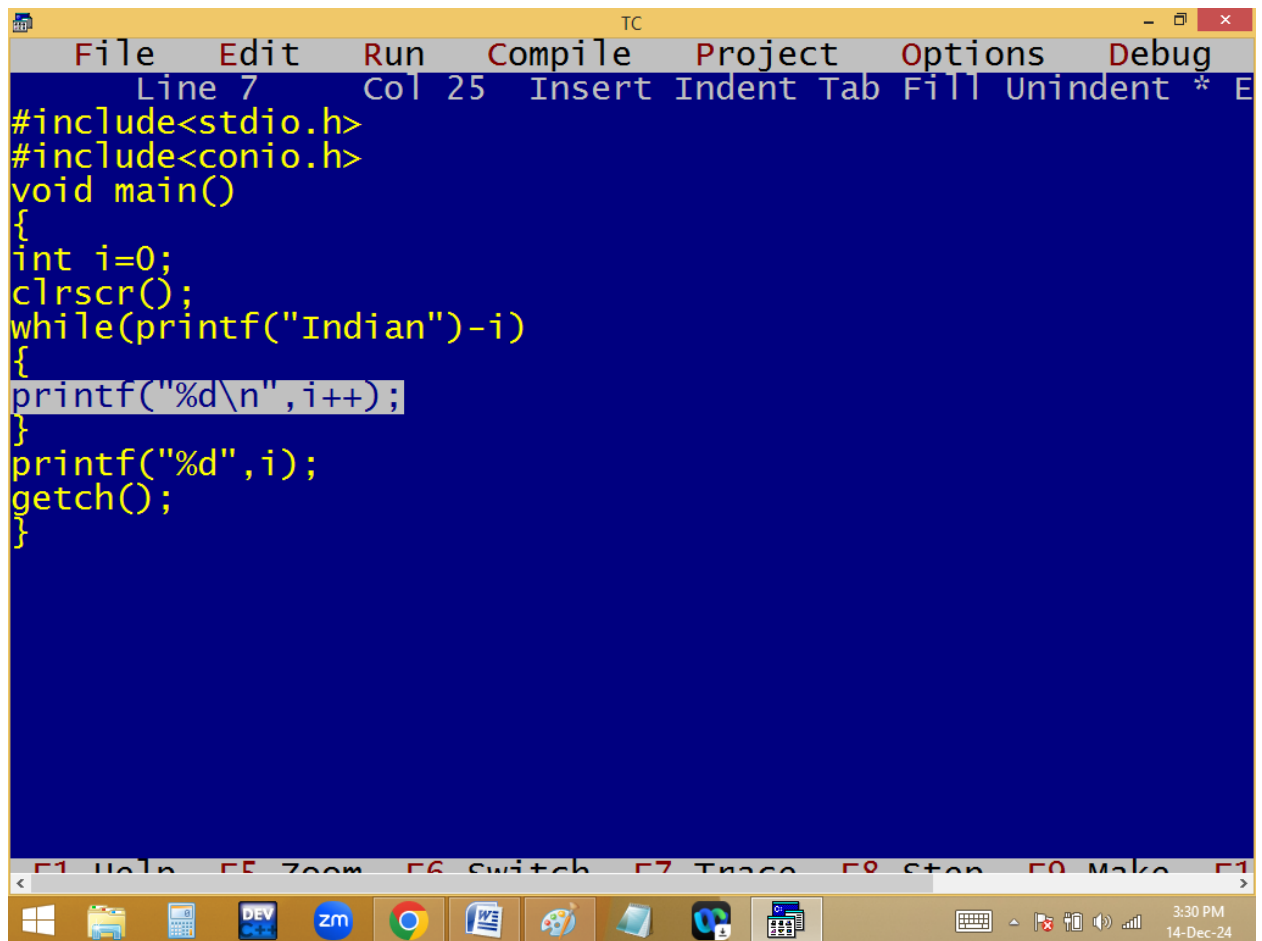


```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 25 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(printf("Indian")-i)
{
printf("%d\n",i++);
}
printf("%d",i);
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

3:30 PM
14-Dec-24

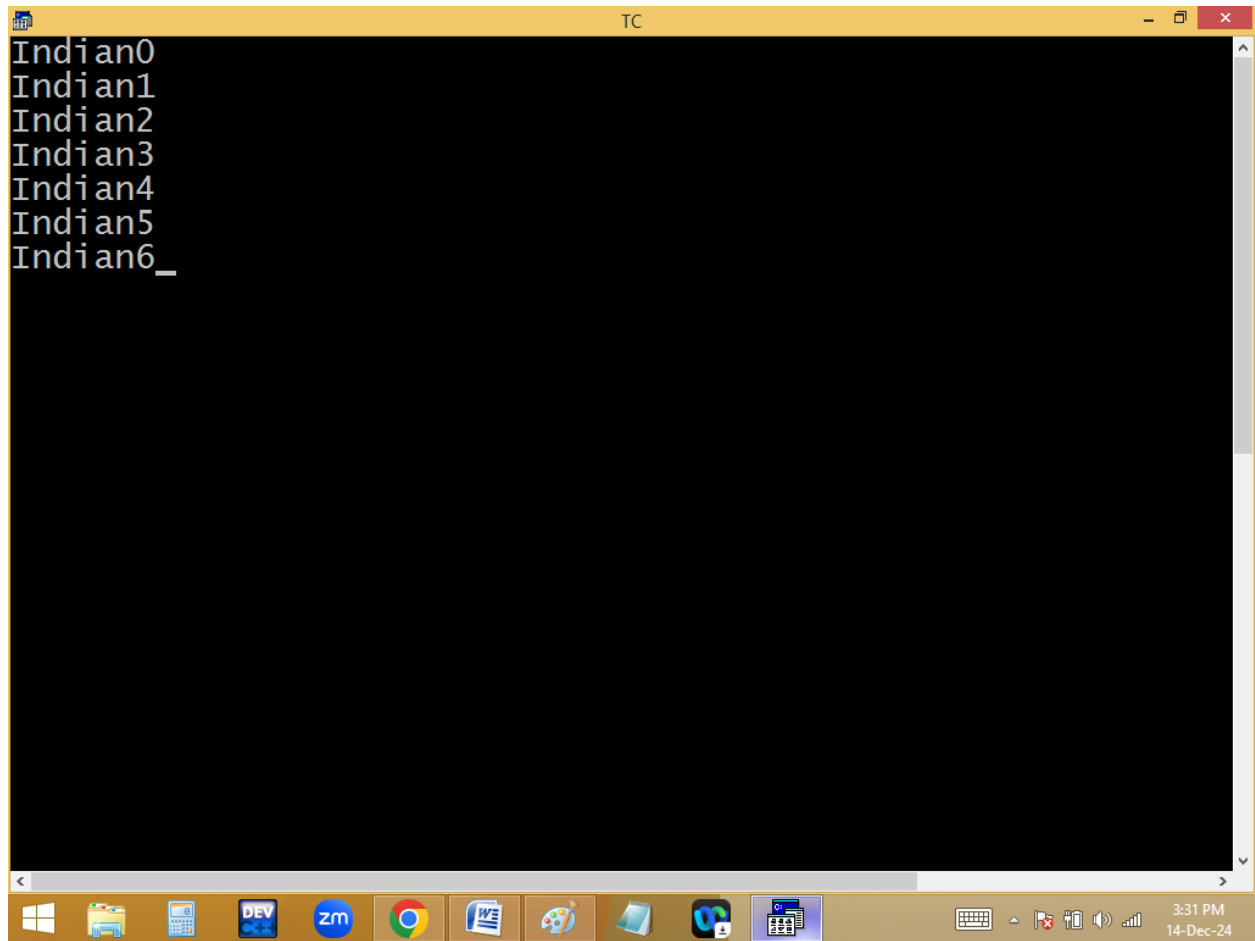

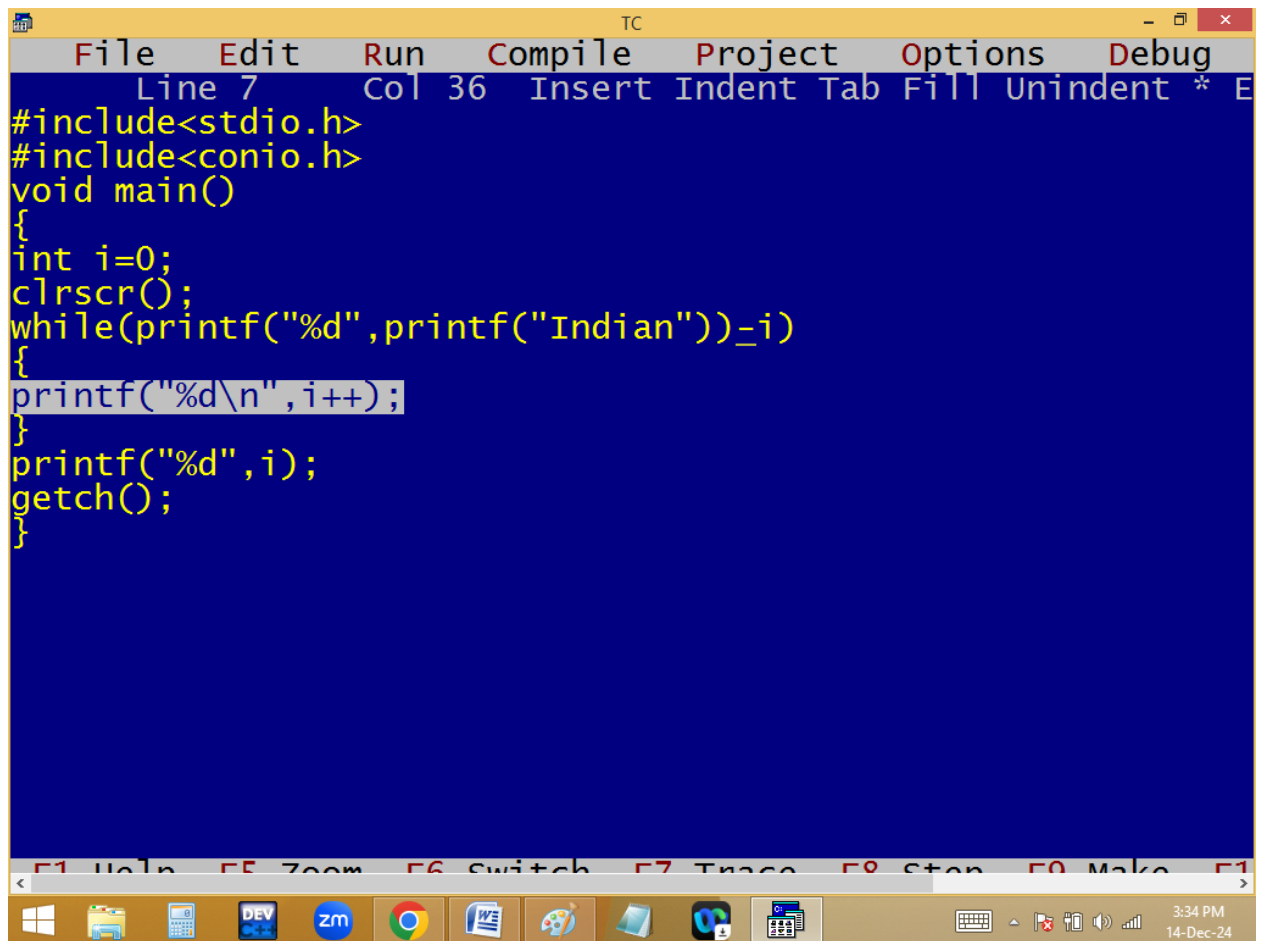


```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 36 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(printf("%d",printf("Indian"))_i)
{
printf("%d\\n",i++);
}
printf("%d",i);
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

3:34 PM
14-Dec-24




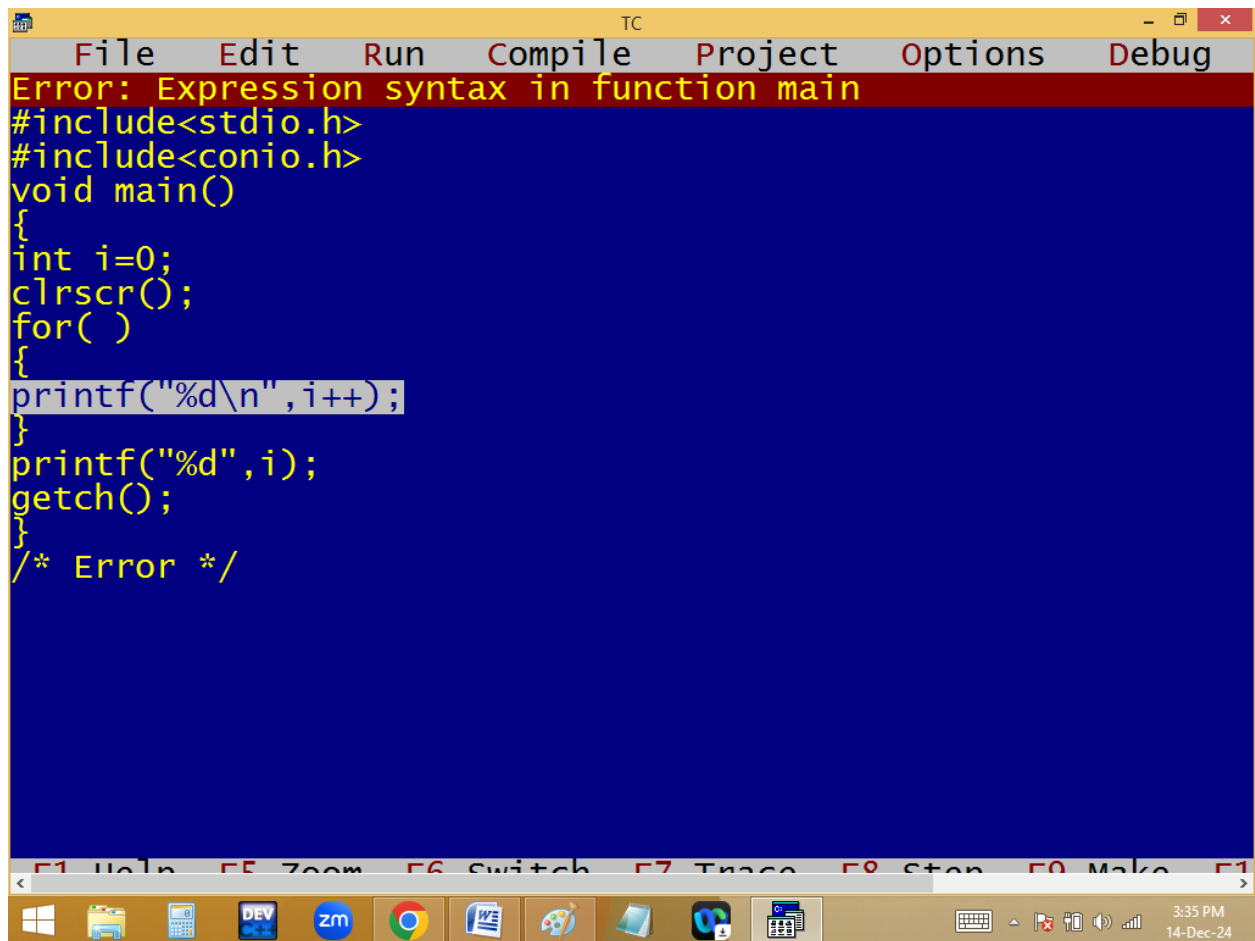

The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top states "Error: Expression syntax in function main". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
for( )
{
printf("%d\n",i++);
}
printf("%d",i);
getch();
}
/* Error */
```


The line `printf("%d\n",i++);` is highlighted. Below the code editor, a status bar shows function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. The Windows taskbar at the bottom includes icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and a folder. System tray icons on the right show keyboard, volume, and network status. The system clock displays "3:35 PM" and "14-Dec-24".

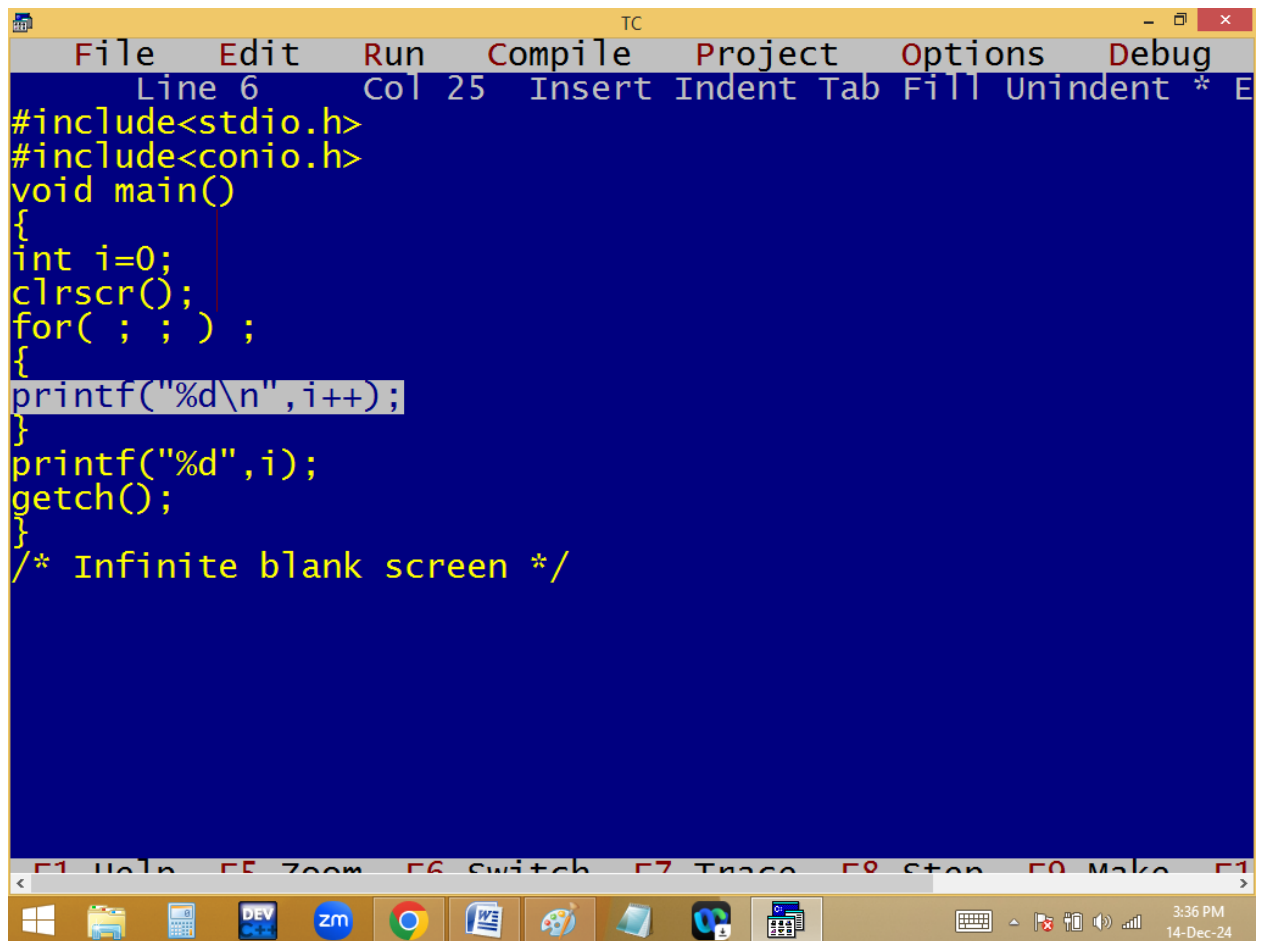

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 6", "Col 25", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a dark blue background and contains the following C code:


```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    for( ; ; ) ;
    {
        printf("%d\n",i++);
    }
    printf("%d",i);
    getch();
}
/* Infinite blank screen */
```

The line containing `printf("%d\n",i++);` is highlighted with a light blue background. At the bottom of the window, there is a toolbar with icons for various functions and a status bar showing the time "3:36 PM" and the date "14-Dec-24".

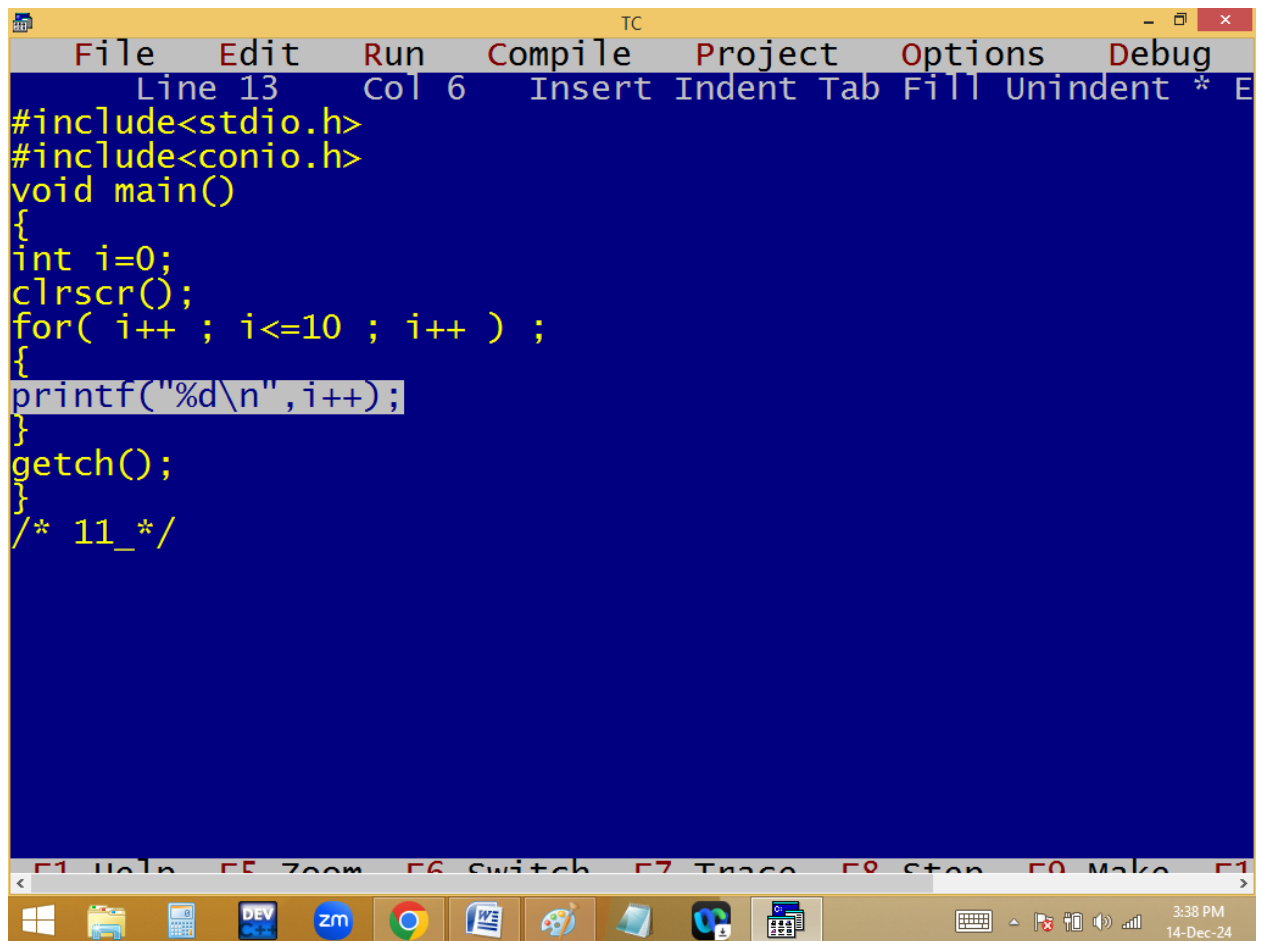


```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 6 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
for( i++ ; i<=10 ; i++ ) ;
{
printf("%d\\n",i++);
}
getch();
}
/* 11_*/

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

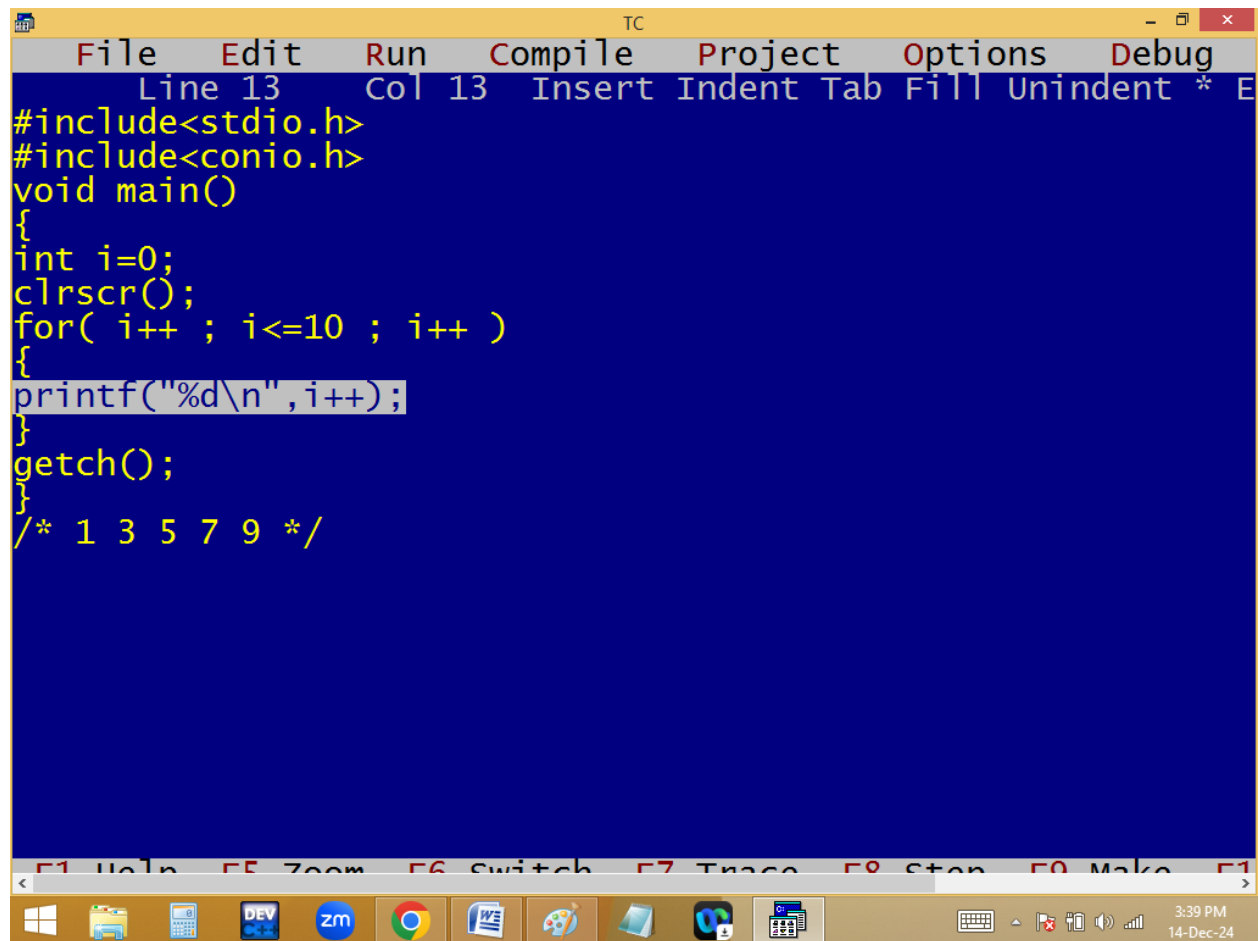


```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 13 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
for( i++ ; i<=10 ; i++ )
{
printf("%d\\n",i++);
}
getch();
}
/* 1 3 5 7 9 */

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

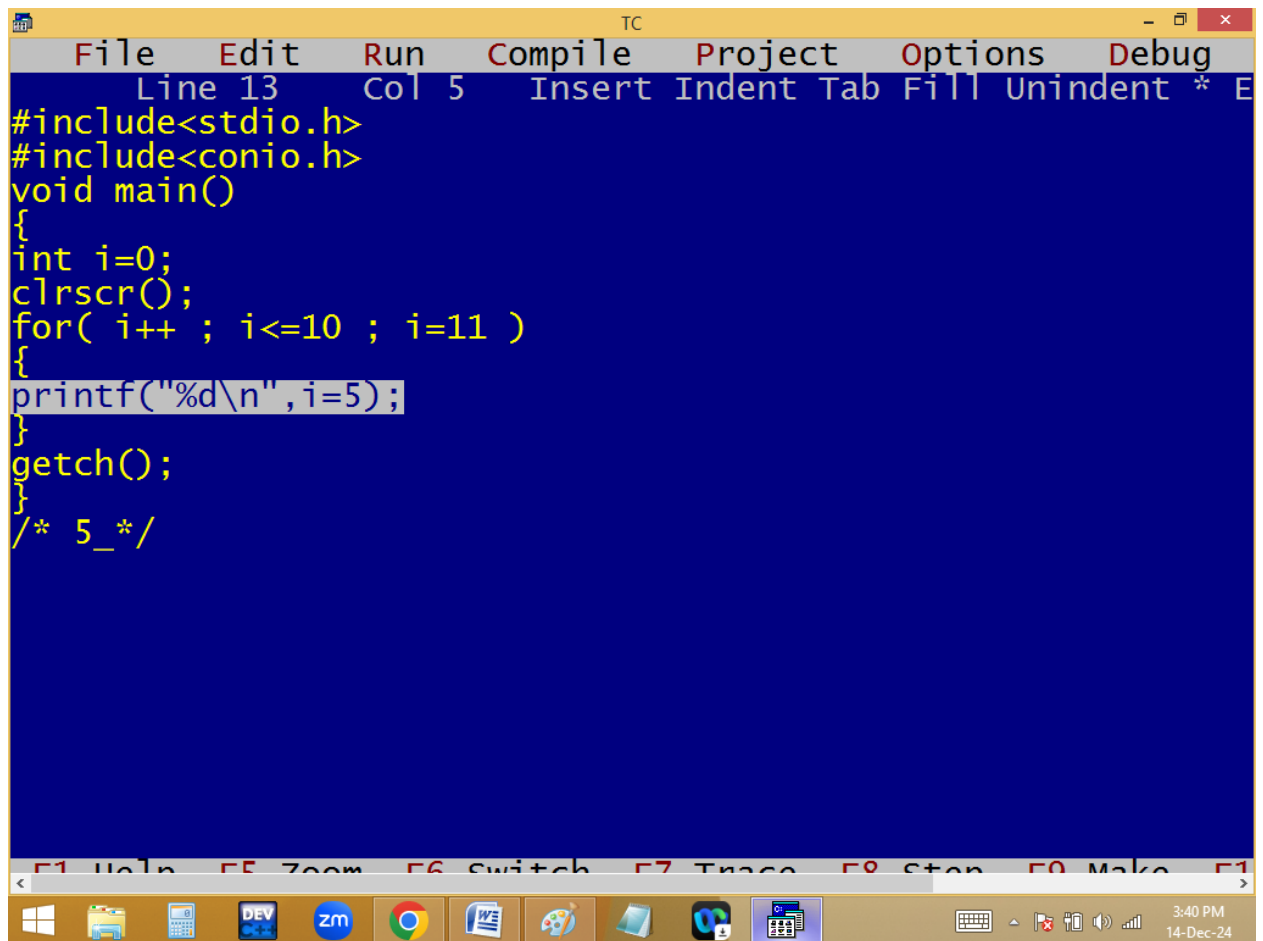



```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 5 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
for( i++ ; i<=10 ; i=11 )
{
printf("%d\\n",i=5);
}
getch();
}
/* 5_*/

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
3:40 PM
14-Dec-24
```
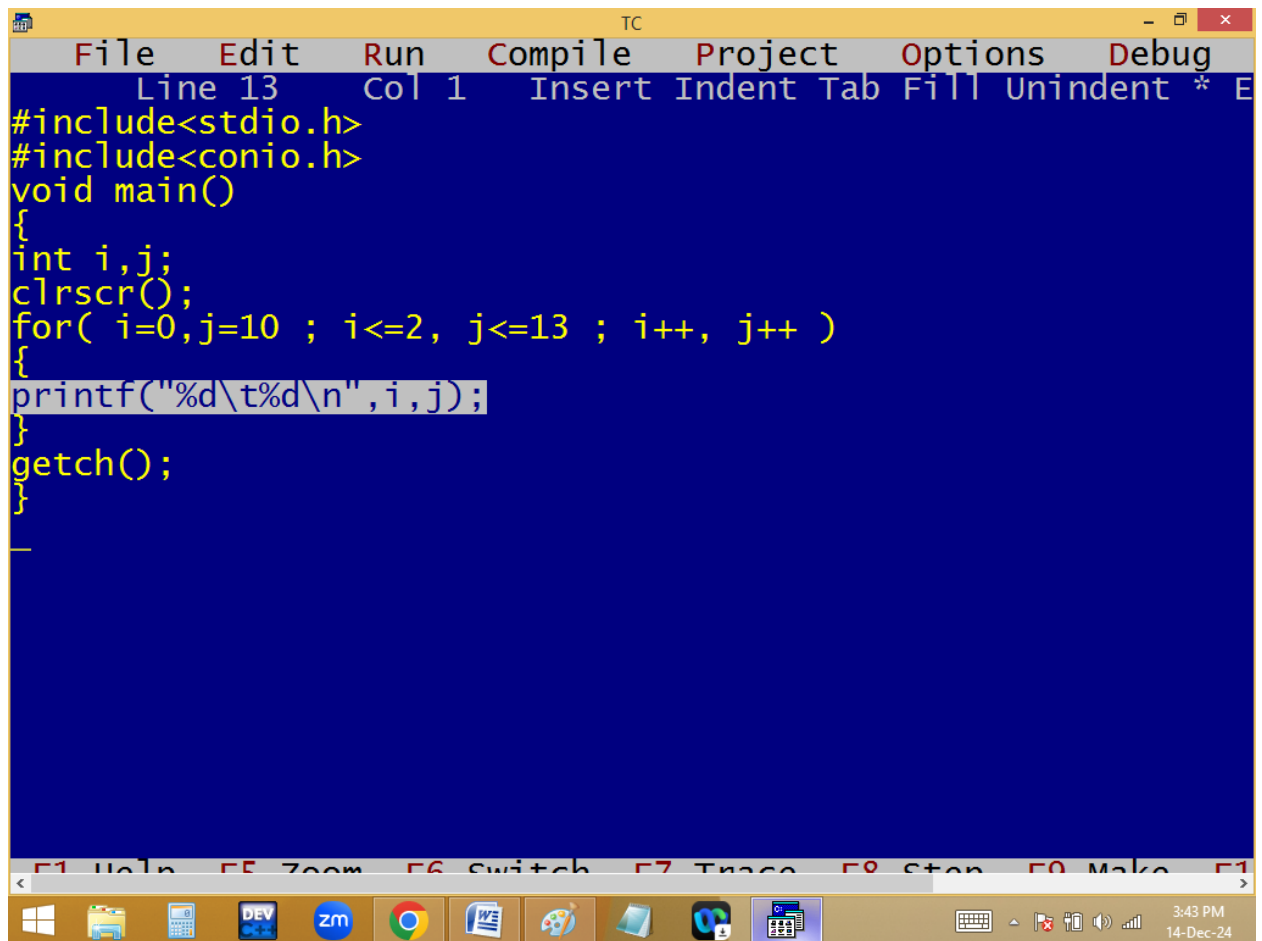
```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 1 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i,j;
clrscr();
for( i=0,j=10 ; i<=2, j<=13 ; i++, j++ )
{
printf("%d\t%d\n",i,j);
}
getch();
}
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```




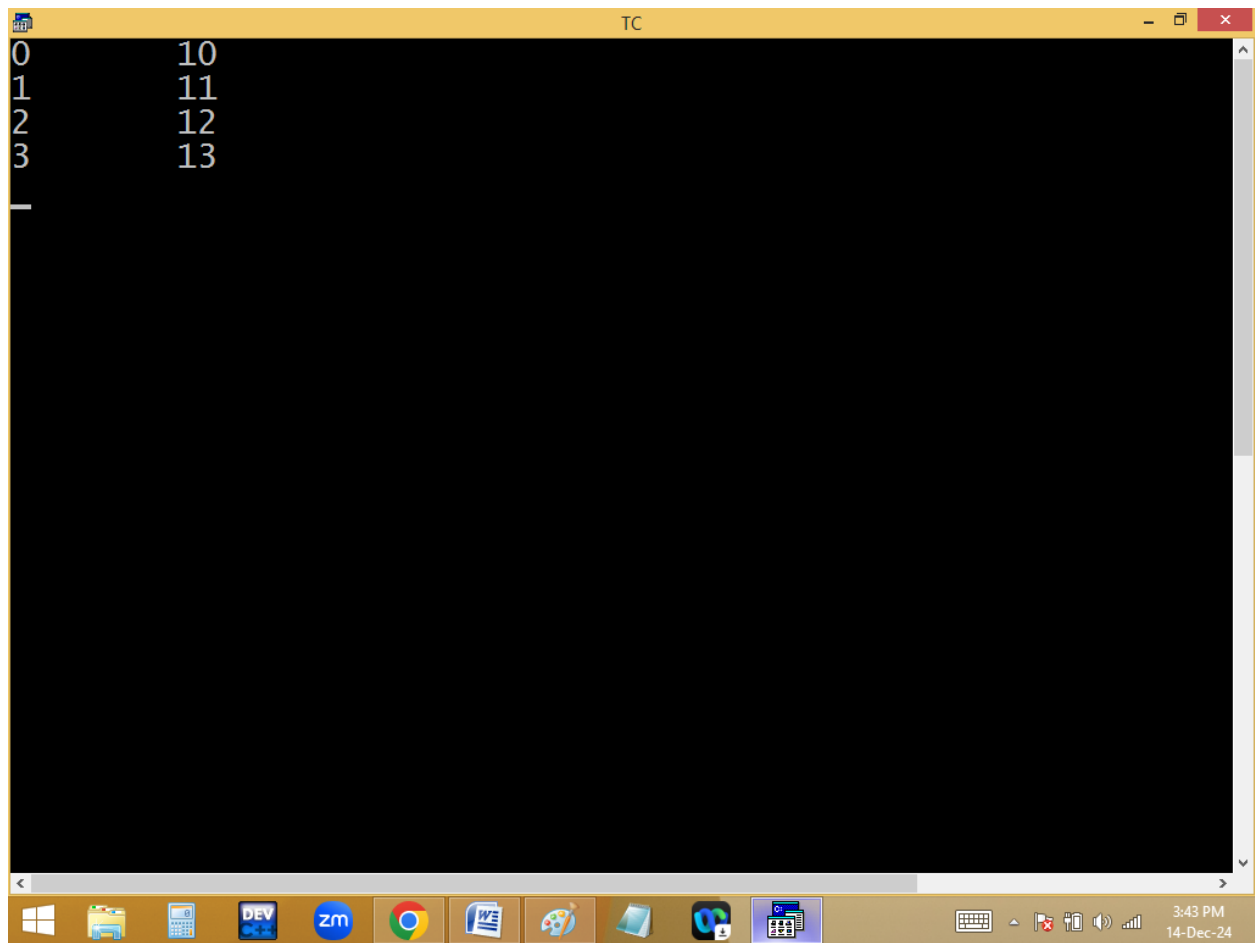

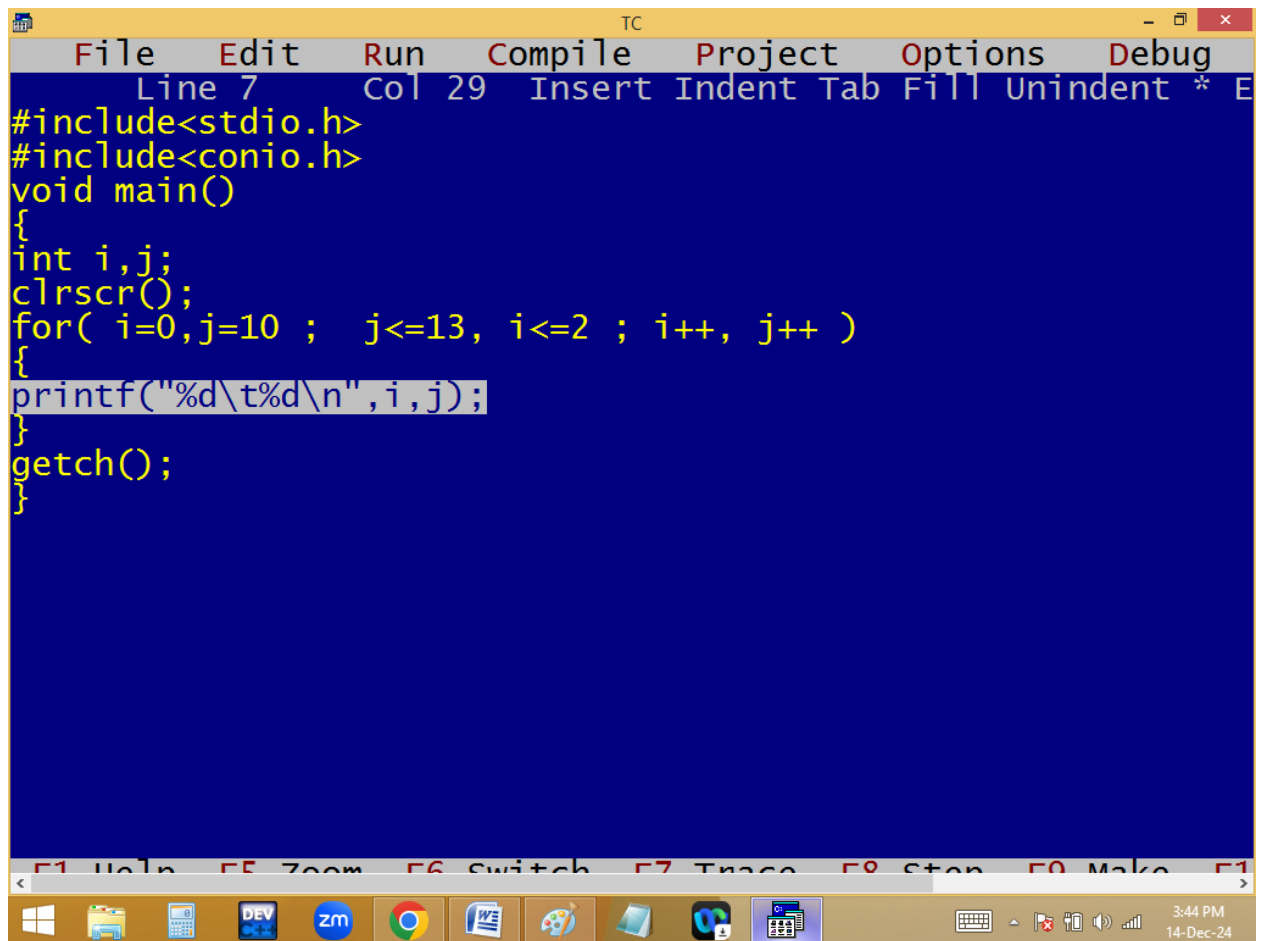
```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 29 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i,j;
clrscr();
for( i=0,j=10 ; j<=13, i<=2 ; i++, j++ )
{
printf("%d\t%d\n",i,j);
}
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

Windows taskbar: File Explorer, Calculator, DEV C++, ZOOM, Google Chrome, Microsoft Word, Paint, VS Code, Task View, System tray (Keyboard, Mouse, Volume, Network, Date/Time: 3:44 PM 14-Dec-24)

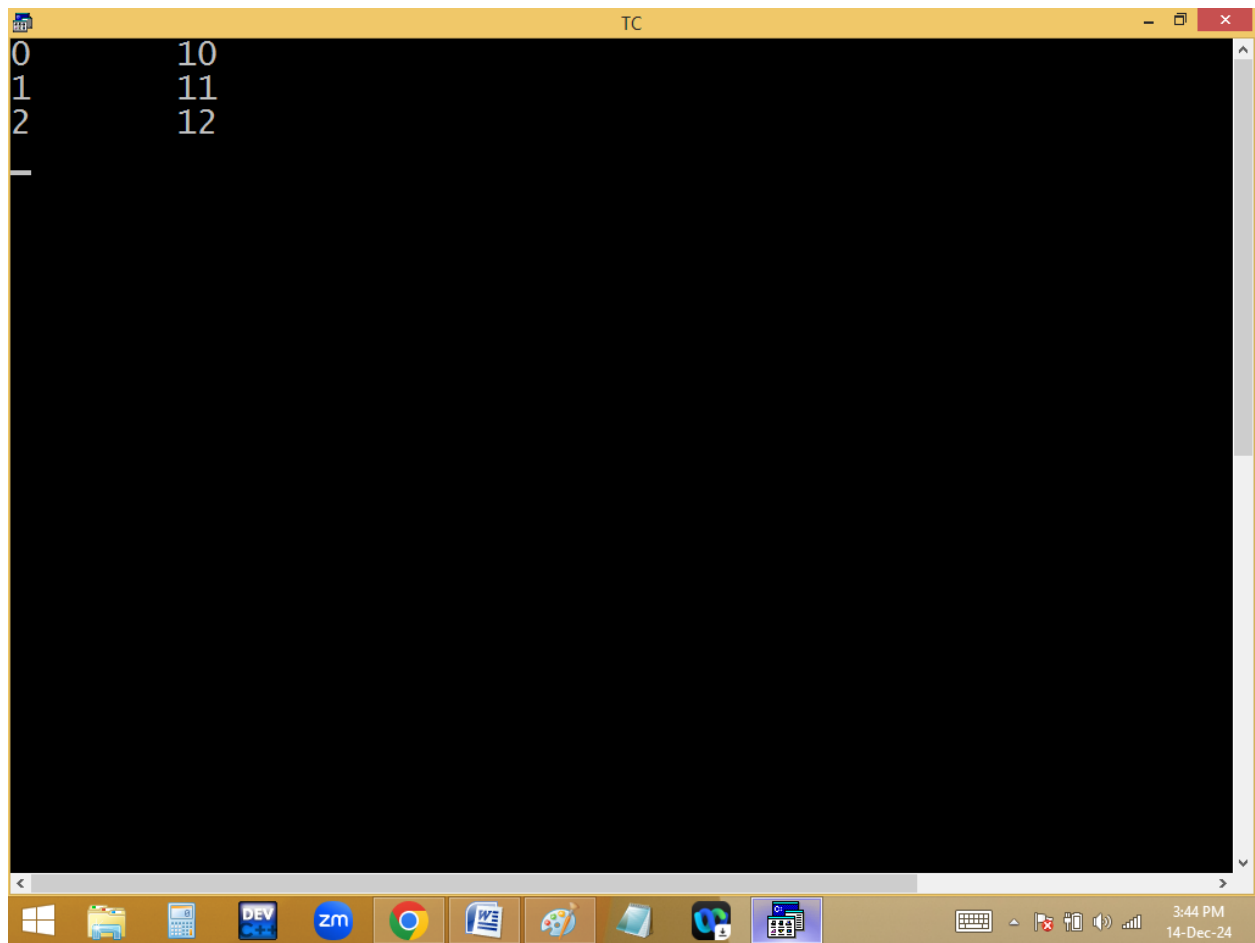

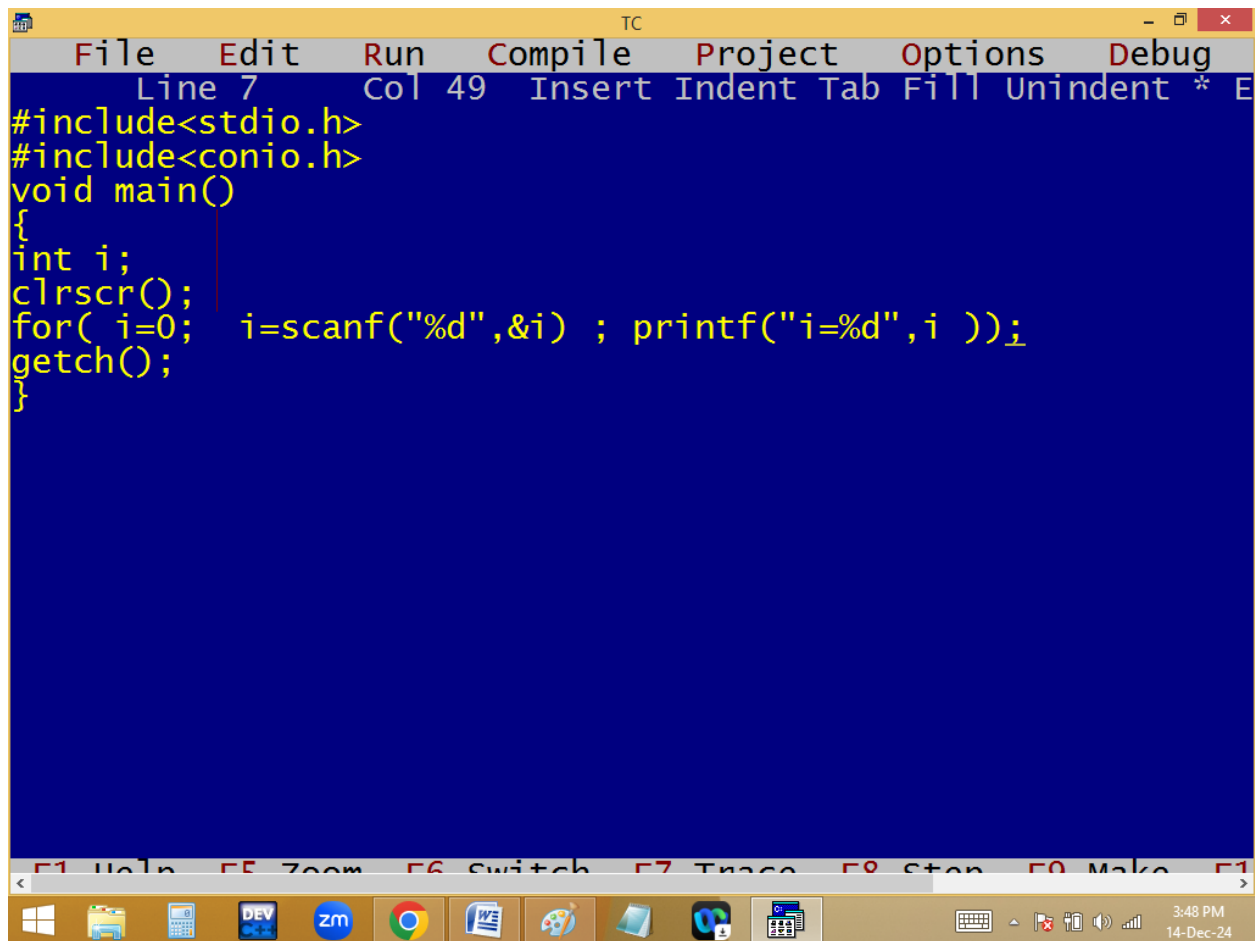


The screenshot shows the Turbo C++ (TC) IDE interface. The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates Line 7, Col 49, and lists keyboard shortcuts: Insert, Indent, Tab, Fill, Unindent, *, and E. The code editor contains the following C program:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i;
    clrscr();
    for( i=0; i=scanf("%d",&i) ; printf("i=%d",i ));
    getch();
}
```

The code has a syntax error in the for loop condition: `i=scanf("%d",&i)` should be `i=scanf("%d",&i) && i != 0`. The bottom status bar shows function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. The Windows taskbar at the bottom shows the time as 3:48 PM on 14-Dec-24.


Output: infinite times 1 printed.

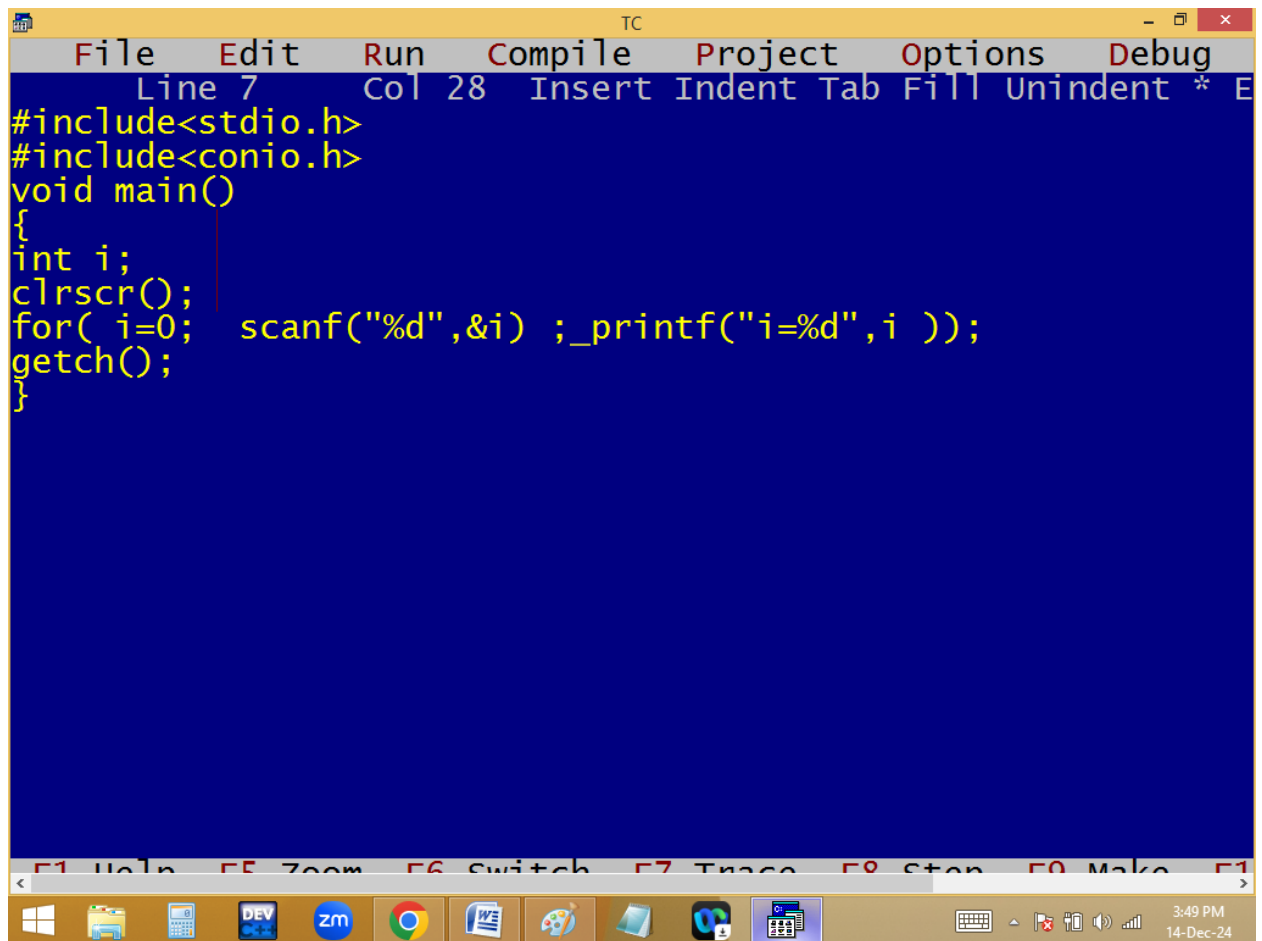


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 7", "Col 28", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i;
clrscr();
for( i=0;  scanf("%d",&i) ;_printf("i=%d",i ));
getch();
}
```

Below the code editor, there is a toolbar with function key shortcuts: "F1 Help", "F5 Zoom", "F6 Switch", "F7 Trace", "F8 Stop", "F9 Make", and "F10". The Windows taskbar is visible at the bottom, showing icons for Windows, File Explorer, Calculator, DEV C++, ZOOM, Google Chrome, Word, Paint, and a folder. The system clock in the bottom right corner shows "3:49 PM" and "14-Dec-24".

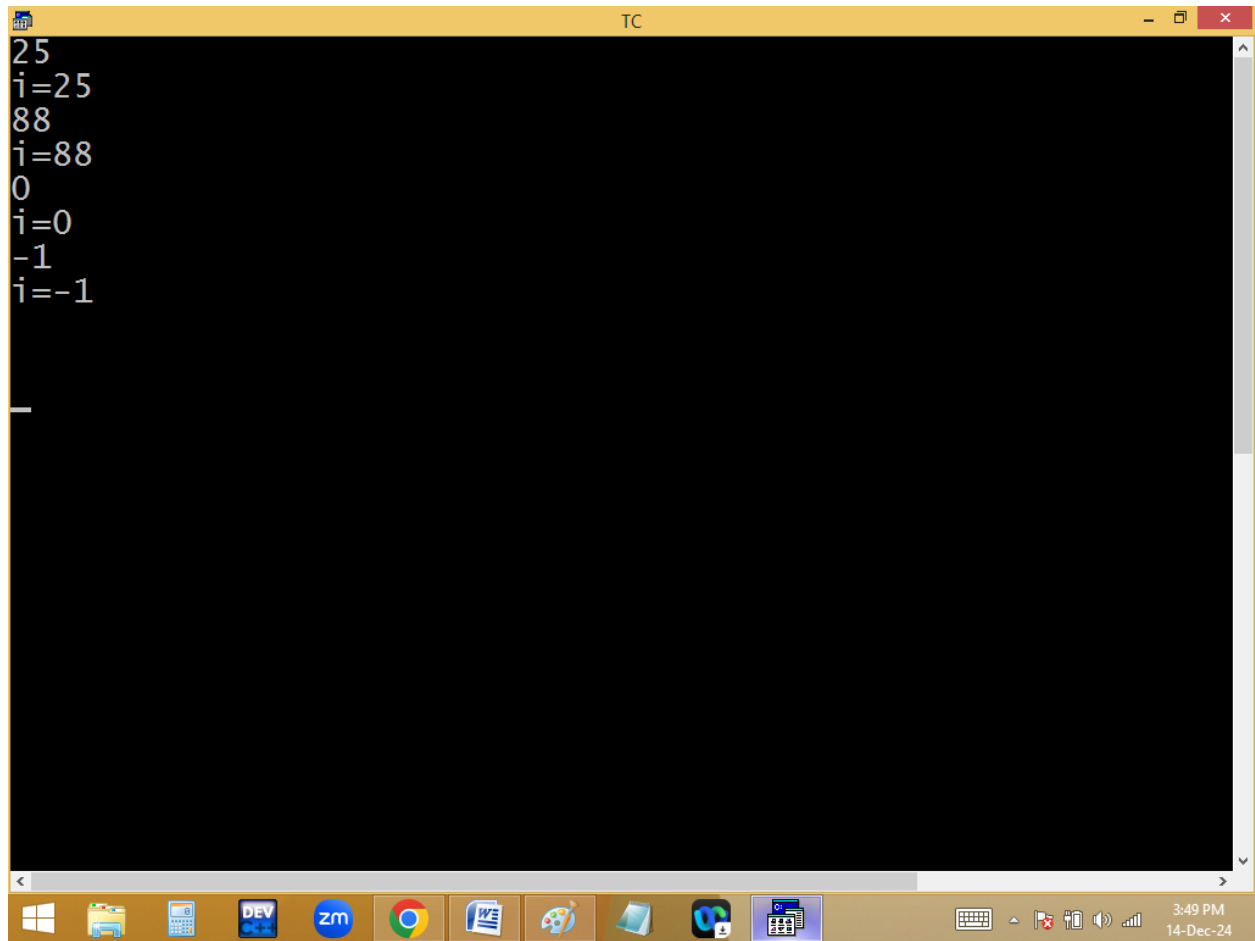

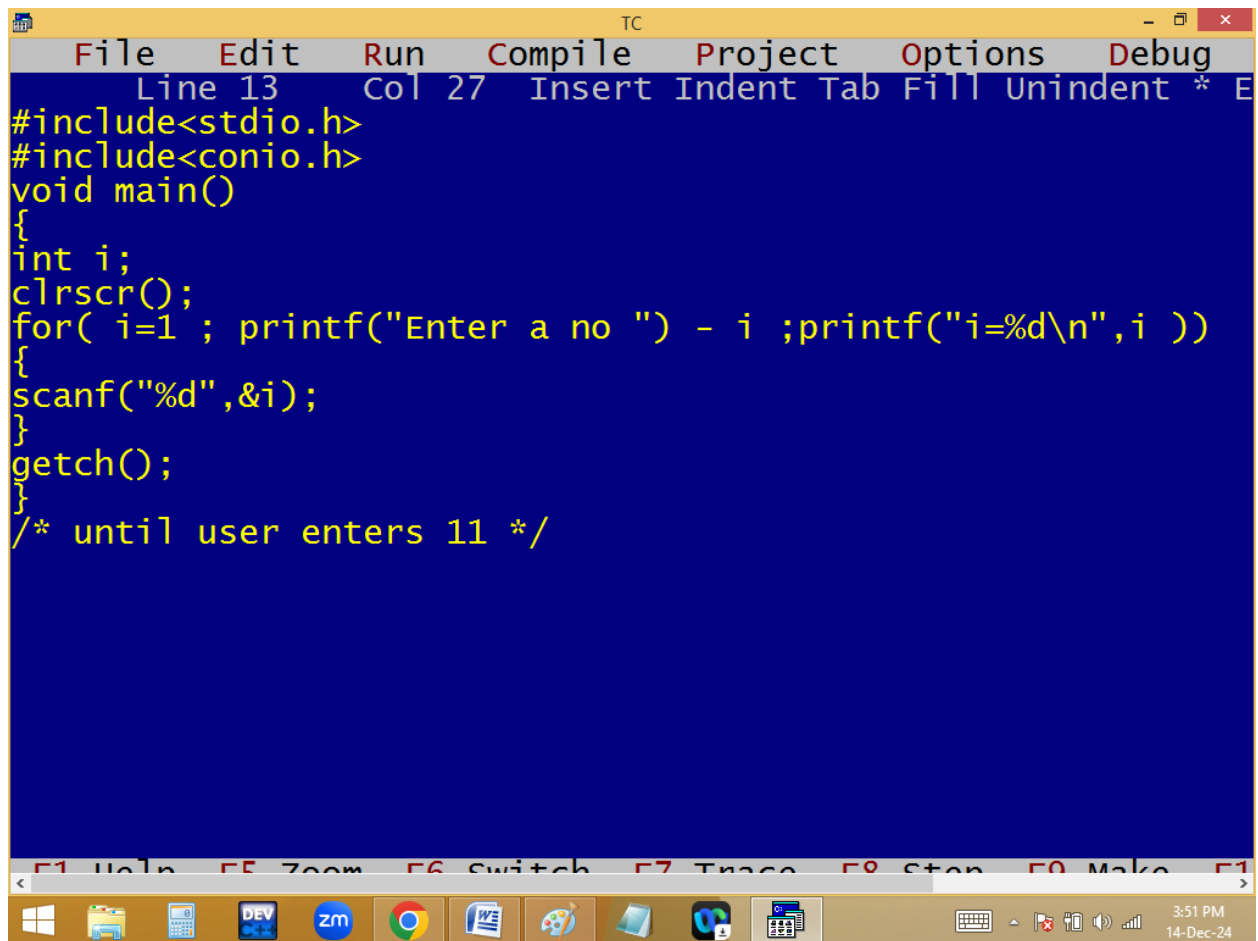

```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 27 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i;
clrscr();
for( i=1 ; printf("Enter a no ") - i ;printf("i=%d\n",i ))
{
scanf("%d",&i);
}
getch();
}
/* until user enters 11 */

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```




```
TC
Enter a no 0
i=0
Enter a no 1
i=1
Enter a no -1
i=-1
Enter a no 11
i=11
Enter a no _
```




```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 23 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i;
clrscr();
for( i=1 ; i ;printf("i=%d\n",i ))
{
printf("Enter a no ");_
scanf("%d",&i);
}
getch();
}
/* until user enters 11 */

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```


```
TC
Enter a no 1
i=1
Enter a no 2
i=2
Enter a no -1
i=-1
Enter a no 0
i=0
```

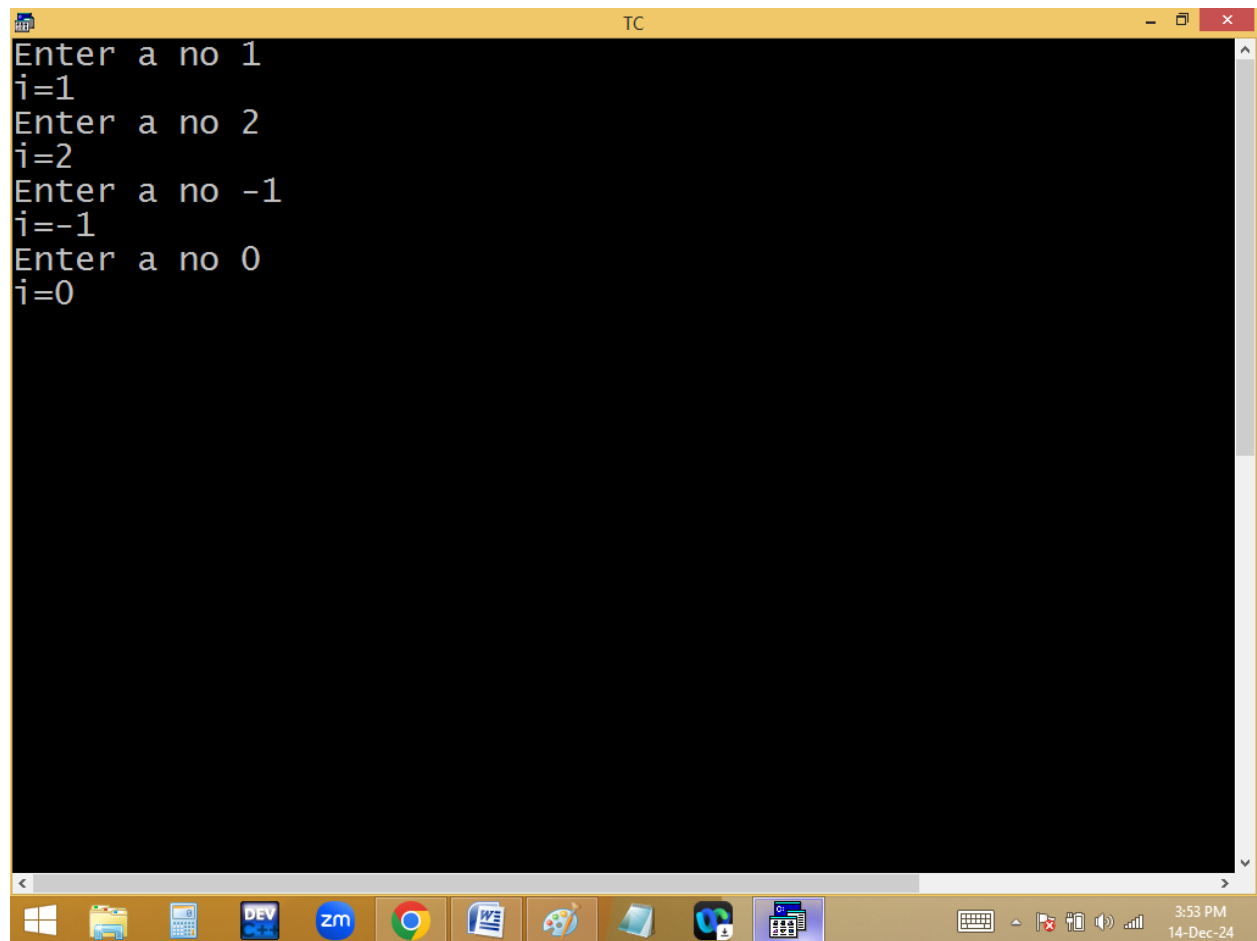

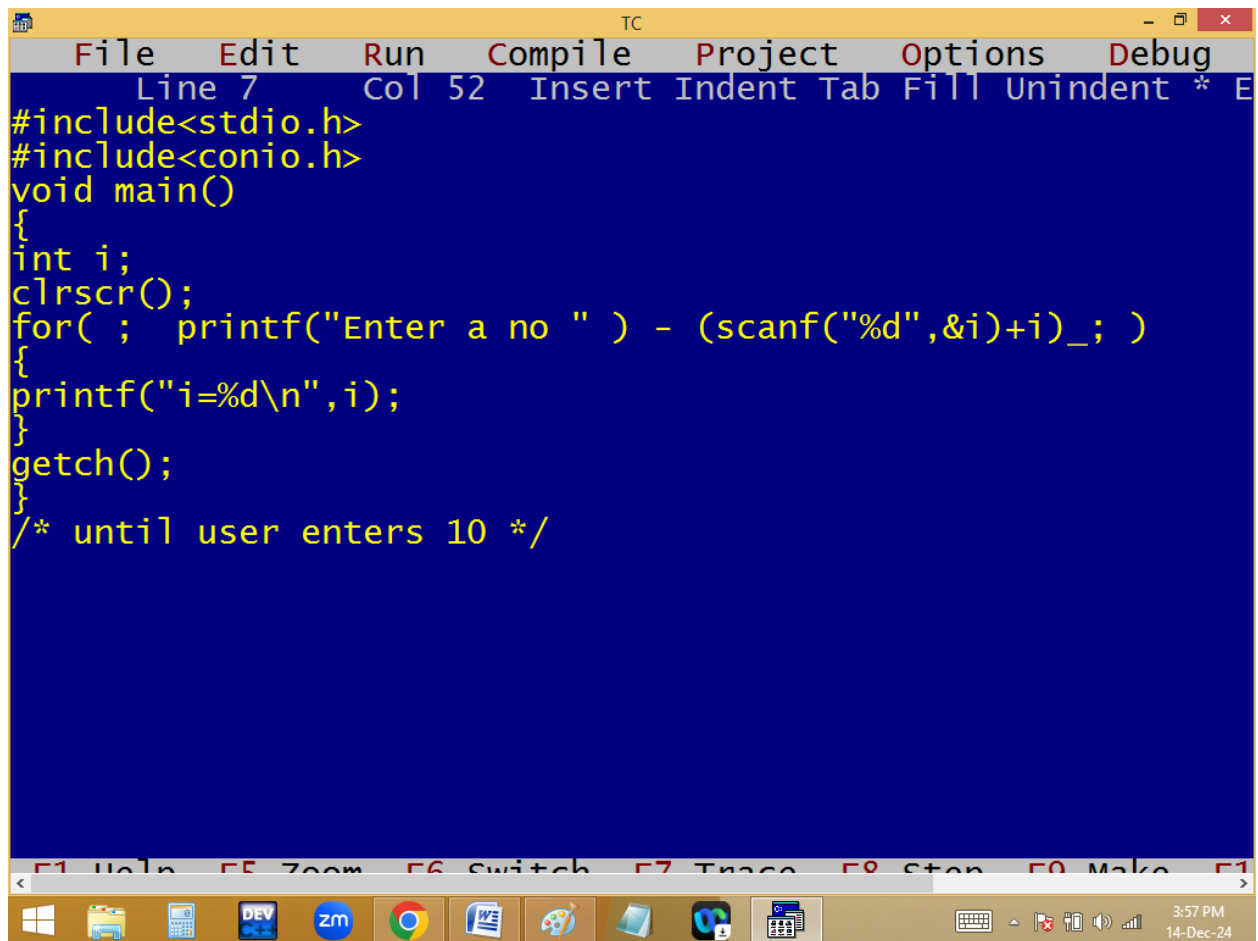

```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 52 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int i;
clrscr();
for( ; printf("Enter a no " ) - (scanf("%d",&i)+i)_; )
{
printf("i=%d\n",i);
}
getch();
}
/* until user enters 10 */

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

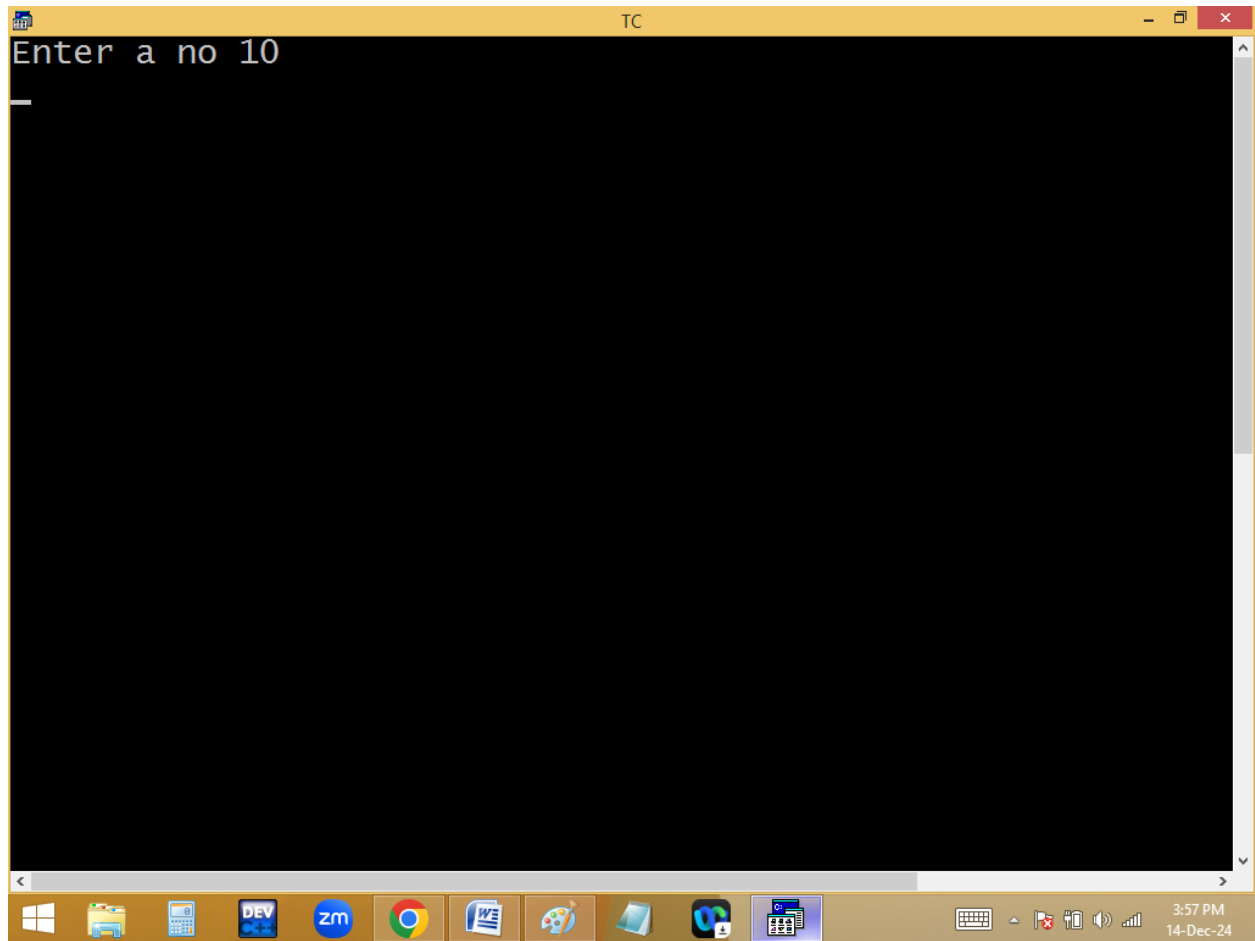

```
TC
Enter a no 4
i=4
Enter a no -1
i=-1
Enter a no 0
i=0
Enter a no 10
```

