


1 2 3 4

1 2 3

1 2

1

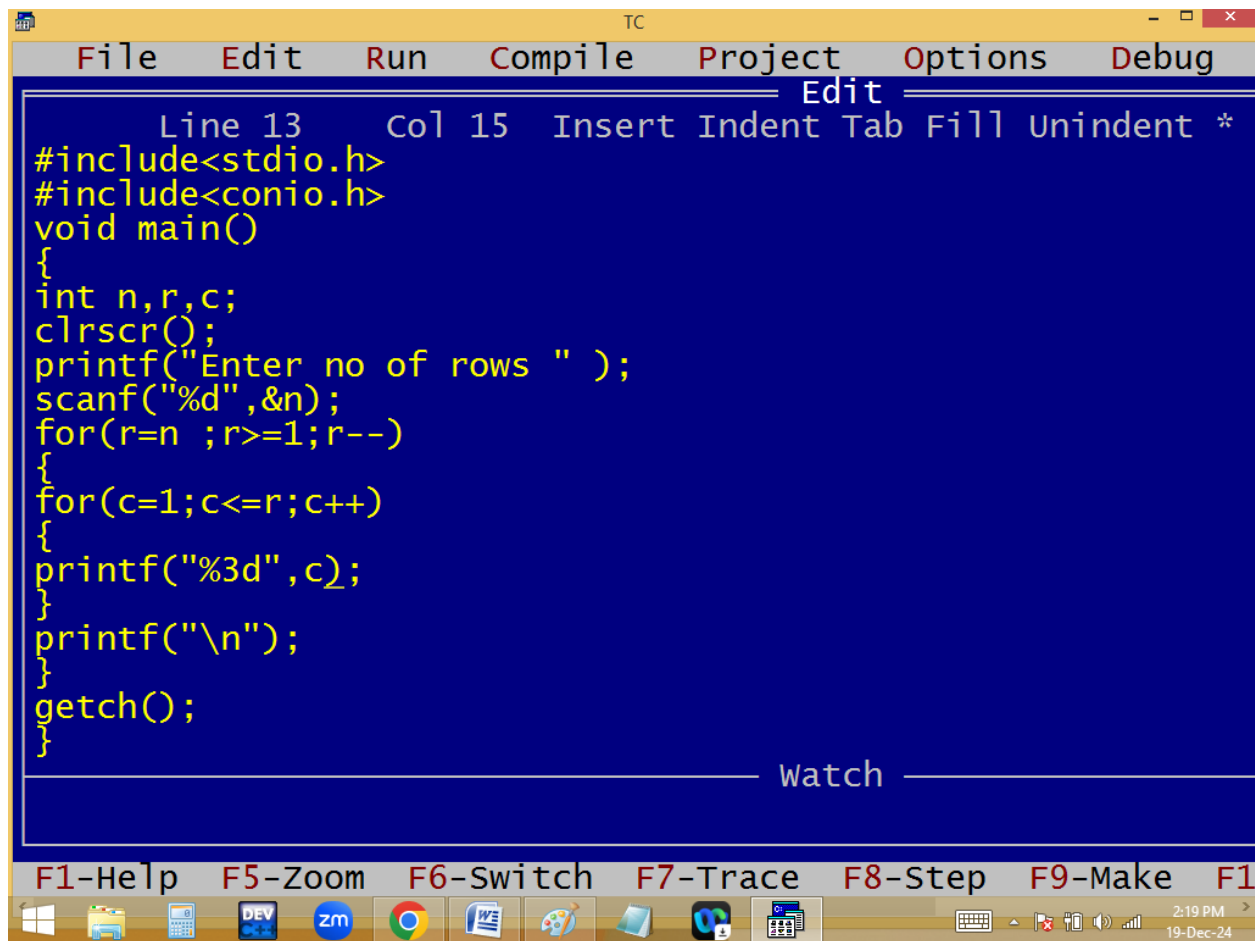

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The "Edit" menu is open, showing options: "Line 13", "Col 15", "Insert", "Indent", "Tab", "Fill", "Unindent", and "*". The code editor has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c;
clrscr();
printf("Enter no of rows " );
scanf("%d",&n);
for(r=n ;r>=1;r--)
{
for(c=1;c<=r;c++)
{
printf("%3d",c);
}
printf("\n");
}
getch();
}
```

Below the code editor is a "Watch" window, which is currently empty. At the bottom of the IDE, there is a toolbar with icons for various functions and a status bar. The status bar shows the time "2:19 PM" and the date "19-Dec-24".

Line 13 Col 15 Insert Indent Tab Fill Unindent *


```
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c;
clrscr();
printf("Enter no of rows " );
scanf("%d",&n);
for(r=n ;r>=1;r--)
{
for(c=1;c<=r;c++)
{
printf("%3d",c);
}
printf("\n");
}
getch();
}
```

Watch

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

2:19 PM
19-Dec-24

```
TC
Enter no of rows 4
1 2 3 4
1 2 3
1 2
1
```

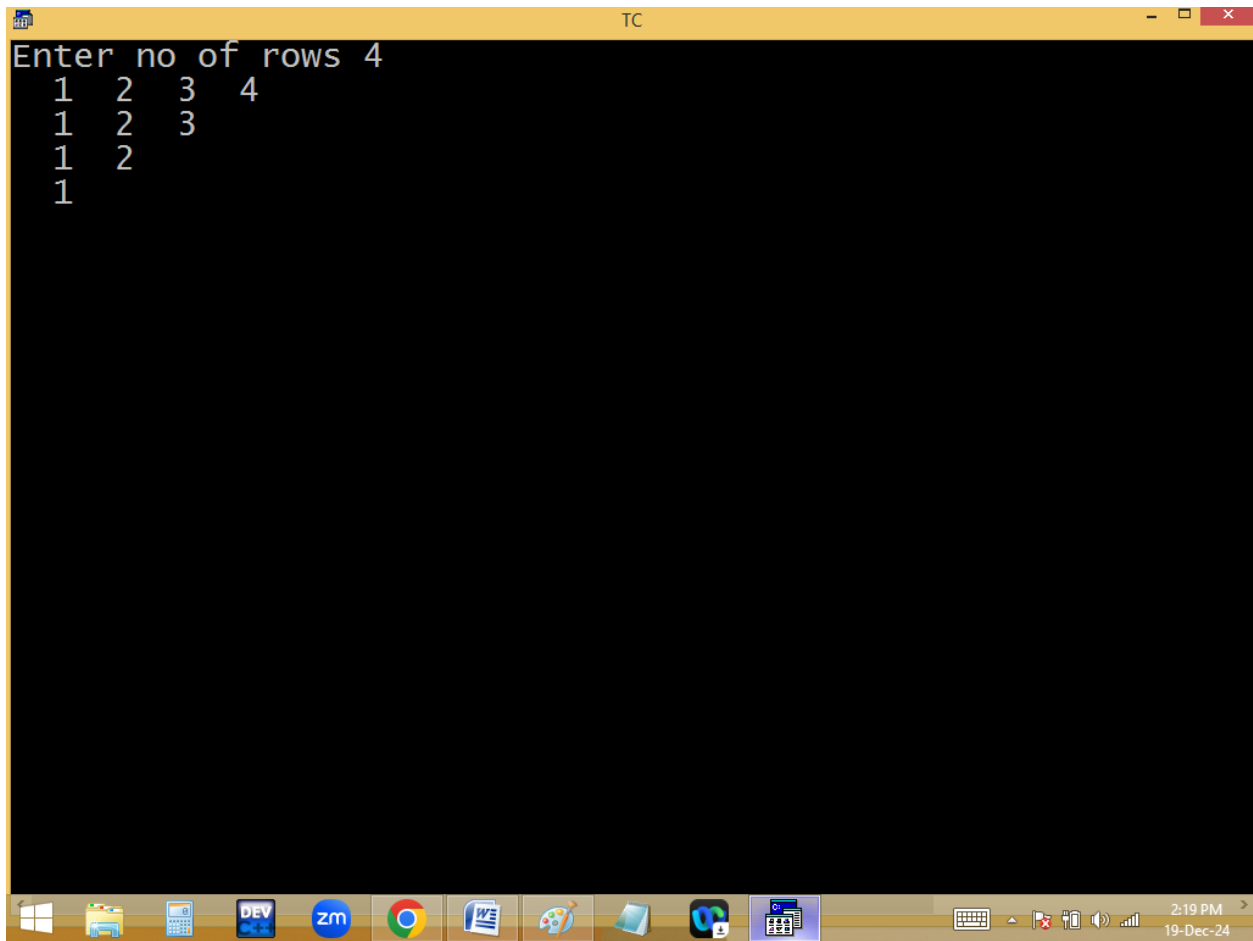

```

Enter no of rows 10
1 2 3 4 5 6 7 8 9 10
1 2 3 4 5 6 7 8 9
1 2 3 4 5 6 7 8
1 2 3 4 5 6 7
1 2 3 4 5 6
1 2 3 4 5
1 2 3 4
1 2 3
1 2
1

```

```

for( r=n; r>=1; r-- )
{
for(c=1; c<=r; c++) p(c);
p("\n");
}

```


<u>n</u>	<u>c=1 to</u>	<u>r=n</u>	
4	1 to	4	1 2 3 4
	1 to	3	1 2 3
	1 to	2	1 2
	1 to	1	1

4 3 2 1

4 3 2

4 3

4

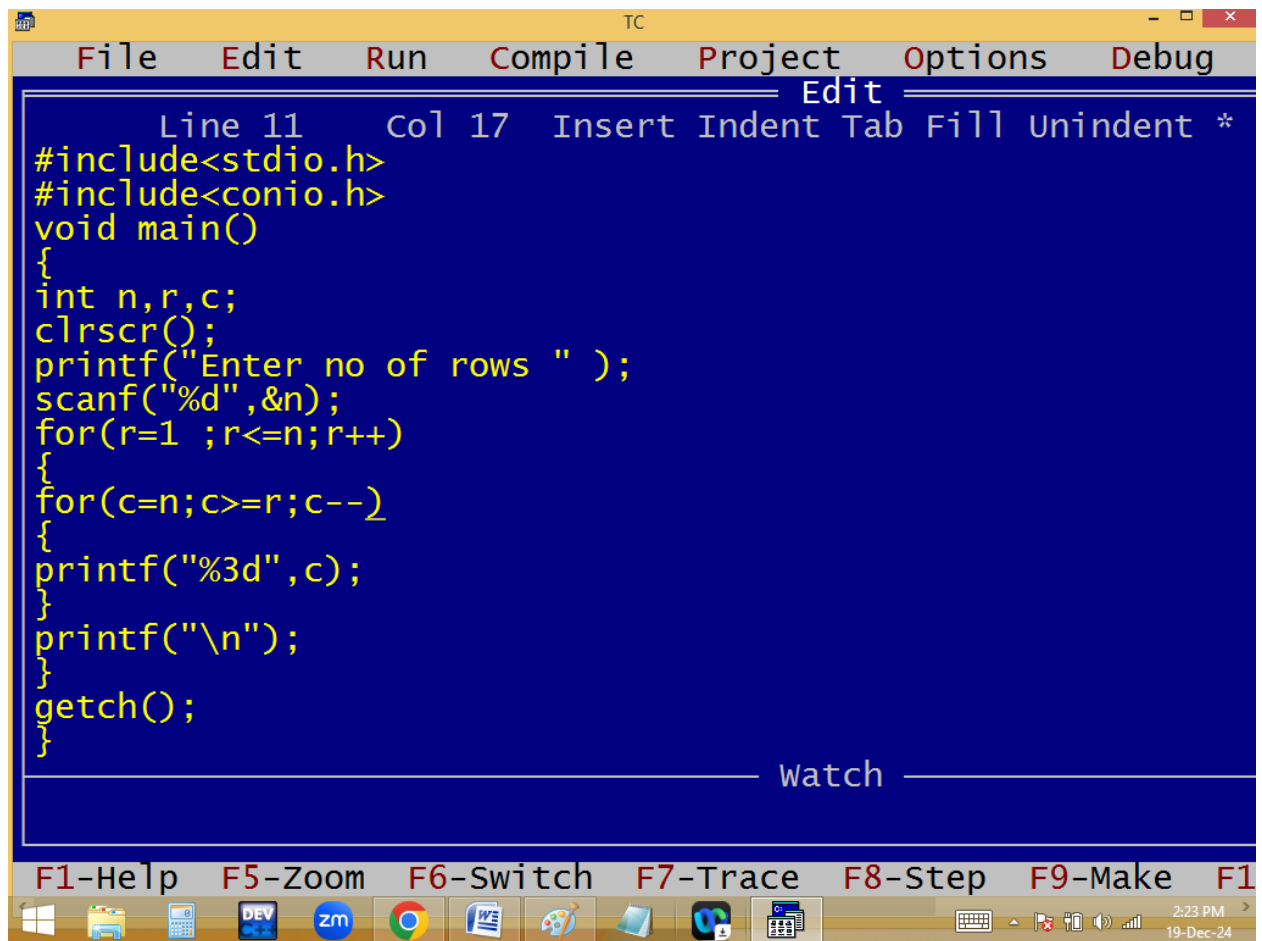

The image shows a screenshot of the Turbo C++ (TC) IDE. The main window has a dark blue background with yellow text for the code. The menu bar at the top includes File, Edit, Run, Compile, Project, Options, and Debug. Below the menu bar is a toolbar with icons for various editing and development actions. The code is as follows:

```
Line 11   Col 17   Insert  Indent  Tab  Fill  Unindent  *
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c;
clrscr();
printf("Enter no of rows " );
scanf("%d",&n);
for(r=1 ;r<=n;r++)
{
for(c=n;c>=r;c--)
{
printf("%3d",c);
}
printf("\n");
}
getch();
}
```

Below the code editor is a 'Watch' window, which is currently empty. At the bottom of the IDE is a status bar with function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar is visible at the very bottom, showing the Start button and several application icons. The system clock in the bottom right corner indicates the time is 2:23 PM on 19-Dec-24.

```
TC
Enter no of rows 4
4 3 2 1
4 3 2
4 3
4
```


```
for( r= 1;r<=n;r++)
{
for(c=n;c>=r;c-- ) p(c);
p("\n");
}
```

1
4 c = 4 to 1 4 3 2 1
4 to 1 4 3 2
4 to 2 4 3
4 to 3 4
4 to 4 4

```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 43 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c;
clrscr();
printf("Enter no of rows " );
scanf("%d",&n);
for(r=1 ;r<=n;r++)
{
for(c=1;c<=n;c++)
{
if(c<=n-r)printf(" ");else printf("%d",c);_
}
printf("\n");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

2:34 PM
19-Dec-24

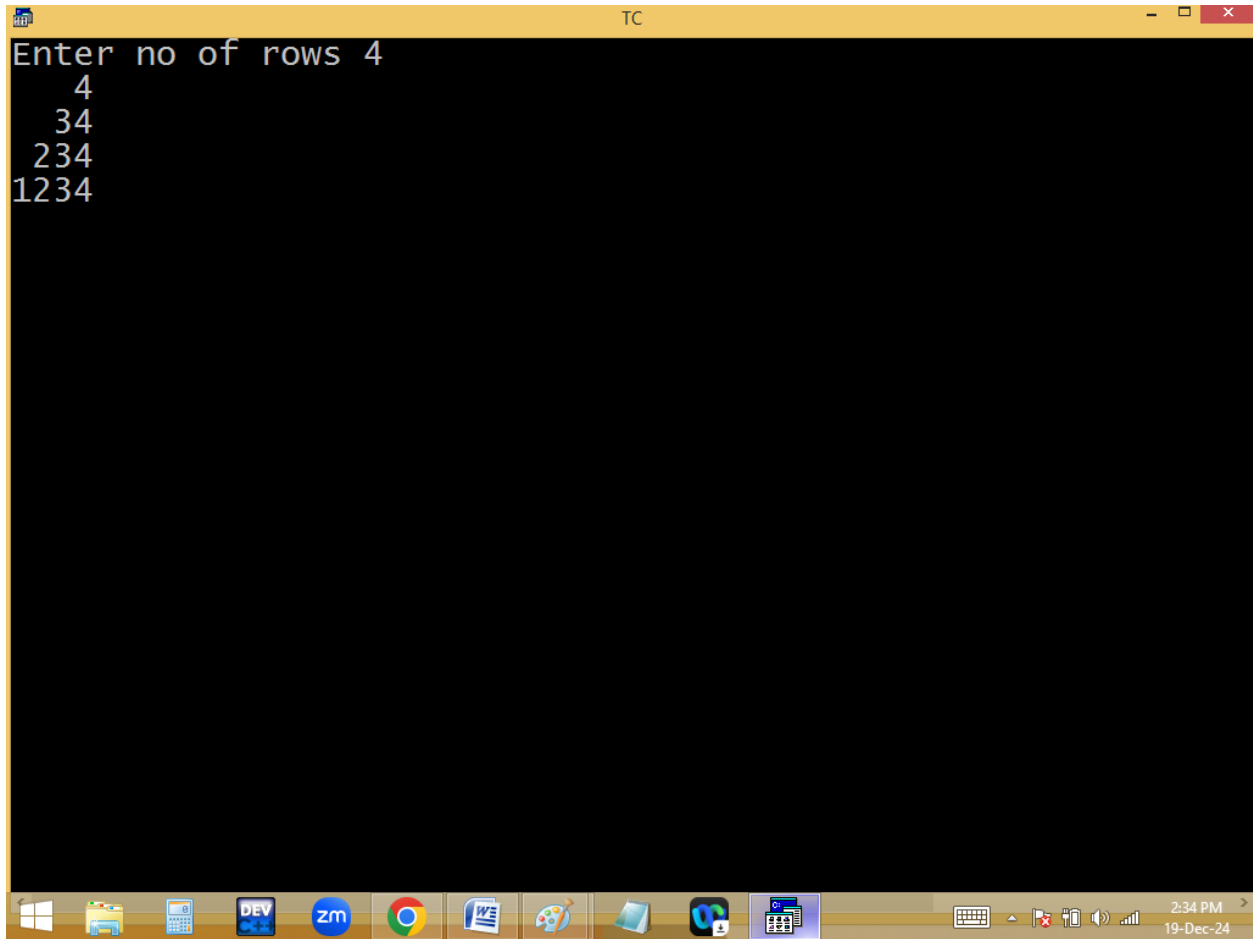


```

TC
Enter no of rows 9
  9
 89
789
6789
56789
456789
3456789
23456789
123456789

```


$\frac{n}{4}$	γ	$C \leq n - \gamma$	
4	1	$1234 \leq 4 - 1 = 3$	- - - 4
	2	$1234 \leq 4 - 2 = 2$	- - 3 4
	3	$1 \leq 4 - 3 = 1$	- 2 3 4
	4	$1234 \leq 4 - 4 = 0$	1 2 3 4

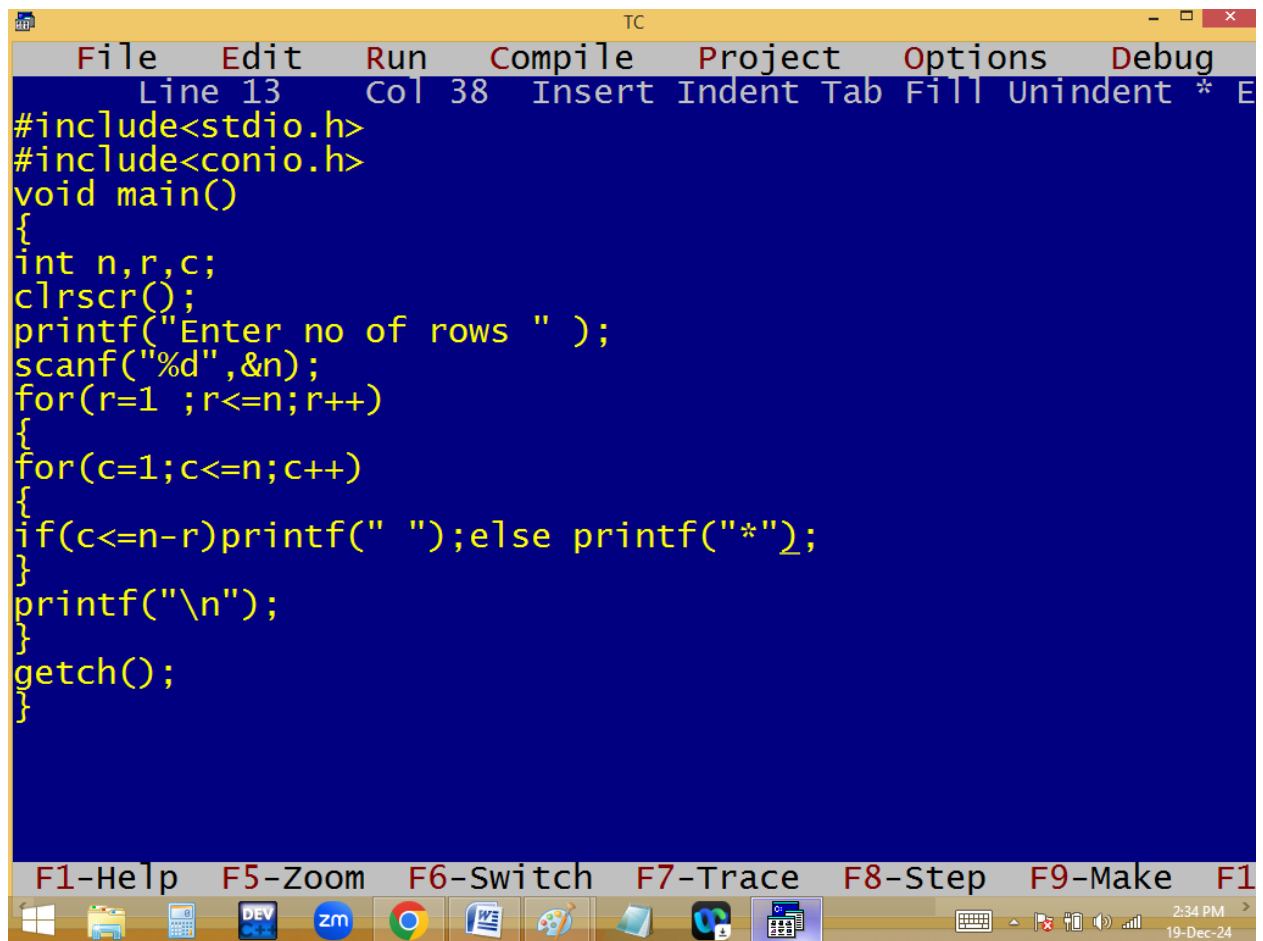


```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 38 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c;
clrscr();
printf("Enter no of rows " );
scanf("%d",&n);
for(r=1 ;r<=n;r++)
{
for(c=1;c<=n;c++)
{
if(c<=n-r)printf(" ");else printf("*");
printf("\n");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit

2:34 PM 19-Dec-24

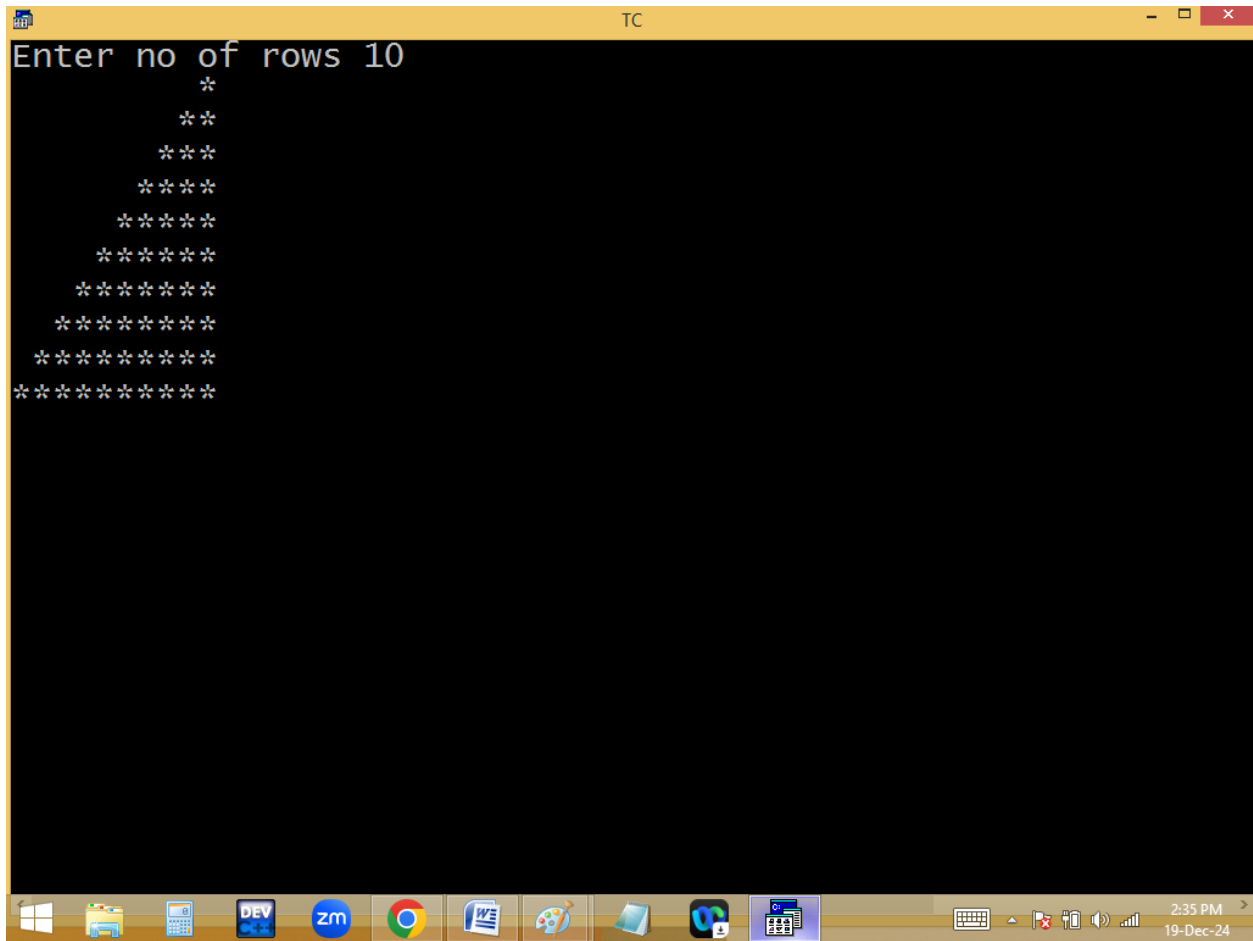


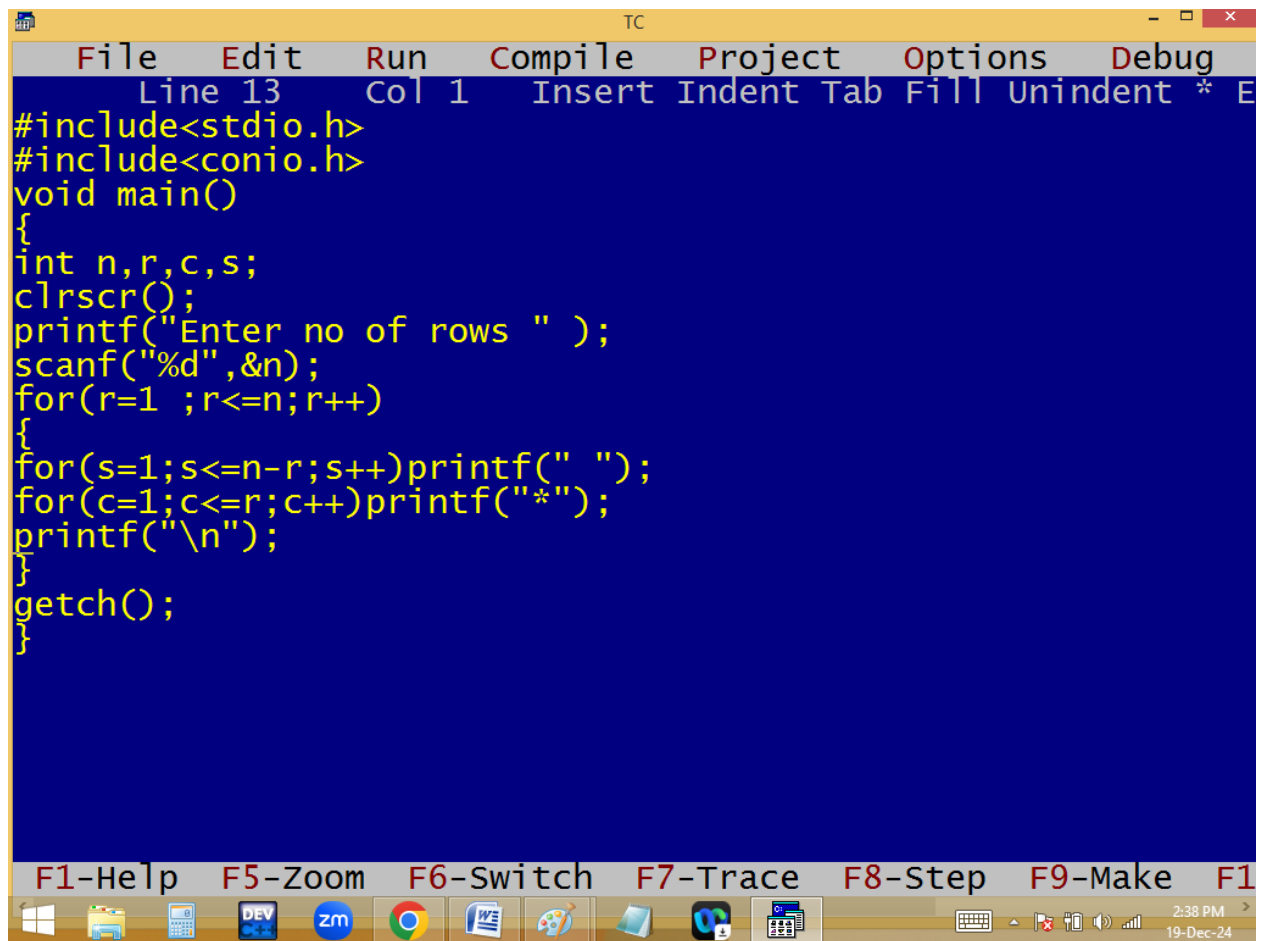

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 13", "Col 1", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and a cursor icon. The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,s;
clrscr();
printf("Enter no of rows " );
scanf("%d",&n);
for(r=1 ;r<=n;r++)
{
for(s=1;s<=n-r;s++)printf(" ");
for(c=1;c<=r;c++)printf("*");
printf("\n");
}
getch();
}
```



At the bottom of the window, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the very bottom, showing various application icons and the system clock indicating 2:38 PM on 19-Dec-24.

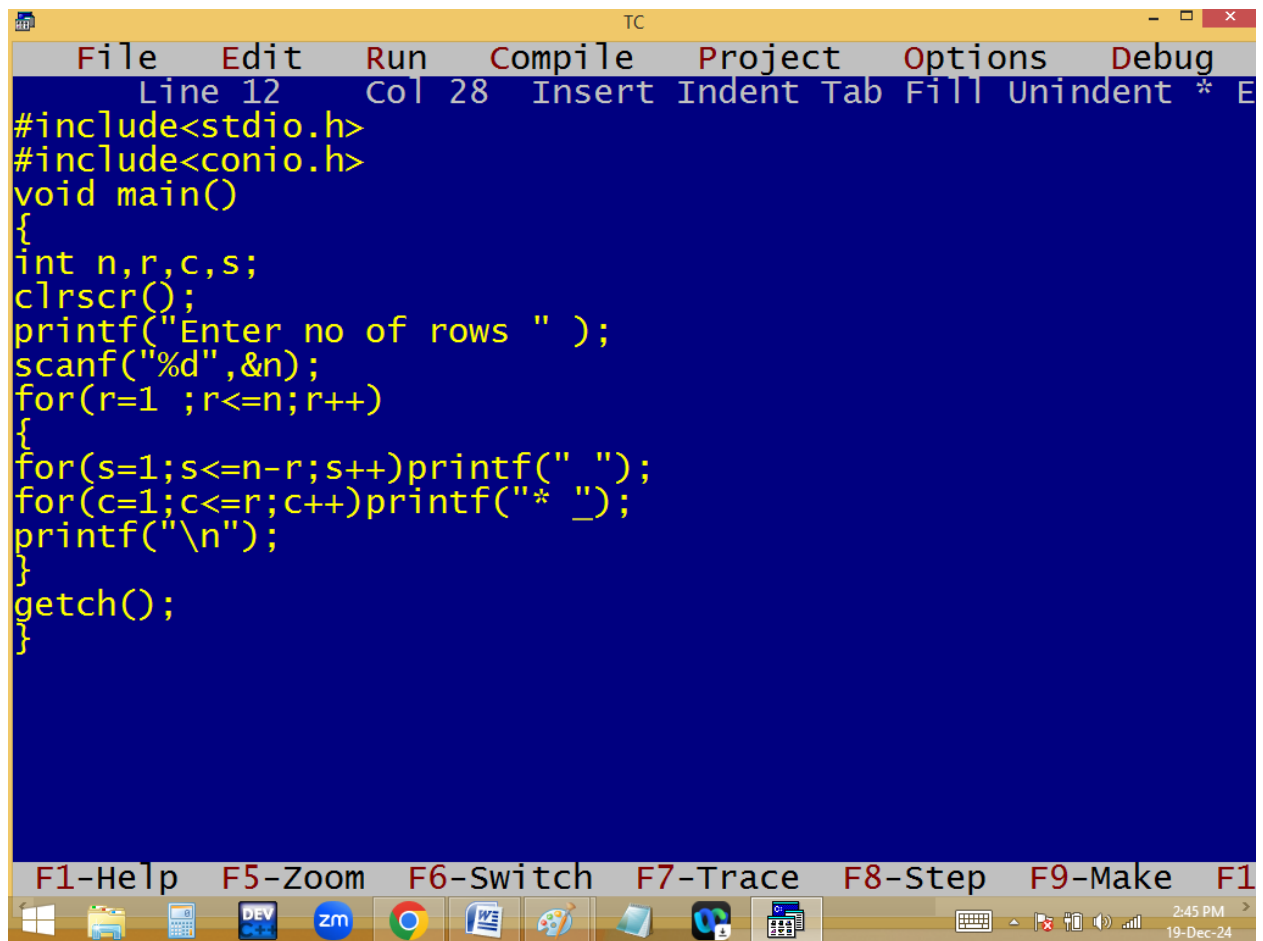


```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 28 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,s;
clrscr();
printf("Enter no of rows " );
scanf("%d",&n);
for(r=1 ;r<=n;r++)
{
for(s=1;s<=n-r;s++)printf(" ");
for(c=1;c<=r;c++)printf("* ");
printf("\n");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Go To

2:45 PM
19-Dec-24

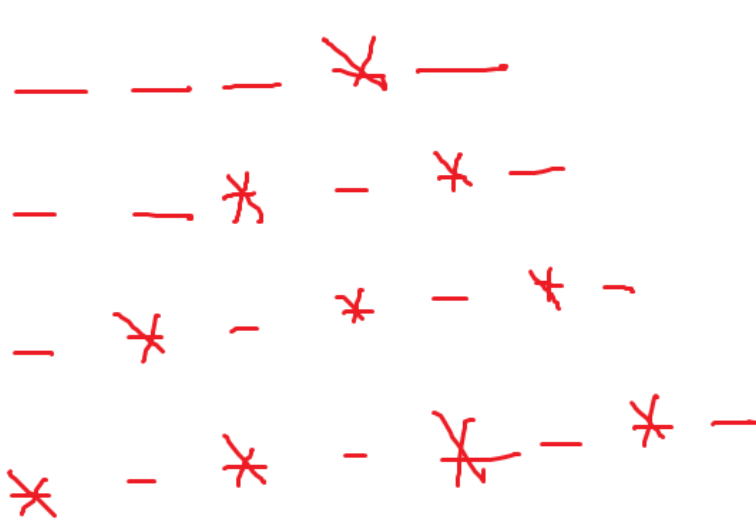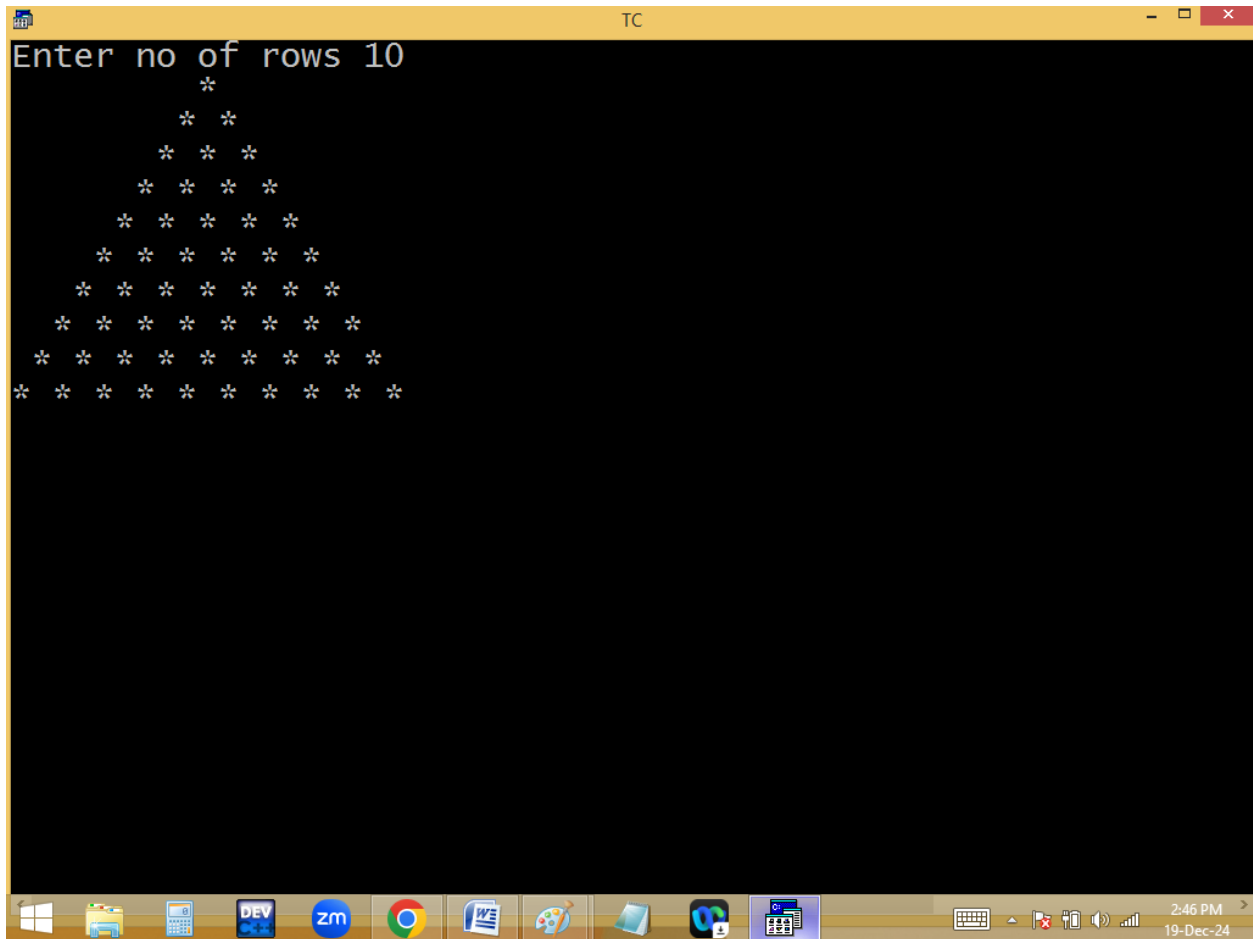


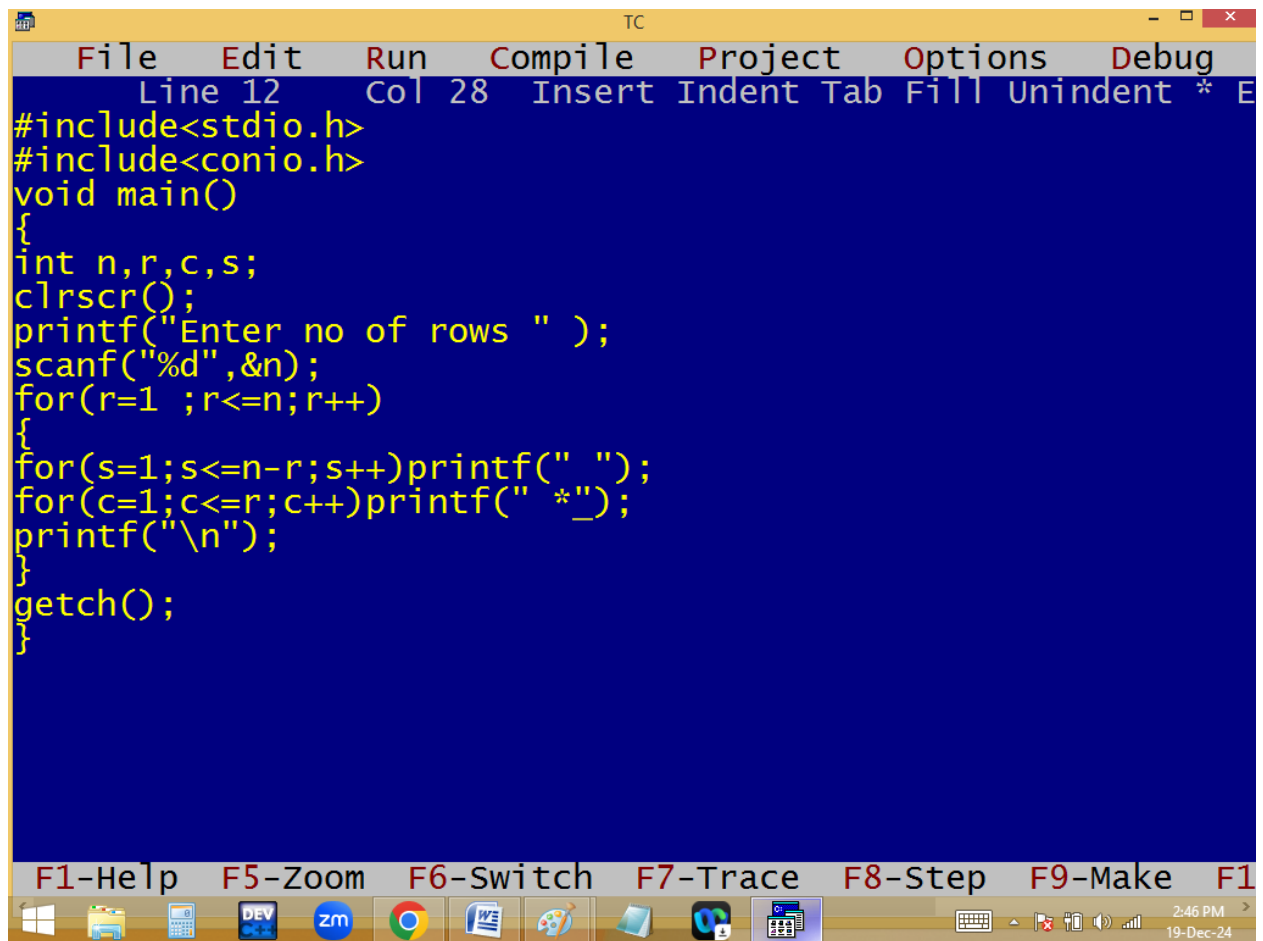


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 12 Col 28 Insert Indent Tab Fill Unindent * E". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int n,r,c,s;
    clrscr();
    printf("Enter no of rows " );
    scanf("%d",&n);
    for(r=1 ;r<=n;r++)
    {
        for(s=1;s<=n-r;s++)printf(" ");
        for(c=1;c<=r;c++)printf(" *");
        printf("\n");
    }
    getch();
}
```

The function key bar at the bottom includes F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar at the very bottom shows the Start button, taskbar icons for File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and a folder, along with system tray icons for keyboard, volume, and network, and the system clock showing 2:46 PM on 19-Dec-24.

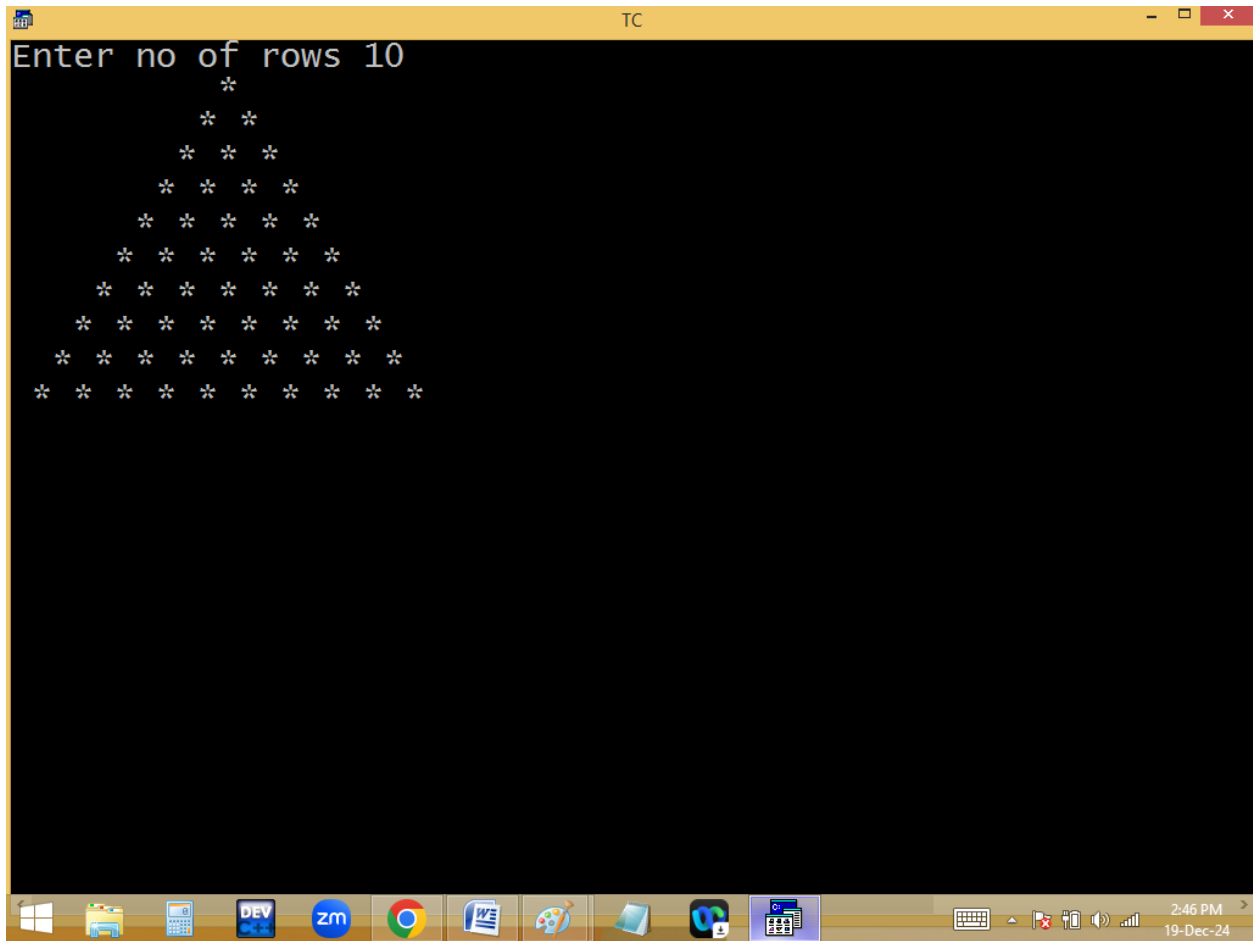


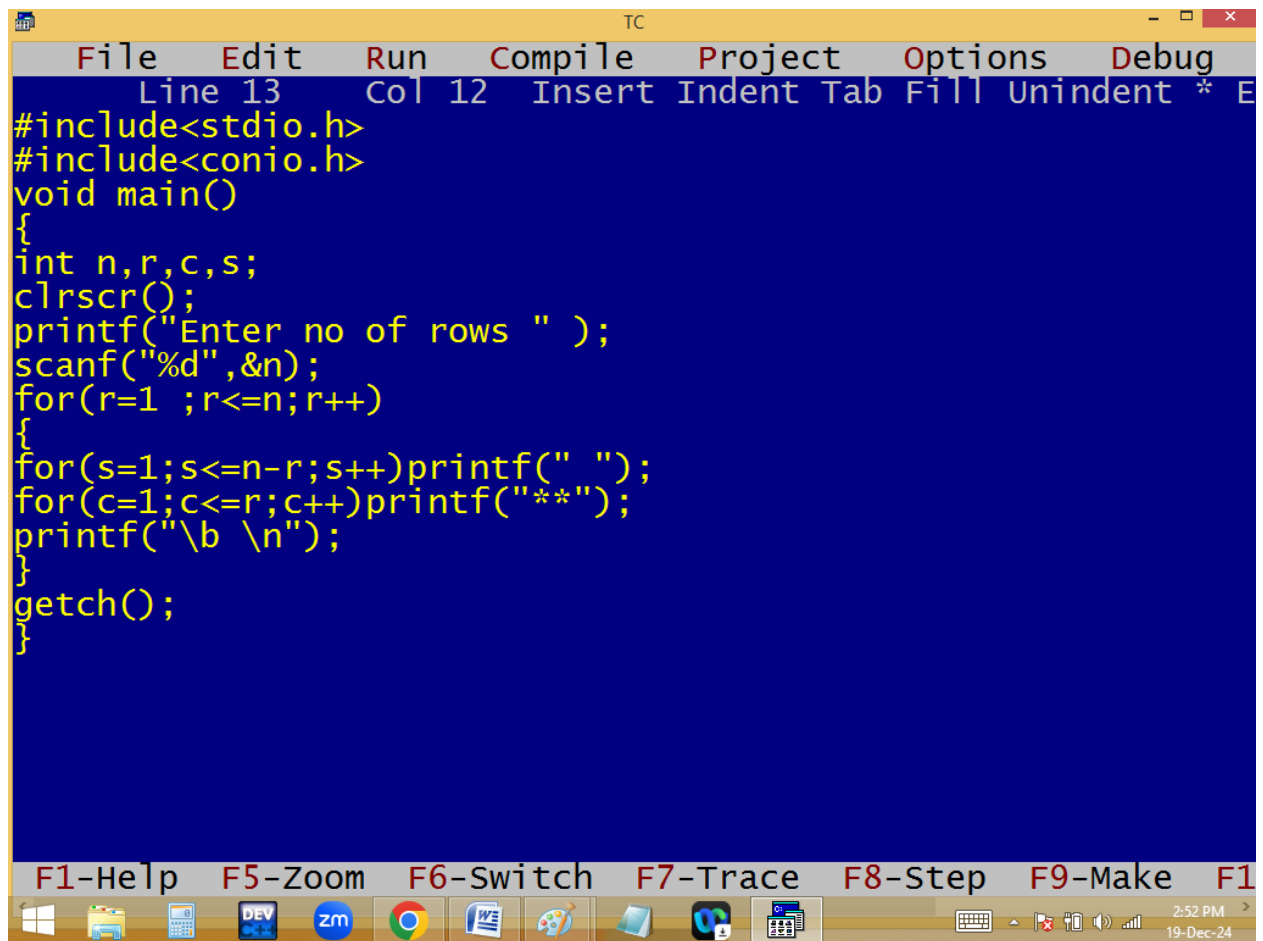

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 13", "Col 12", and various editing options like "Insert", "Indent", "Tab", "Fill", "Unindent", and a "E" (likely for End). The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,s;
clrscr();
printf("Enter no of rows " );
scanf("%d",&n);
for(r=1 ;r<=n;r++)
{
for(s=1;s<=n-r;s++)printf(" ");
for(c=1;c<=r;c++)printf("**");
printf("\b \n");
}
getch();
}
```


At the bottom of the window, there is a toolbar with icons for various functions and a row of function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the very bottom, showing the Start button, several application icons (including File Explorer, Calculator, DEV C++, Zoom, Chrome, Word, Paint, and VS Code), and the system clock displaying "2:52 PM" and "19-Dec-24".

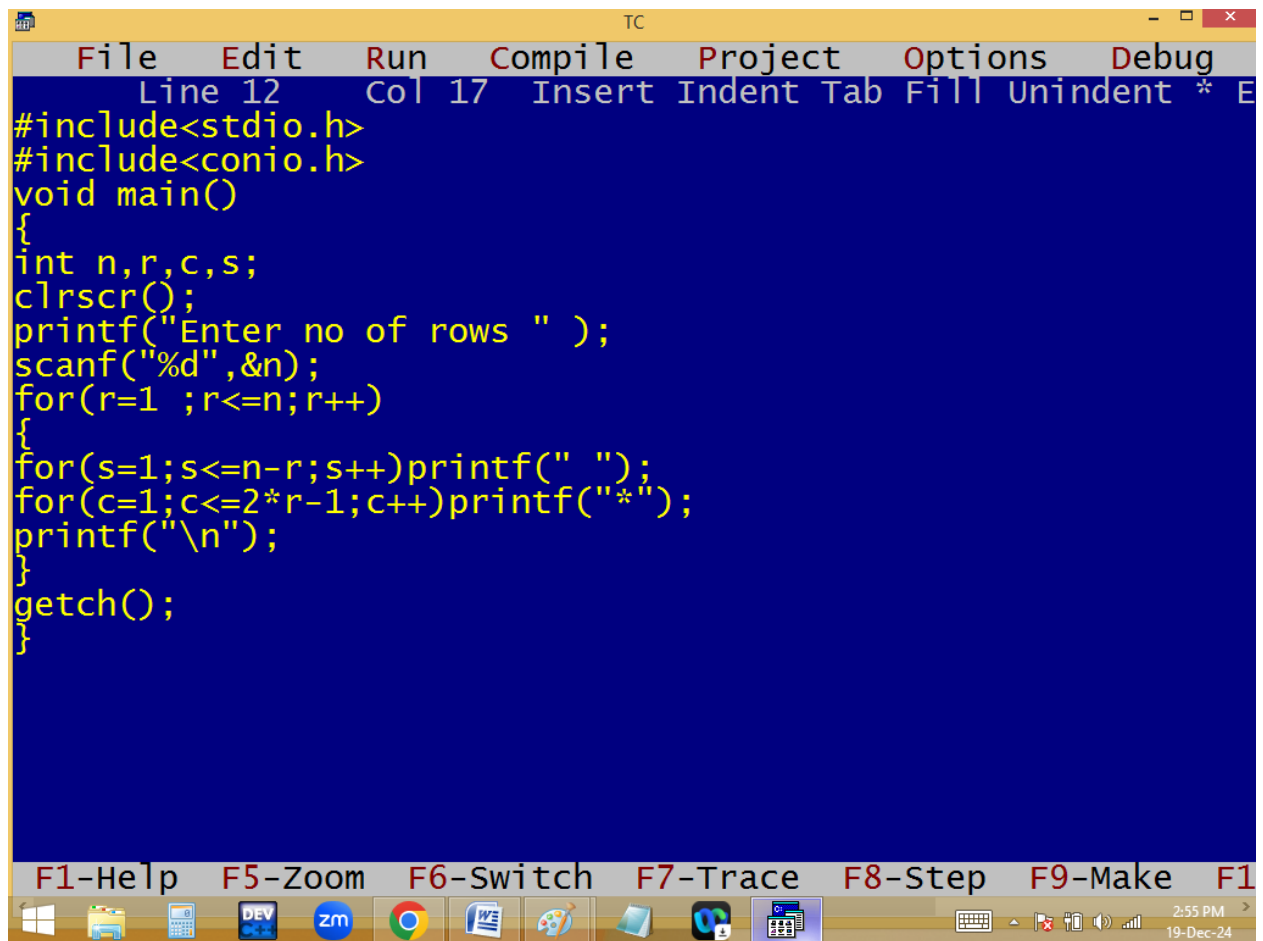

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 12", "Col 17", and various editing options like "Insert", "Indent", "Tab", "Fill", "Unindent", and a "E" (likely for End). The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,s;
clrscr();
printf("Enter no of rows " );
scanf("%d",&n);
for(r=1 ;r<=n;r++)
{
for(s=1;s<=n-r;s++)printf(" ");
for(c=1;c<=2*r-1;c++)printf("*");
printf("\n");
}
getch();
}
```

At the bottom of the window, there is a toolbar with icons for various functions and a status bar. The status bar shows the time "2:55 PM" and the date "19-Dec-24".

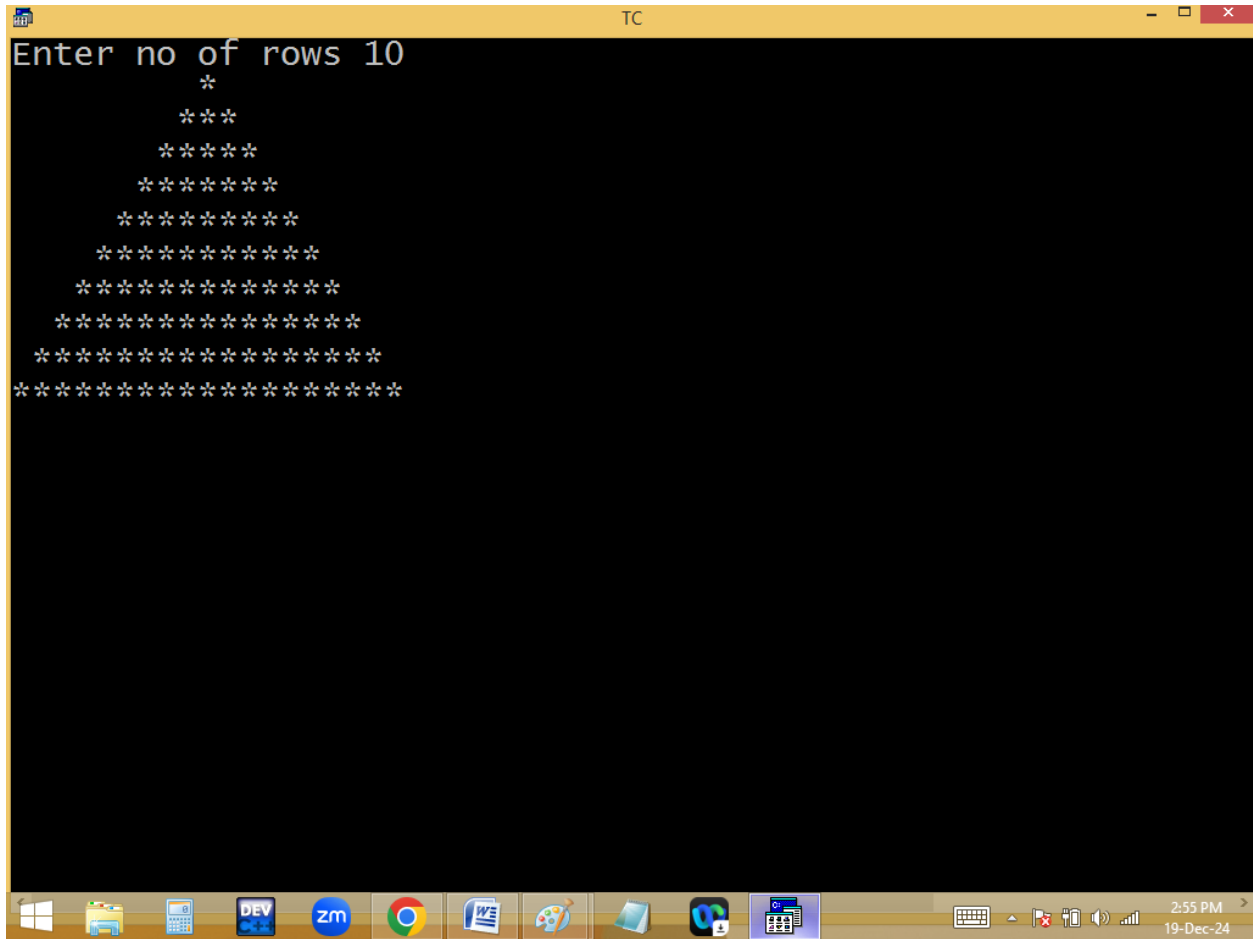



$$2*r-1$$

$$2*1-1=1$$


$$2*2-1=3$$

$$2*3-1=5$$

```
TC
File Edit Run Compile Project Options Debug
Line 15 Col 10 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,s;
clrscr();
printf("Enter no of rows " );
scanf("%d",&n);
for(r=1 ;r<=n;r++)
{
for(s=1;s<=n-r;s++)printf(" ");
for(c=1;c<=2*r-1;c++)printf("*");
printf("\n");
}
for(r=n-1_;r>=1;r--)
{
for(s=1;s<=n-r;s++)printf(" ");
for(c=1;c<=2*r-1;c++)printf("*");
printf("\n");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run


2:58 PM 19-Dec-24

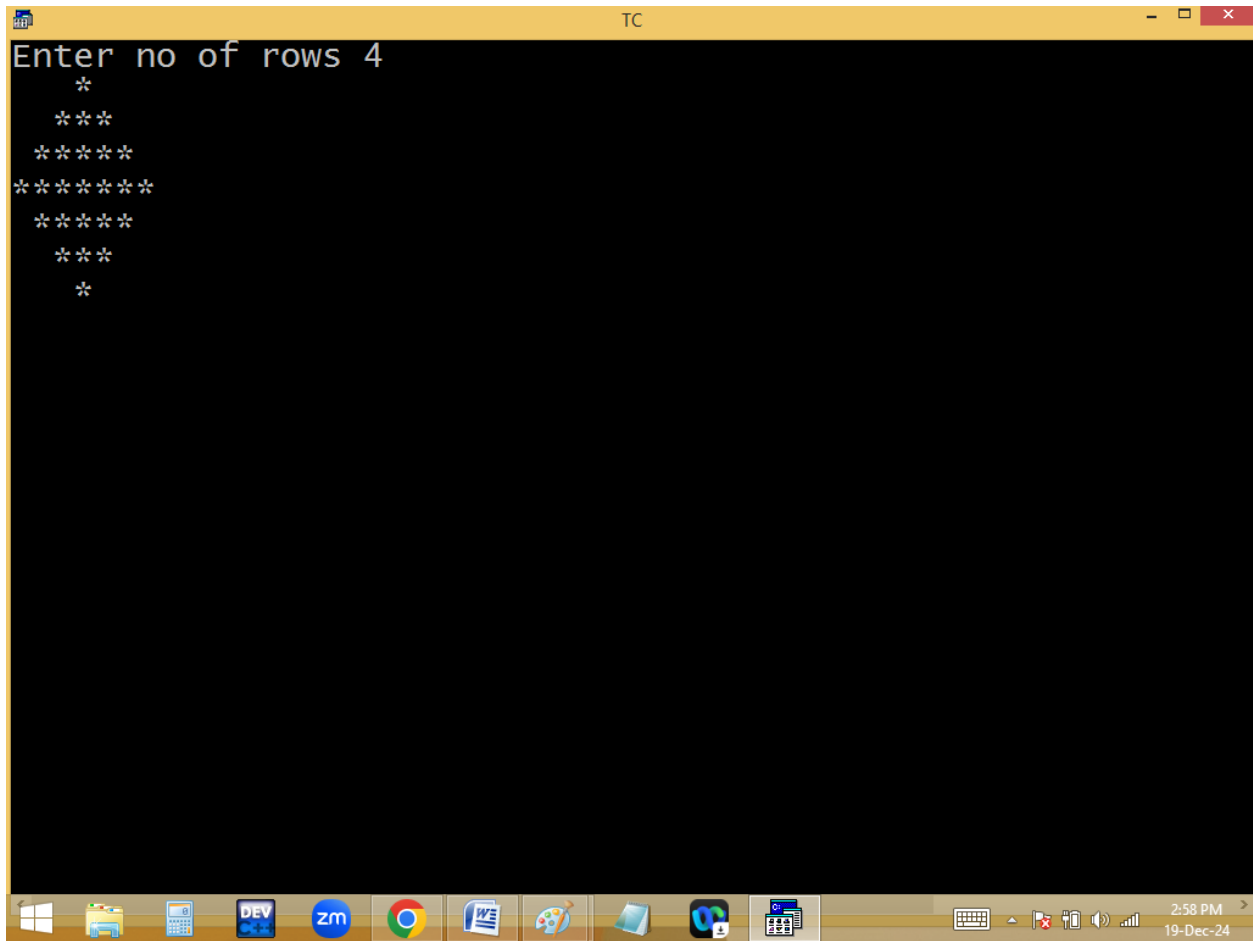


```
TC
File Edit Run Compile Project Options Debug
Line 6 Col 30 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,s;clrscr();
printf("Enter no of rows " );scanf("%d",&n);
for(r=1 ;r<=n;r++)
{
for(s=1;s<=n-r;s++)printf(" ");
for(c=1;c<=2*r-1;c++)
if(c==1||c==r)printf("* ");else printf(" ");
printf("\n");
}
for(r=n-1 ;r>=1;r--)
{
for(s=1;s<=n-r;s++)printf(" ");
for(c=1;c<=2*r-1;c++)
if(c==1||c==r)printf("* ");else printf(" ");
printf("\n");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

3:05 PM 19-Dec-24

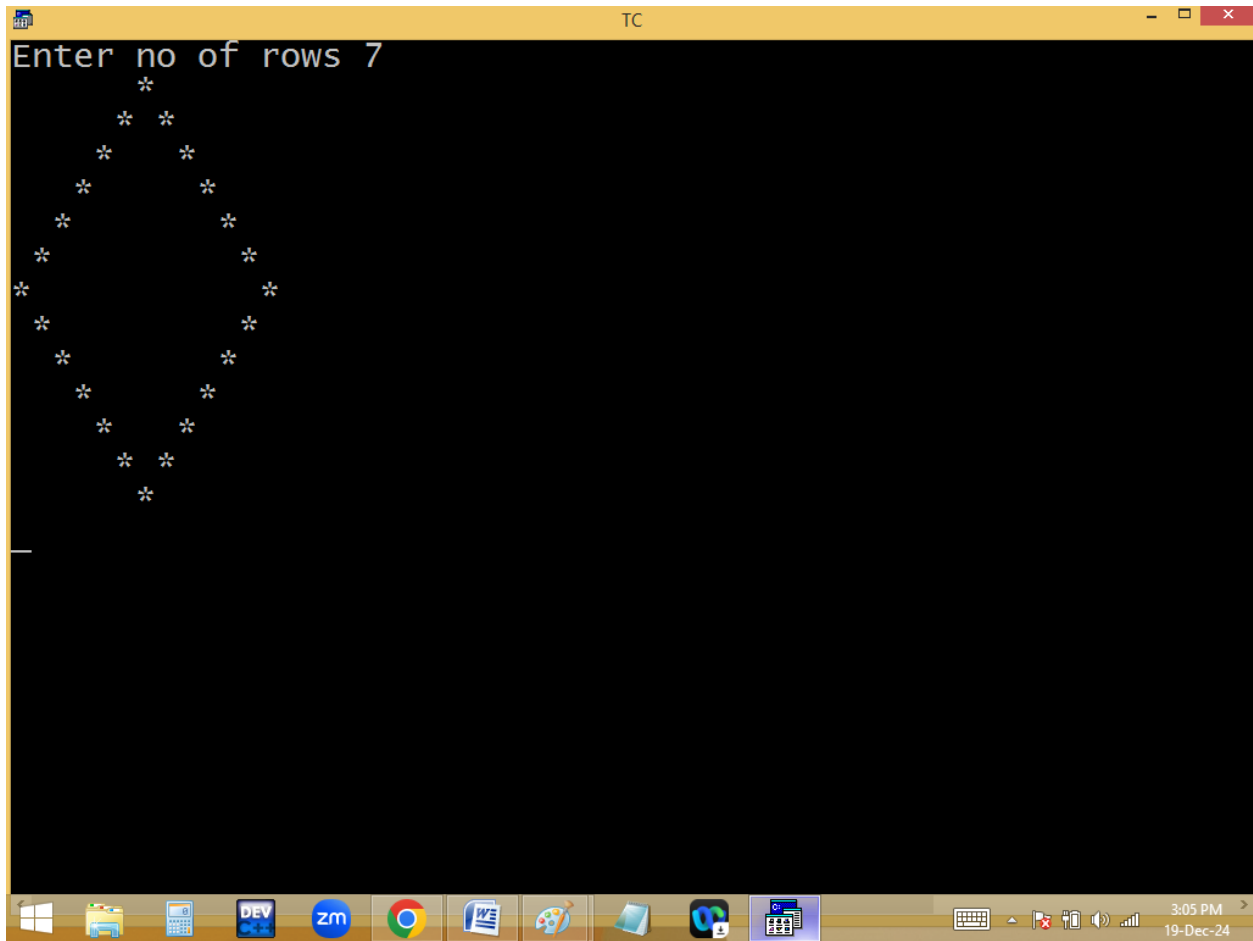


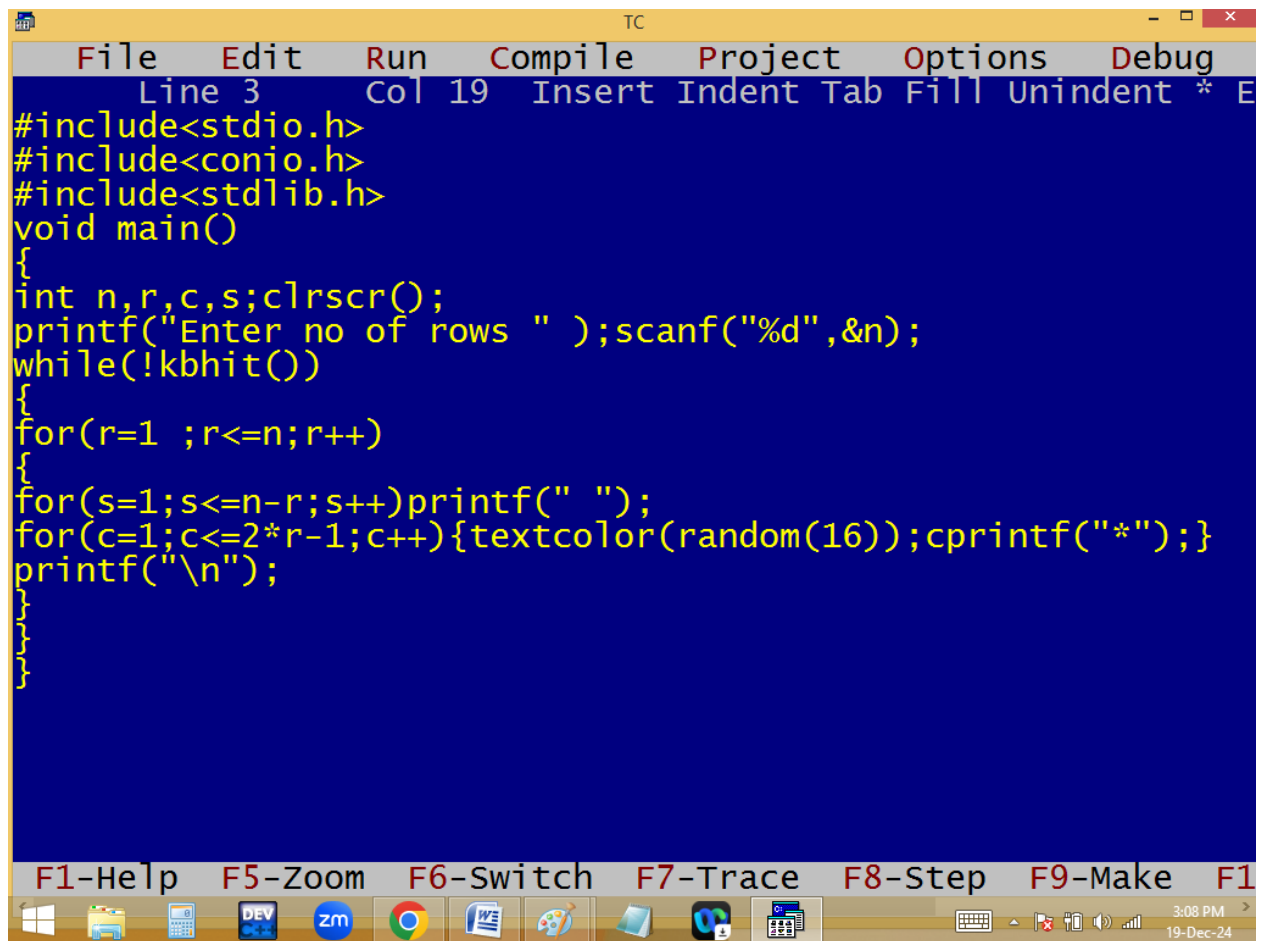

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 3", "Col 19", and various editing options like "Insert", "Indent", "Tab", "Fill", "Unindent", and a "E" (likely for End). The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
#include<stdlib.h>
void main()
{
int n,r,c,s;clrscr();
printf("Enter no of rows " );scanf("%d",&n);
while(!kbhit())
{
for(r=1 ;r<=n;r++)
{
for(s=1;s<=n-r;s++)printf(" ");
for(c=1;c<=2*r-1;c++){textcolor(random(16));cprintf("*");}
printf("\n");
}
```


Below the code, there is a toolbar with icons for various functions. At the bottom of the window, a status bar displays "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The system tray on the right shows the time "3:08 PM" and the date "19-Dec-24".

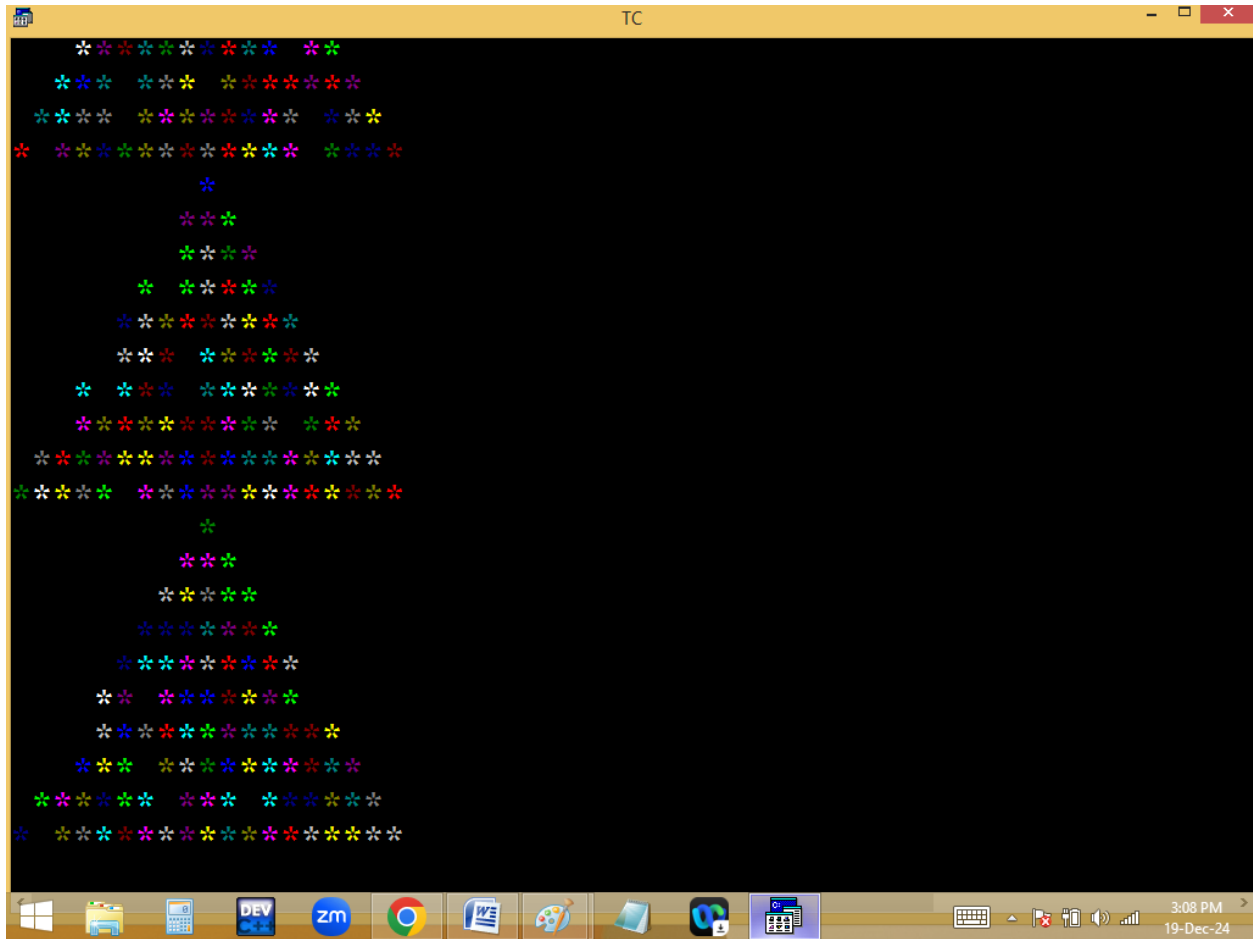

```
TC
File Edit Run Compile Project Options Debug
Line 1 Col 35 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<stdlib.h>
void main()
{
int n,r,c,s;clrscr();
printf("Enter no of rows " );scanf("%d",&n);
while(!kbhit())
{
for(r=1 ;r<=n;r++)
{textcolor(random(16));
for(s=1;s<=n-r;s++)printf(" ");
for(c=1;c<=2*r-1;c++)cprintf("*");
printf("\n");
}
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run


3:09 PM
19-Dec-24

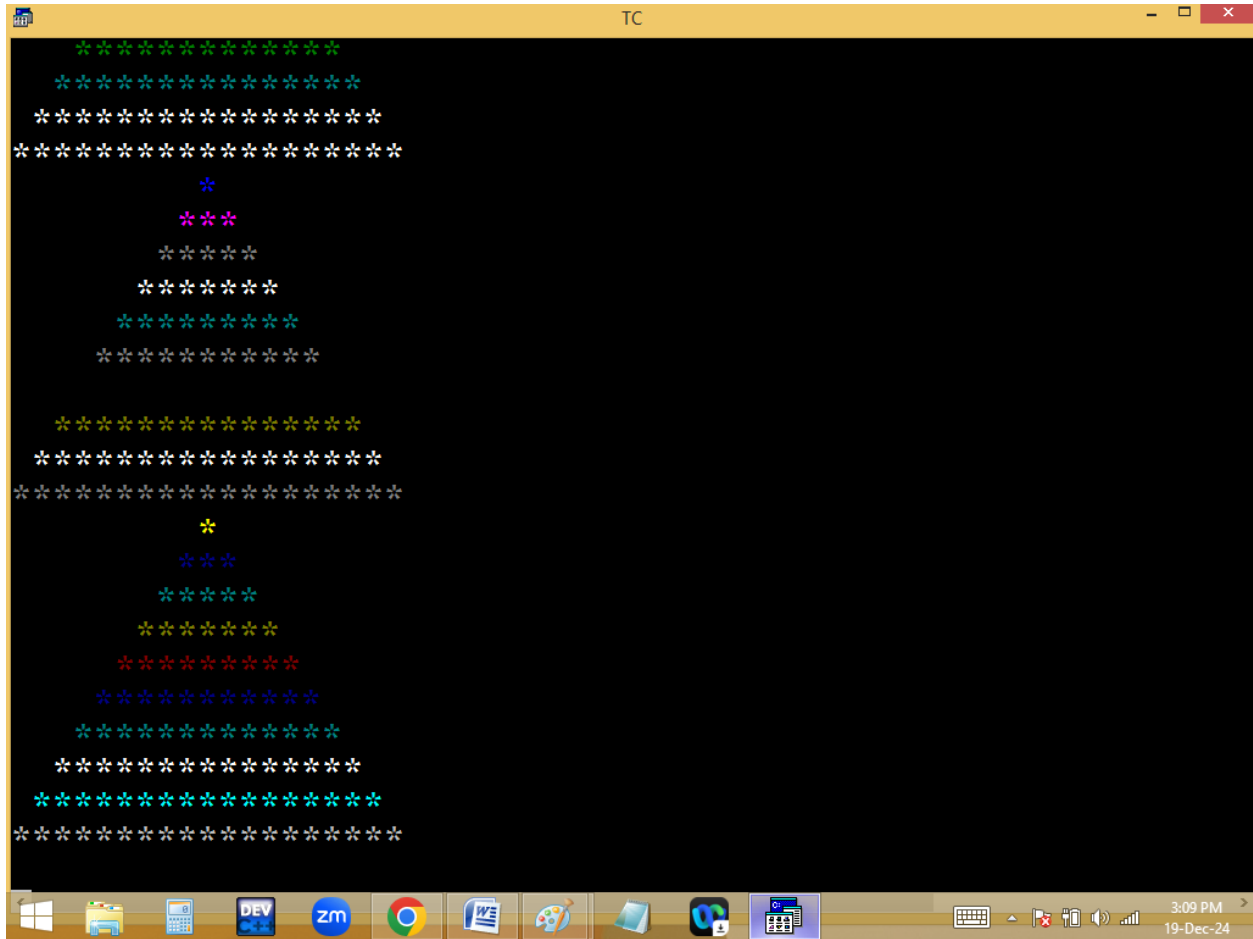

```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 1 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<stdlib.h>
void main()
{
int n,r,c,s;clrscr();
printf("Enter no of rows " );scanf("%d",&n);
while(!kbhit())
{
textcolor(random(16));
for(r=1 ;r<=n;r++)
{
for(s=1;s<=n-r;s++)printf(" ");
for(c=1;c<=2*r-1;c++)cprintf("*");
printf("\n");
}
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run


3:10 PM
19-Dec-24

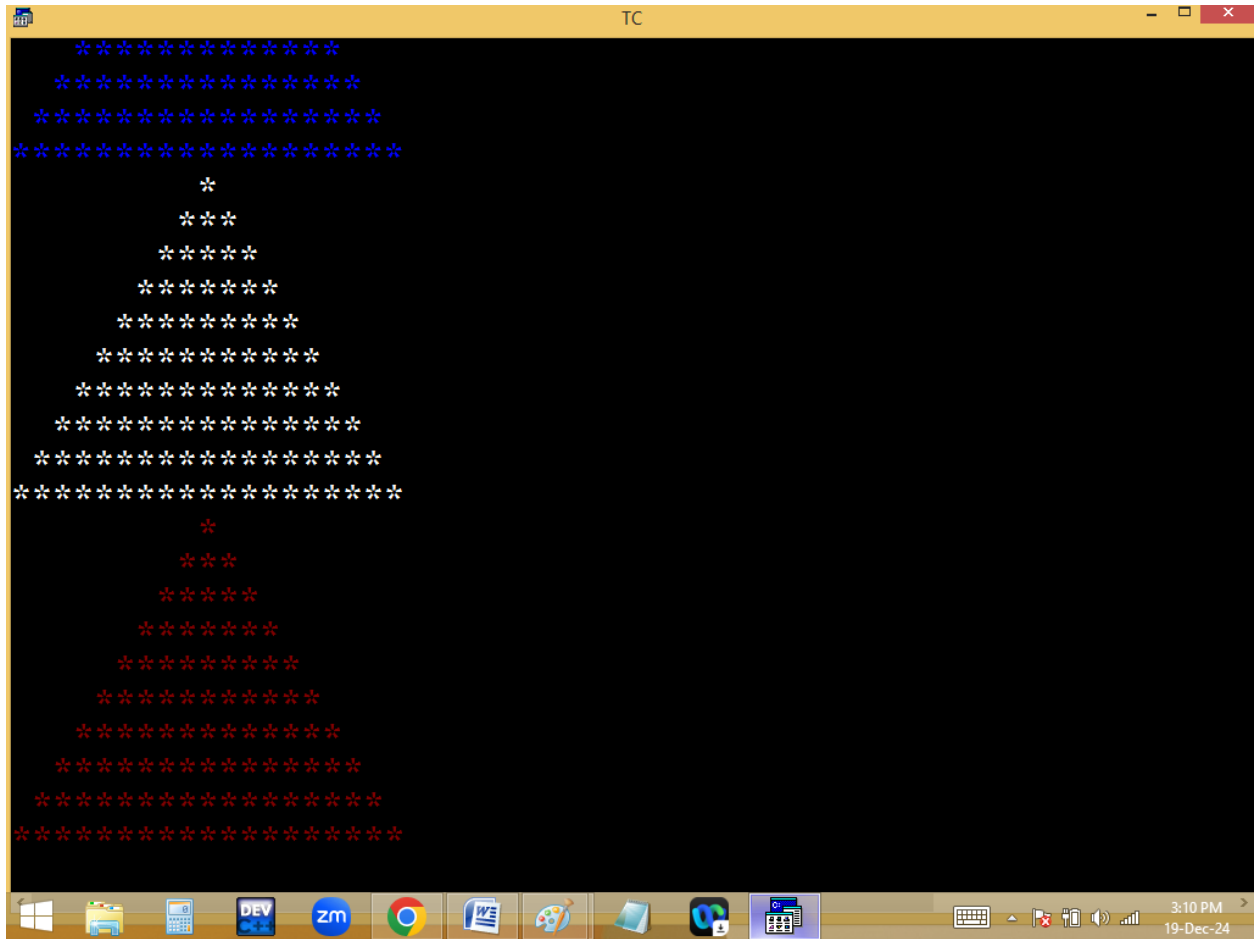

```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 19 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<stdlib.h>
void main()
{
int n,r,c,s;clrscr();
printf("Enter no of rows " );scanf("%d",&n);
while(!kbhit())
{
textcolor(LIGHTRED);
for(r=1 ;r<=n;r++)
{
for(s=1;s<=n-r;s++)printf(" ");
for(c=1;c<=2*r-1;c++)cprintf("*");
printf("\n");
}
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit


3:13 PM 19-Dec-24

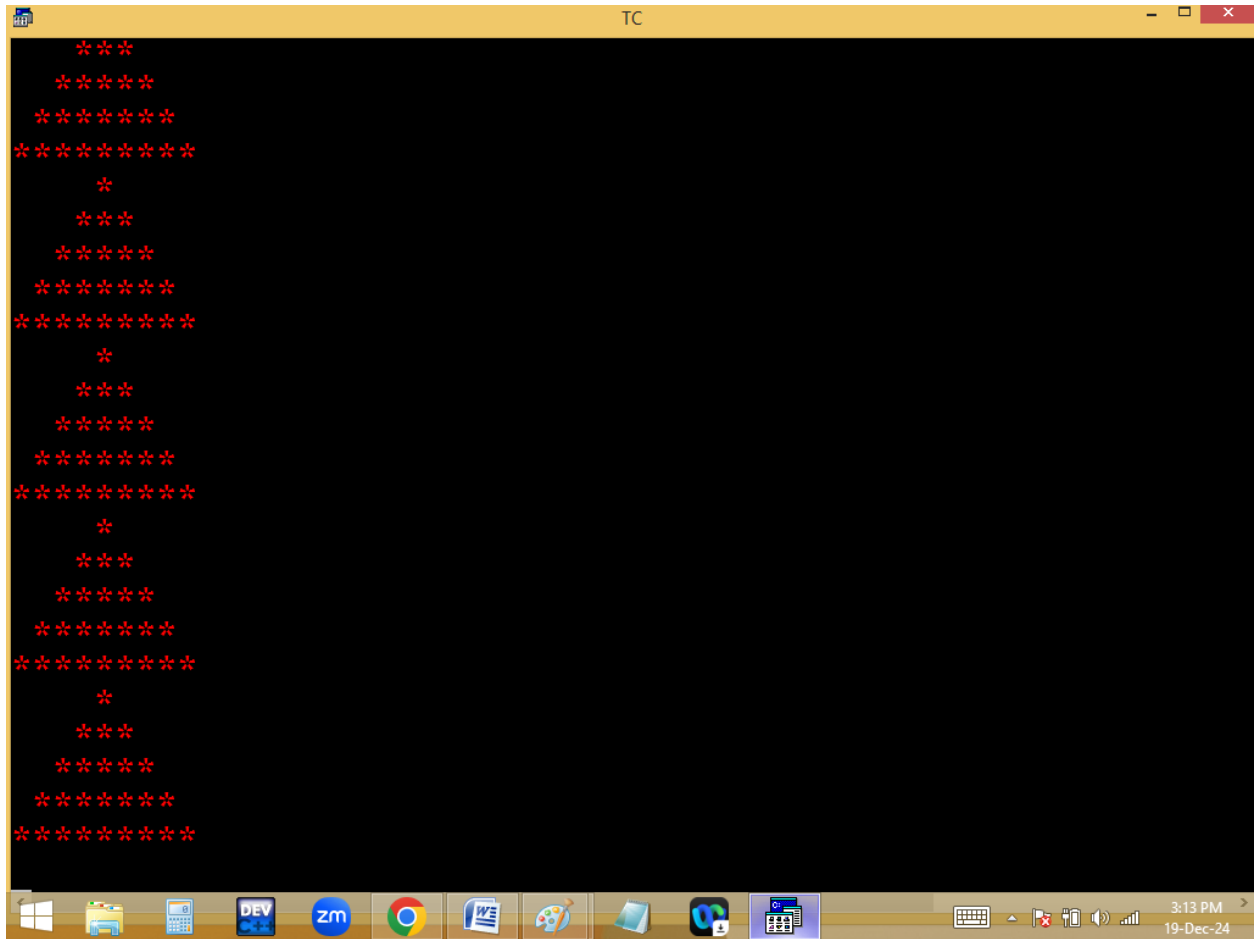


```
TC
File Edit Run Compile Project Options Debug
Line 11 Col 18 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<stdlib.h>
void main()
{
int n,r,c,s;clrscr();
printf("Enter no of rows " );scanf("%d",&n);
while(!kbhit())
{
textcolor(LIGHTRED);
for(r=n ;r>=1;r--)
{
for(s=1;s<=n-r;s++)printf(" ");
for(c=1;c<=2*r-1;c++)cprintf("*");
printf("\n");
}
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

3:14 PM 19-Dec-24

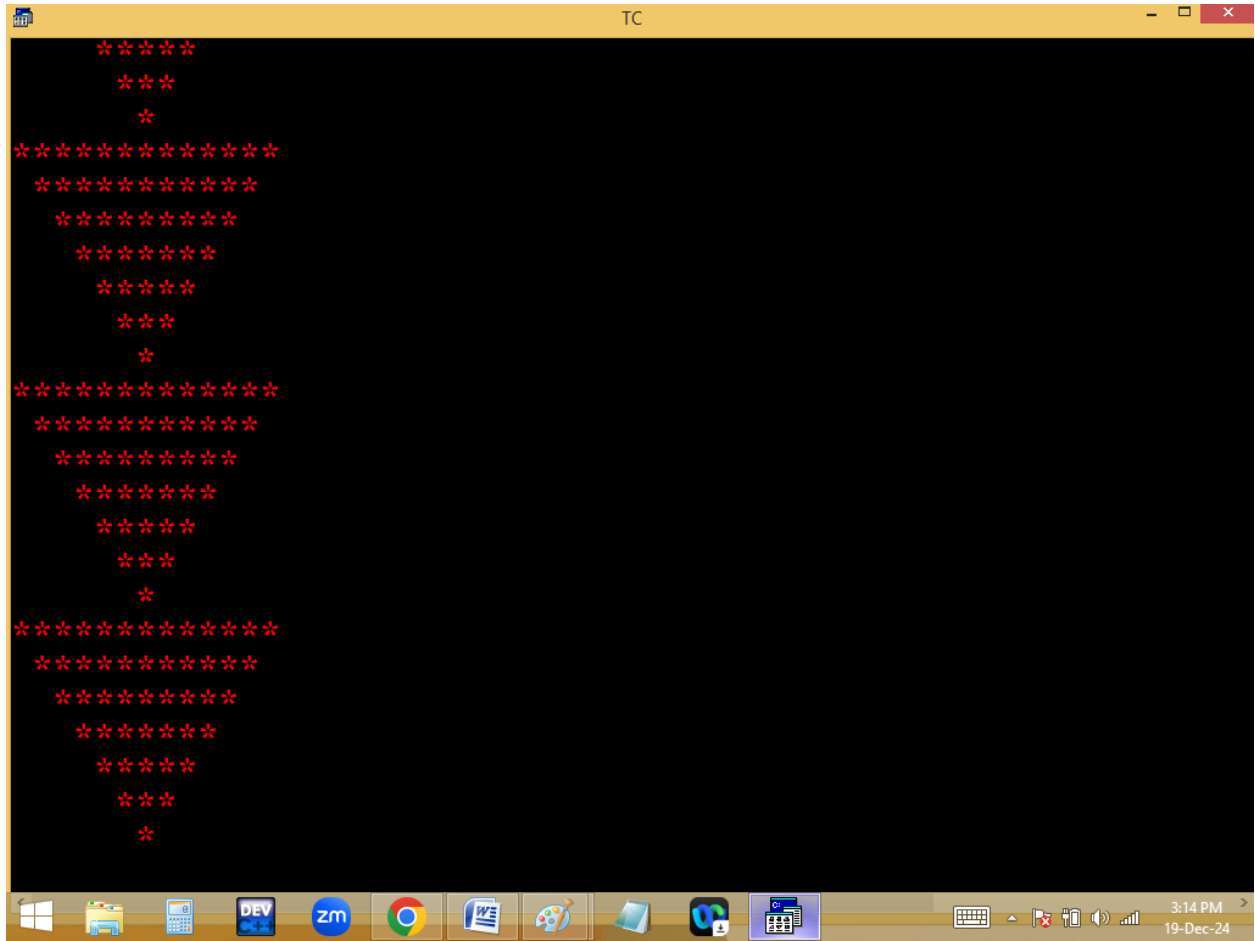


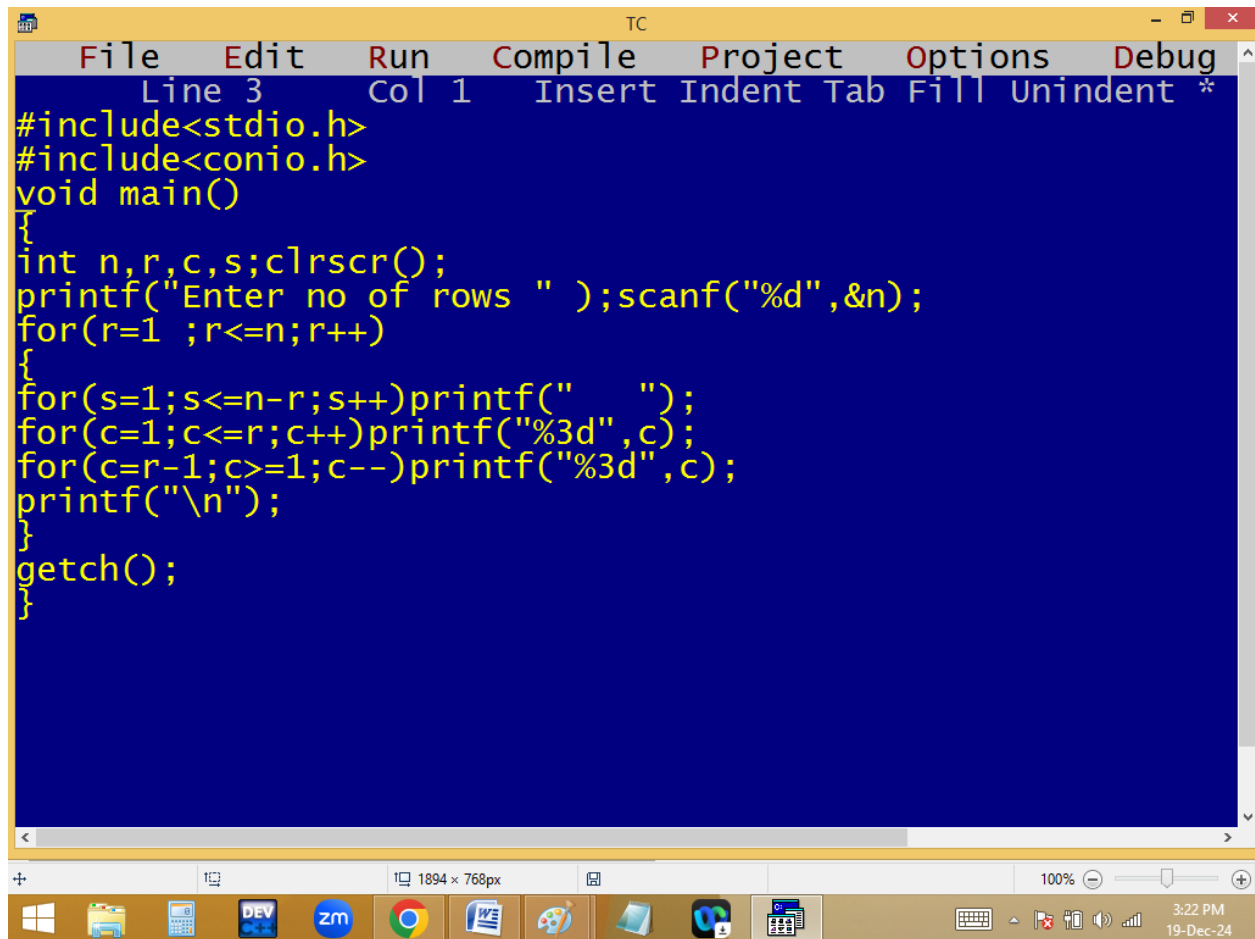


The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. Below the title bar is a menu bar with the following options: File, Edit, Run, Compile, Project, Options, and Debug. Under the "Edit" menu, there is a submenu with the options: Line 3, Col 1, Insert, Indent, Tab, Fill, Unindent, and *. The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int n,r,c,s;clrscr();
    printf("Enter no of rows " );scanf("%d",&n);
    for(r=1 ;r<=n;r++)
    {
        for(s=1;s<=n-r;s++)printf("  ");
        for(c=1;c<=r;c++)printf("%3d",c);
        for(c=r-1;c>=1;c--)printf("%3d",c);
        printf("\n");
    }
    getch();
}
```

At the bottom of the window, there is a status bar showing the cursor position "Line 3 Col 1", the window size "1894 x 768px", and the zoom level "100%". Below the IDE window is the Windows taskbar, which includes the Start button and several application icons: File Explorer, Calculator, DEV C++, Zoho Mail, Google Chrome, Microsoft Word, Paint, and a folder icon. The system tray on the right shows the time "3:22 PM" and the date "19-Dec-24".

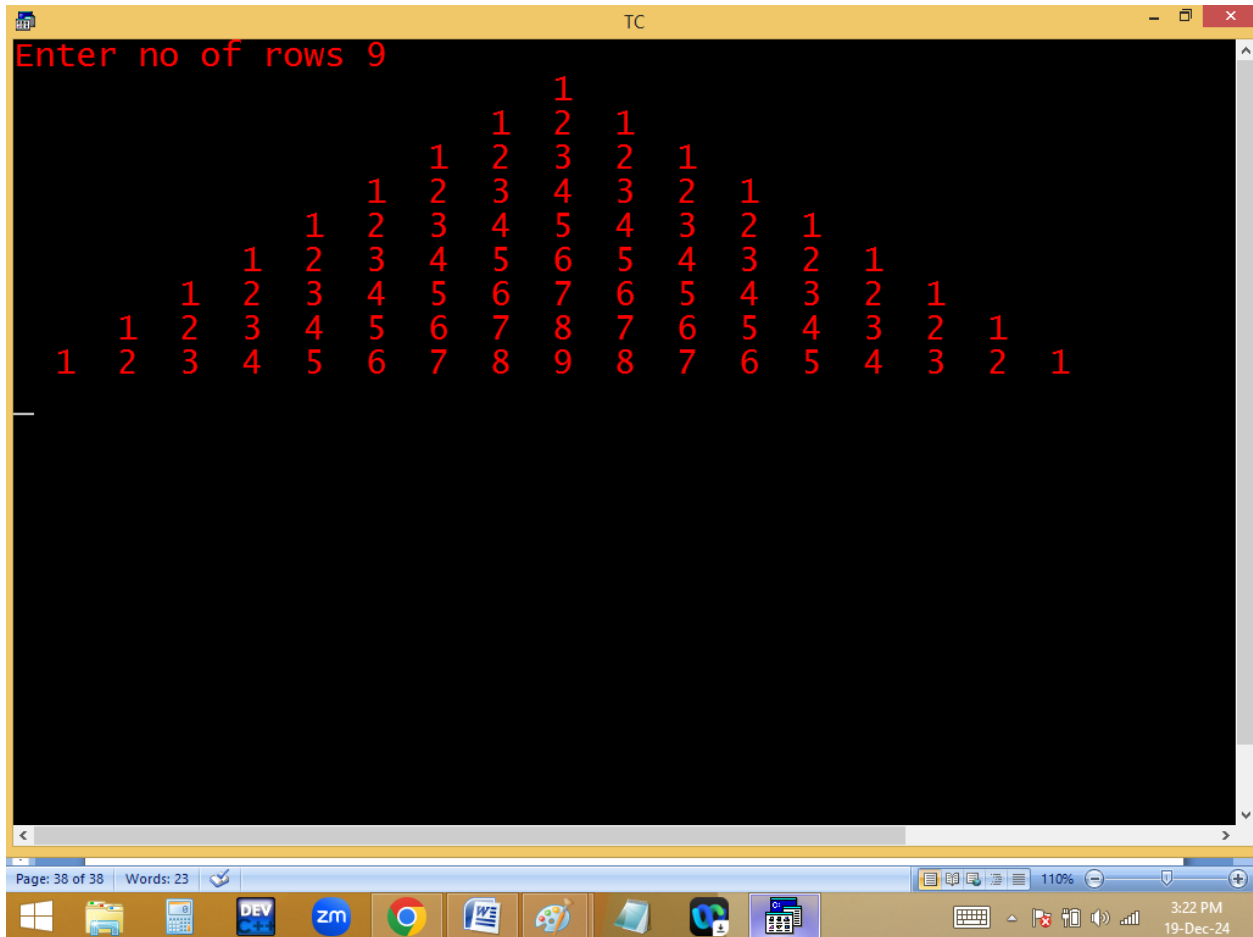

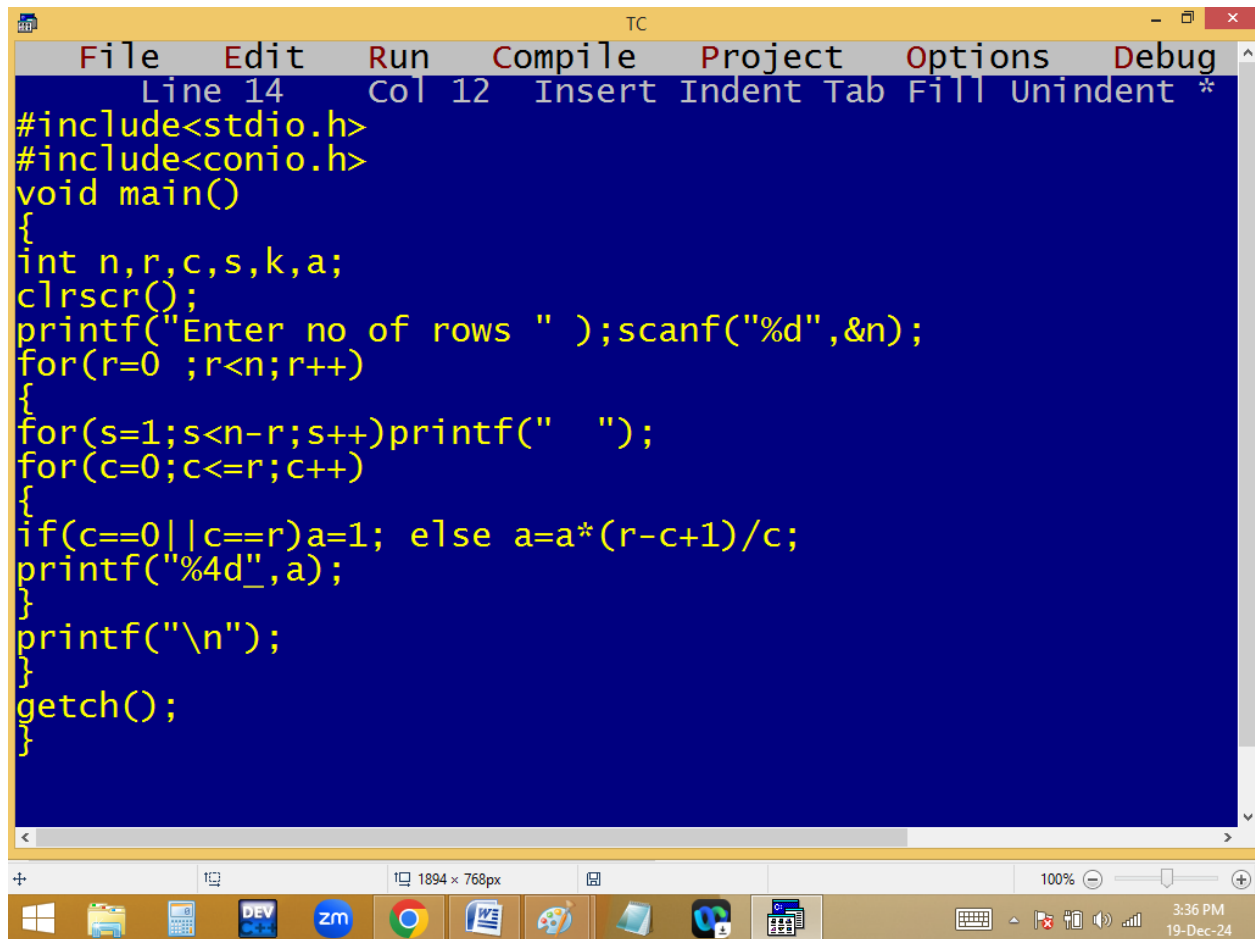

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 14", "Col 12", and lists editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and "*". The main text area has a dark blue background with yellow text. It contains a C program that calculates and prints Pascal's triangle for a given number of rows. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int n,r,c,s,k,a;
    clrscr();
    printf("Enter no of rows " );scanf("%d",&n);
    for(r=0 ;r<n;r++)
    {
        for(s=1;s<n-r;s++)printf(" ");
        for(c=0;c<=r;c++)
        {
            if(c==0||c==r)a=1; else a=a*(r-c+1)/c;
            printf("%4d_",a);
        }
        printf("\n");
    }
    getch();
}
```

The bottom of the image shows the Windows taskbar with various application icons (Windows Explorer, Calculator, DEV C++, Zm, Google Chrome, Word, Paint, etc.) and the system clock showing 3:36 PM on 19-Dec-24.

```

Enter no of rows 12

      1
     1 1
    1 2 1
   1 3 3 1
  1 4 6 4 1
 1 5 10 10 5 1
1 6 15 20 15 6 1
1 7 21 35 35 21 7 1
1 8 28 56 70 56 28 8 1
1 9 36 84 126 126 84 36 9 1
1 10 45 120 210 252 210 120 45 10 1
1 11 55 165 330 462 462 330 165 55 11 1

```

```


for( r=0; r<4;r++ )
{
for(s=1;s<n-r;s++) p(" ");
for(c=0;c<=r;c++)
{
if(c==0 || c==r) a=1;
else a=a*(r-c+1)/c;
p(a);
}
p("\n");
}


```

$$\frac{n}{4} - \frac{r}{0} = 4 \quad 3$$

$\frac{r}{0}$	$\frac{c}{0}$	$\frac{a}{1}$
1	0 1	1
2	0 2	$1 * (2-1+1)/1 = 2$
3	0 2 3	$1 * (3-1+1)/1 = 3$
		$3 * (3-2+1)/2 = 3$

PASCAL TRIANGLE




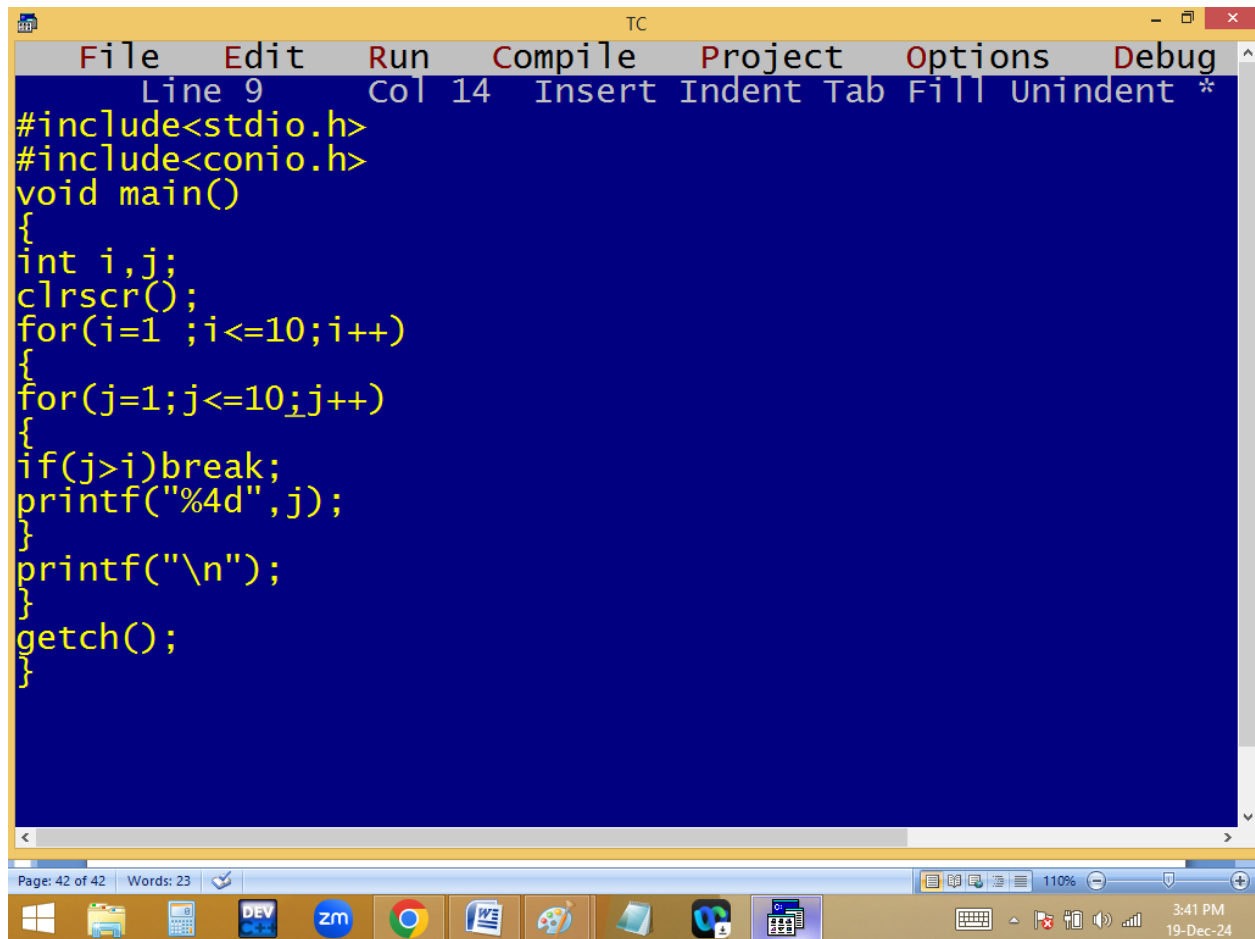


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 9", "Col 14", and lists editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and "*". The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i,j;
    clrscr();
    for(i=1 ;i<=10;i++)
    {
        for(j=1;j<=10;j++)
        {
            if(j>i)break;
            printf("%4d",j);
        }
        printf("\n");
    }
    getch();
}
```


At the bottom, there is a status bar showing "Page: 42 of 42" and "Words: 23". Below the IDE window is the Windows taskbar, which includes icons for Windows, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and other applications. The system clock in the bottom right corner shows "3:41 PM" and "19-Dec-24".

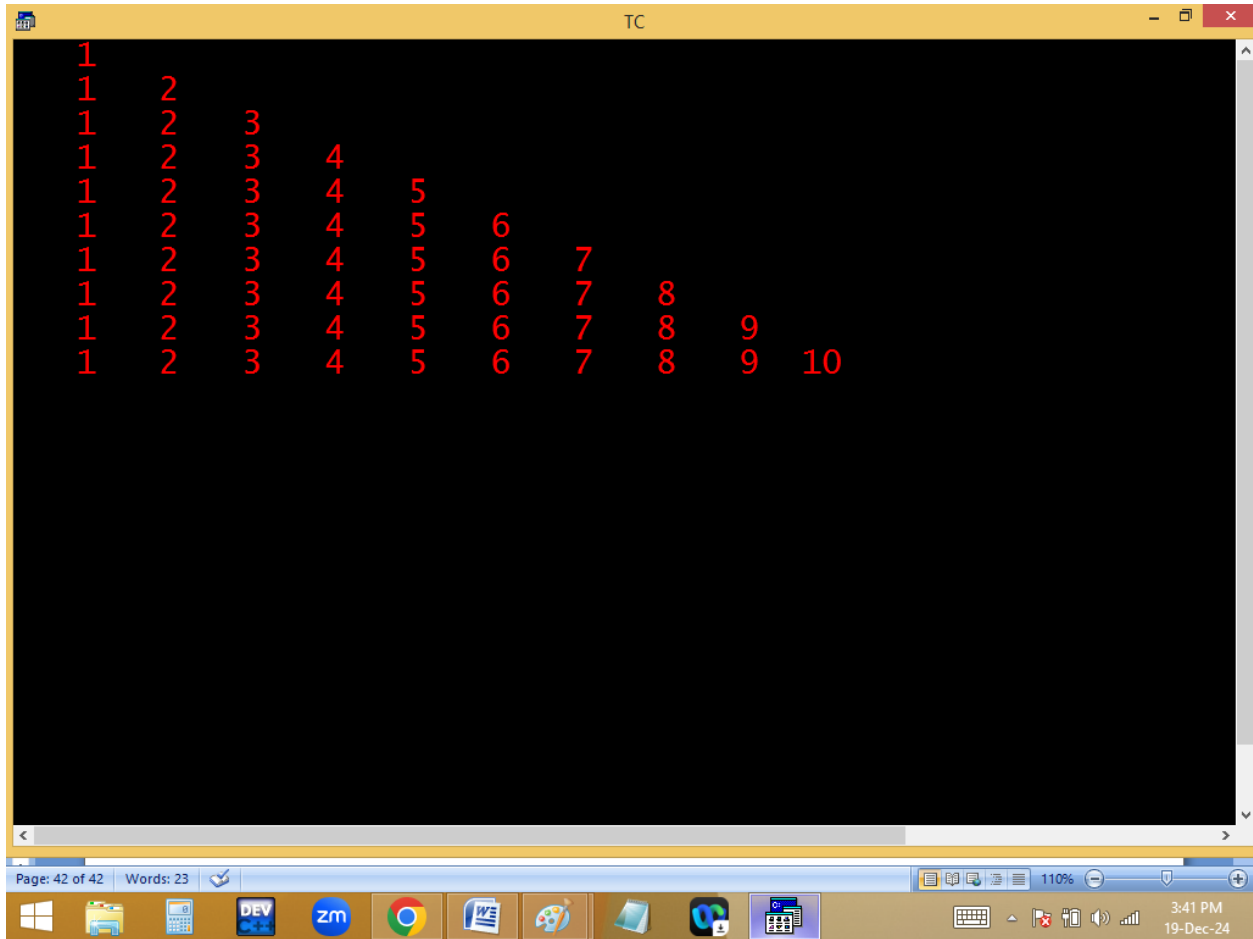


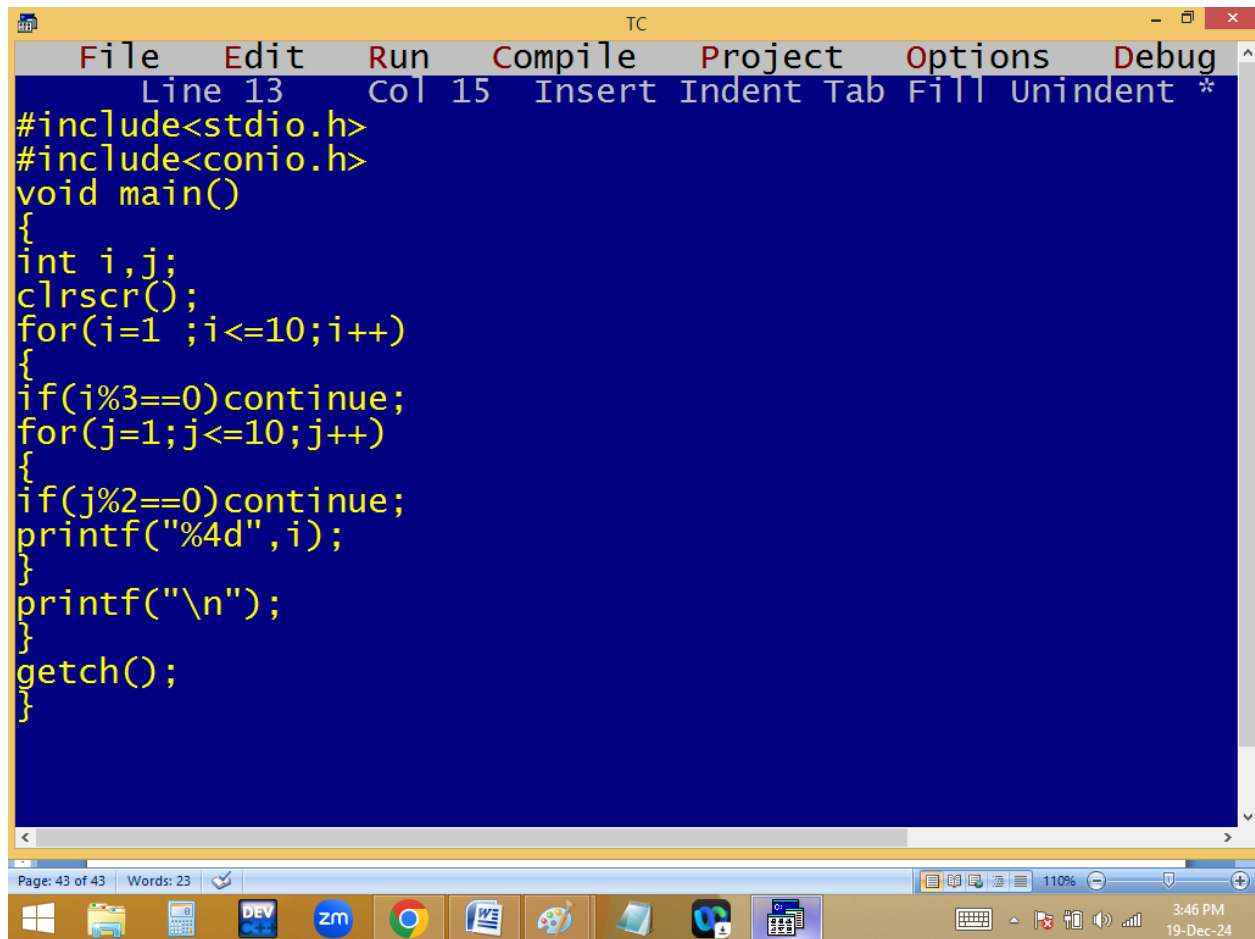

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 13", "Col 15", and lists editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and "*". The code is written in yellow text on a dark blue background. It includes headers for `stdio.h` and `conio.h`, and defines a `main` function. Inside `main`, it declares two integer variables `i` and `j`, clears the screen with `clrscr()`, and uses two nested `for` loops. The outer loop iterates `i` from 1 to 10, and the inner loop iterates `j` from 1 to 10. The program uses `continue` statements to skip iterations where `i` is divisible by 3 or `j` is divisible by 2. It prints the value of `i` in a 4-digit format using `printf("%4d", i);` and inserts a newline with `printf("\n");` after the inner loop. Finally, it calls `getch()` to wait for a key press. The bottom status bar shows "Page: 43 of 43" and "Words: 23". The Windows taskbar at the bottom contains icons for various applications and the system clock shows 3:46 PM on 19-Dec-24.


```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i,j;
    clrscr();
    for(i=1 ;i<=10;i++)
    {
        if(i%3==0)continue;
        for(j=1;j<=10;j++)
        {
            if(j%2==0)continue;
            printf("%4d",i);
        }
        printf("\n");
    }
    getch();
}
```

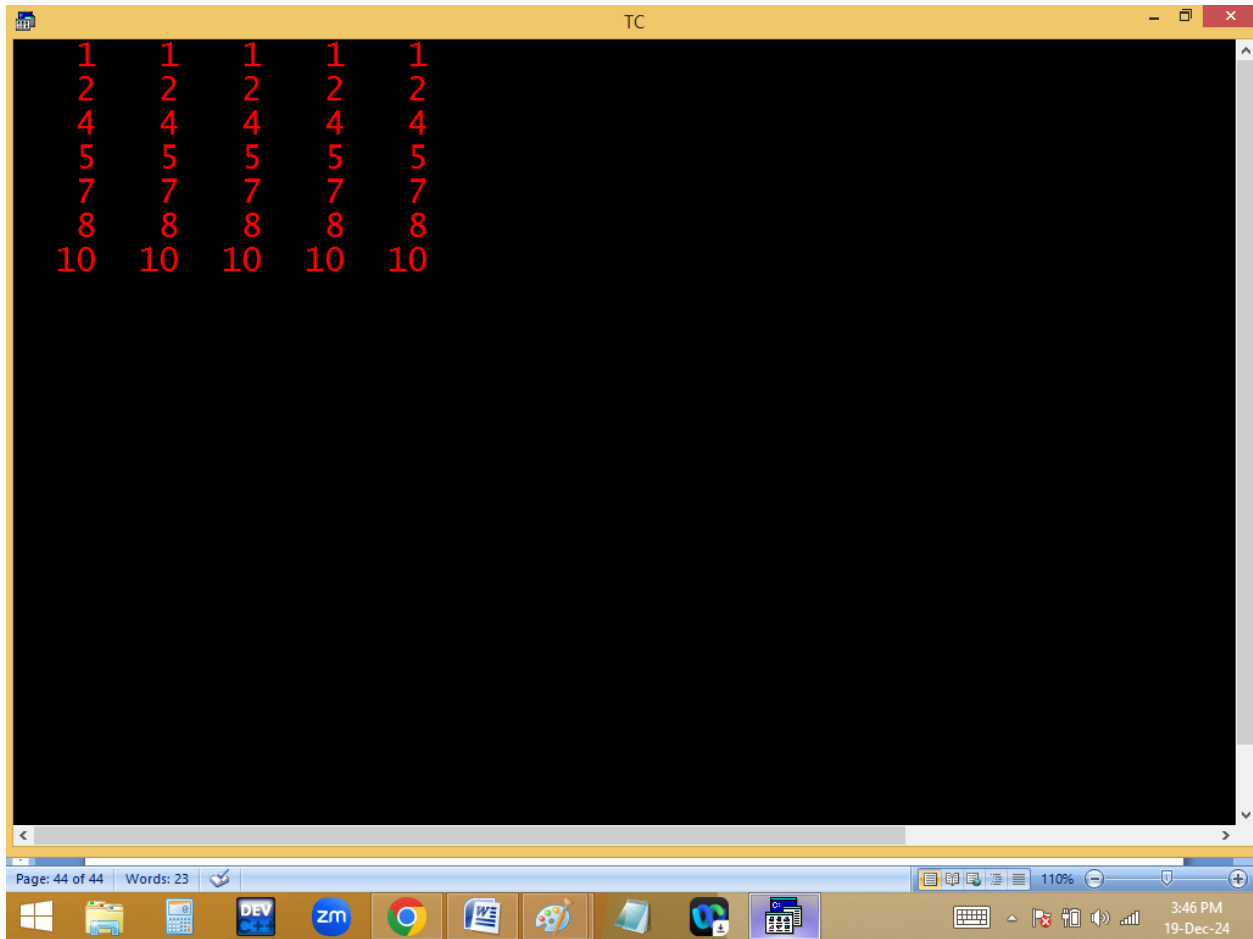

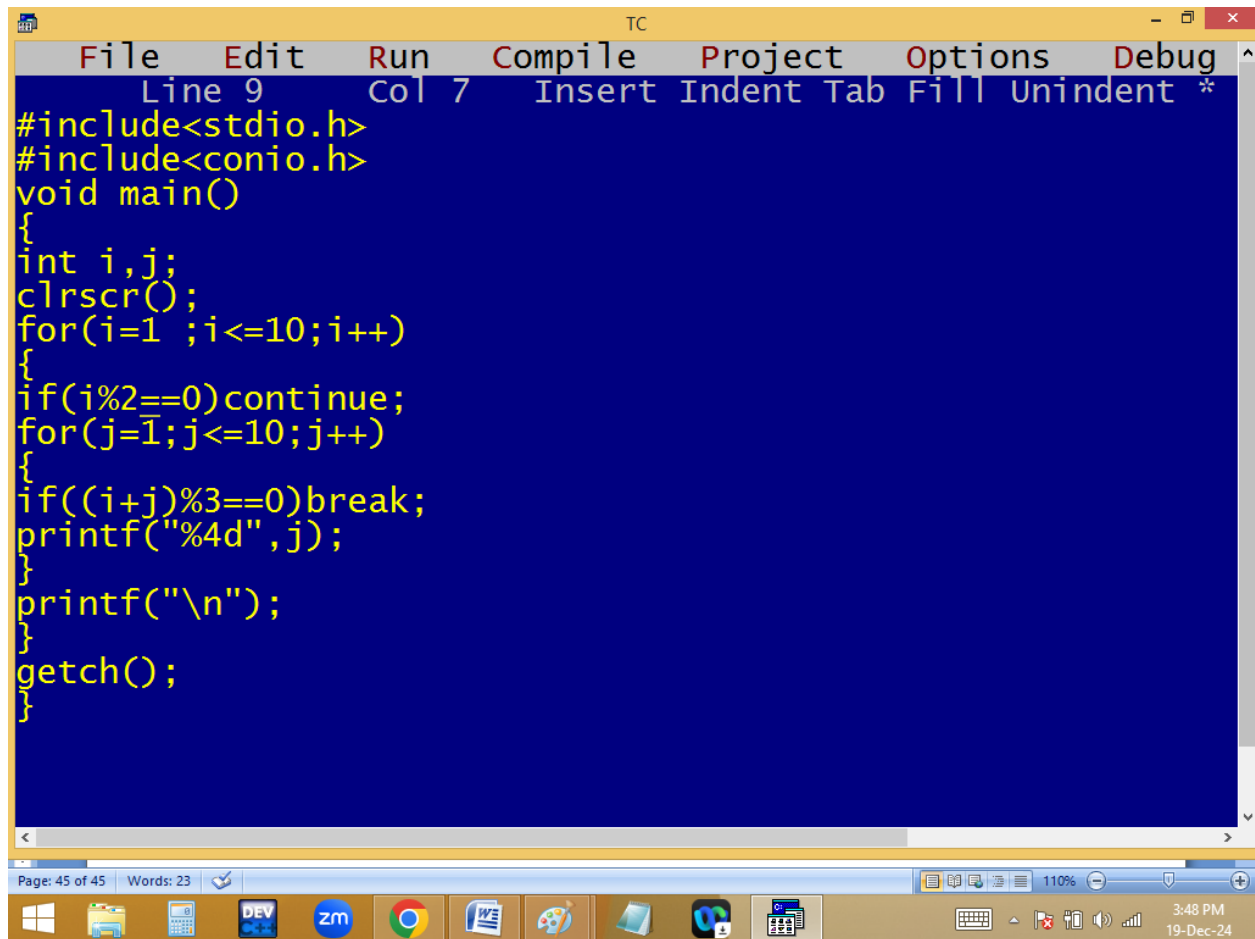

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 9", "Col 7", and "Insert Indent Tab Fill Unindent *". The code is written in yellow text on a dark blue background. It includes headers for `stdio.h` and `conio.h`, and defines a `main` function. The function declares two integer variables, `i` and `j`, and calls `clrscr()` to clear the screen. It then enters a nested loop structure: an outer loop for `i` from 1 to 10, and an inner loop for `j` from 1 to 10. Inside the inner loop, there is a conditional statement `if((i+j)%3==0)break;` which breaks the inner loop if the sum of `i` and `j` is divisible by 3. The program prints the value of `j` using `printf("%4d",j);` and a newline character using `printf("\n");`. Finally, it calls `getch()` to wait for a key press before exiting. The bottom status bar shows "Page: 45 of 45" and "Words: 23". The Windows taskbar at the bottom displays various application icons, including File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and the Start menu. The system clock shows the time as 3:48 PM on 19-Dec-24.

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i,j;
clrscr();
for(i=1 ;i<=10;i++)
{
if(i%2==0)continue;
for(j=1;j<=10;j++)
{
if((i+j)%3==0)break;
printf("%4d",j);
}
printf("\n");
}
getch();
}
```

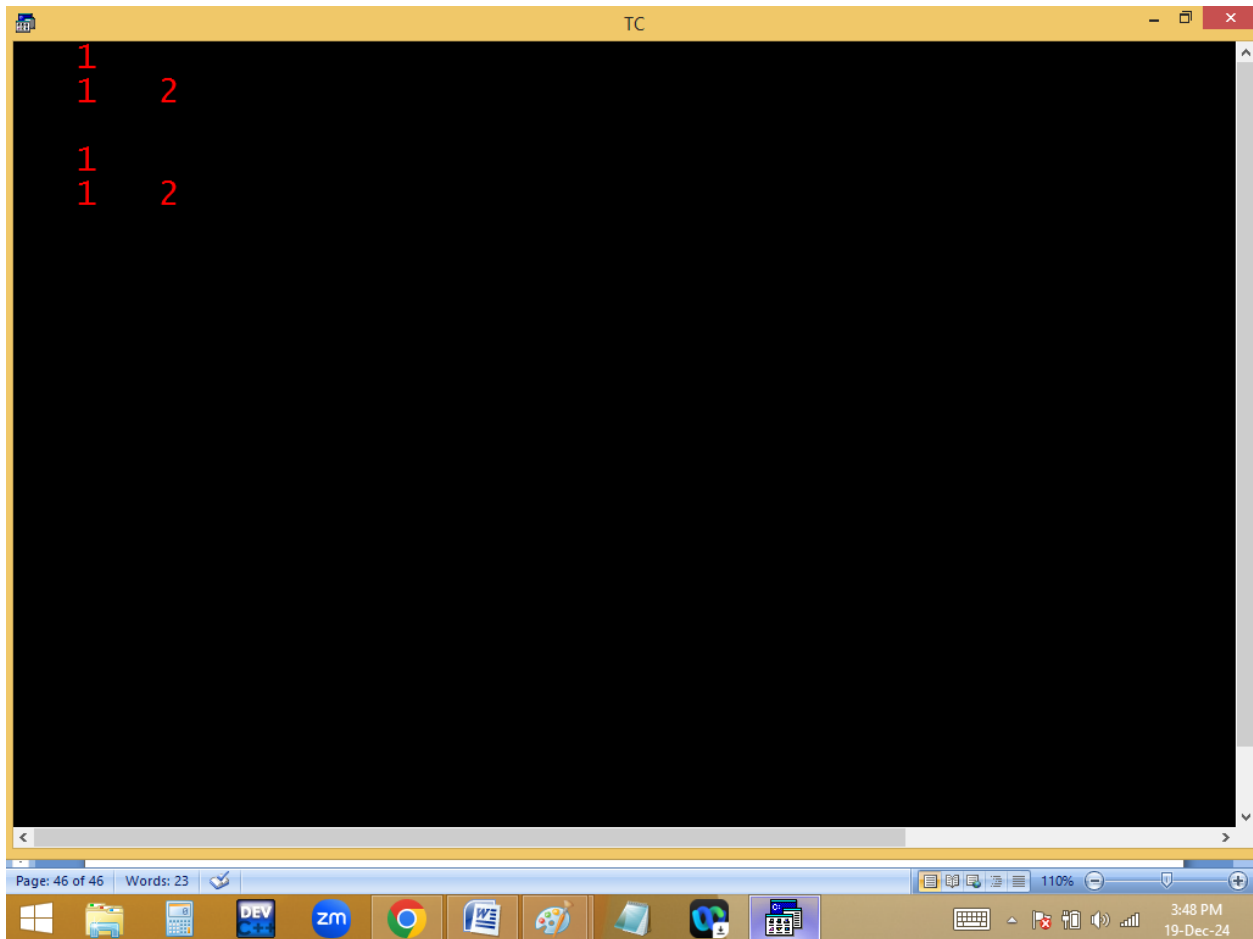

$$\begin{array}{rcl}
 1 & & \\
 3 & & \\
 5 \checkmark & & \\
 7 & & \\
 9 & &
 \end{array}$$

$$\begin{array}{rcl}
 \cancel{5+1} & & \\
 \cancel{1} & & \\
 \cancel{1} & & \\
 \cancel{1} & & \\
 \cancel{1} & & \\
 \cancel{1} & & \\
 \cancel{1} & & \\
 \cancel{1} & & \\
 \cancel{1} & & \\
 \cancel{1} & &
 \end{array}$$

$$\begin{array}{rcl}
 7+1=8 & & 1 \checkmark \\
 7+2=9 & & 1 \ 2 \\
 9+1=10 & & 1 \ 2 \\
 2=11 & & \\
 1=2 \times 3=2 & & 1 \checkmark \\
 2=3 \times 3=0 & & X \\
 1=4 \times 3=1 & & 1 \ 2 \\
 2=5 & & \\
 3=6 & &
 \end{array}$$