




Finding array size:

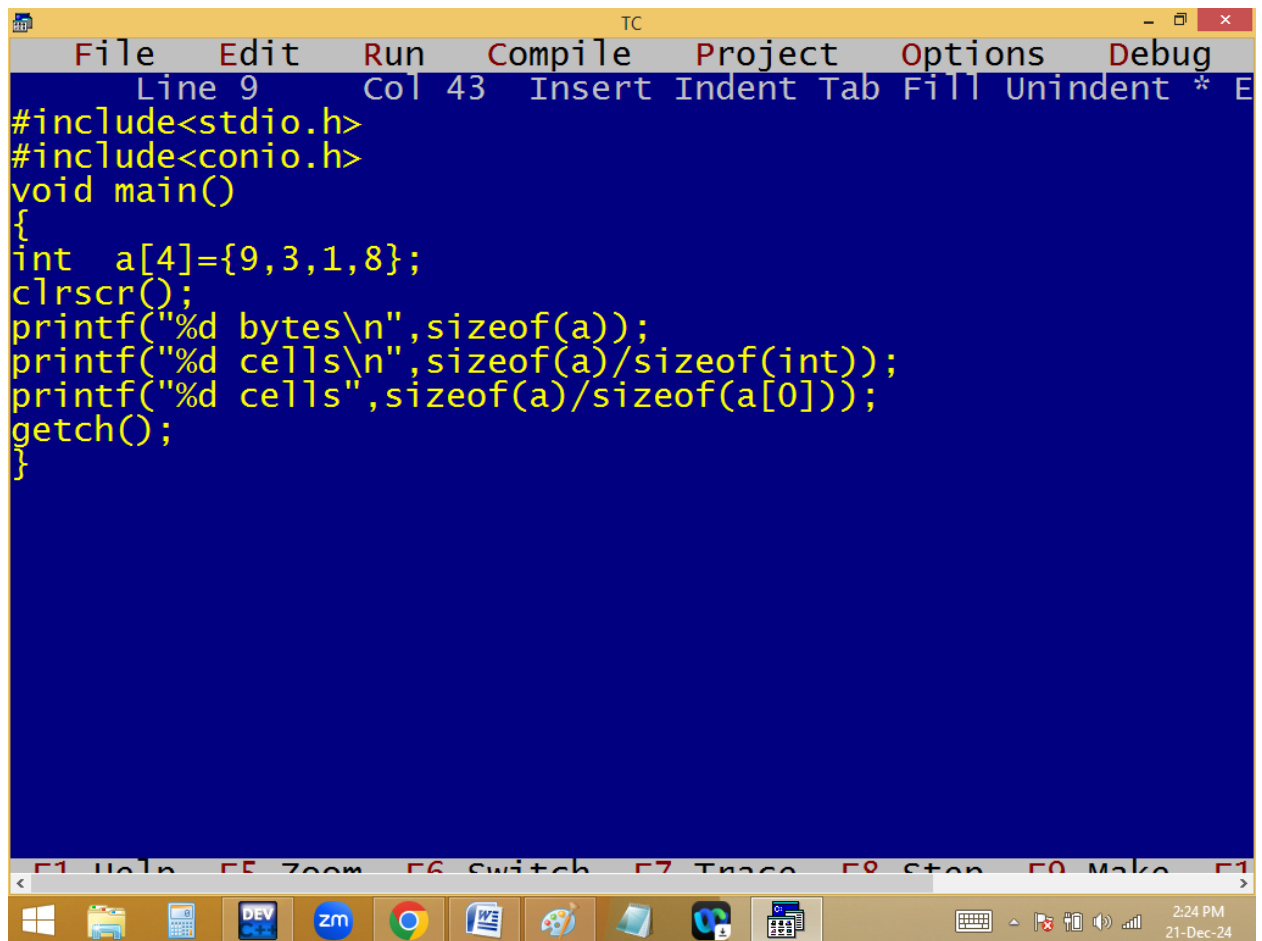


```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 43 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]={9,3,1,8};
clrscr();
printf("%d bytes\n",sizeof(a));
printf("%d cells\n",sizeof(a)/sizeof(int));
printf("%d cells",sizeof(a)/sizeof(a[0]));
getch();
}

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

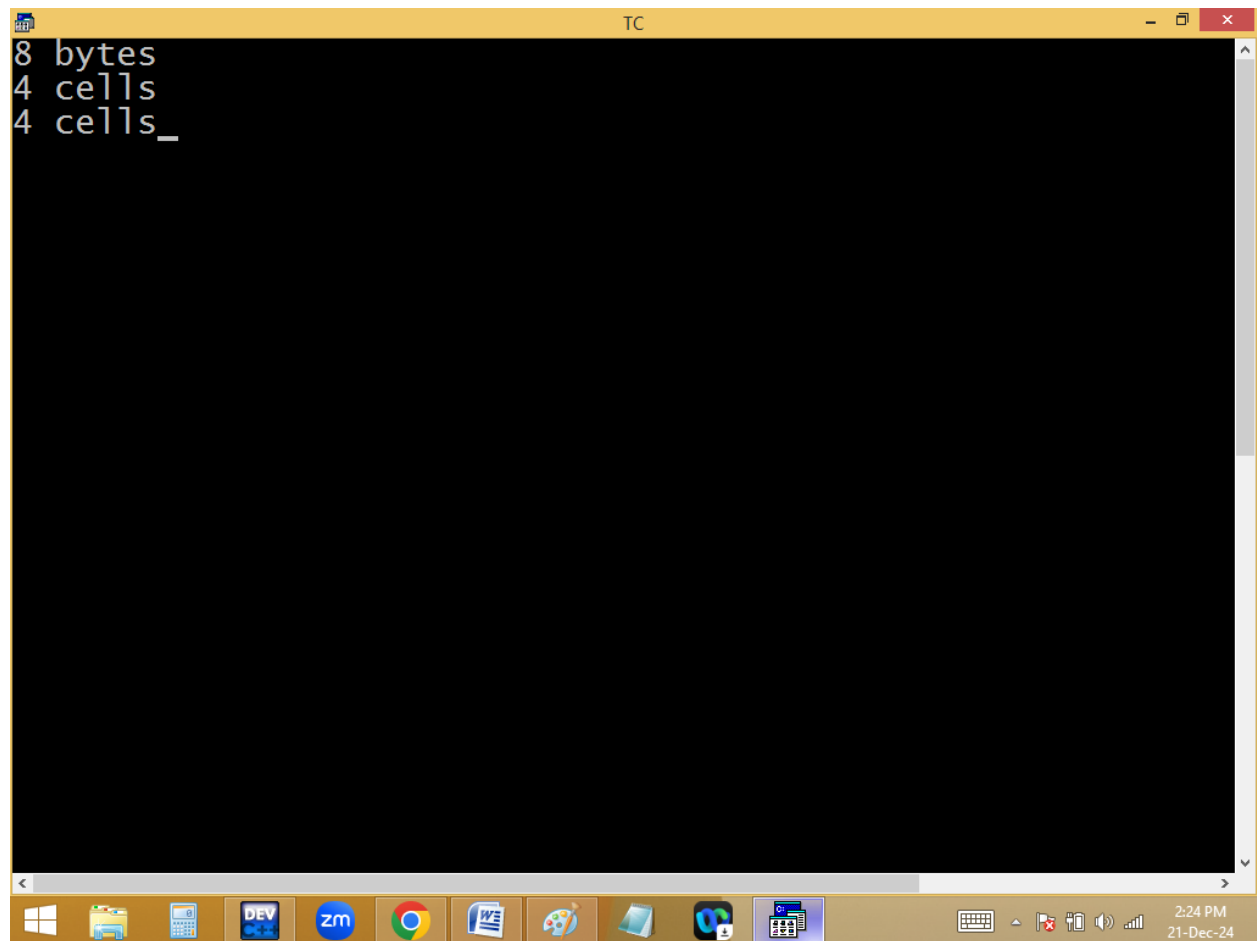


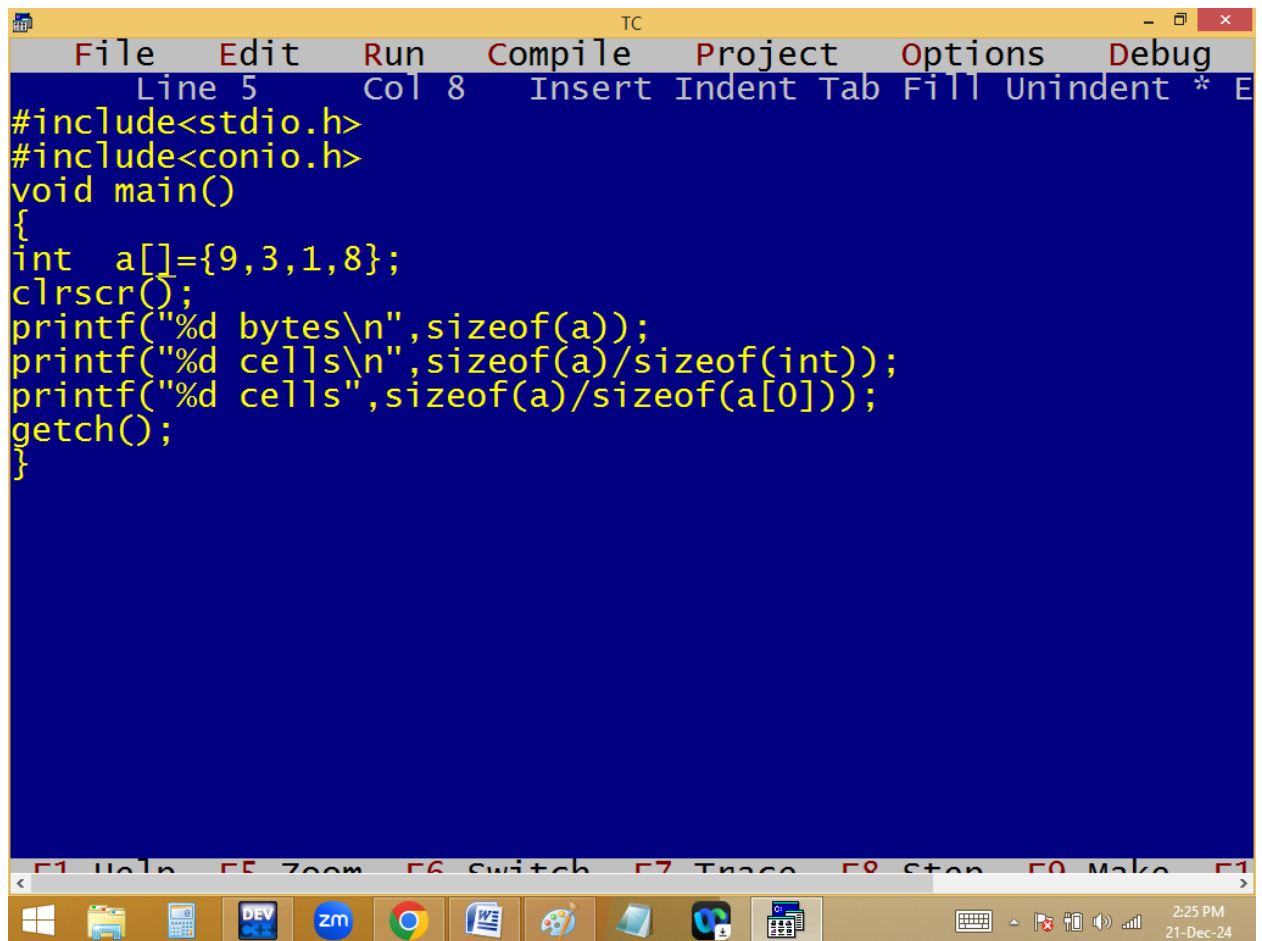

```
TC
File Edit Run Compile Project Options Debug
Line 5 Col 8 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a[]={9,3,1,8};
clrscr();
printf("%d bytes\n",sizeof(a));
printf("%d cells\n",sizeof(a)/sizeof(int));
printf("%d cells",sizeof(a)/sizeof(a[0]));
getch();
}
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

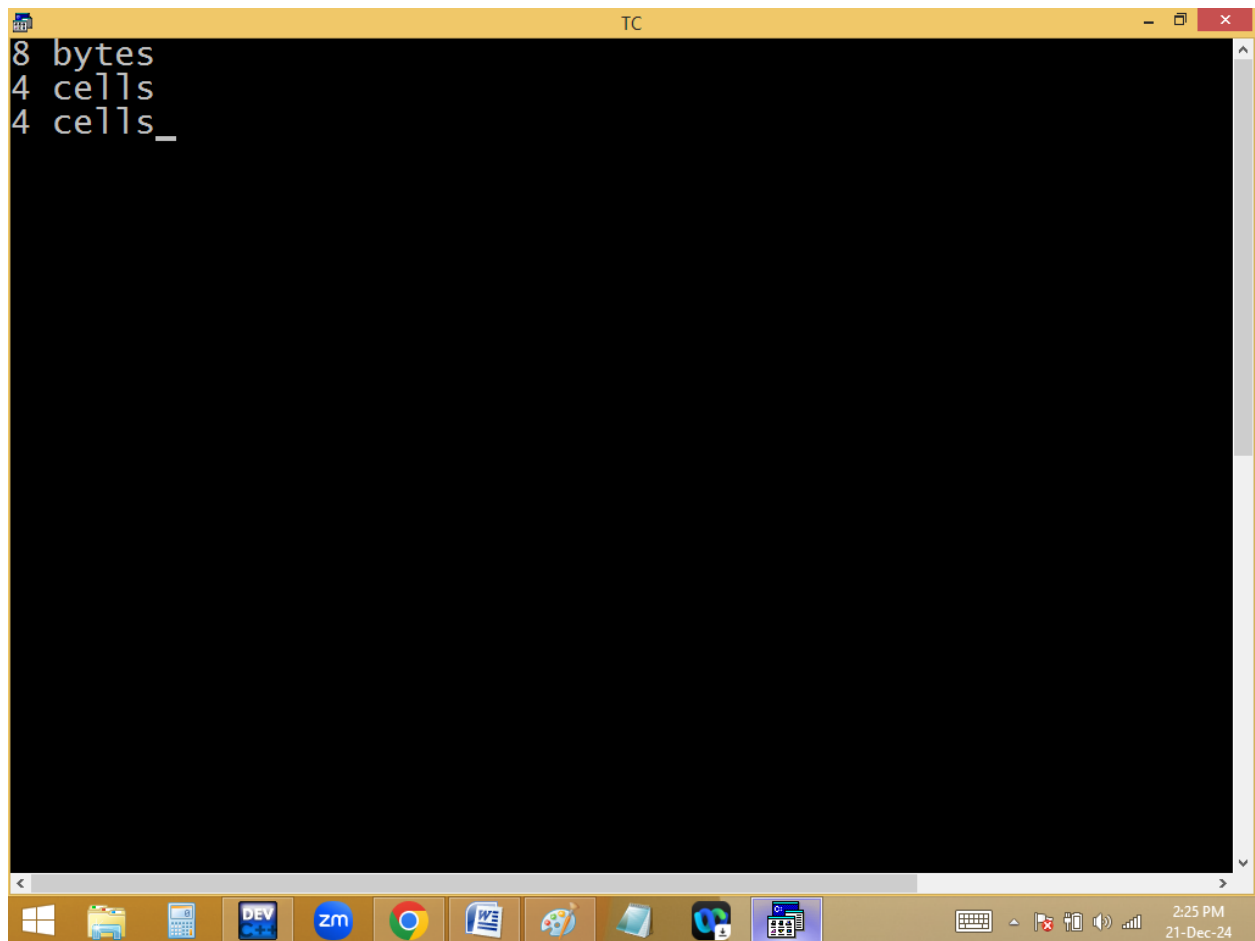


Finding array address:

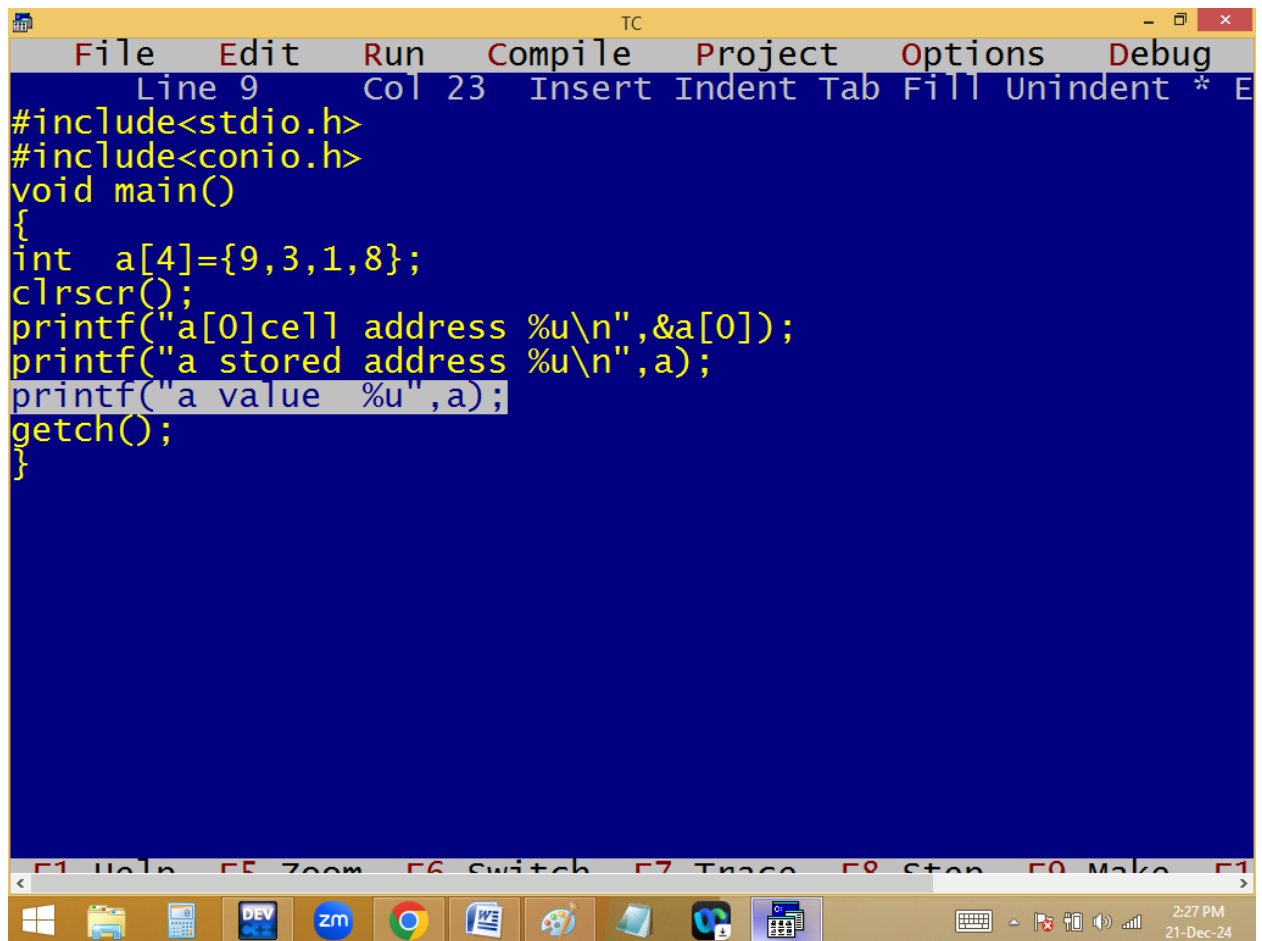


```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 23 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]={9,3,1,8};
clrscr();
printf("a[0]cell address %u\n",&a[0]);
printf("a stored address %u\n",a);
printf("a value %u",a);
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

2:27 PM
21-Dec-24

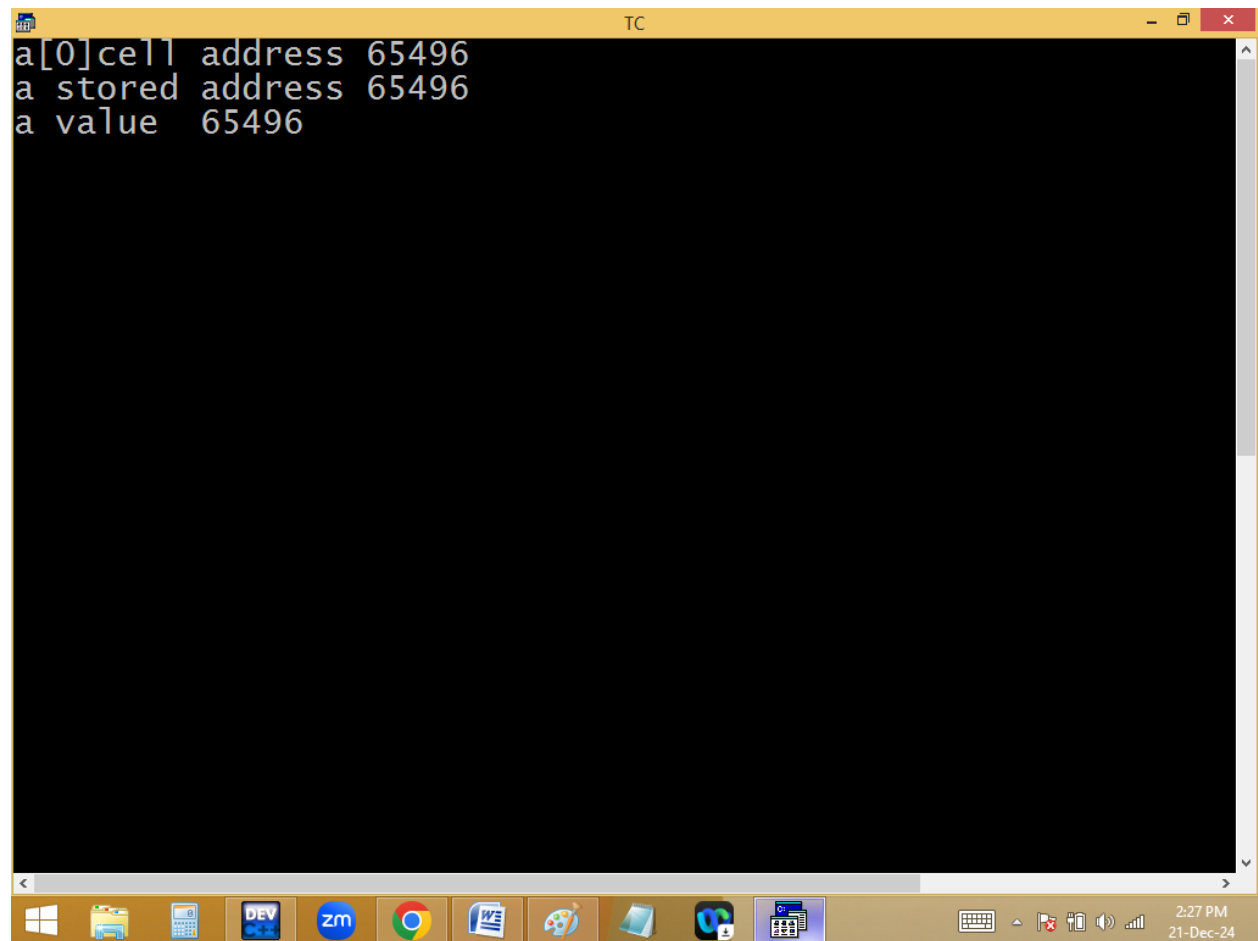

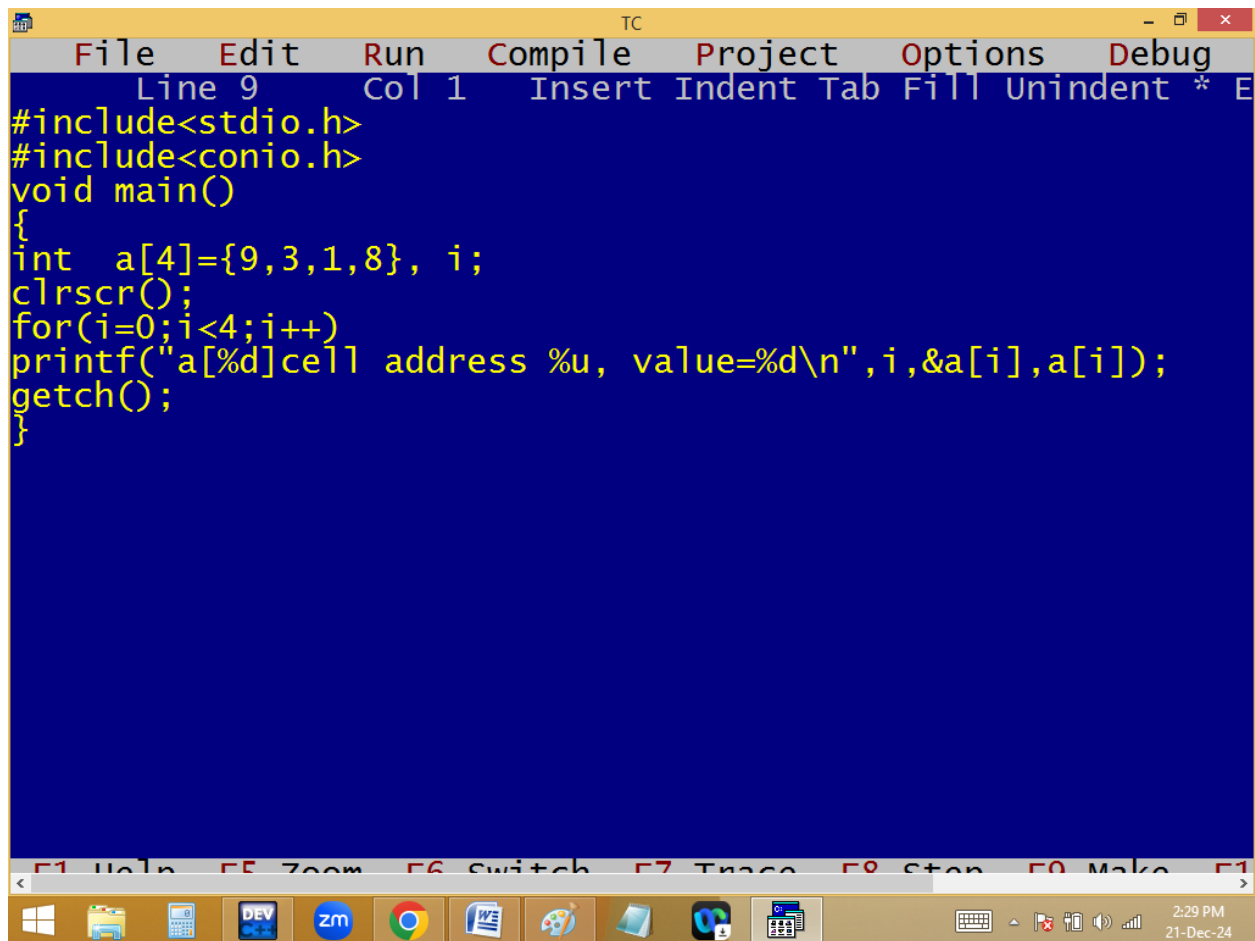



```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 1 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]={9,3,1,8}, i;
clrscr();
for(i=0;i<4;i++)
printf("a[%d]cell address %u, value=%d\n",i,&a[i],a[i]);
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

2:29 PM
21-Dec-24


```
TC
a[0]cell address 65496, value=9
a[1]cell address 65498, value=3
a[2]cell address 65500, value=1
a[3]cell address 65502, value=8
```

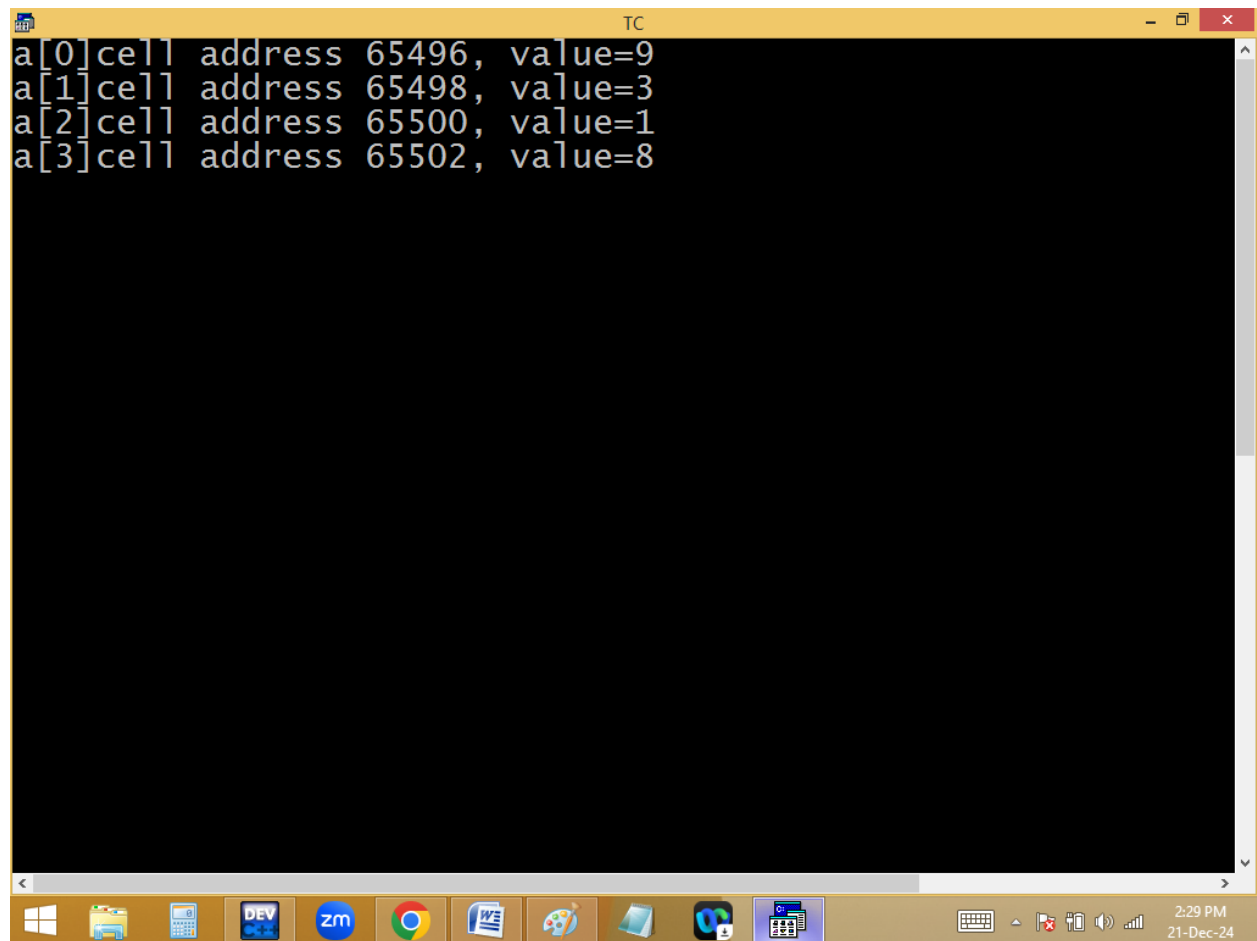

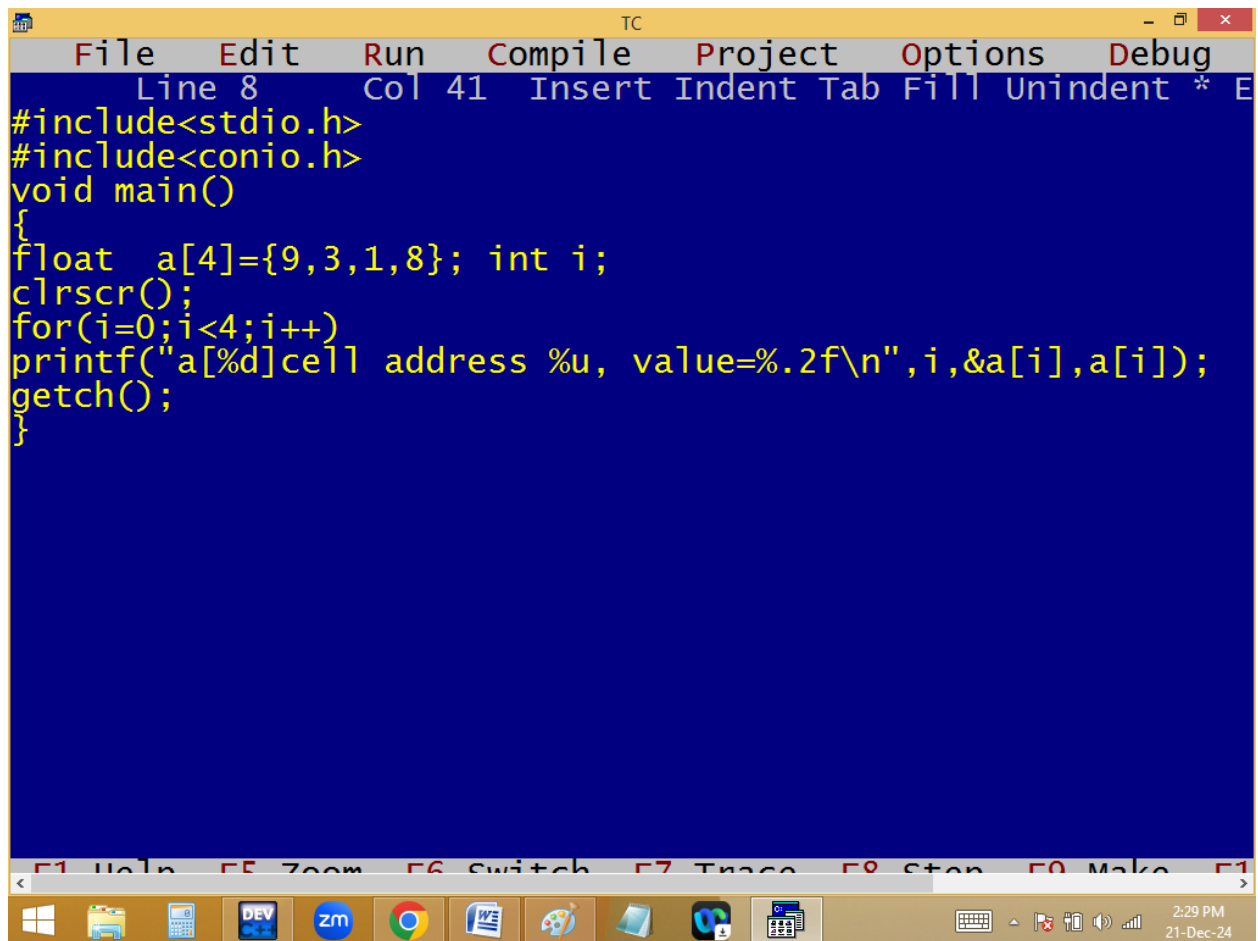



```
TC
File Edit Run Compile Project Options Debug
Line 8 Col 41 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
float a[4]={9,3,1,8}; int i;
clrscr();
for(i=0;i<4;i++)
printf("a[%d]cell address %u, value=%.2f\n",i,&a[i],a[i]);
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

2:29 PM 21-Dec-24

```
TC
a[0]cell address 65488, value=9.00
a[1]cell address 65492, value=3.00
a[2]cell address 65496, value=1.00
a[3]cell address 65500, value=8.00
```

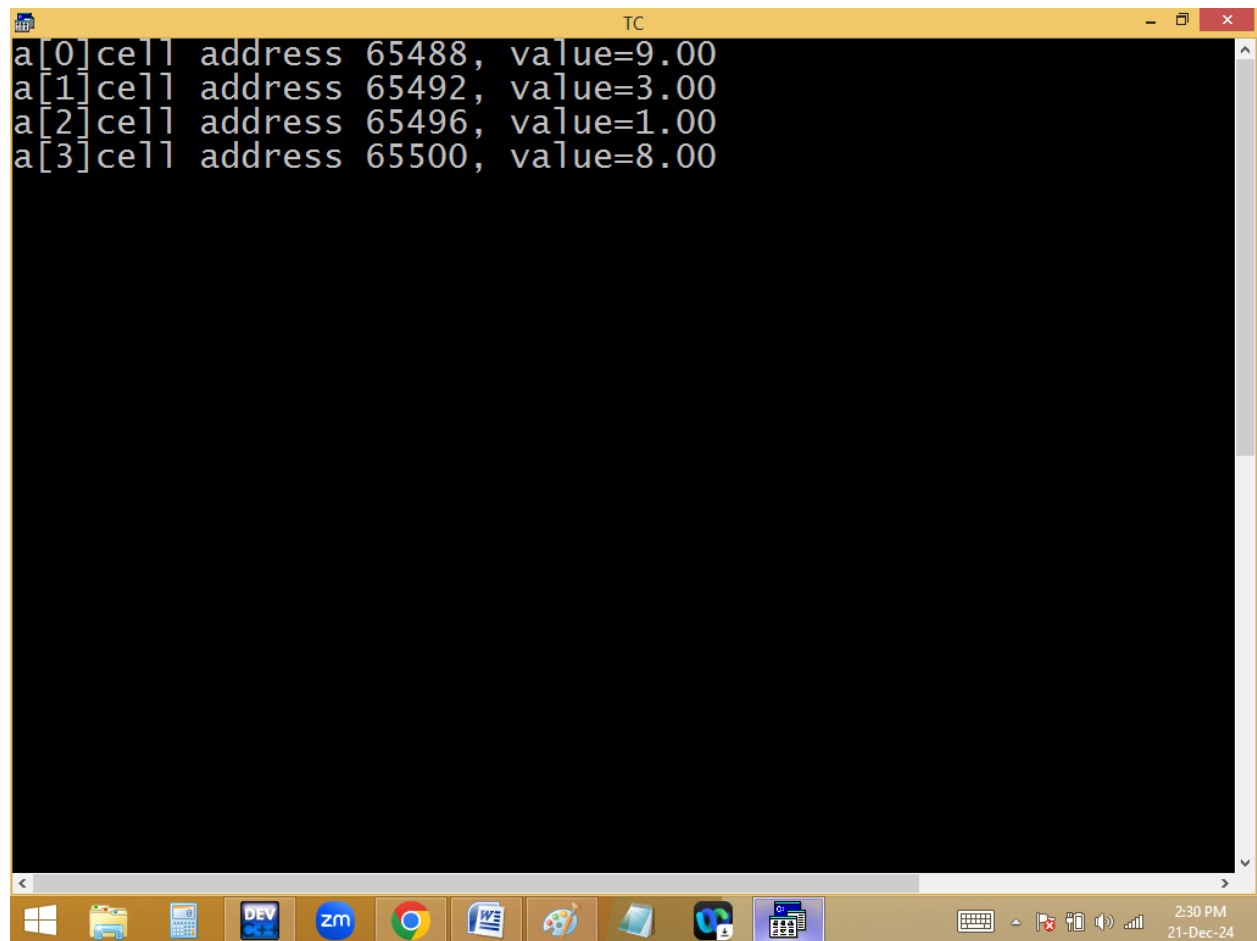

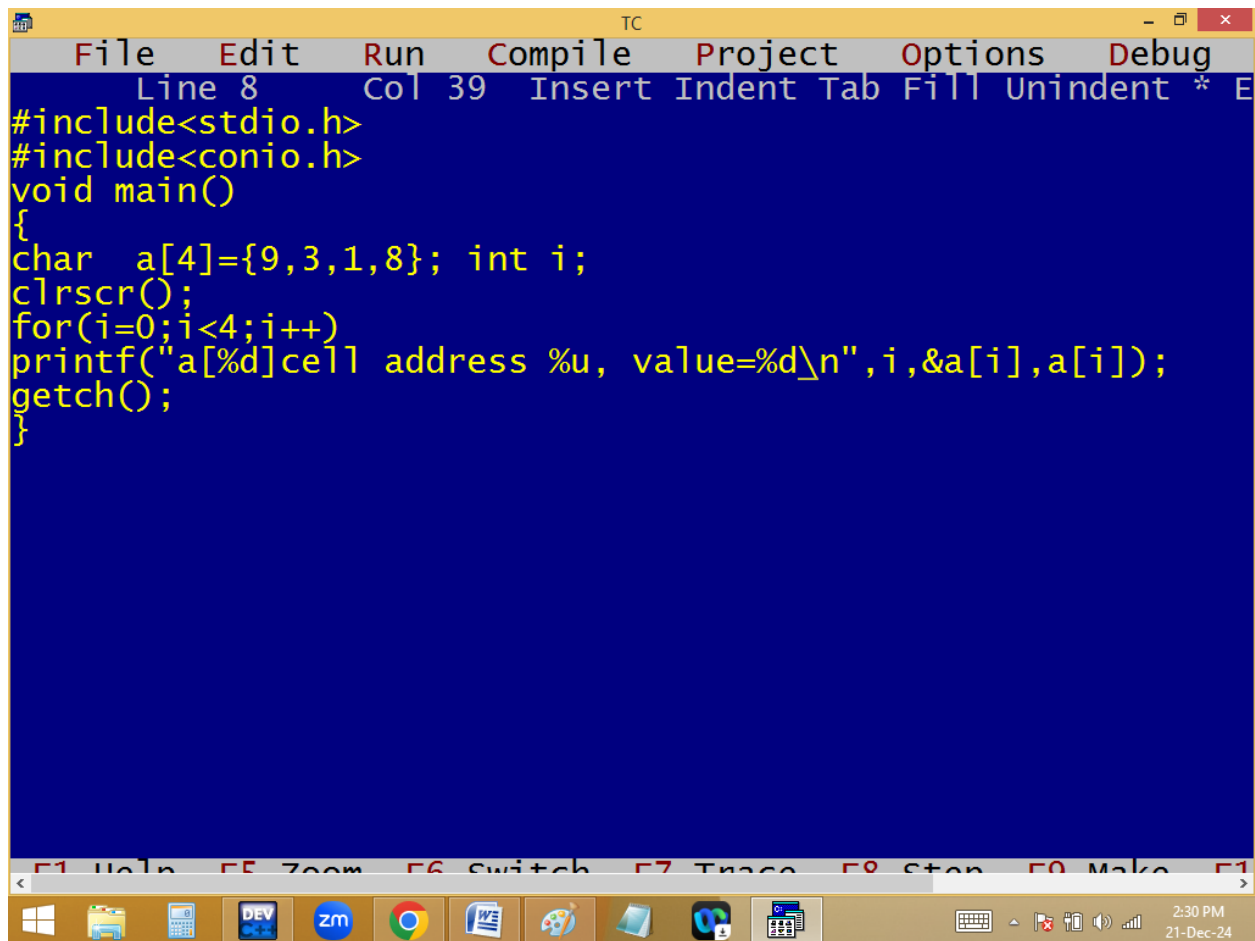


```
TC
File Edit Run Compile Project Options Debug
Line 8 Col 39 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char a[4]={9,3,1,8}; int i;
clrscr();
for(i=0;i<4;i++)
printf("a[%d]cell address %u, value=%d\n",i,&a[i],a[i]);
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

2:30 PM
21-Dec-24

```
TC
a[0]cell address 65500, value=9
a[1]cell address 65501, value=3
a[2]cell address 65502, value=1
a[3]cell address 65503, value=8
```


Direct initialization of array elements:

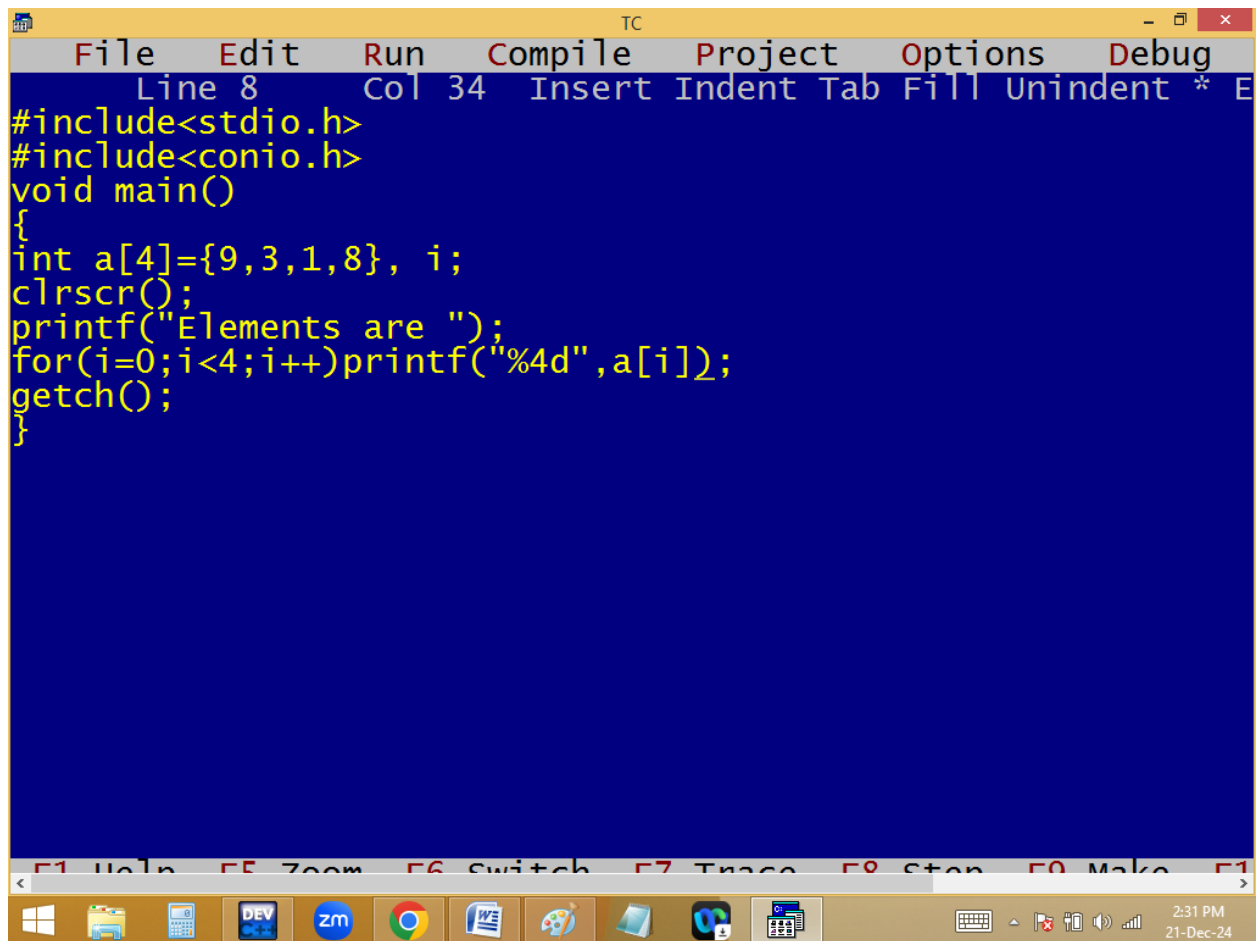


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 8" and "Col 34". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]={9,3,1,8}, i;
clrscr();
printf("Elements are ");
for(i=0;i<4;i++)printf("%4d",a[i]);
getch();
}
```

At the bottom of the window, there is a toolbar with icons for various functions, and a status bar showing the time "2:31 PM" and the date "21-Dec-24".

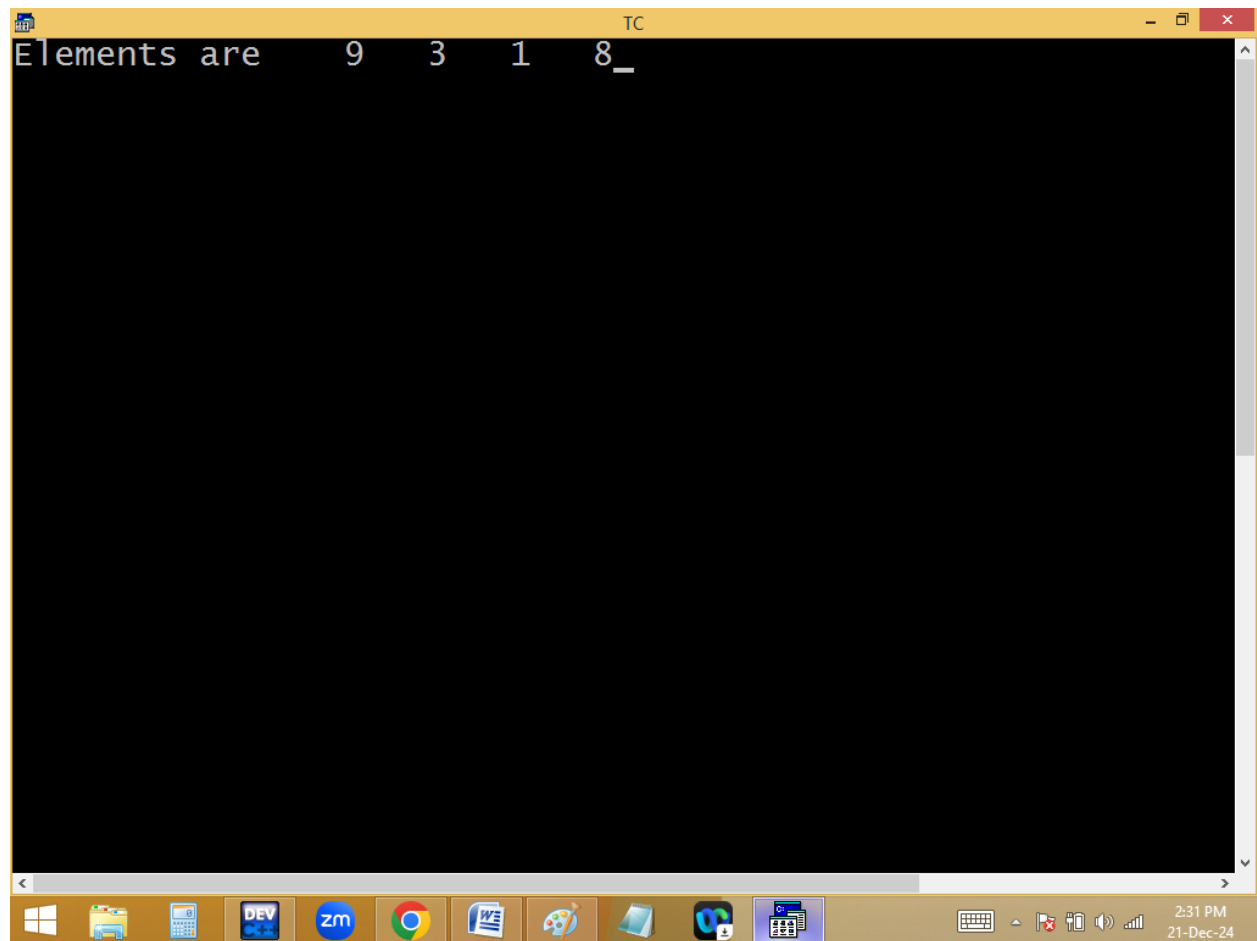


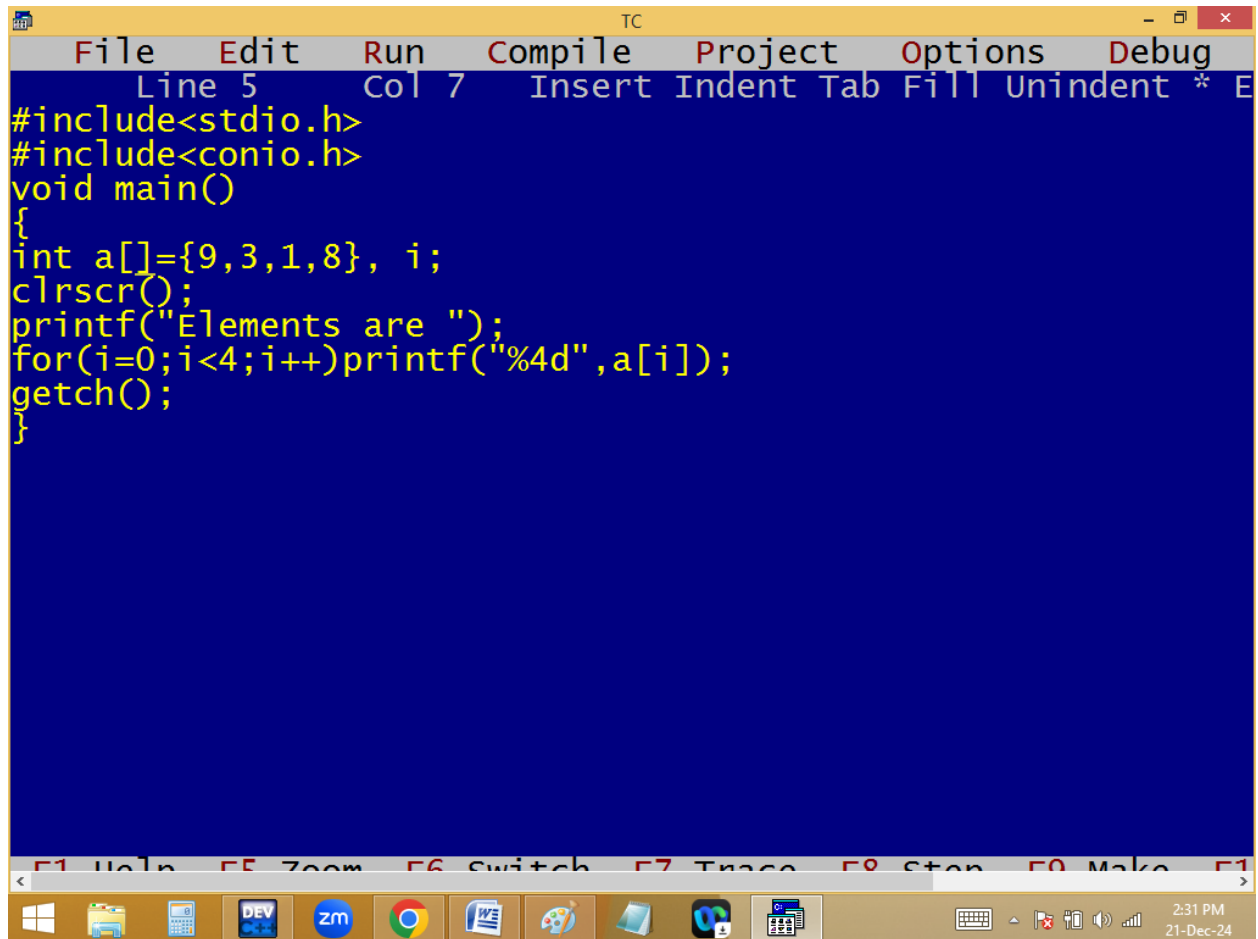


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 5", "Col 7", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[]={9,3,1,8}, i;
clrscr();
printf("Elements are ");
for(i=0;i<4;i++)printf("%4d",a[i]);
getch();
}
```

At the bottom of the window, there is a toolbar with icons for various functions, and a status bar on the far right showing the time "2:31 PM" and the date "21-Dec-24".

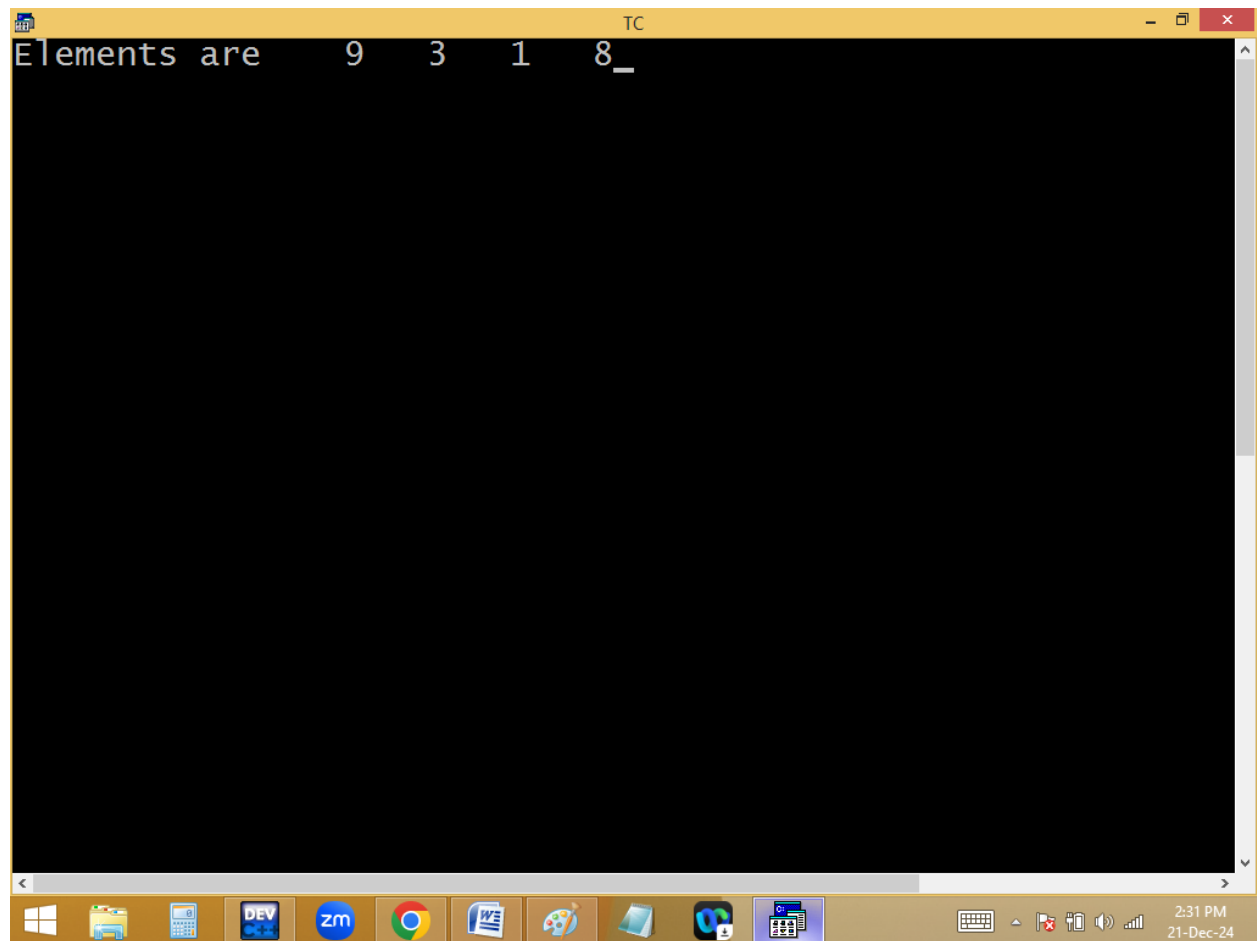


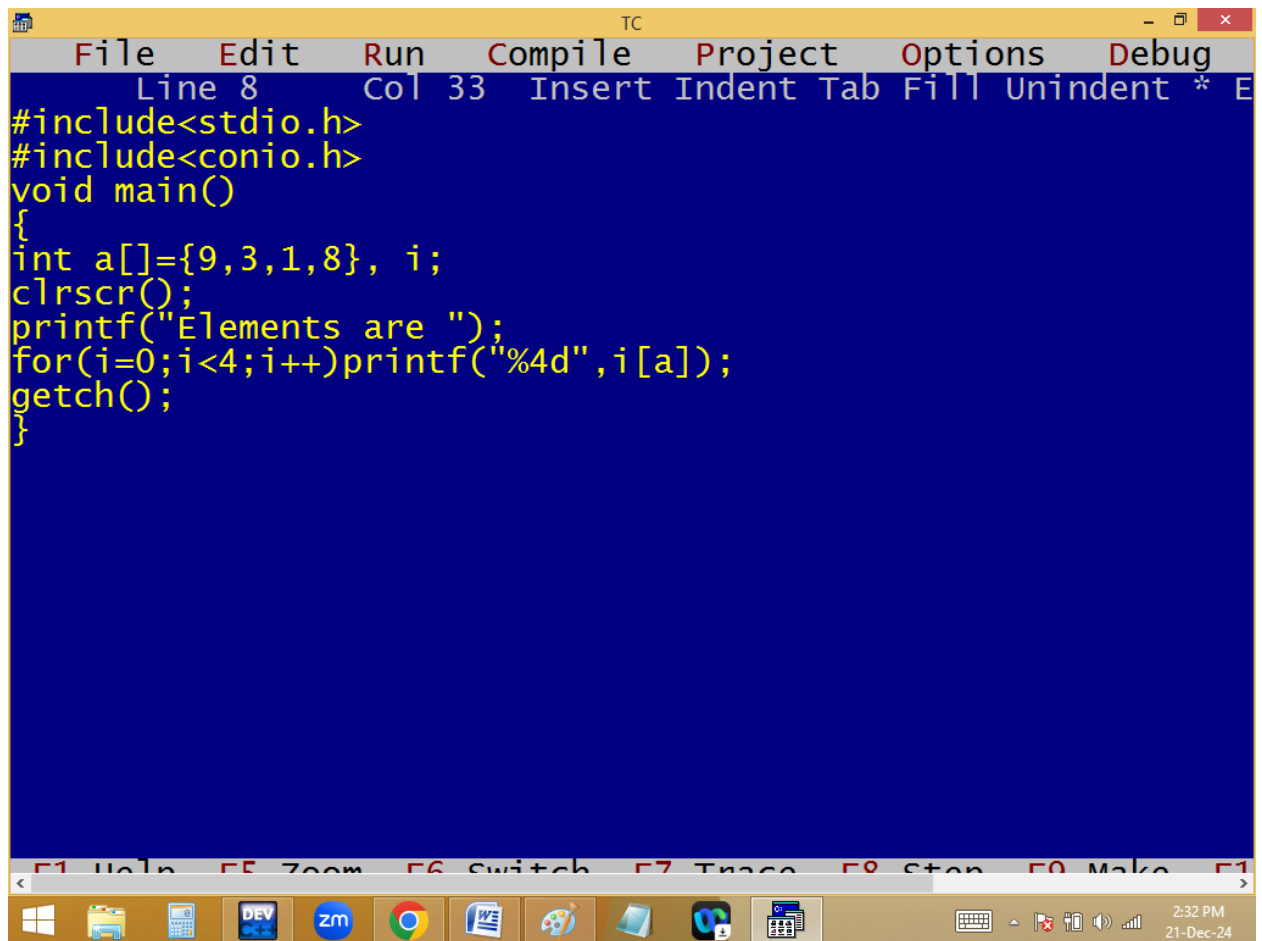

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 8", "Col 33", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[]={9,3,1,8}, i;
clrscr();
printf("Elements are ");
for(i=0;i<4;i++)printf("%4d",i[a]);
getch();
}
```

At the bottom of the window, there is a toolbar with icons for various functions, and a status bar showing the time "2:32 PM" and the date "21-Dec-24".

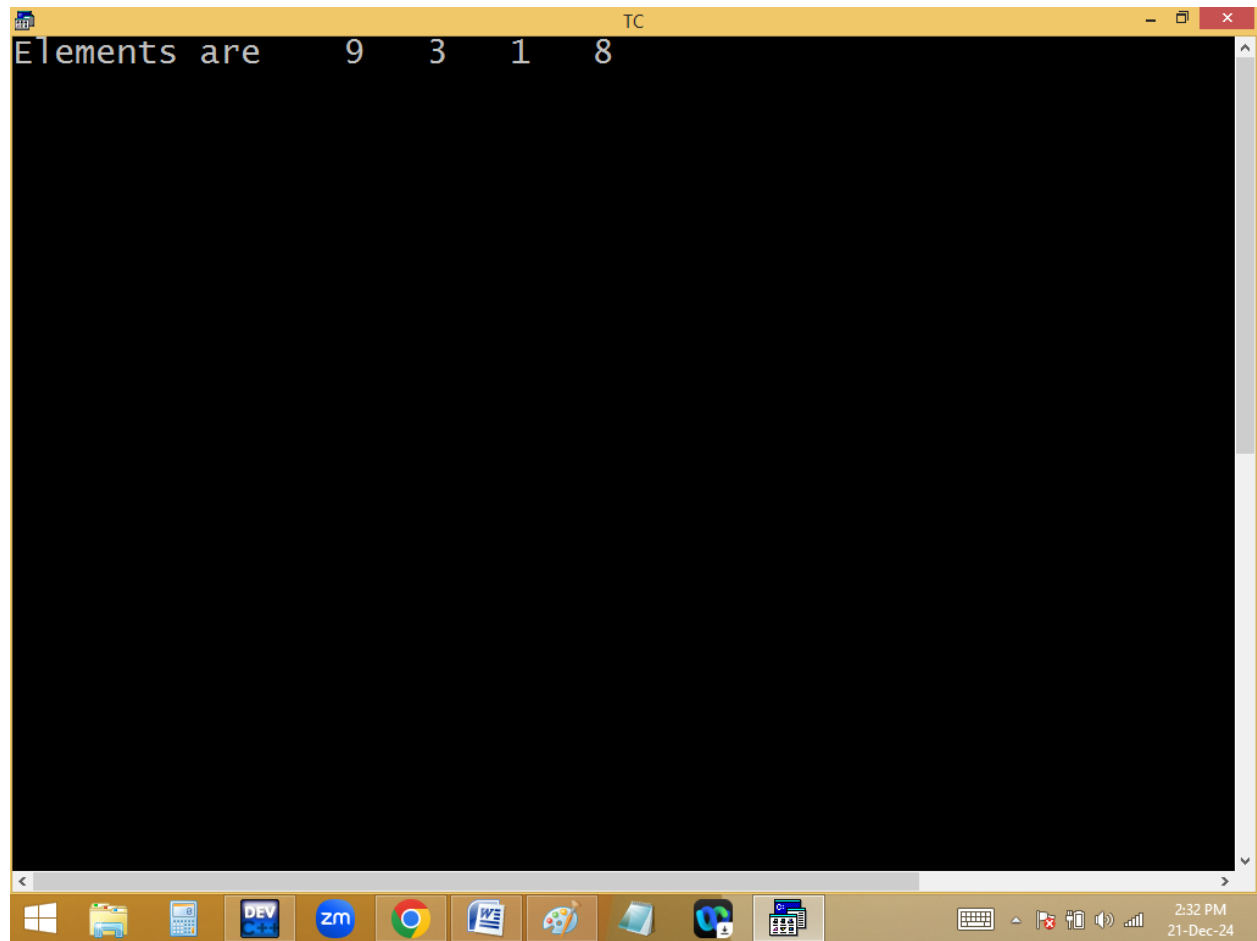


$p(a[0]) ==> 9$

int size


$65500 + 0 * 2 = 65500 ==> \text{print value at } 65500 ==> 9$

offset

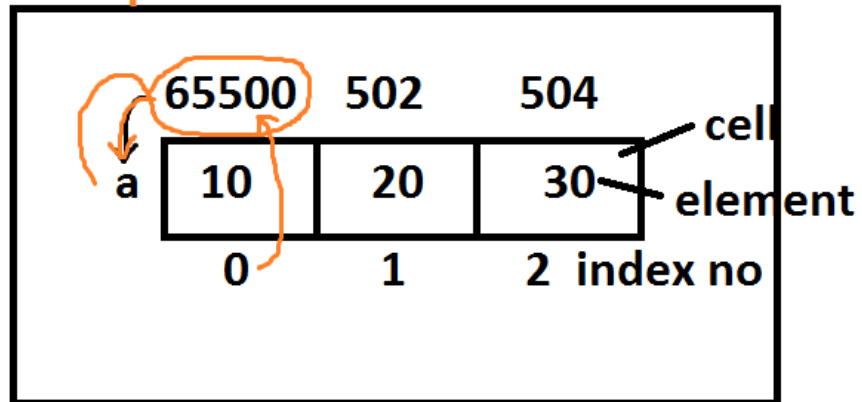

$p(0[a]) ==> 9$

$0 * 2 + 65500 = 65500$

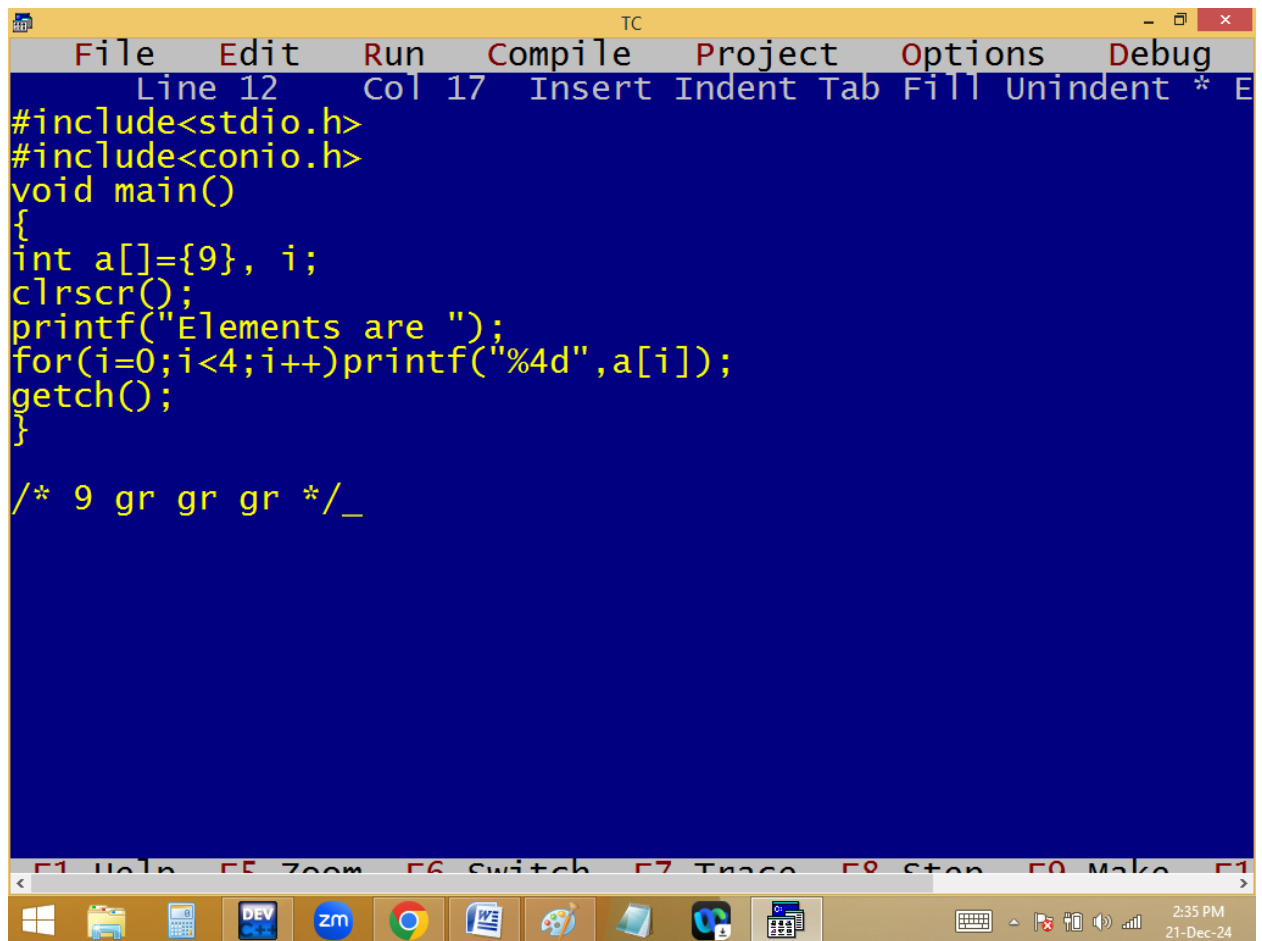


The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 12", "Col 17", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and a function key "F". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[]={9}, i;
clrscr();
printf("Elements are ");
for(i=0;i<4;i++)printf("%4d",a[i]);
getch();
}

/* 9 gr gr gr */_
```


Below the code, there is a row of function key shortcuts: "F1 Help", "F5 Zoom", "F6 Switch", "F7 Trace", "F8 Stop", "F9 Make", and "F10". The Windows taskbar is visible at the bottom, showing icons for Windows, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and a folder. The system tray on the right shows the time as "2:35 PM" and the date as "21-Dec-24".

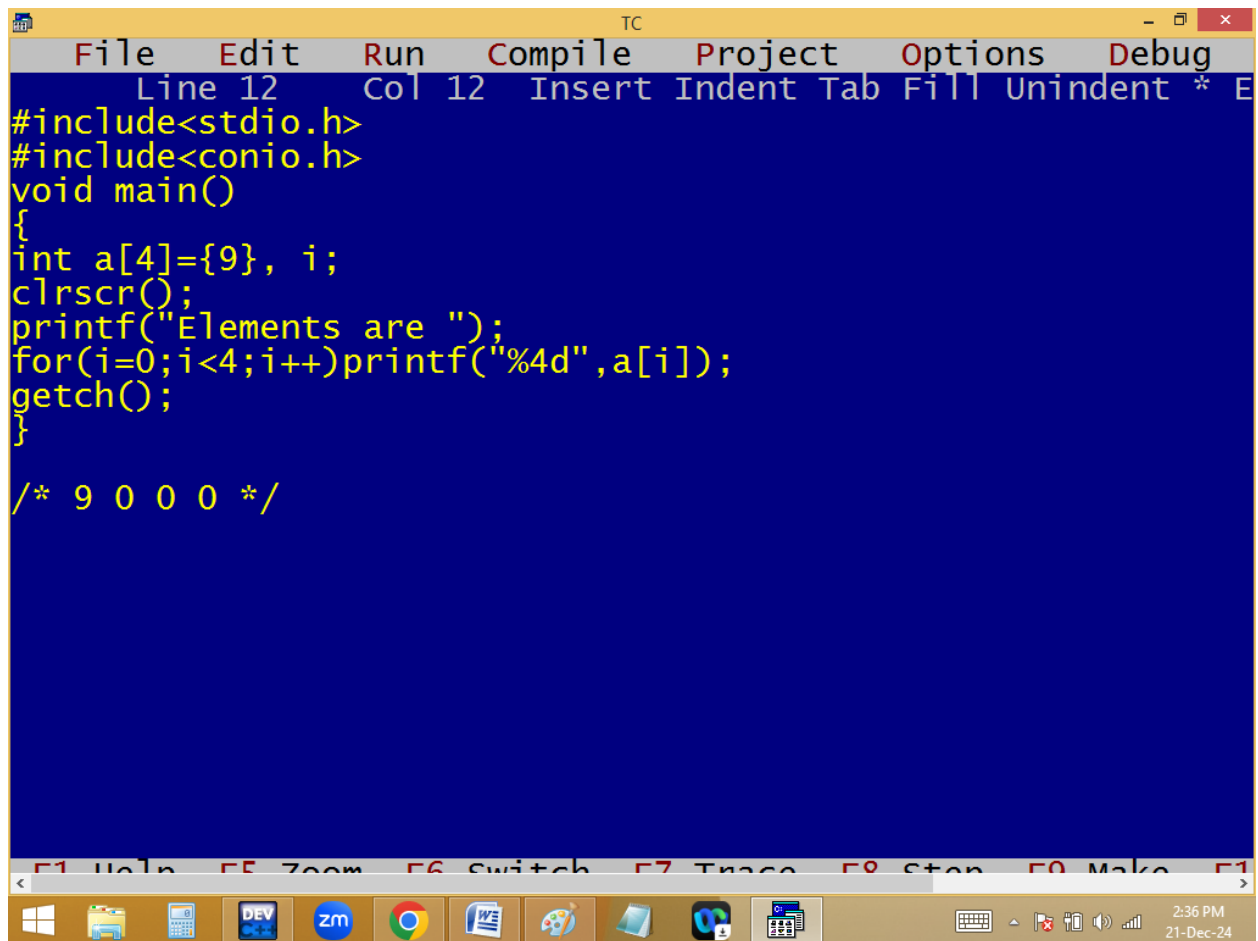

```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 12 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]={9}, i;
clrscr();
printf("Elements are ");
for(i=0;i<4;i++)printf("%4d",a[i]);
getch();
}

/* 9 0 0 0 */

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

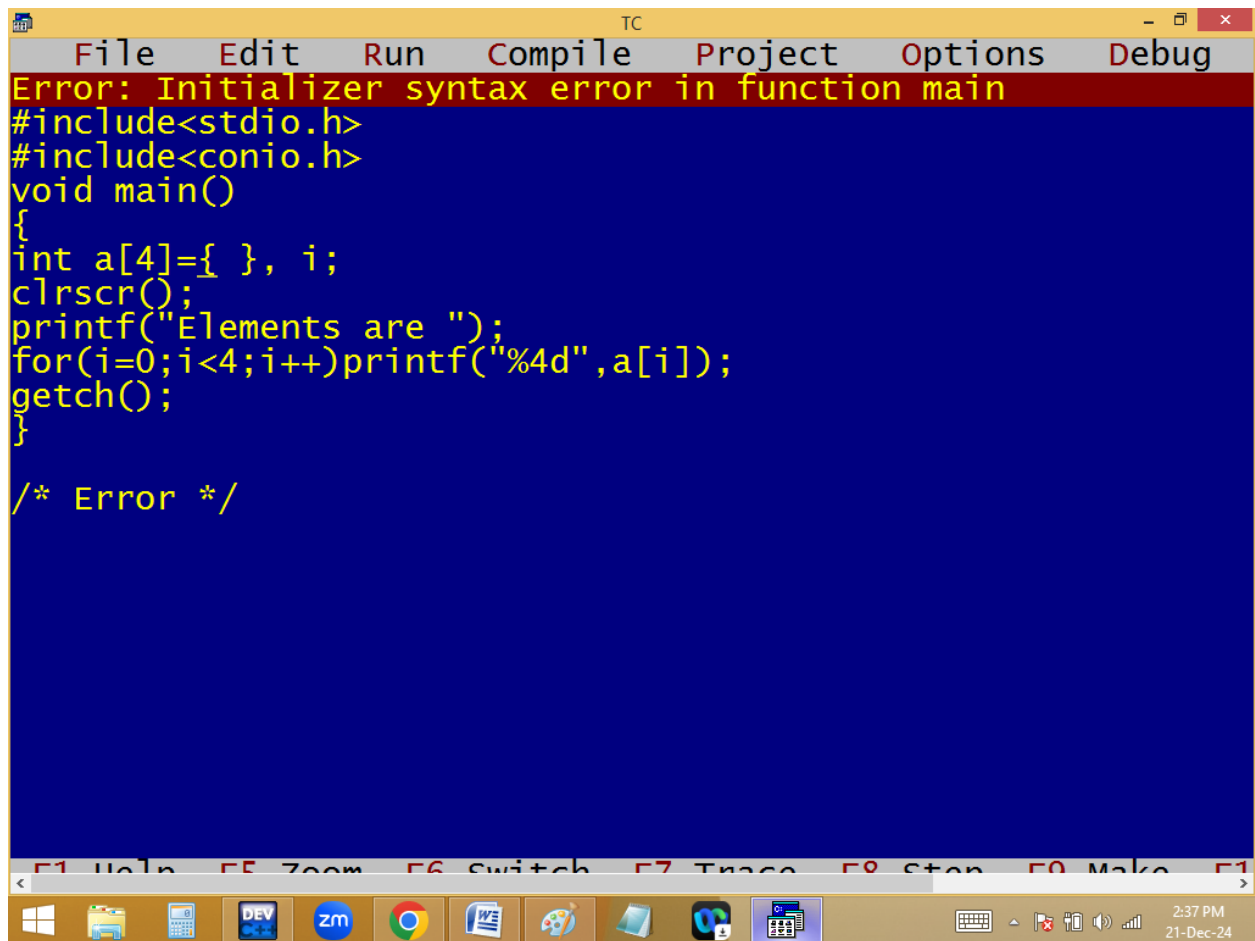


The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top of the editor area states: "Error: Initializer syntax error in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]={ }, i;
clrscr();
printf("Elements are ");
for(i=0;i<4;i++)printf("%4d",a[i]);
getch();
}

/* Error */
```

Below the editor, there is a toolbar with icons for various functions. At the bottom of the window, the Windows taskbar is visible, showing icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and other applications. The system clock in the bottom right corner indicates the time is 2:37 PM on 21-Dec-24.

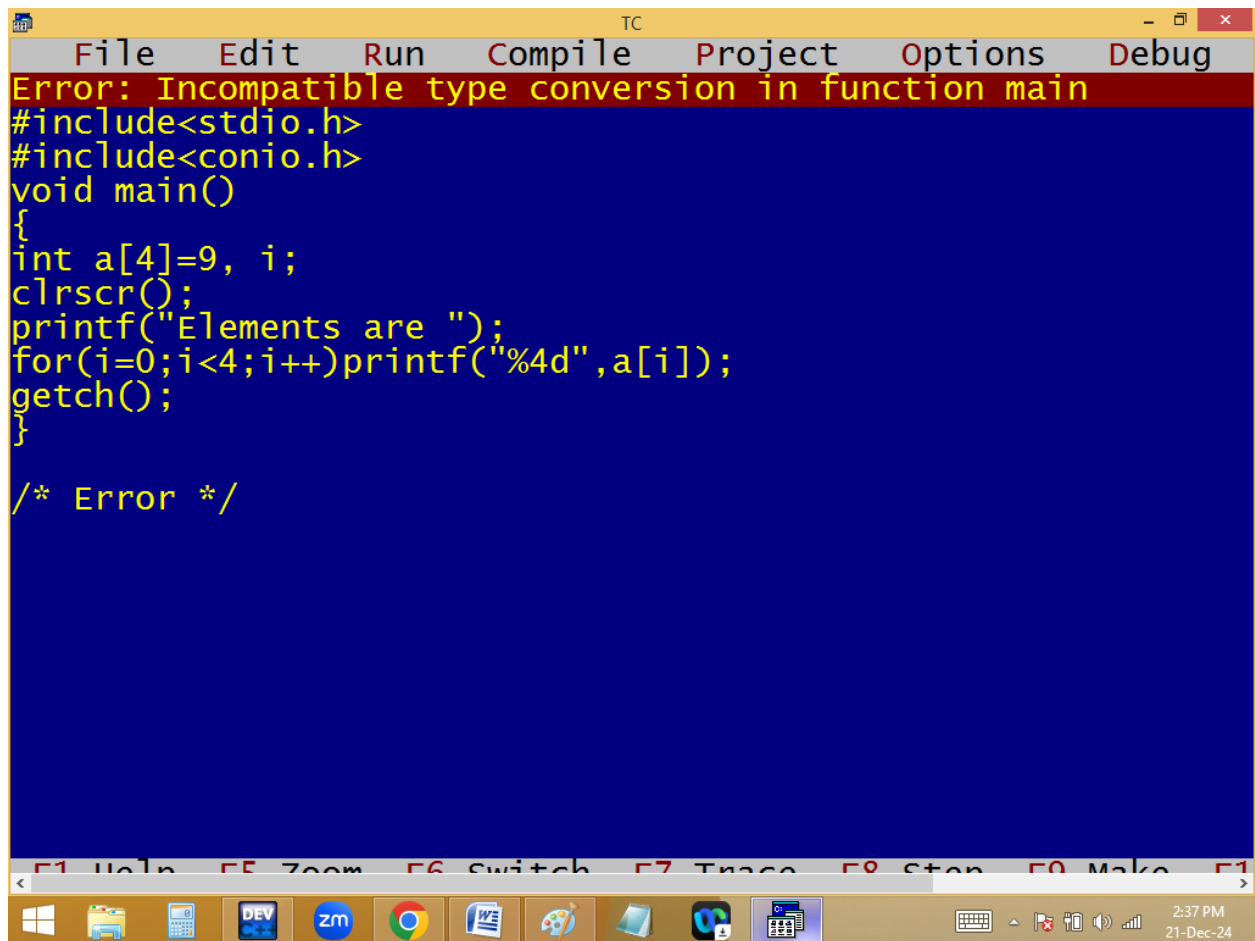


The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error banner at the top of the code editor displays the message: "Error: Incompatible type conversion in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]=9, i;
clrscr();
printf("Elements are ");
for(i=0;i<4;i++)printf("%4d",a[i]);
getch();
}

/* Error */
```


Below the code editor, there is a toolbar with icons for various functions, and a status bar at the bottom right showing the time "2:37 PM" and the date "21-Dec-24". The Windows taskbar is visible at the very bottom of the screen.

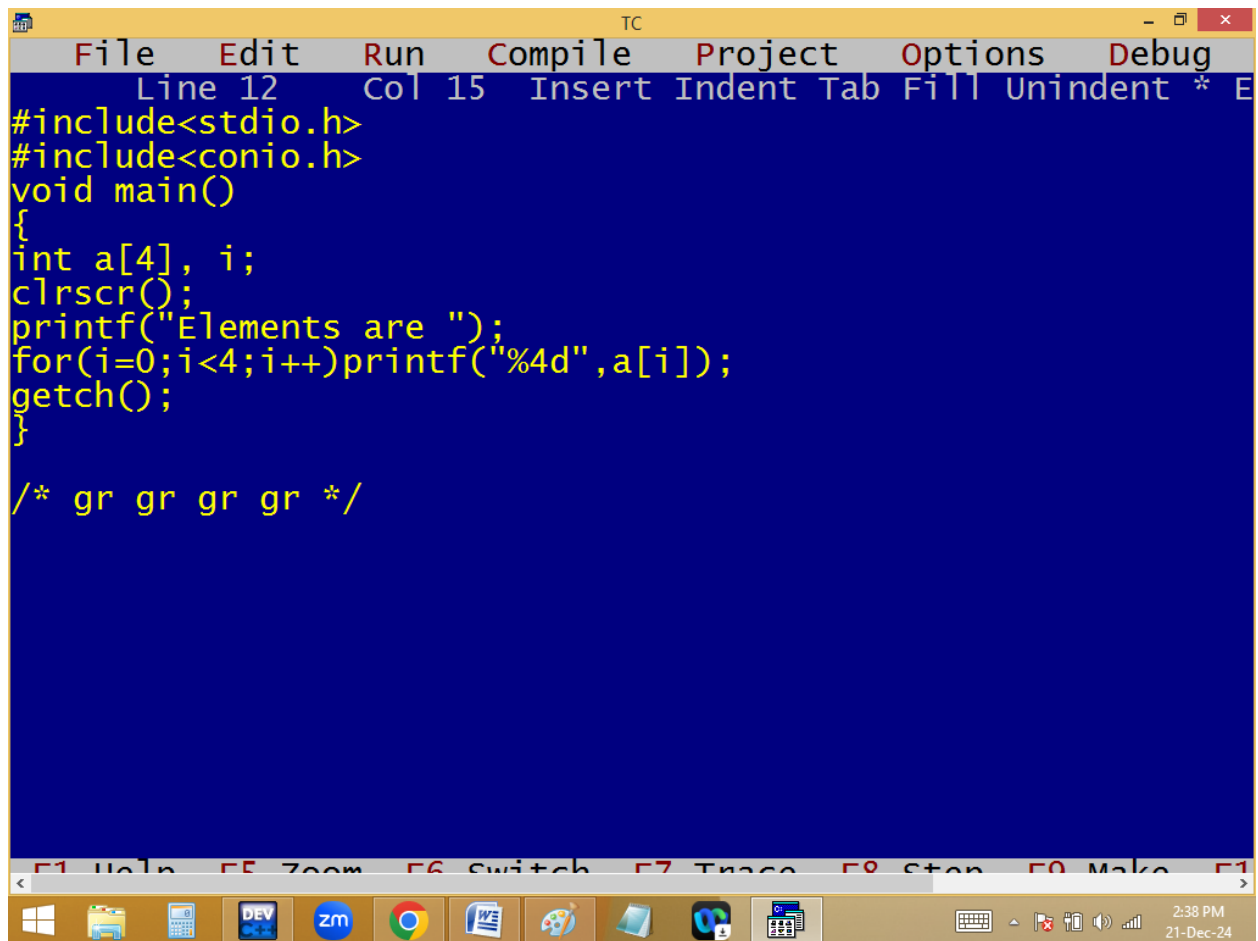

```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 15 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4], i;
clrscr();
printf("Elements are ");
for(i=0;i<4;i++)printf("%4d",a[i]);
getch();
}

/* gr gr gr gr */
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F11
```

2:38 PM
21-Dec-24

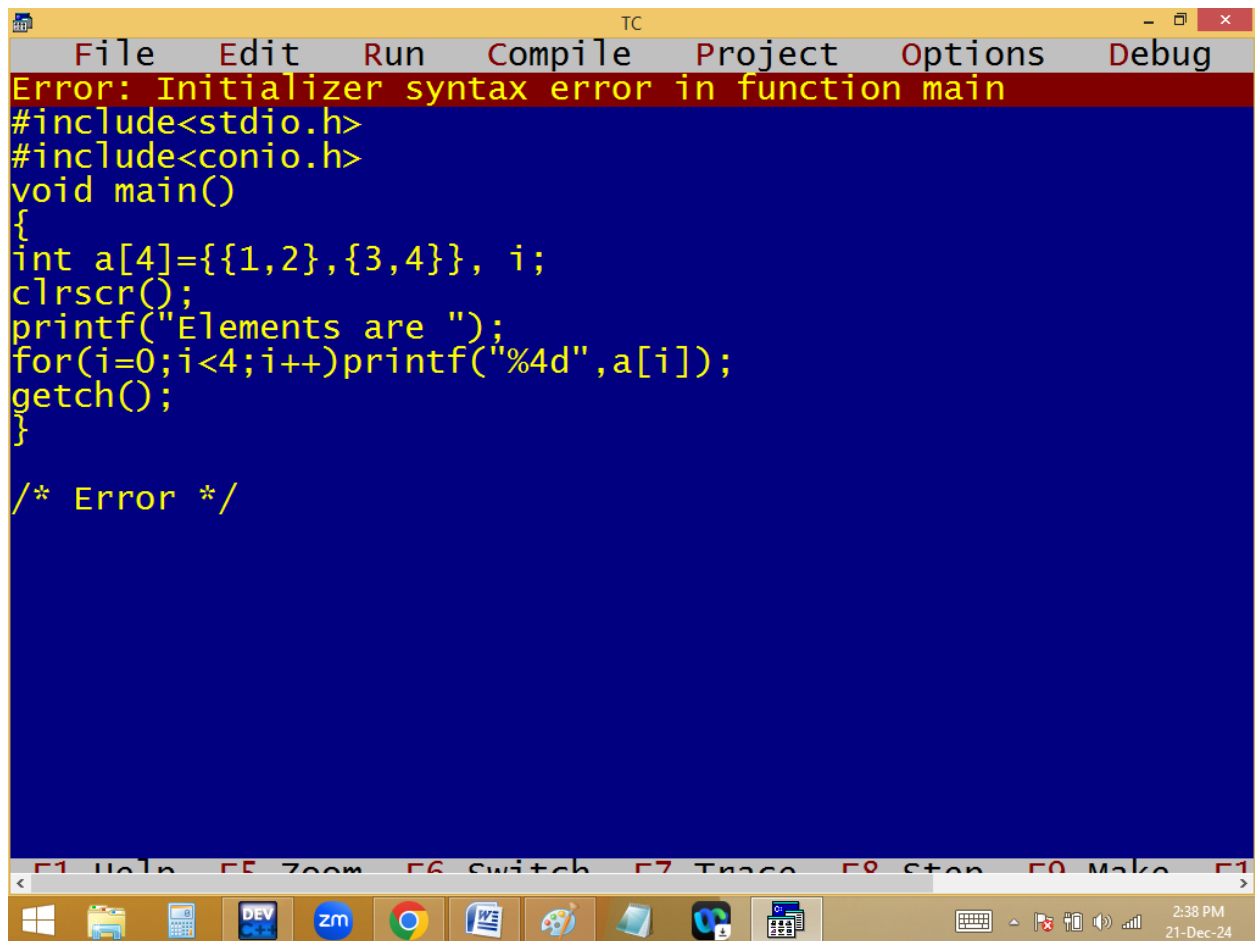


The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error banner at the top of the editor window states "Error: Initializer syntax error in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]={{1,2},{3,4}}, i;
clrscr();
printf("Elements are ");
for(i=0;i<4;i++)printf("%4d",a[i]);
getch();
}

/* Error */
```

Below the editor window, there is a toolbar with icons for various functions. At the bottom of the screen, the Windows taskbar is visible, showing icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and other applications. The system clock in the bottom right corner indicates the time is 2:38 PM on 21-Dec-24.

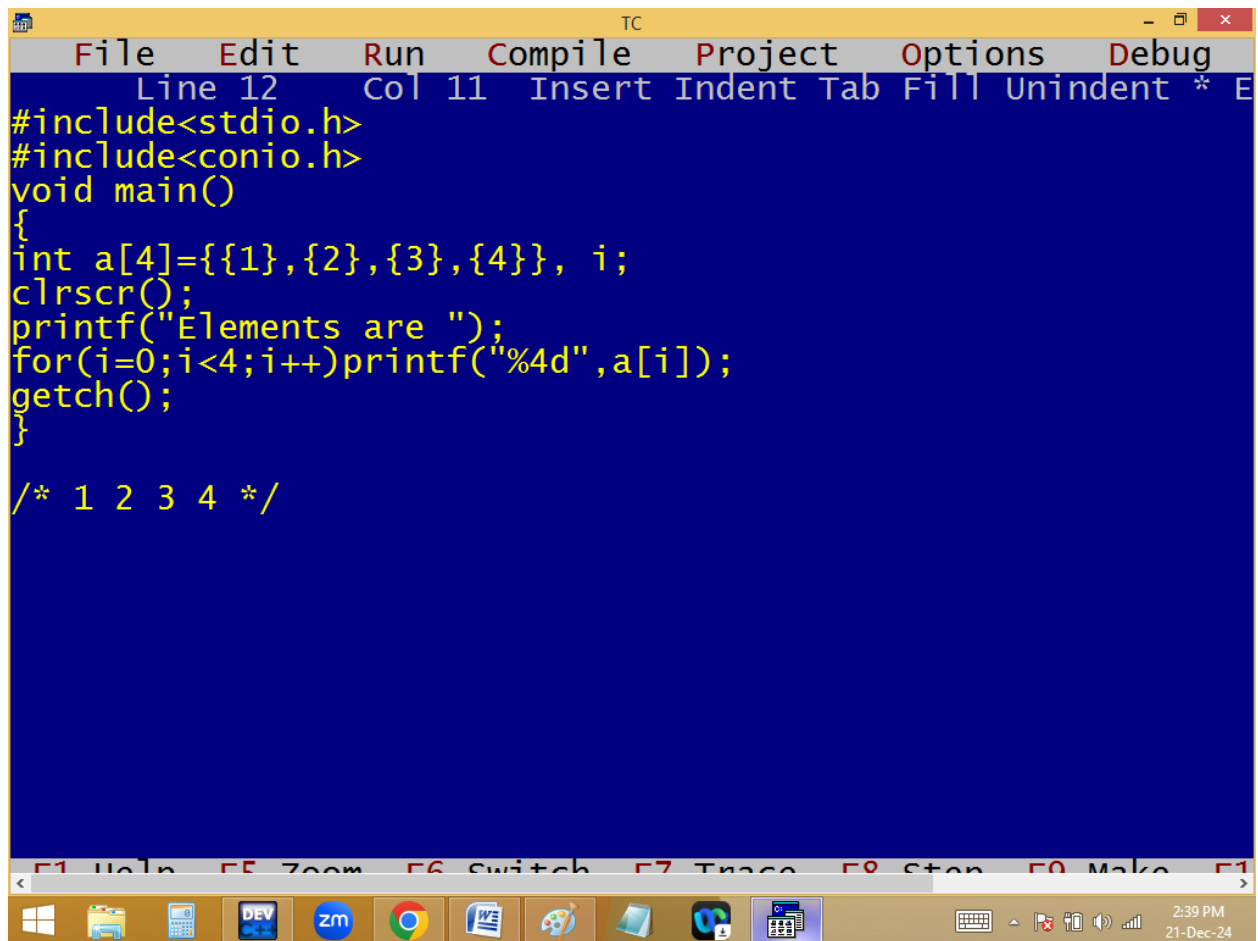


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 12", "Col 11", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and a cursor icon. The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]={{1},{2},{3},{4}}, i;
clrscr();
printf("Elements are ");
for(i=0;i<4;i++)printf("%4d",a[i]);
getch();
}

/* 1 2 3 4 */
```

At the bottom of the window, there is a toolbar with icons for various functions, and a status bar on the far right showing the time "2:39 PM" and the date "21-Dec-24".

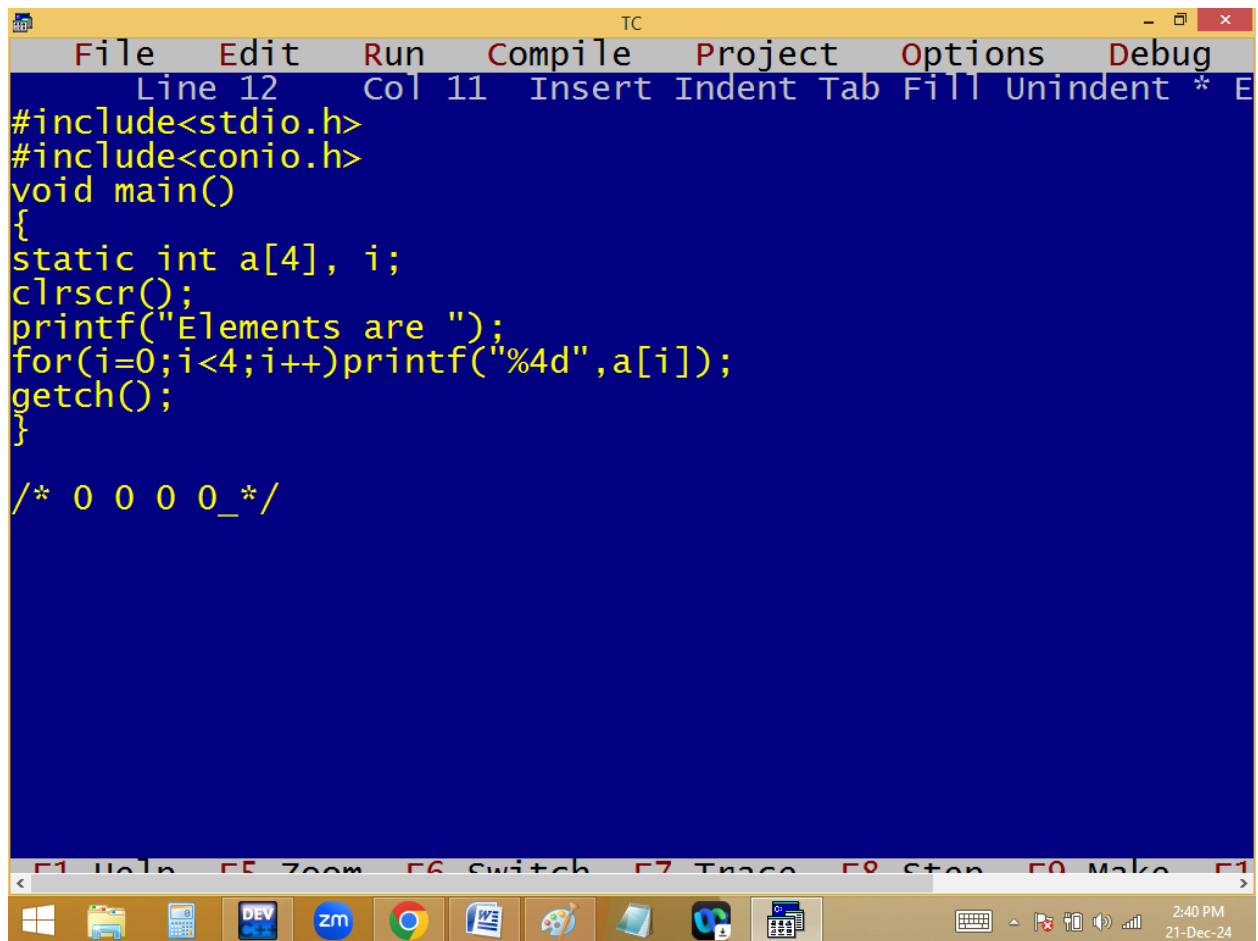


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 12 Col 11" and lists keyboard shortcuts: Insert, Indent, Tab, Fill, Unindent, *, and E. The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
static int a[4], i;
clrscr();
printf("Elements are ");
for(i=0;i<4;i++)printf("%4d",a[i]);
getch();
}

/* 0 0 0 0_*/
```

Below the code, there is a row of function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. The Windows taskbar is visible at the bottom, showing icons for Windows, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and a folder. The system tray on the right shows the time as 2:40 PM and the date as 21-Dec-24.

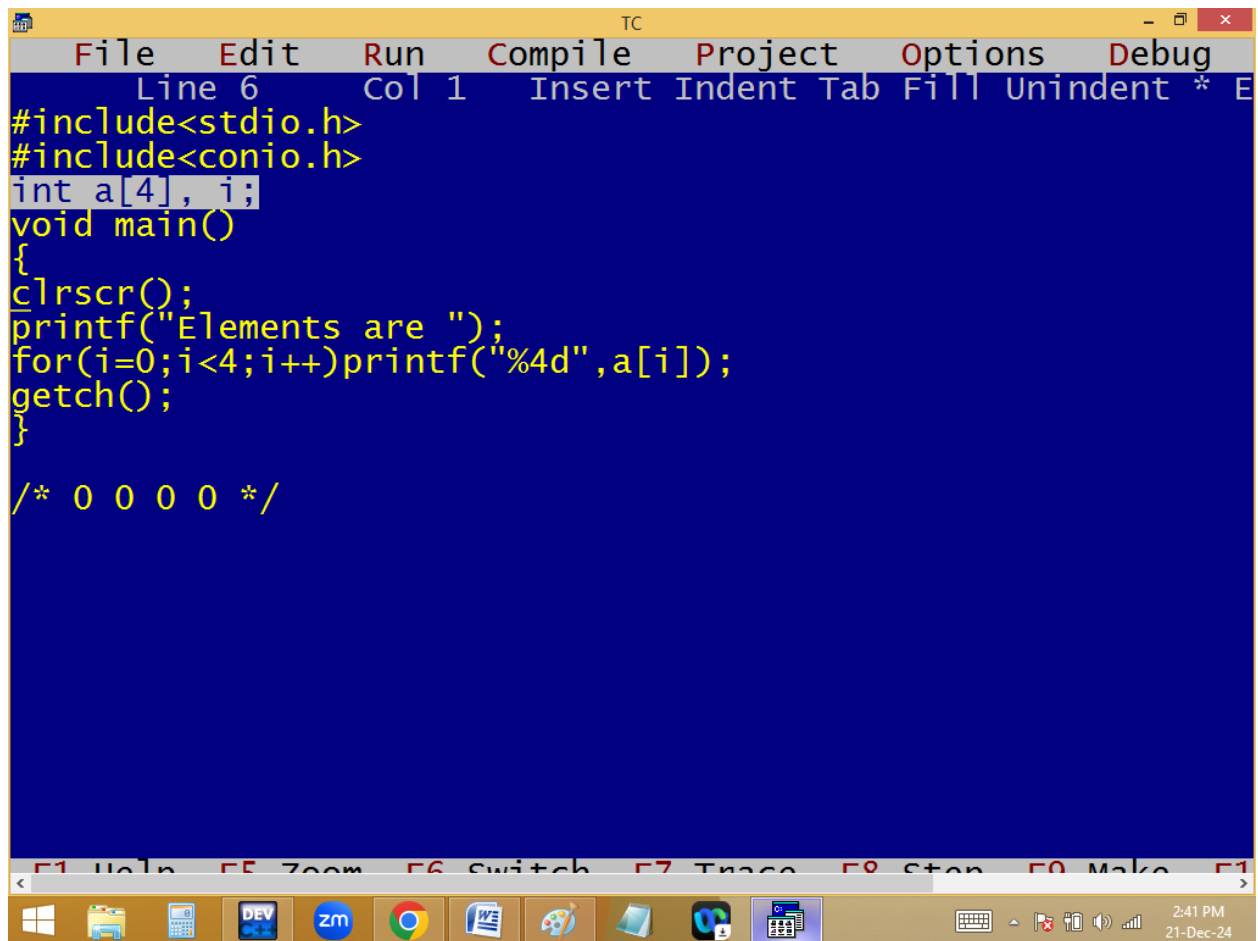


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 6", "Col 1", and "Insert Indent Tab Fill Unindent * E". The code editor has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
int a[4], i;
void main()
{
clrscr();
printf("Elements are ");
for(i=0;i<4;i++)printf("%4d",a[i]);
getch();
}

/* 0 0 0 0 */
```

Below the code editor, there is a toolbar with function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. The Windows taskbar is visible at the bottom, showing icons for Windows, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and other applications. The system clock in the bottom right corner shows "2:41 PM" and "21-Dec-24".

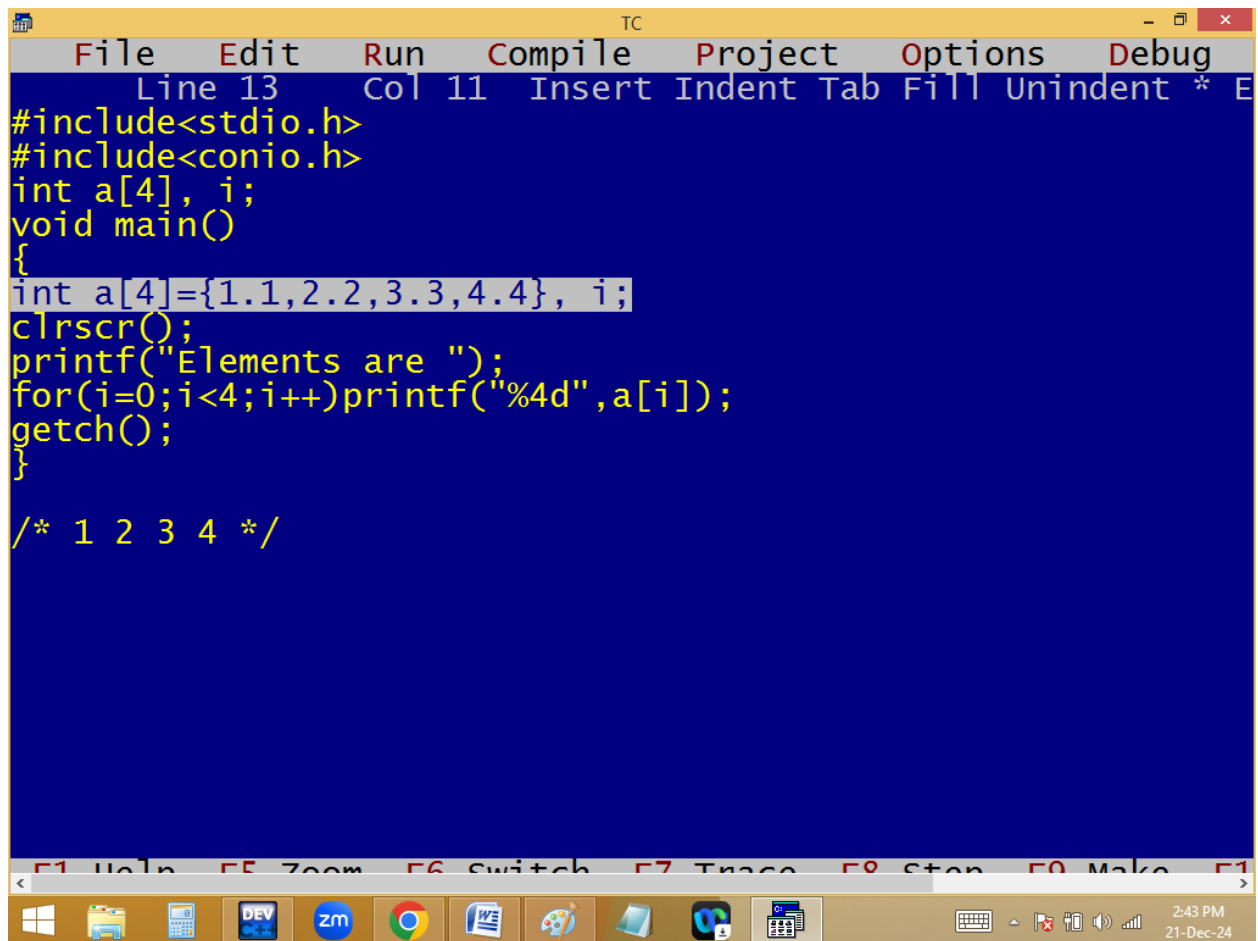


The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 13", "Col 11", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
int a[4], i;
void main()
{
    int a[4]={1.1,2.2,3.3,4.4}, i;
    clrscr();
    printf("Elements are ");
    for(i=0;i<4;i++)printf("%4d",a[i]);
    getch();
}

/* 1 2 3 4 */
```

At the bottom of the window, there is a toolbar with icons for various functions, and a status bar showing the time "2:43 PM" and the date "21-Dec-24".

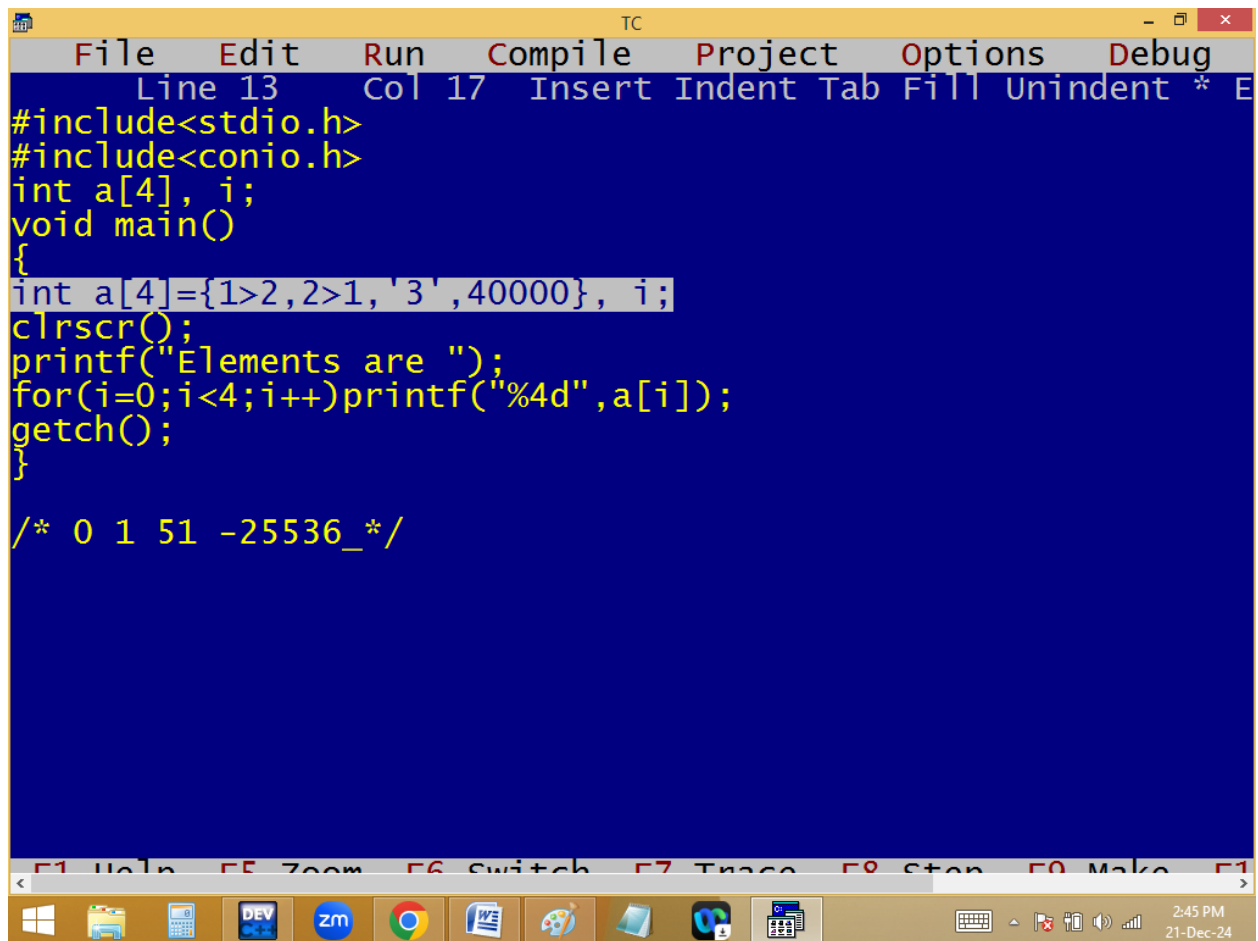


```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 17 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
int a[4], i;
void main()
{
int a[4]={1>2,2>1,'3',40000}, i;
clrscr();
printf("Elements are ");
for(i=0;i<4;i++)printf("%4d",a[i]);
getch();
}

/* 0 1 51 -25536_*/

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

2:45 PM
21-Dec-24

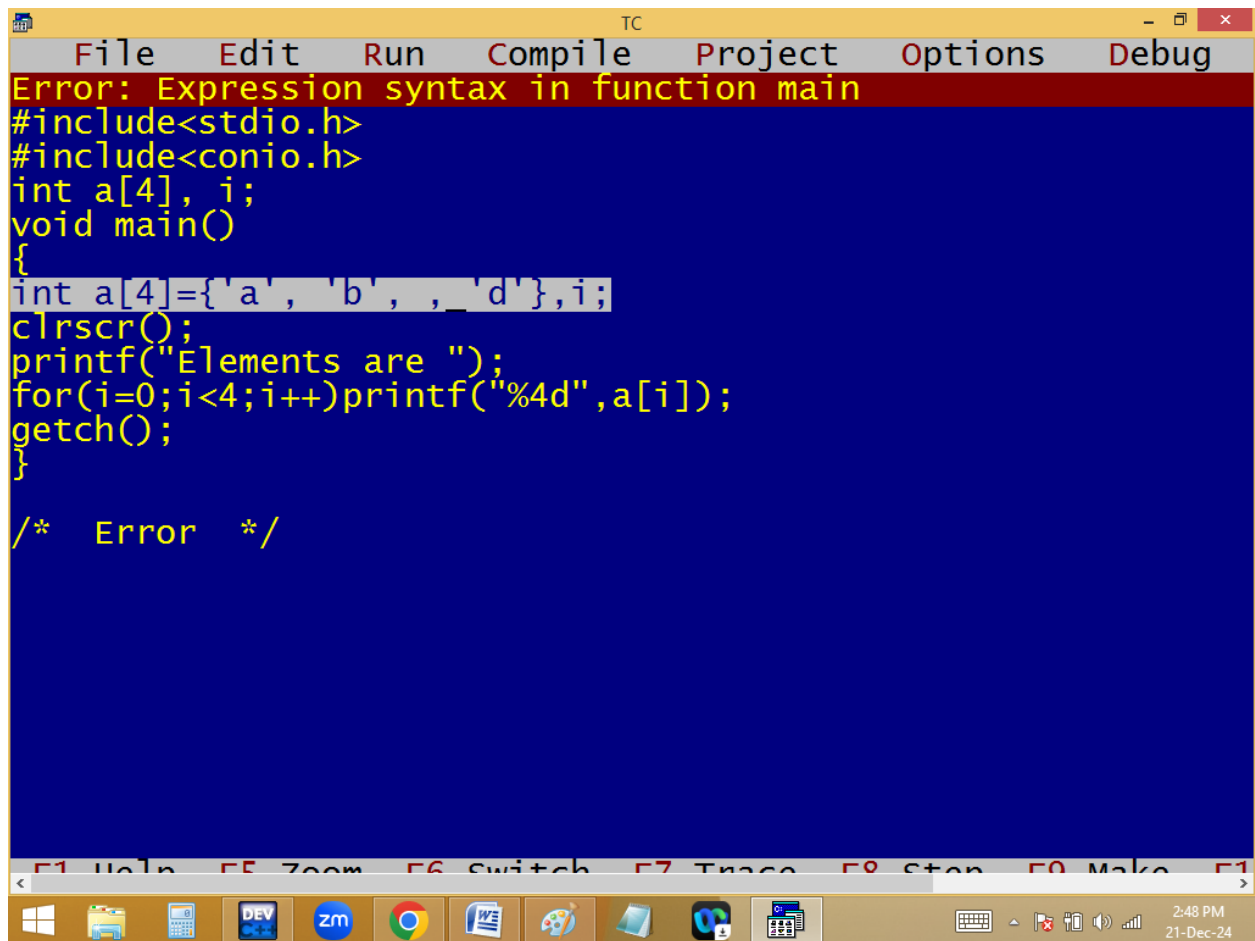


The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top states "Error: Expression syntax in function main". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
int a[4], i;
void main()
{
    int a[4]={'a', 'b', , 'd'},i;
    clrscr();
    printf("Elements are ");
    for(i=0;i<4;i++)printf("%4d",a[i]);
    getch();
}

/* Error */
```

The line `int a[4]={'a', 'b', , 'd'},i;` is highlighted in light blue. Below the code, a status bar shows function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. The Windows taskbar at the bottom includes icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and a folder. The system clock on the right indicates 2:48 PM on 21-Dec-24.

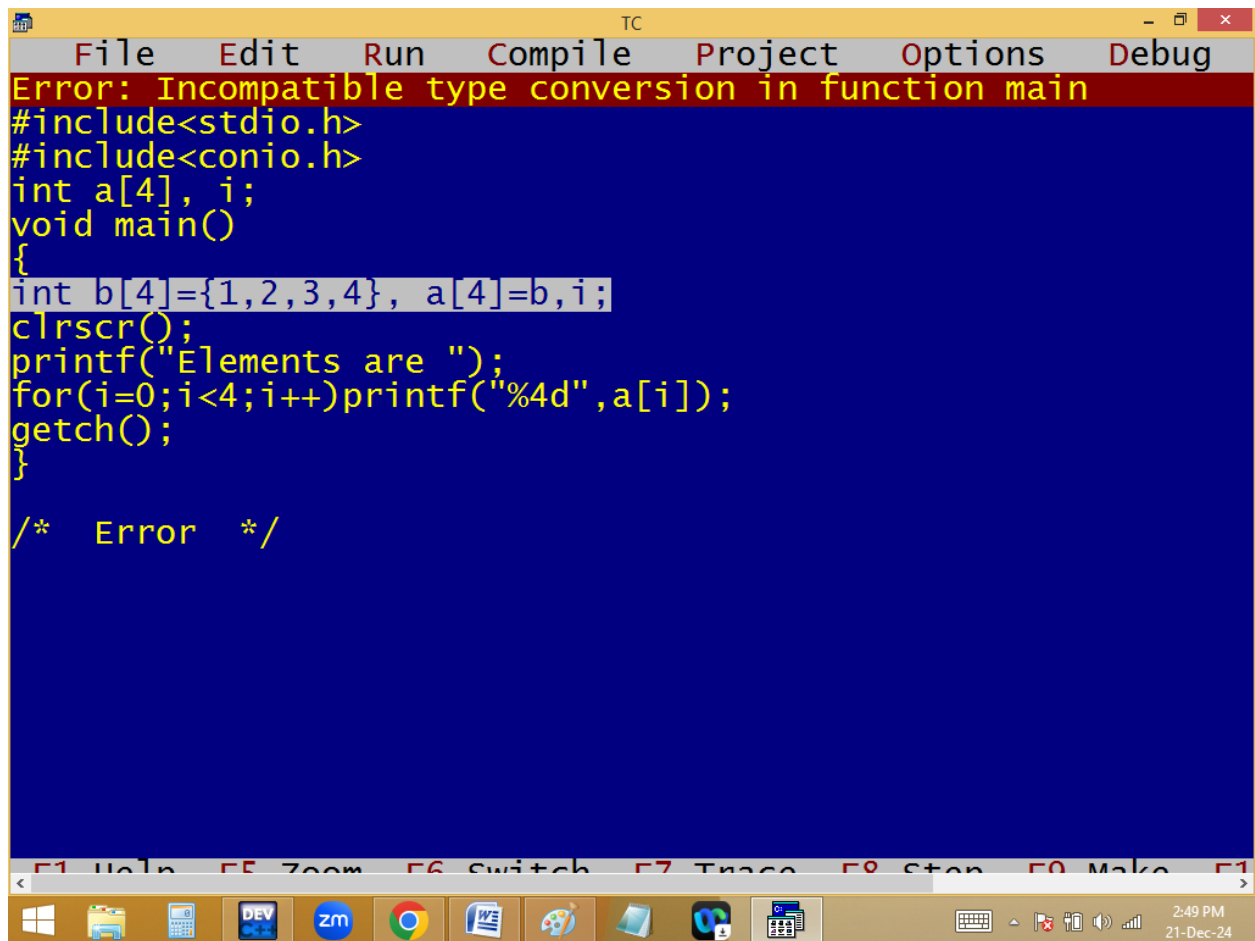


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error banner at the top states "Error: Incompatible type conversion in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
int a[4], i;
void main()
{
    int b[4]={1,2,3,4}, a[4]=b,i;
    clrscr();
    printf("Elements are ");
    for(i=0;i<4;i++)printf("%4d",a[i]);
    getch();
}

/* Error */
```

Below the code editor, there is a toolbar with icons for various functions, and a status bar at the bottom right showing the time "2:49 PM" and date "21-Dec-24".

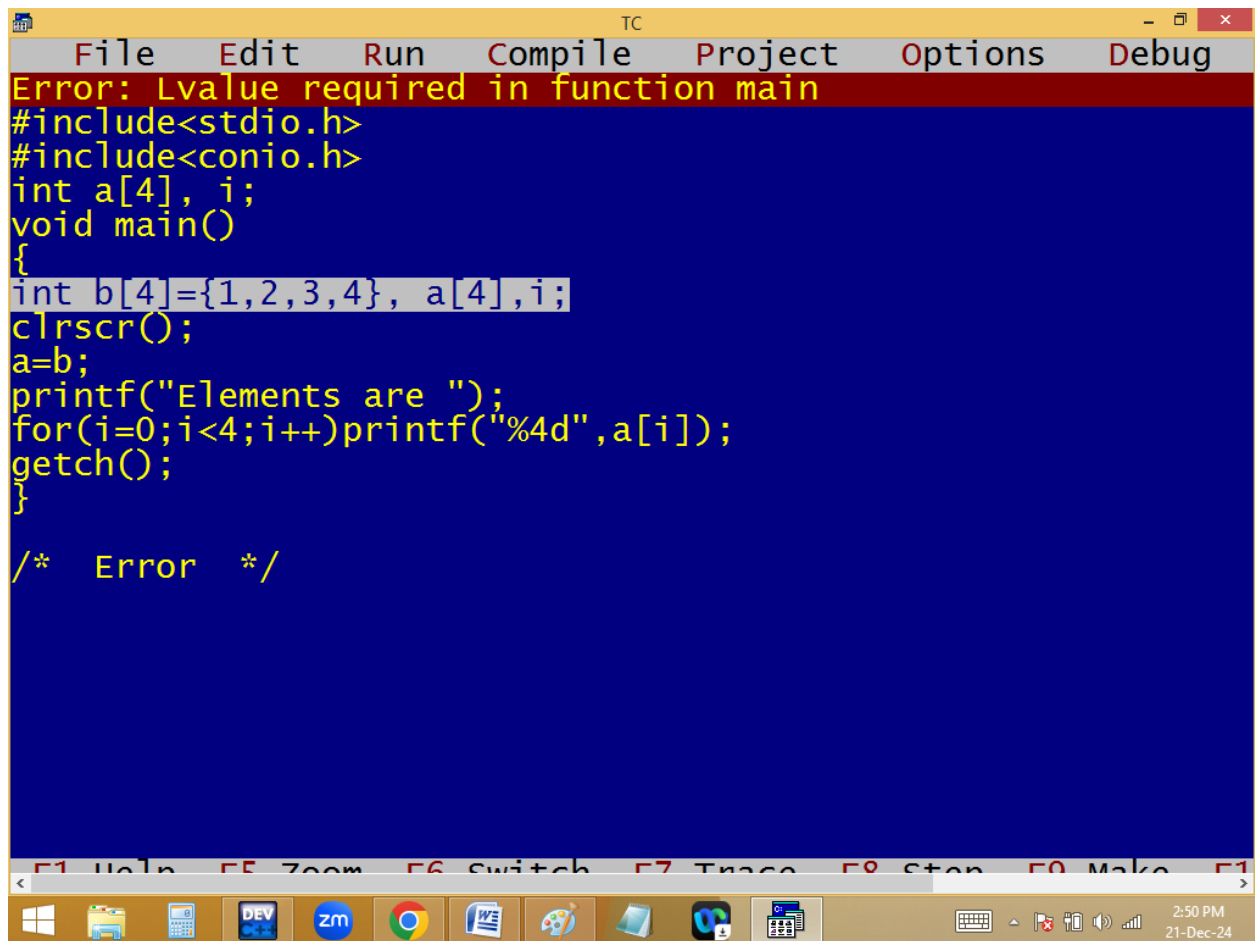


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error banner at the top reads "Error: Lvalue required in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
int a[4], i;
void main()
{
    int b[4]={1,2,3,4}, a[4], i;
    clrscr();
    a=b;
    printf("Elements are ");
    for(i=0;i<4;i++)printf("%4d",a[i]);
    getch();
}

/* Error */
```

Below the code editor, there is a toolbar with function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. The Windows taskbar at the bottom shows various application icons and the system clock indicating 2:50 PM on 21-Dec-24.

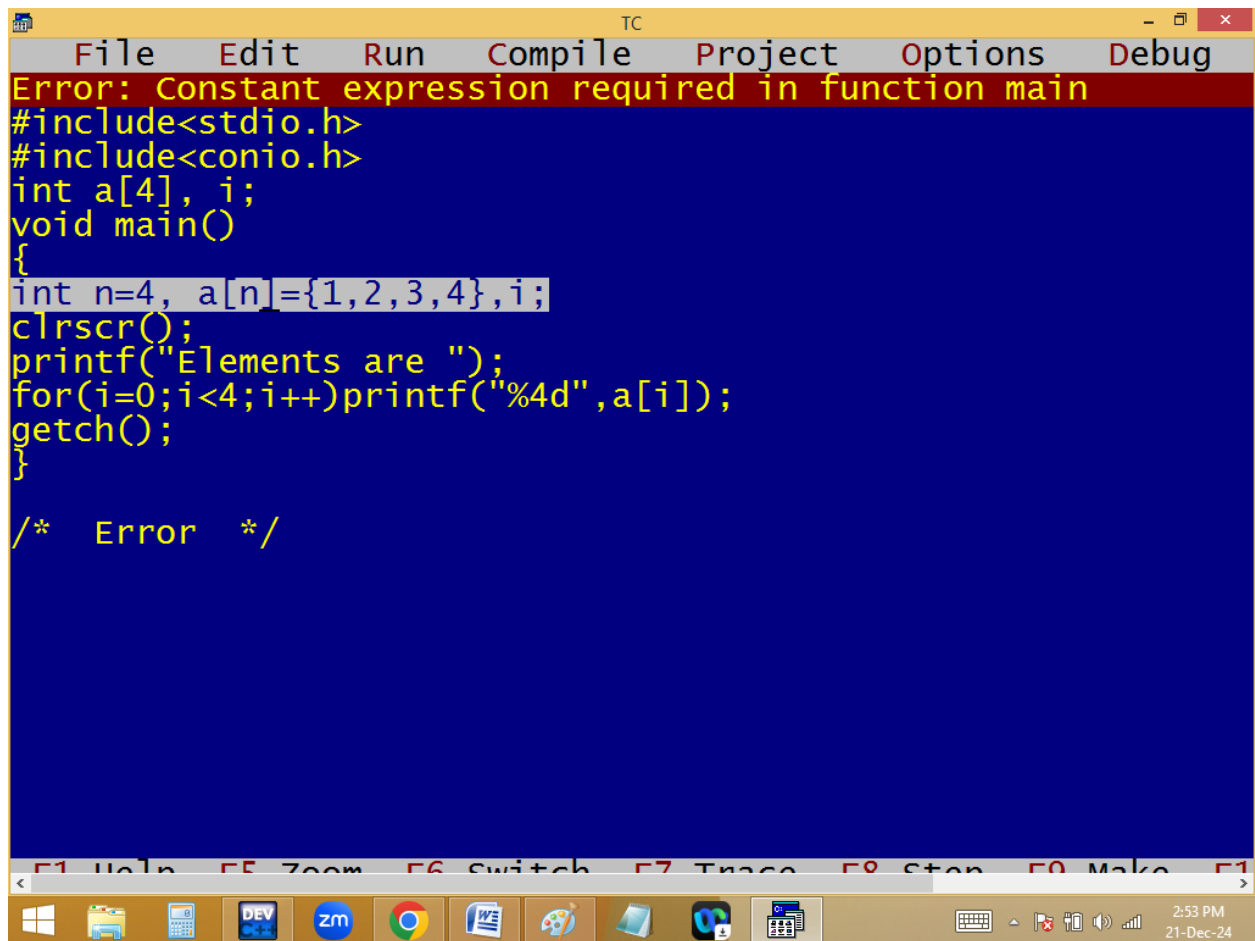


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top reads "Error: Constant expression required in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
int a[4], i;
void main()
{
    int n=4, a[n]={1,2,3,4},i;
    clrscr();
    printf("Elements are ");
    for(i=0;i<4;i++)printf("%4d",a[i]);
    getch();
}

/* Error */
```

At the bottom of the window, there is a toolbar with icons for various functions and a status bar showing the time "2:53 PM" and date "21-Dec-24".

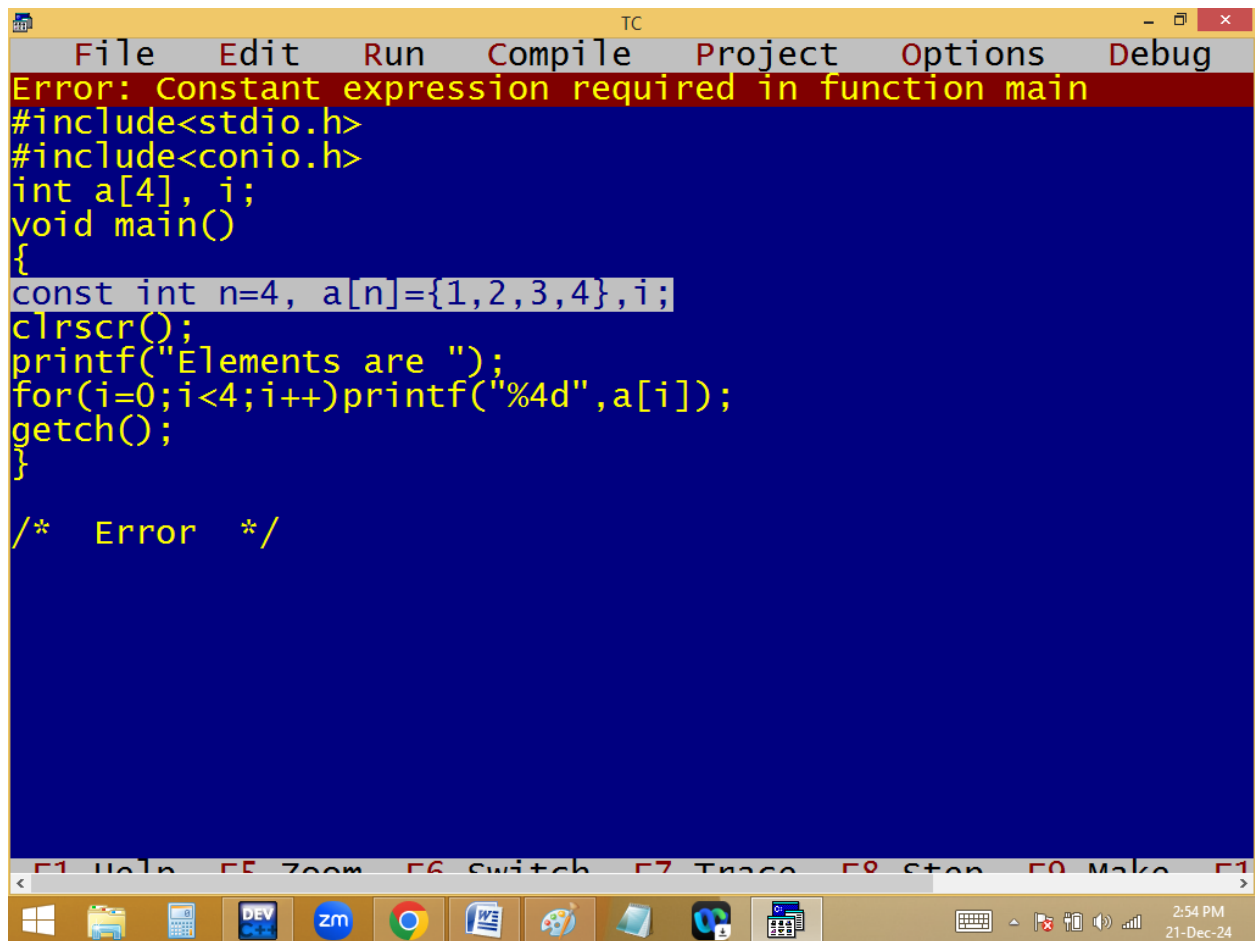


The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top states: "Error: Constant expression required in function main". The main text area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
int a[4], i;
void main()
{
const int n=4, a[n]={1,2,3,4},i;
clrscr();
printf("Elements are ");
for(i=0;i<4;i++)printf("%4d",a[i]);
getch();
}

/* Error */
```

Below the code, a status bar shows function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. The Windows taskbar at the bottom includes icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and a folder. System tray icons on the right show keyboard, volume, and network status. The system clock displays "2:54 PM" and "21-Dec-24".

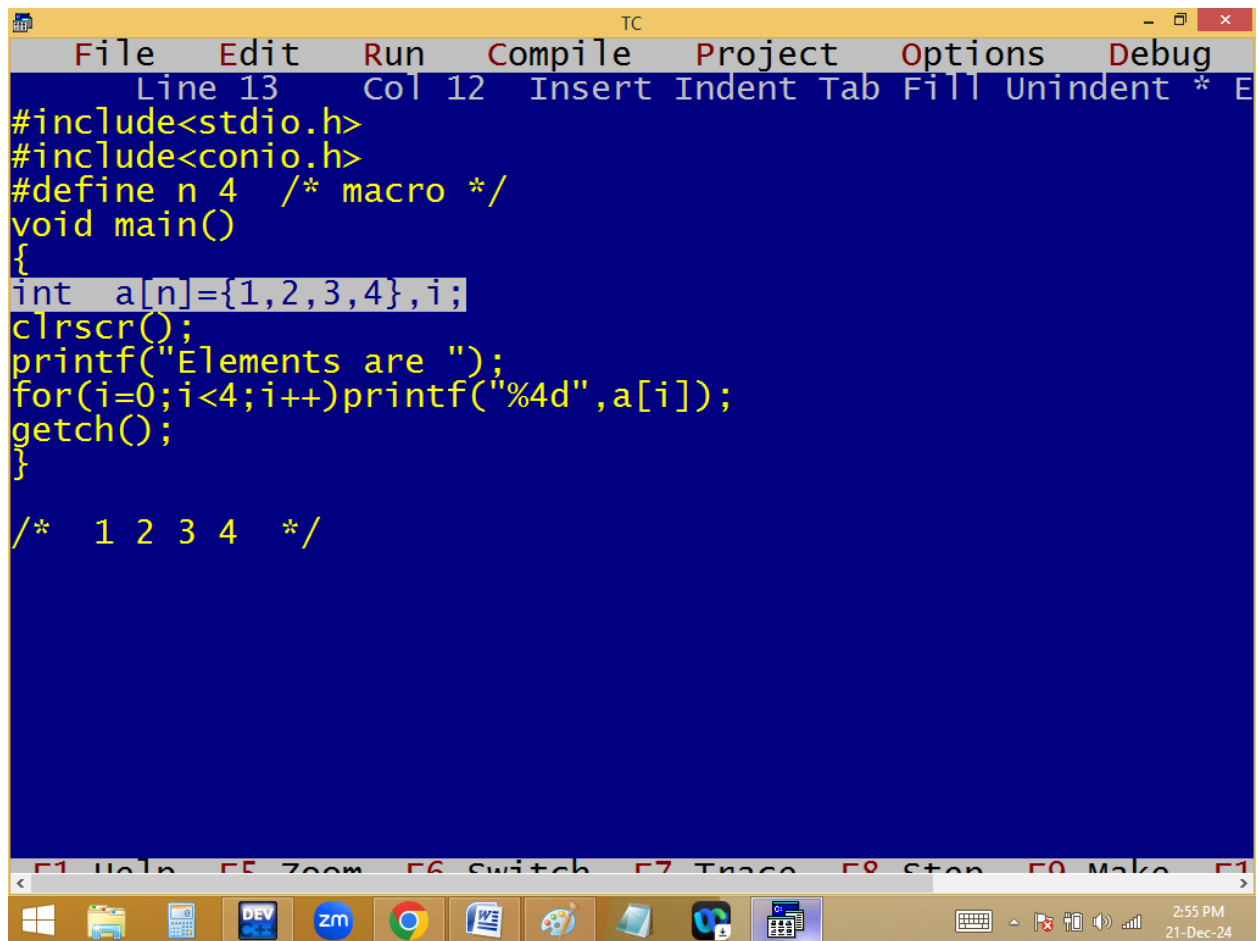


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 13", "Col 12", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and a cursor icon. The main text area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
#define n 4 /* macro */
void main()
{
    int a[n]={1,2,3,4},i;
    clrscr();
    printf("Elements are ");
    for(i=0;i<4;i++)printf("%4d",a[i]);
    getch();
}

/*  1 2 3 4  */
```

At the bottom of the window, there is a toolbar with icons for various functions, and a status bar on the far right showing the time "2:55 PM" and the date "21-Dec-24".

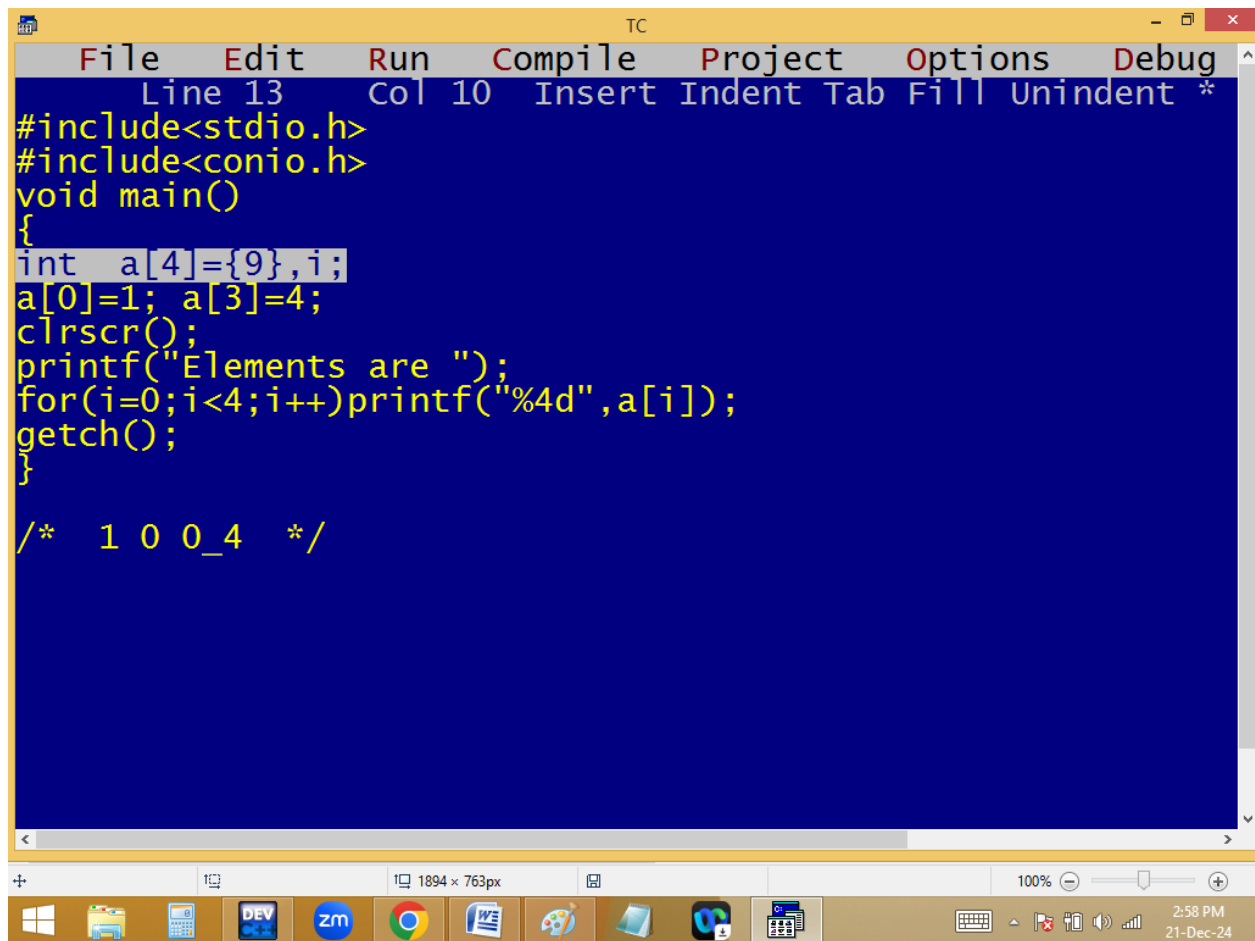


The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar is a status bar showing "Line 13", "Col 10", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and "*". The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int a[4]={9},i;
    a[0]=1; a[3]=4;
    clrscr();
    printf("Elements are ");
    for(i=0;i<4;i++)printf("%4d",a[i]);
    getch();
}

/* 1 0 0 4 */
```


At the bottom of the window is a Windows taskbar. It contains several application icons: Windows Start button, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Microsoft Word, a game controller icon, a folder icon, and a calendar icon. The taskbar also shows a system tray with icons for keyboard, volume, and network, along with the date and time: "2:58 PM 21-Dec-24".

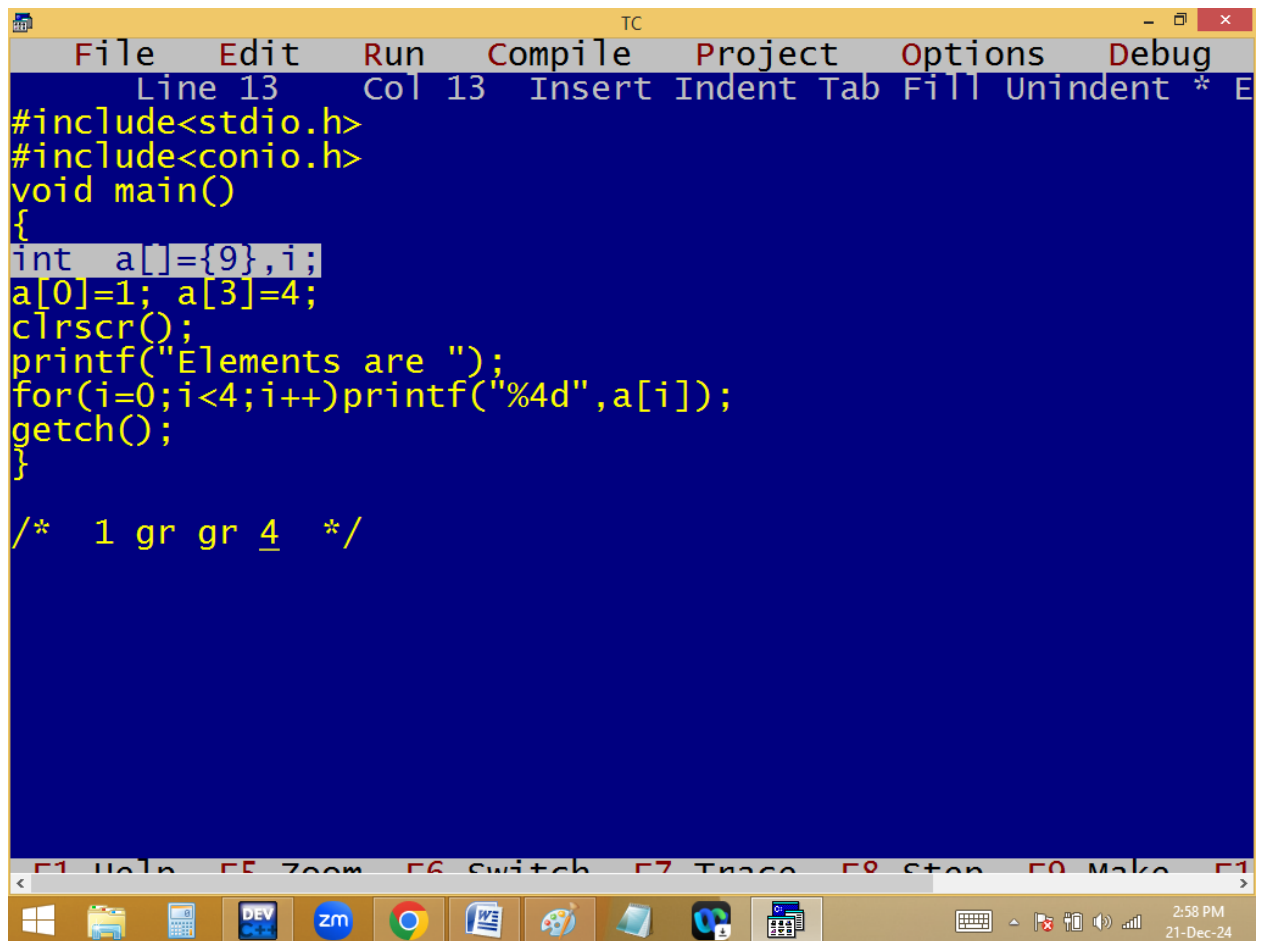

```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 13 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a[]={9},i;
a[0]=1; a[3]=4;
clrscr();
printf("Elements are ");
for(i=0;i<4;i++)printf("%4d",a[i]);
getch();
}


/* 1 gr gr 4 */

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

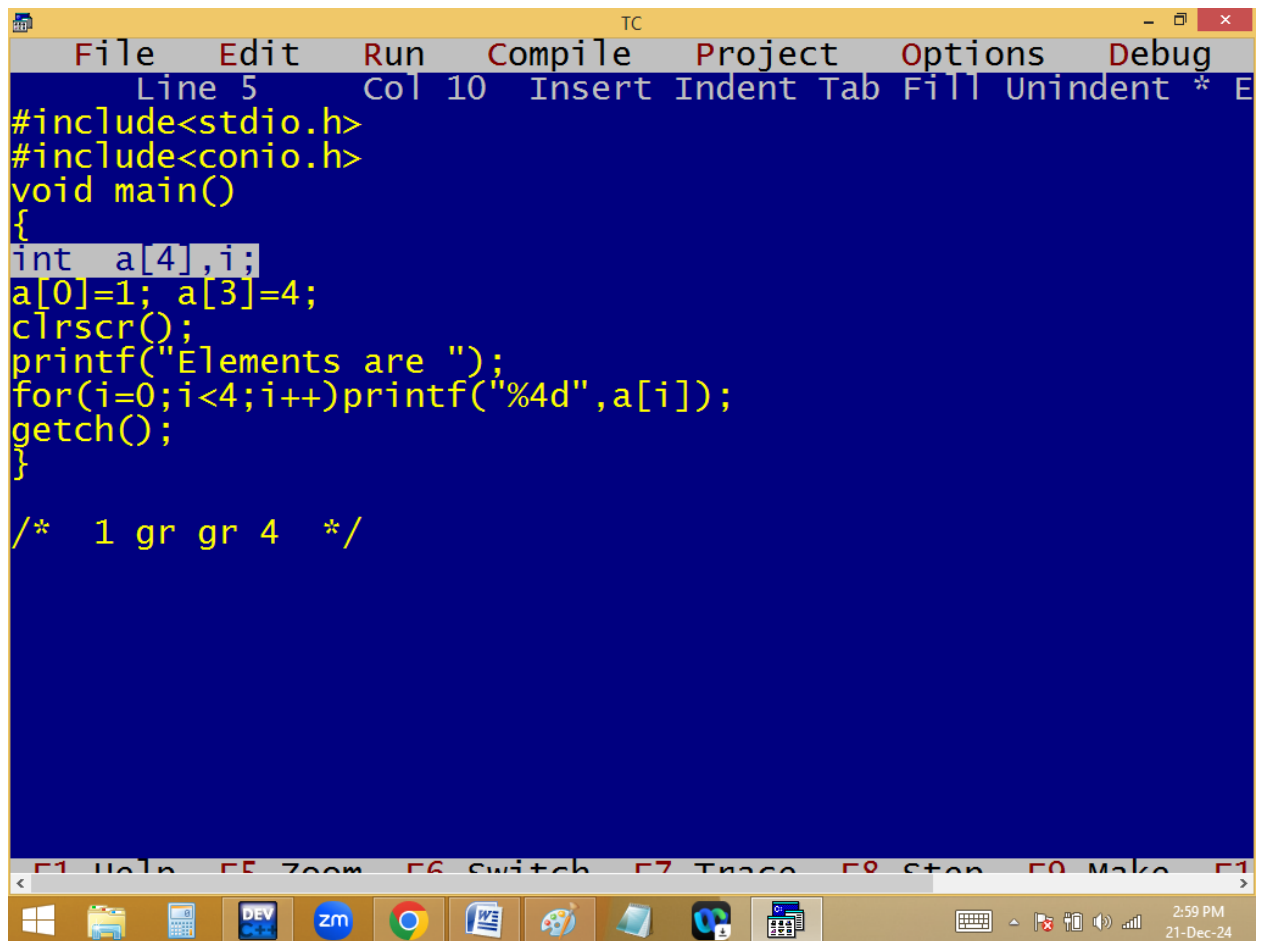

```
TC
File Edit Run Compile Project Options Debug
Line 5 Col 10 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4],i;
a[0]=1; a[3]=4;
clrscr();
printf("Elements are ");
for(i=0;i<4;i++)printf("%4d",a[i]);
getch();
}

/* 1 gr gr 4 */
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

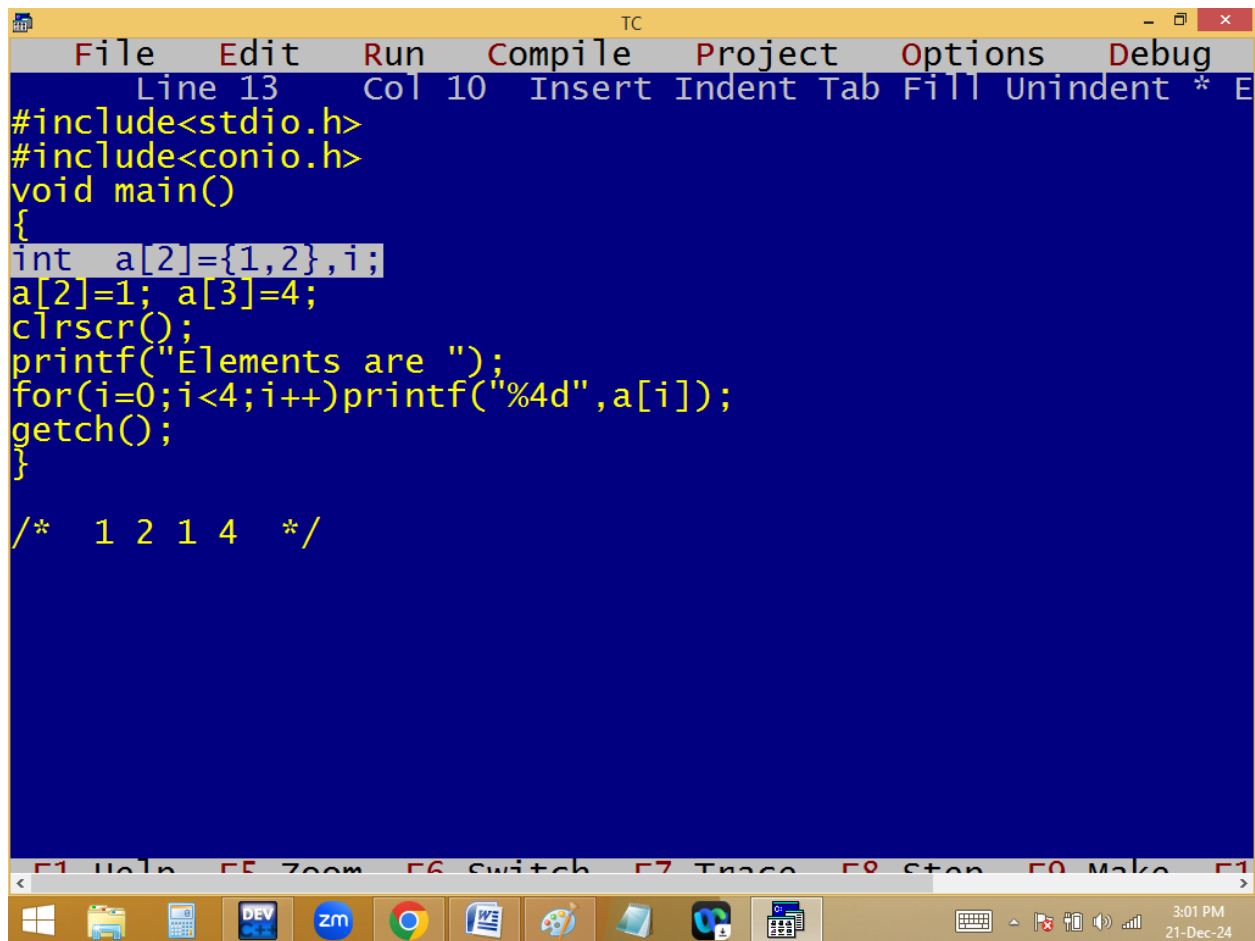
The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the bottom shows "Line 13", "Col 10", and "Insert". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int a[2]={1,2},i;
    a[2]=1; a[3]=4;
    clrscr();
    printf("Elements are ");
    for(i=0;i<4;i++)printf("%4d",a[i]);
    getch();
}

/*  1 2 1 4  */
```

The code declares an array `a` of size 2, initializes it with `{1, 2}`, and then manually sets `a[2] = 1` and `a[3] = 4`. It then prints the elements of the array using a `for` loop and `printf` with the format `%4d`. The output shown in the comment is `1 2 1 4`. The Windows taskbar is visible at the bottom, showing various application icons and the system clock indicating 3:01 PM on 21-Dec-24.

Reading and printing array elements:

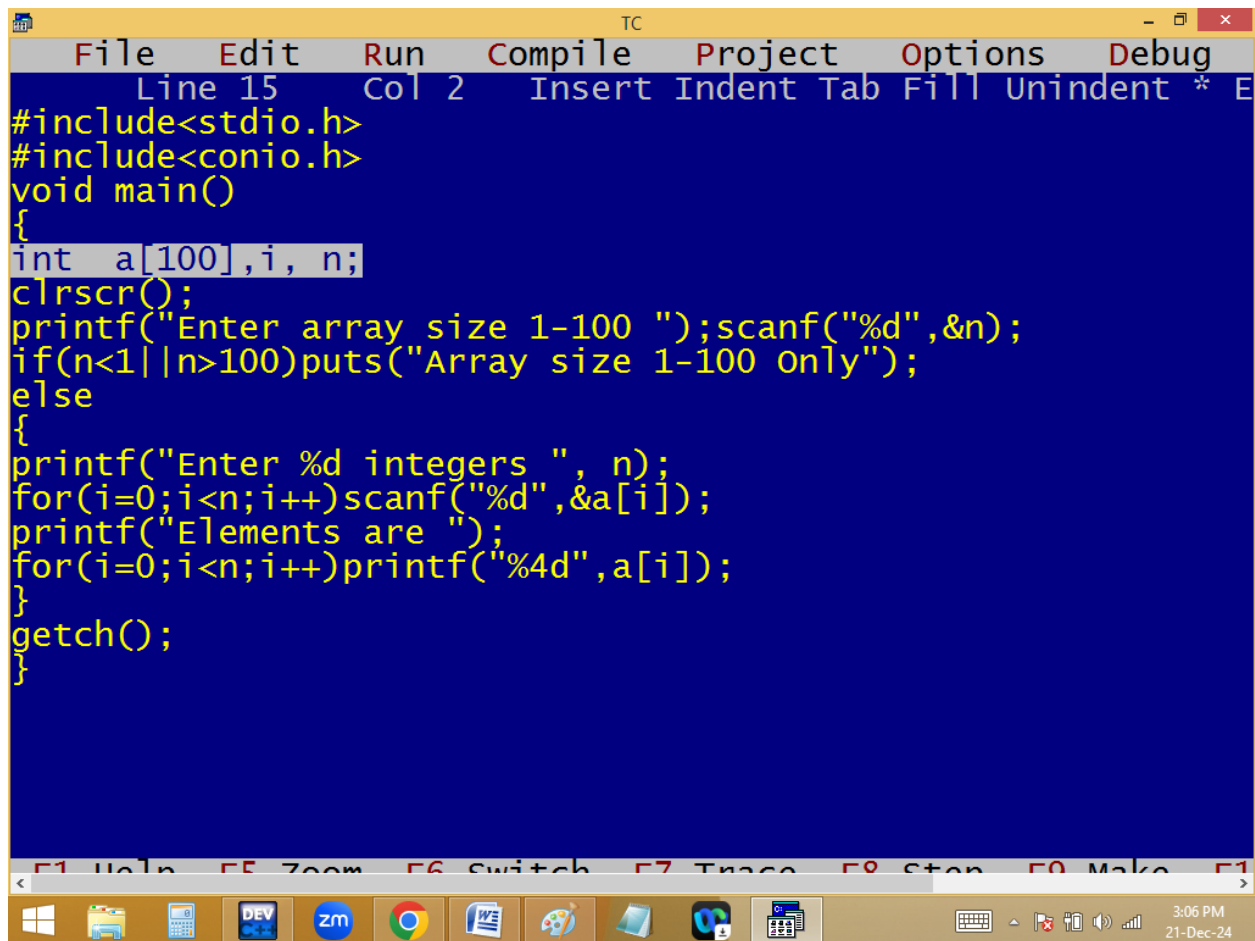


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar indicates "Line 15", "Col 2", and provides keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a dark blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
    int a[100],i, n;
    clrscr();
    printf("Enter array size 1-100 ");scanf("%d",&n);
    if(n<1||n>100)puts("Array size 1-100 only");
    else
    {
        printf("Enter %d integers ", n);
        for(i=0;i<n;i++)scanf("%d",&a[i]);
        printf("Elements are ");
        for(i=0;i<n;i++)printf("%4d",a[i]);
    }
    getch();
}
```


At the bottom of the window, there is a toolbar with icons for various functions, and a status bar showing the time "3:06 PM" and the date "21-Dec-24".


```
TC
Enter array size 1-100 4
Enter 4 integers 2 0 8 1
Elements are 2 0 8 1_
```

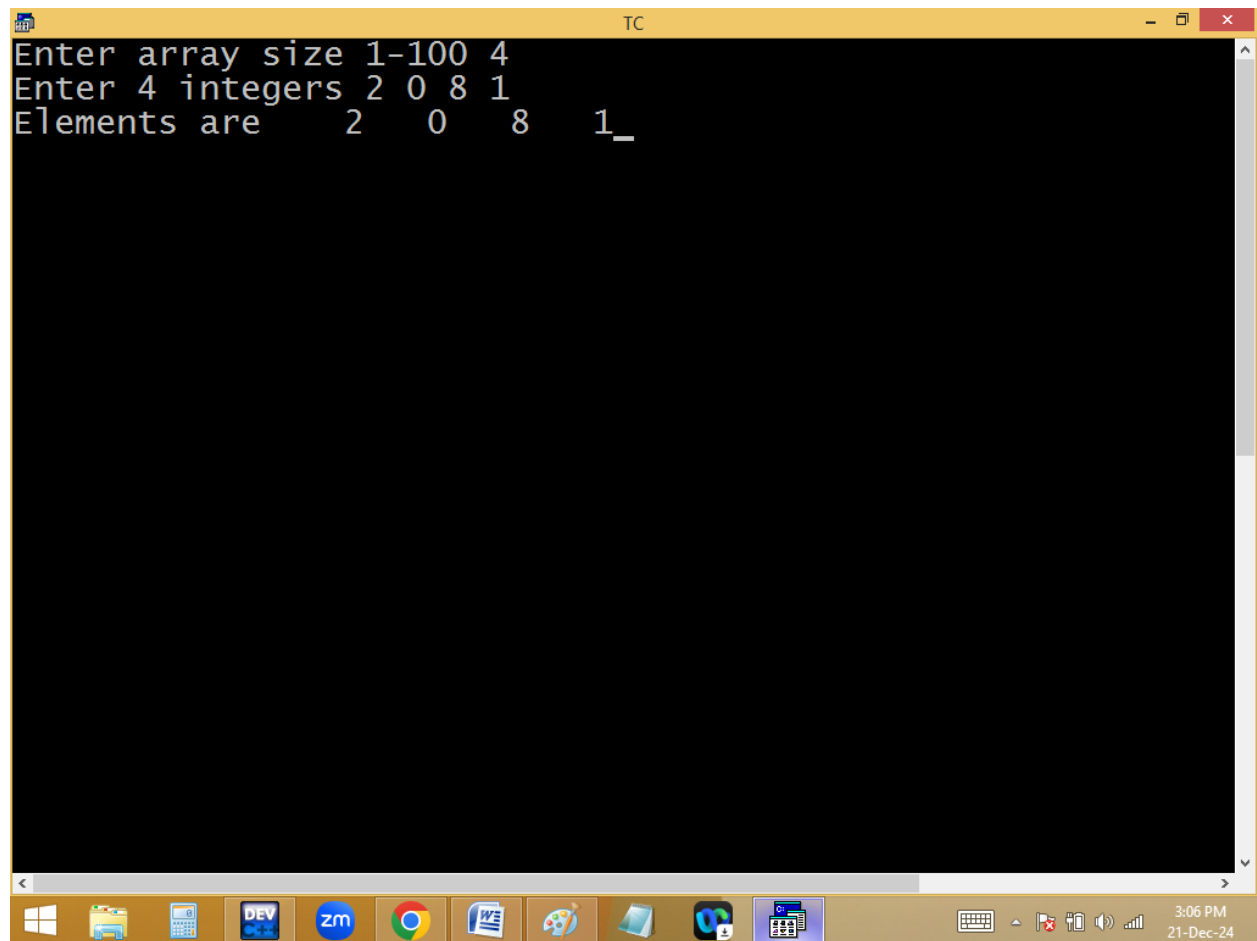

The image shows a Windows 10 desktop environment. A terminal window titled "TC" is open, displaying the following text: "Enter array size 1-100 4", "Enter 4 integers 2 0 8 1", and "Elements are 2 0 8 1_". The taskbar at the bottom contains several application icons: Windows Start button, File Explorer, Calculator, DEV (a blue icon with white text), ZM (Zoom), Google Chrome, Microsoft Word, a game controller icon, a folder icon, a Teams icon, and a calendar icon. On the right side of the taskbar, there are system tray icons for keyboard, network, and volume, along with the system clock showing "3:06 PM" and the date "21-Dec-24".

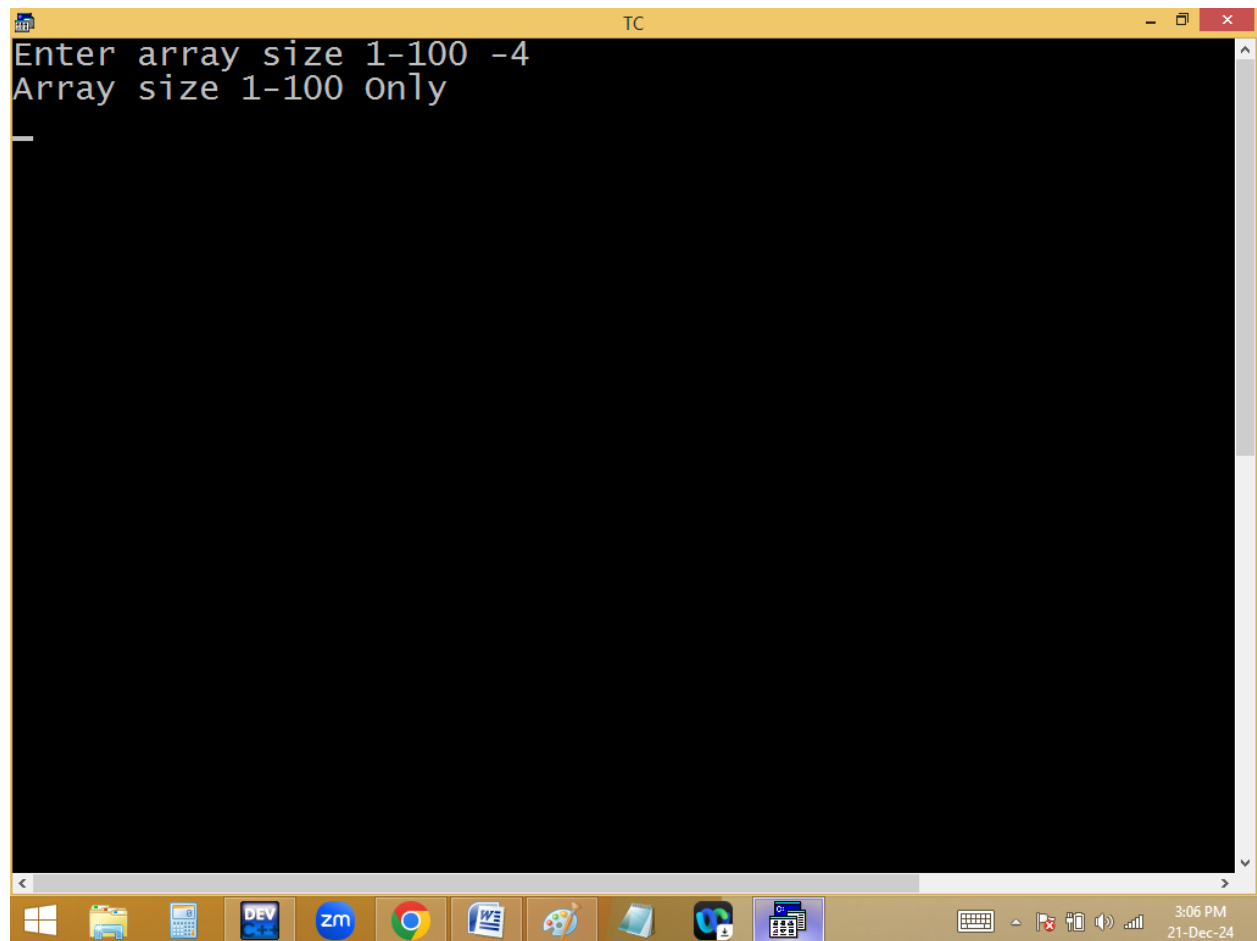

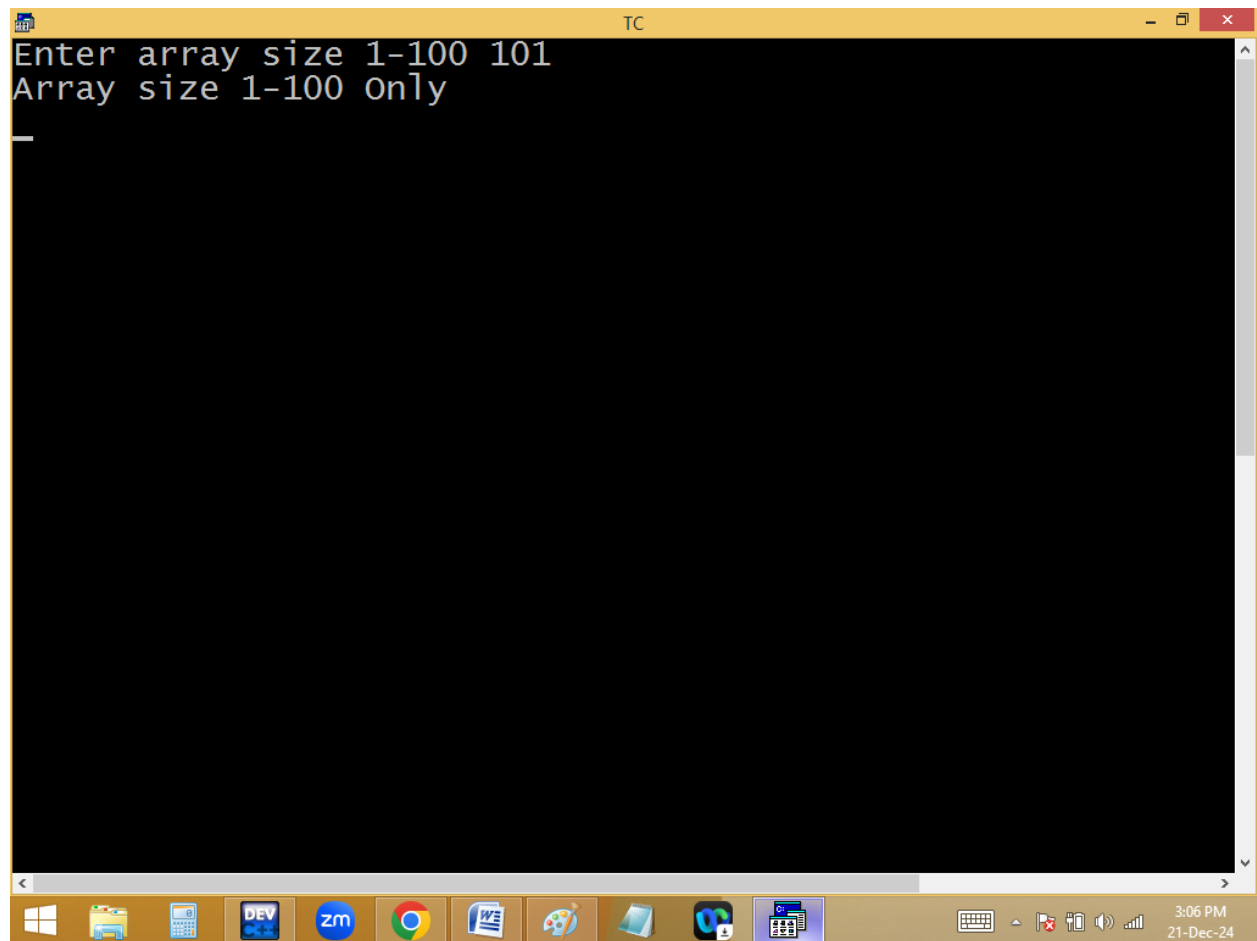

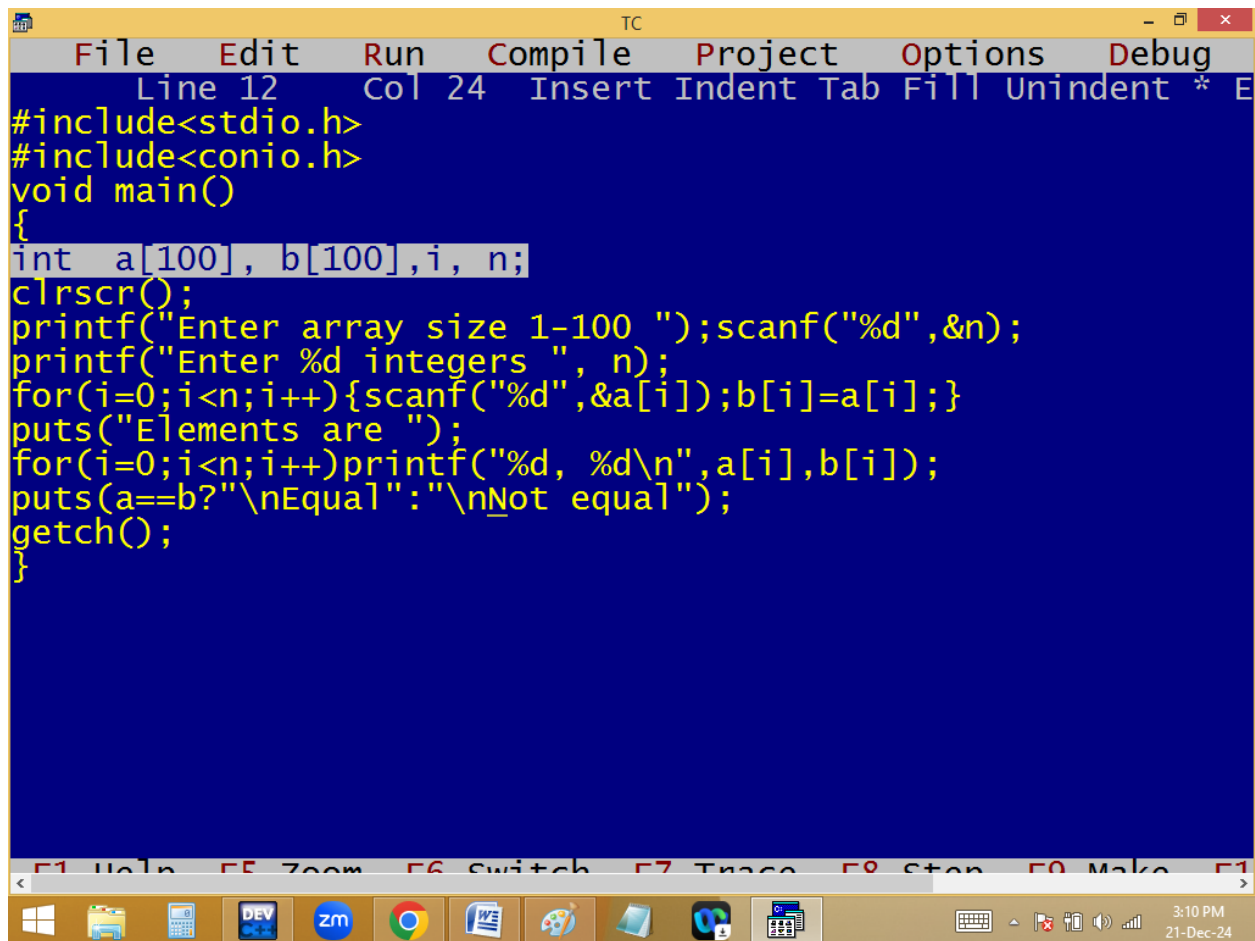

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 12", "Col 24", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code:


```
#include<stdio.h>
#include<conio.h>
void main()
{
    int a[100], b[100], i, n;
    clrscr();
    printf("Enter array size 1-100 ");scanf("%d",&n);
    printf("Enter %d integers ", n);
    for(i=0;i<n;i++){scanf("%d",&a[i]);b[i]=a[i];}
    puts("Elements are ");
    for(i=0;i<n;i++)printf("%d, %d\n",a[i],b[i]);
    puts(a==b?"\nEqual":"\nNot equal");
    getch();
}
```

At the bottom of the window, there is a toolbar with icons for various functions and a status bar showing the time "3:10 PM" and the date "21-Dec-24".

```
TC
Enter array size 1-100 4
Enter 4 integers 1 2 3 4
Elements are
1, 1
2, 2
3, 3
4, 4

Not equal
```


Read n elements into array and find the elements sum and avg.

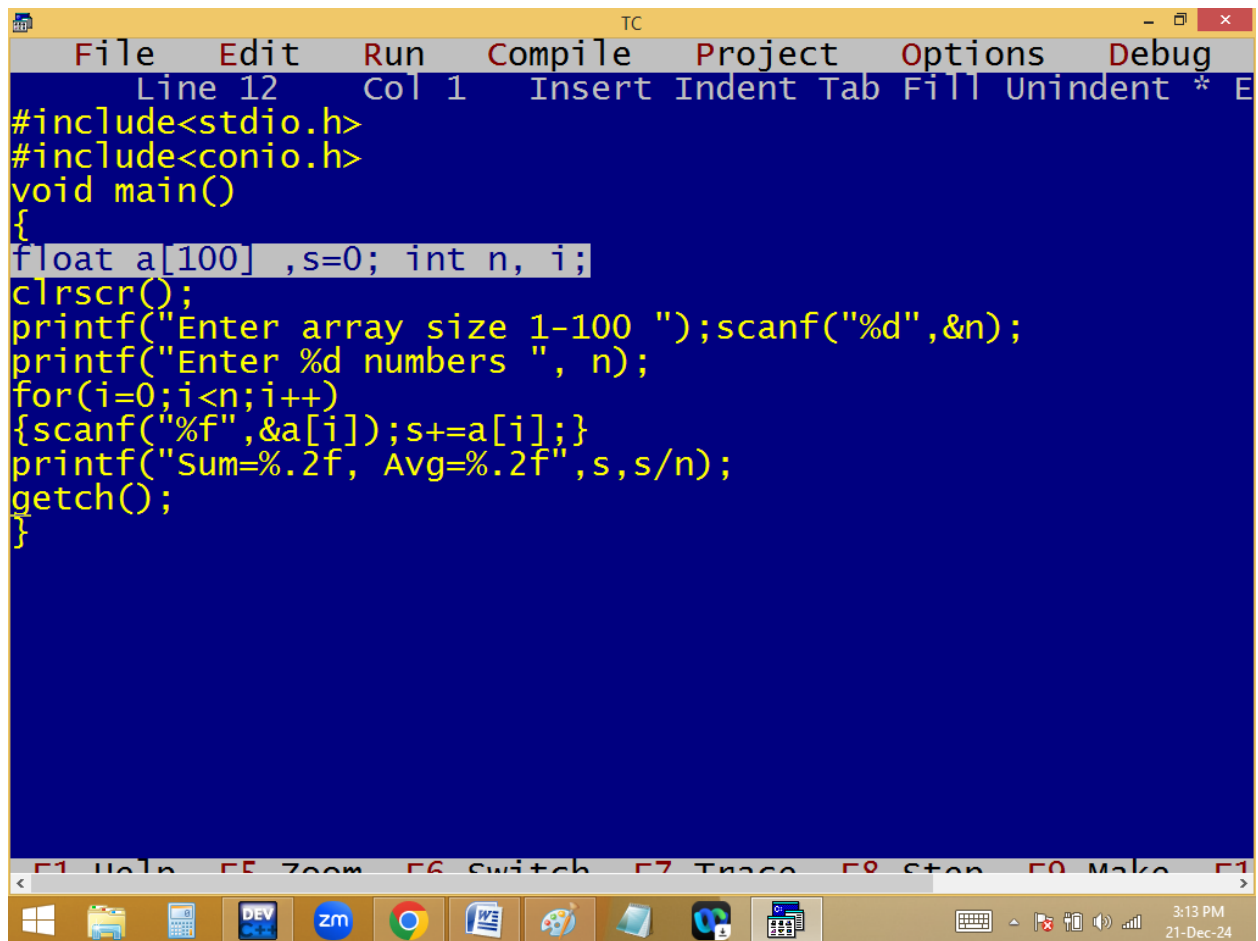

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar is a status bar showing "Line 12", "Col 1", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
float a[100],s=0; int n, i;
clrscr();
printf("Enter array size 1-100 ");scanf("%d",&n);
printf("Enter %d numbers ", n);
for(i=0;i<n;i++)
{scanf("%f",&a[i]);s+=a[i];}
printf("Sum=%.2f, Avg=%.2f",s,s/n);
getch();
}
```

At the bottom of the window, there is a toolbar with icons for various functions, and a status bar showing the time "3:13 PM" and the date "21-Dec-24".

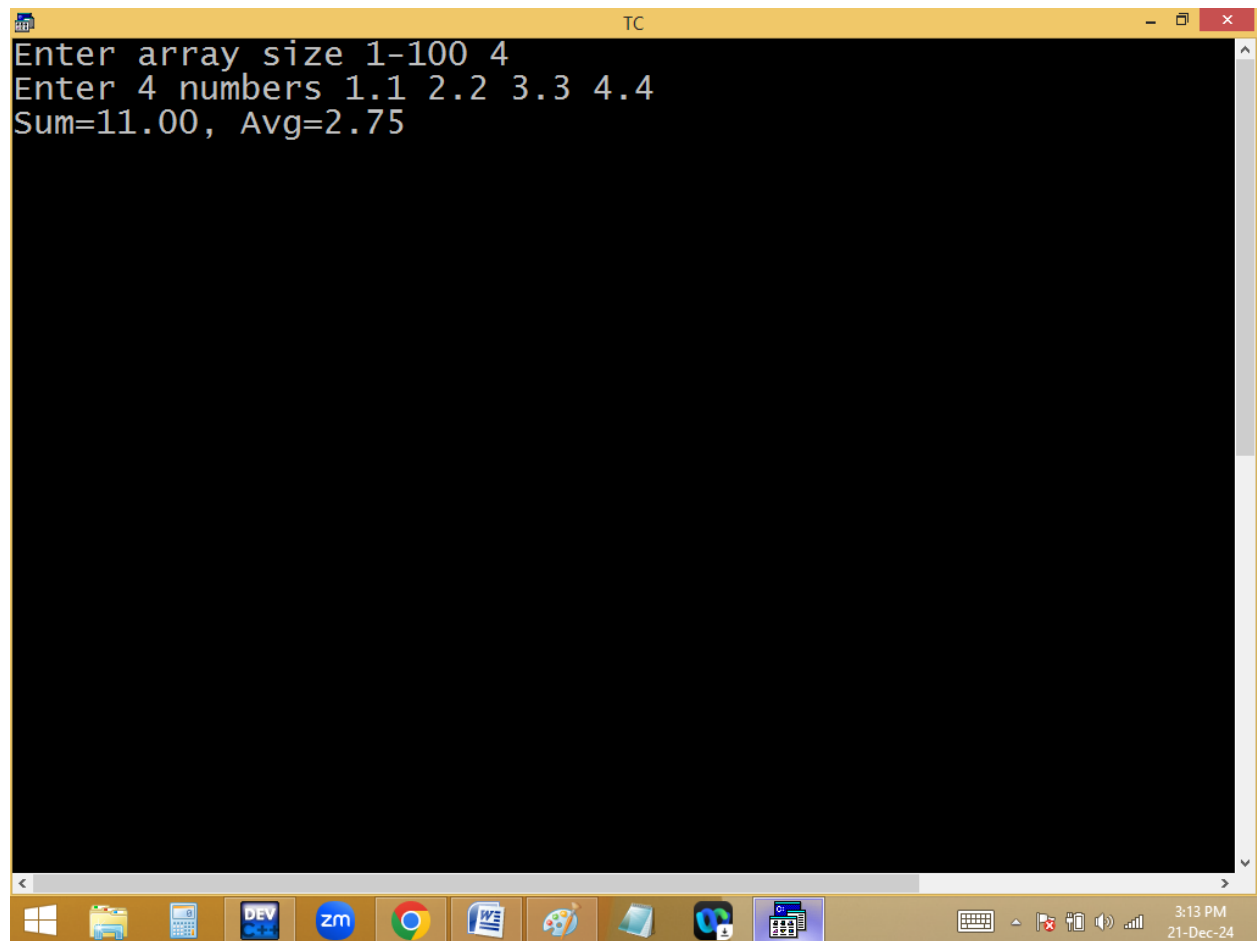

The image shows a screenshot of a Turbo C++ (TC) window. The window has a yellow title bar with the text "TC" and standard Windows window controls (minimize, maximize, close). The main area is black with white text. The text displayed is:

```
Enter array size 1-100 4
Enter 4 numbers 1.1 2.2 3.3 4.4
Sum=11.00, Avg=2.75
```

At the bottom of the window is a taskbar with various icons, including the Windows logo, File Explorer, Calculator, DEV C++, Zm, Google Chrome, Word, Paint, and a folder icon. The system tray on the right shows the time as 3:13 PM and the date as 21-Dec-24.

Finding max, min array elements.

```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 25 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a[100] , n, i, max, min;
clrscr();
printf("Enter array size 1-100 ");scanf("%d",&n);
printf("Enter %d numbers ", n);
for(i=0;i<n;i++)scanf("%d",&a[i]);
max=min=a[0];
for(i=1;i<n;i++)
{
if(max<a[i])max=a[i];
if(min>a[i])min=a[i];
}
printf("Max=%d, Min=%d",max, min);
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

3:23 PM
21-Dec-24

```
TC
Enter array size 1-100 9
Enter 9 numbers 3 9 -2 7 0 5 1 -9 6
Max=9, Min=-9
```

max=min=a[0];

for(i=1; i<4; i++)

{
if(max<a[i]) max=a[i];

if(min>a[i]) min=a[i];
}

p(max, min);

9	0	12	-4
---	---	----	----

0 1 2 3

n	i	max	min
4	1	9 < 0	0 > 9
	2	12 < 9	0 > 12
	3	12 < -4	0 > -4

Finding no of even/odd/zero elements of array:


```
TC
File Edit Run Compile Project Options Debug
Line 16 Col 40 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a[100] , n, i, e,o,z;
clrscr();
printf("Enter array size 1-100 ");scanf("%d",&n);
printf("Enter %d numbers ", n);
for(e=o=z=i=0;i<n;i++)
{
scanf("%d",&a[i]);
if(a[i]==0)z++;
else if(a[i]%2==0)e++;
else o++;
}
printf("Even=%d, Odd=%d, Zero=%d",e,o,z);
getch();
}
```

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10


3:32 PM
21-Dec-24

```
TC
Enter array size 1-100 9
Enter 9 numbers 2 0 -9 7 -4 6 5 8 1
Even=4, Odd=4, Zero=1_
```

```
for(i=0; i<4; i++)
{
    scanf("%d", &a[i]);
    if(a[i]==0) z++;
    else if(a[i]%2==0) e++;
    else o++;
}
p(e, o, z);
```

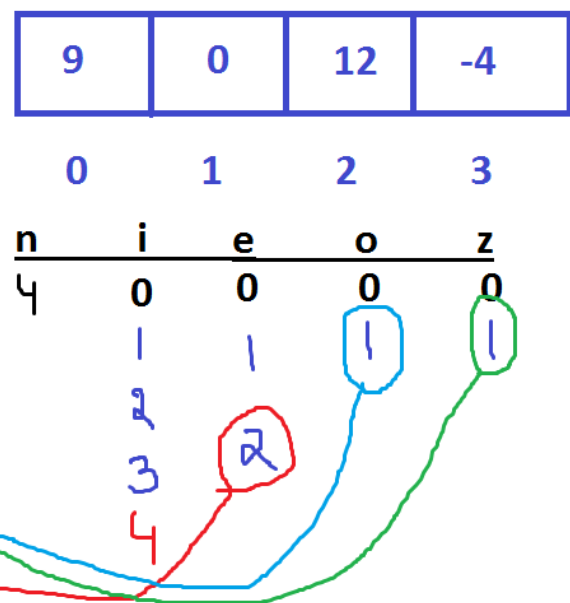

Finding prime/ composite no's of given array:

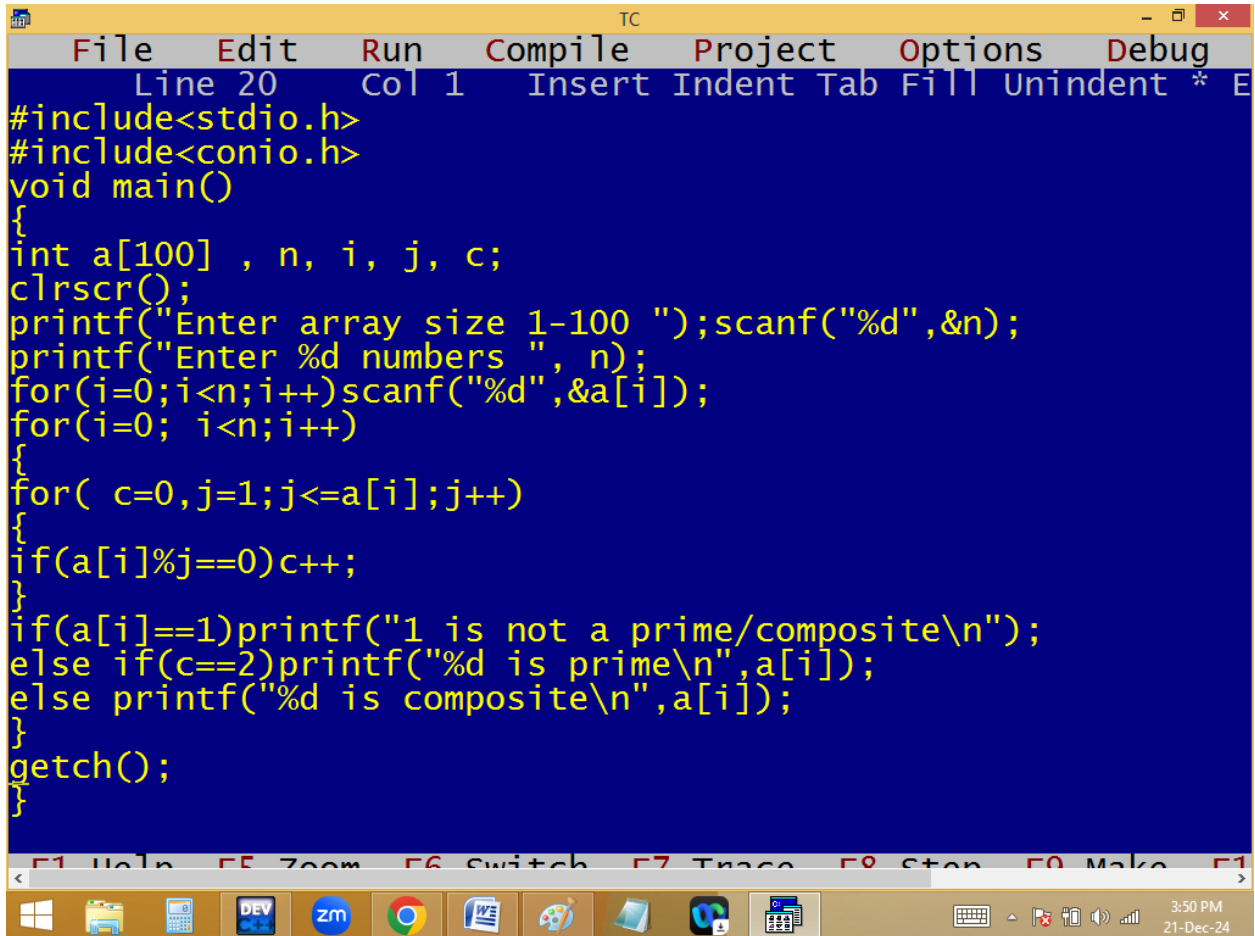

```
TC
File Edit Run Compile Project Options Debug
Line 20 Col 1 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a[100] , n, i, j, c;
clrscr();
printf("Enter array size 1-100 ");scanf("%d",&n);
printf("Enter %d numbers ", n);
for(i=0;i<n;i++)scanf("%d",&a[i]);
for(i=0; i<n;i++)
{
for( c=0,j=1;j<=a[i];j++)
{
if(a[i]%j==0)c++;
}
if(a[i]==1)printf("1 is not a prime/composite\n");
else if(c==2)printf("%d is prime\n",a[i]);
else printf("%d is composite\n",a[i]);
}
getch();
}
```

The screenshot shows a Turbo C++ IDE window titled 'TC'. The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates 'Line 20 Col 1 Insert Indent Tab Fill Unindent * E'. The code is written in C and is designed to find prime and composite numbers in an array. It starts by including `<stdio.h>` and `<conio.h>`, then defines a `main` function. Inside `main`, it declares an array `a` of size 100, and variables `n`, `i`, `j`, and `c`. It clears the screen with `clrscr()` and prompts the user to enter the array size (1-100) and the numbers. It then uses nested loops to check for divisibility and prints the result for each number in the array. The IDE's taskbar at the bottom shows various application icons and the system clock indicating 3:50 PM on 21-Dec-24.

```

Enter array size 1-100 7
Enter 7 numbers 1 2 3 4 5 6 7
1 is not a prime/composite
2 is prime
3 is prime
4 is composite
5 is prime
6 is composite
7 is prime

```

```

for( i=0; i<4;i++ )
{
    1 to 9
    for( c=0, j=1; j<=a[i];j++)
    {
        if( a[i]%j==0)c++;
    }
    if( c==2)p(prime);else p(com);
}

```

