

Frequency of array elements:

```
TC
File Edit Run Compile Project Options Debug Break
Line 14 Col 30 Insert Indent Tab Fill Unindent * E:2PM
#include<stdio.h>
#include<conio.h>
void main()
{
int a[100],b[100]={0},n,i,j,c; clrscr();
printf("Enter array size 1-100 "); scanf("%d",&n);
printf("Enter %d integers ", n);
for(i=0;i<n;i++)scanf("%d",&a[i]);
for(i=0;i<n;i++)
{
if(b[i]!=-1)
{
for(c=1,j=i+1;j<n;j++)
{if(a[i]==a[j]){c++;b[j]=-1;}}
b[i]=c;
}
}
for(i=0;i<n;i++)if(b[i]!=-1)
printf("%d found %d times\n",a[i],b[i]);
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Me

Go to PC settings to activate Windows.

348 x 26px 1894 x 763px Size: 26.0KB 100%

2:35 PM 27-Dec-24

```

Enter array size 1-100 9
Enter 9 integers 1 4 3 1 3 6 1 4 2
1 found 3 times
4 found 2 times
3 found 2 times
6 found 1 times
2 found 1 times


```

```

for( i=0; i<9; i++)
{
  if(b[i] != -1)
  {
    for( c=1, j=i+1; j<9; j++)
    {
      if(a[i] == a[j]) { c++; b[j] = -1; }
    }
    b[i] = c;
  }
}

for(i=0; i<9; i++)
if(b[i] != -1) p(a[i] found b[i]);

```

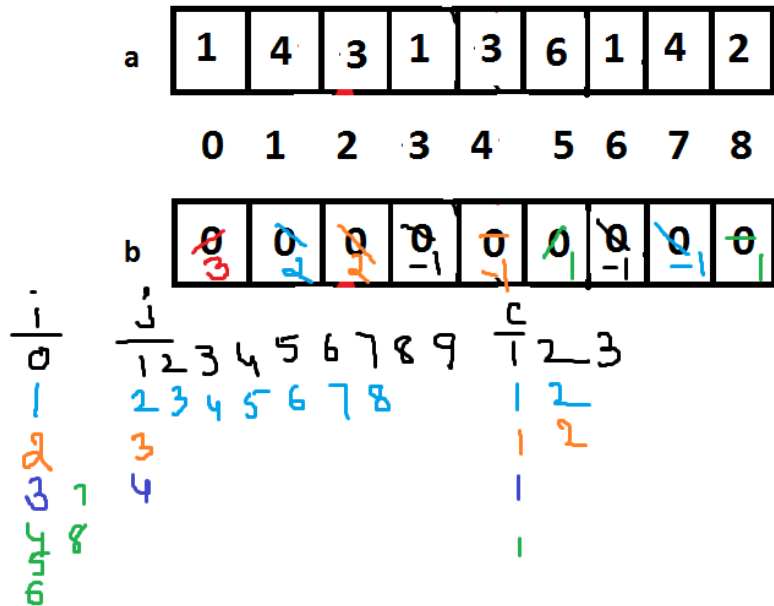

Merging of arrays:

```
TC
File Edit Run Compile Project Options Debug Break
Line 16 Col 42 Insert Indent Tab Fill Unindent * E:2PM
#include<stdio.h>
#include<conio.h>
void main()
{
int a[100],b[100],s1,s2,i,j,t; clrscr();
printf("Enter 1st, 2nd array sizes 1-100 "); scanf("%d%d",&s1,&s2);
printf("Enter %d integers for 1st array ", s1);
for(i=0;i<s1;i++)scanf("%d",&a[i]);
printf("Enter %d integers for 2nd array ", s2);
for(i=0;i<s2;i++)scanf("%d",&b[i]);
for(i=s1,j=0;i<s1+s2;i++,j++)a[i]=b[j];
for(i=0;i<s1+s2;i++)
{
for(j=i+1;j<s1+s2;j++)
{
if(a[i]>a[j]){t=a[i];a[i]=a[j];a[j]=t;}}}_
printf("Elements are ");
for(i=0;i<s1+s2;i++)printf("%4d",a[i]);
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Me

Go to PC settings to activate Windows.

1894 x 763px Size: 26.0KB 100%


2:50 PM 27-Dec-24

```
TC
Enter 1st, 2nd array sizes 1-100 5
4
Enter 5 integers for 1st array 9 4 -5 2 -9
Enter 4 integers for 2nd array 20 12 3 7
Elements are -9 -5 2 3 4 7 9 12 20
```

Activate Windows
Go to PC settings to activate Windows.

Page: 4 of 5 Words: 7 110%

2:50 PM
27-Dec-24

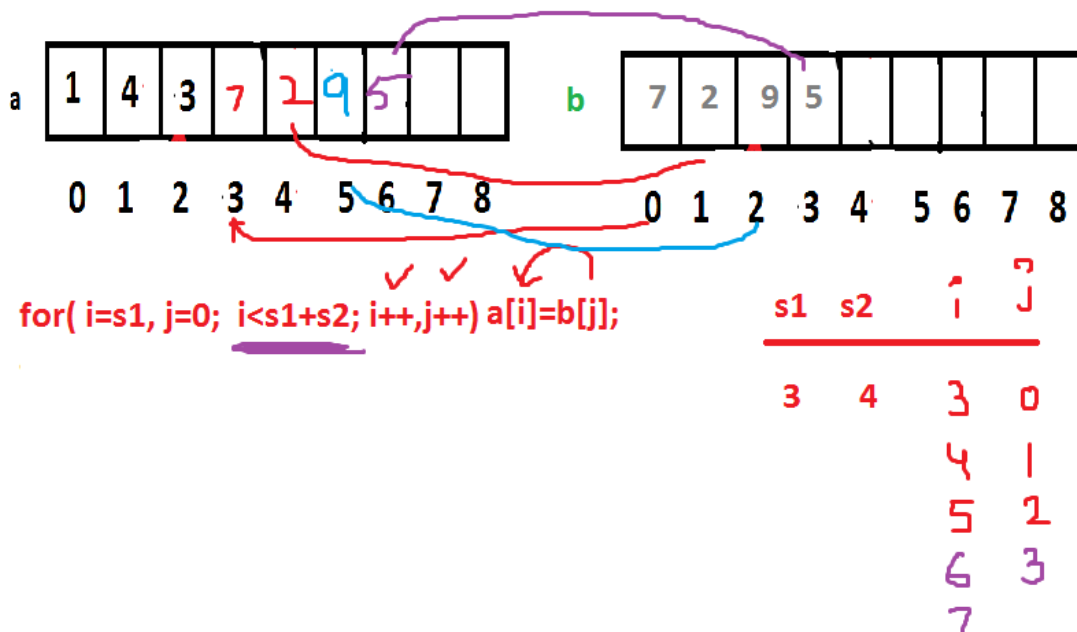

Two dimensional arrays:

Array with several rows and columns.

Array with two subscripting operators **[] []**.

It is array of arrays. i.e. collection of one-dimensional arrays.

It is implicit double pointer.

It is a $n \times n$ matrix.


Syntax:

datatype variable [rows] [columns] = {elements} ;

Eg:

```
int a[ 2 ][ 3 ] = { { 10, 20 , 30 } , { 40 ,50, 60 } };
```

stack

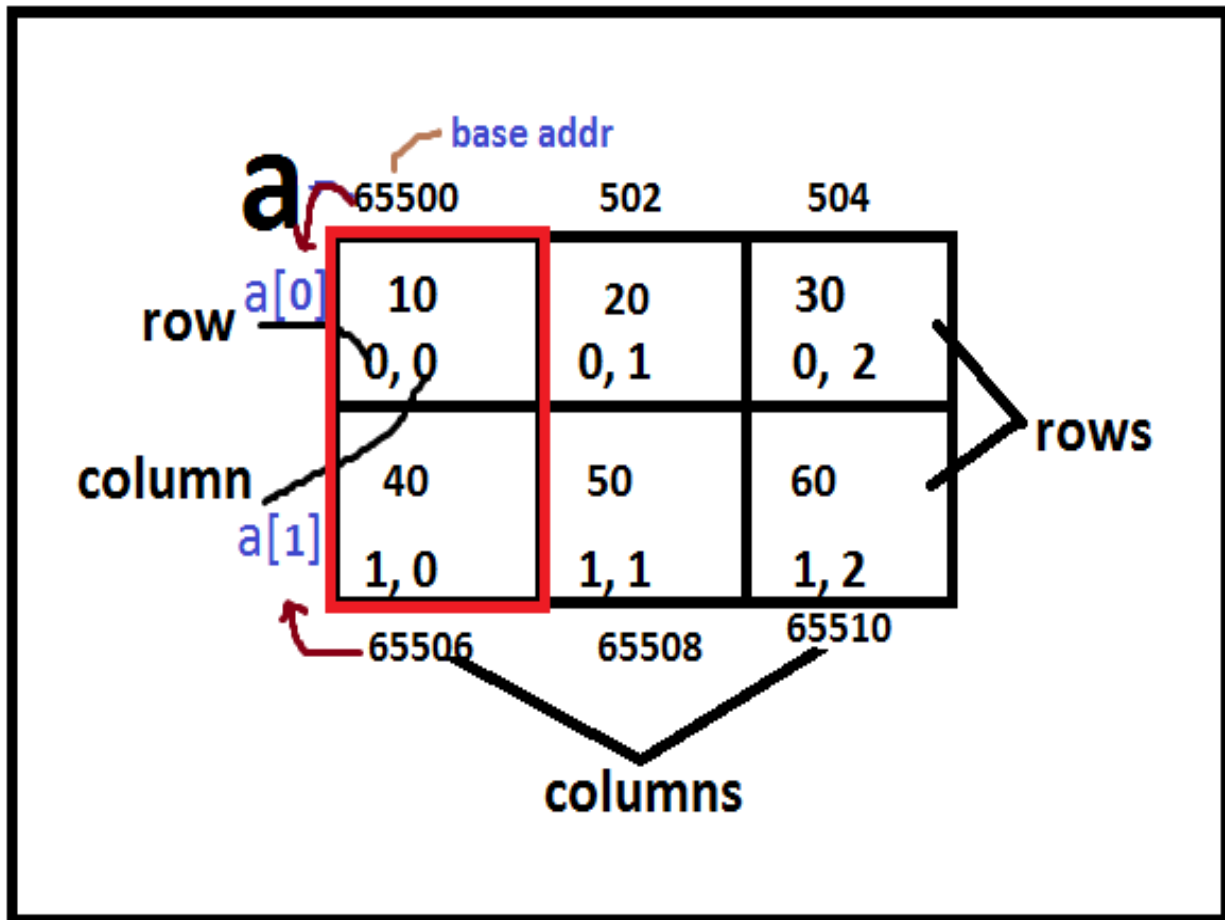

In two dimensional array the rows/first subscript is working as array of pointers and they stores first column address of each row. Hence it is an implicit/internal double pointer.

In the above example, To print the first row, first column value, we have to use

`printf("%d", a[0][0]);` → 10

Internally how this statement is working ?

`a[0]` means value at `a[0]` i.e. 65500.

`65500 + [0] col` → `65500 + 0 * 2` → `65500` →
value at 65500 is 10.

Index no

Int size

stack

<code>a[1][2]</code>	<u>60</u>	65500
<code>a[1][1]</code>	<u>50</u>	65498
<code>a[1][0]</code>	40	65496
<code>a[0][2]</code>	<u>30</u>	65494
<code>a[0][1]</code>	<u>20</u>	65492
<code>a[0][0]</code>	<u>10</u>	65490

`int a[2][2]={10,20,30,40};`

<code>a[1][1]</code>	40	65496
<code>a[1][0]</code>	<u>30</u>	65494
<code>a[0][1]</code>	<u>20</u>	65492
<code>a[0][0]</code>	<u>10</u>	65490

```
int a[2][3]={{1,2,3},{4,5,6}};
```

columns

	[0]	[1]	[2]
65500	1	2	3
502	0, 0	0, 1	0, 2
504			
rows			
65506	4	5	6
508	1, 0	1, 1	1, 2
65510			

$p(a[0][0]) \Rightarrow 1$


$65500 + 0 * 2 = 65500 \Rightarrow \text{print value at } 65500 = 1$

$p(a[1][2]) \Rightarrow 6$

$65506 + 2 * 2 = 65510 \Rightarrow \text{value at } 65510 \Rightarrow 6$

	stack	
a[1][2]	6	65510
a[1][1]	5	65508
a[1][0]	4	65506
a[0][2]	3	65504
a[0][2]	2	65502
a[0][2]	1	65500


Finding array address:

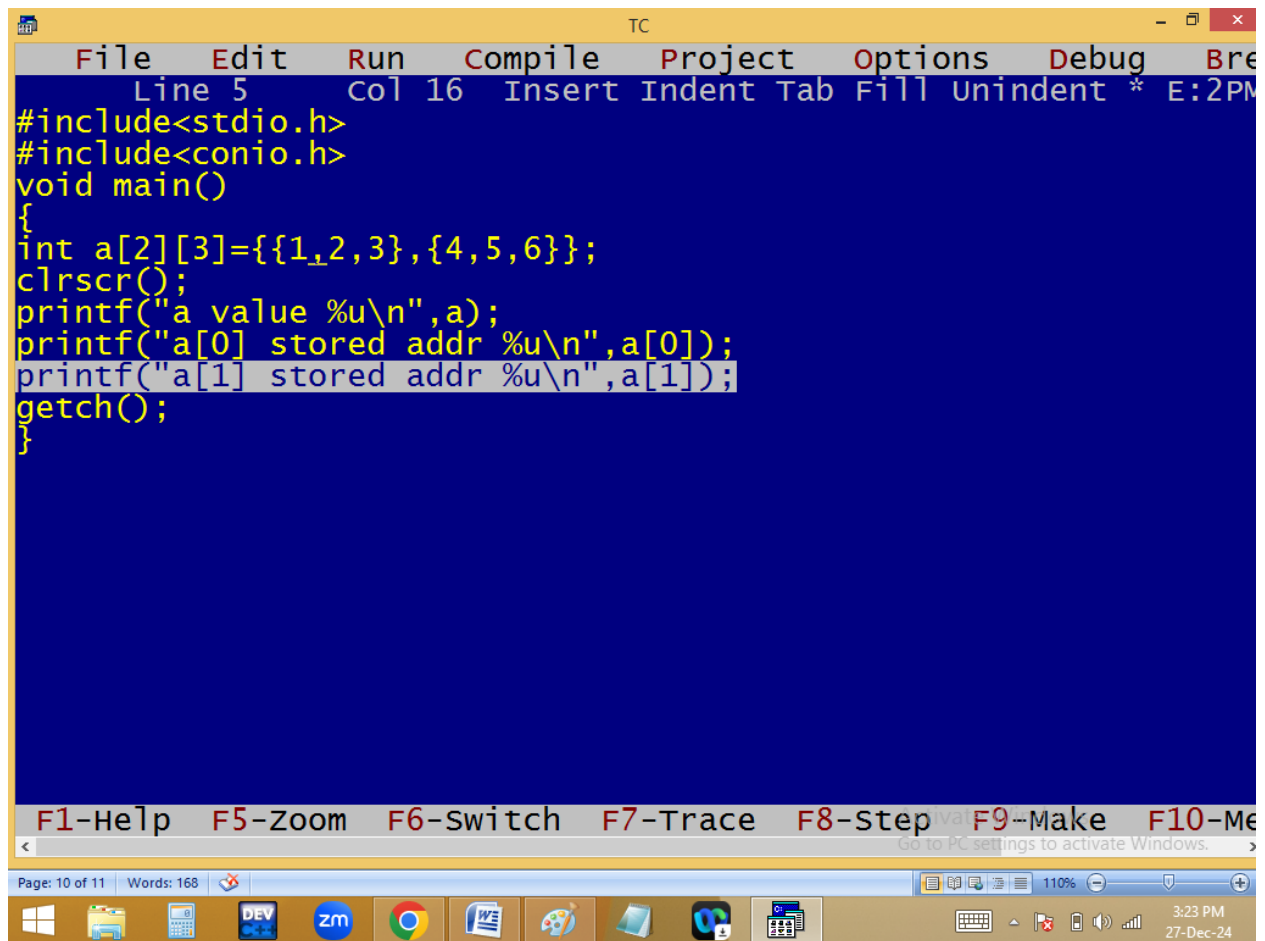

The image shows a screenshot of the Turbo C++ (TC) IDE. The main window has a dark blue background with yellow text. The menu bar at the top includes File, Edit, Run, Compile, Project, Options, Debug, and Break. The status bar at the top shows 'Line 5', 'Col 16', and 'Insert Indent Tab Fill Unindent * E:2PM'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[2][3]={{1,2,3},{4,5,6}};
clrscr();
printf("a value %u\n",a);
printf("a[0] stored addr %u\n",a[0]);
printf("a[1] stored addr %u\n",a[1]);
getch();
}
```


Below the code, there is a status bar with function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Me. A watermark 'WUOLAH' is visible in the background. At the bottom, the Windows taskbar is visible, showing the Start button, taskbar icons for File Explorer, Calculator, DEV C++, ZOOM, Google Chrome, Word, Paint, and VS Code, and the system tray with the date and time '3:23 PM 27-Dec-24'.

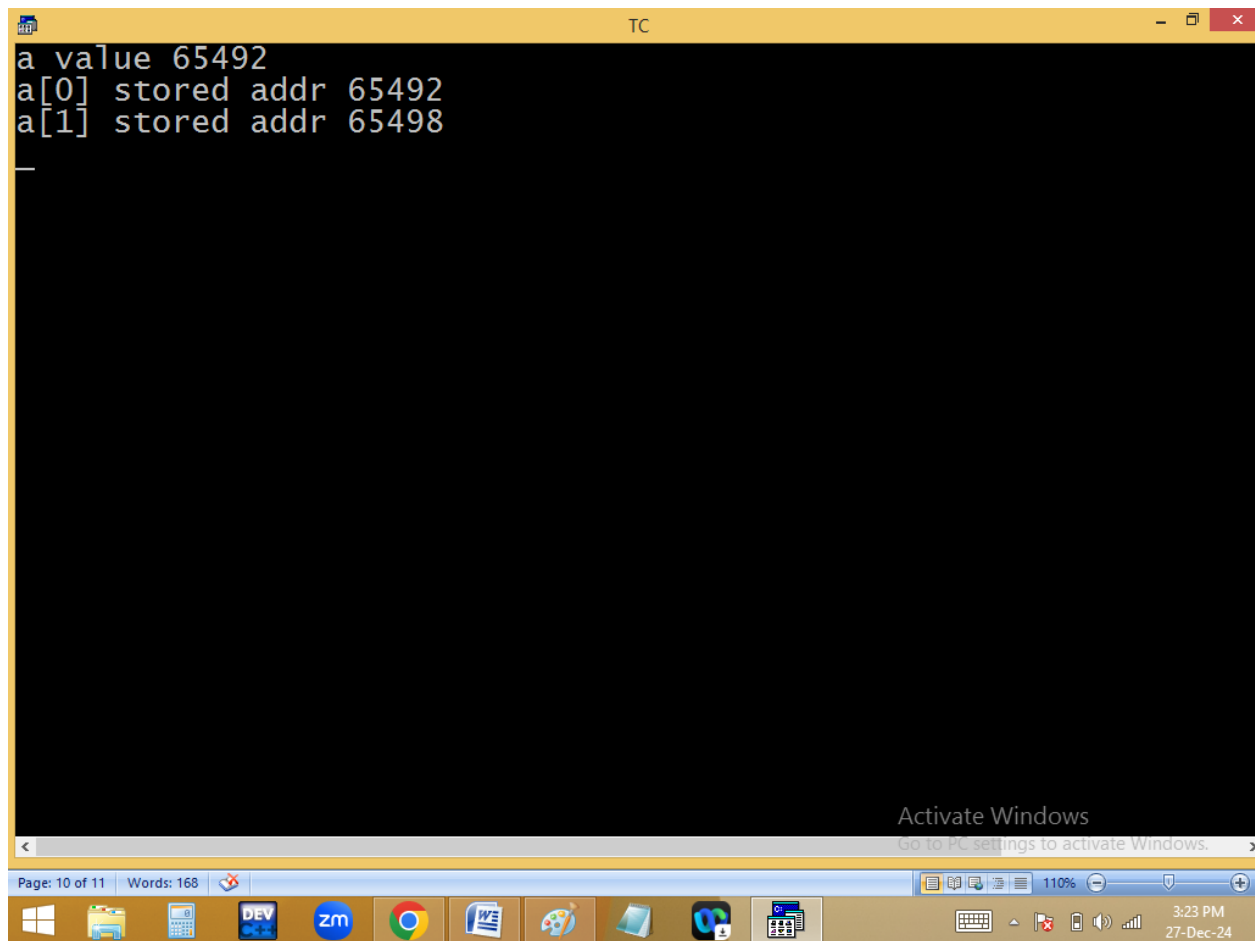

The screenshot shows a Turbo C++ (TC) window with a black background and white text. The text displays the memory addresses and values for an array 'a'. The first line shows 'a value 65492'. The second line shows 'a[0] stored addr 65492'. The third line shows 'a[1] stored addr 65498'. The window title bar is yellow and contains the text 'TC'. The Windows taskbar is visible at the bottom, showing various application icons and the system clock indicating 3:23 PM on 27-Dec-24.

```
a value 65492
a[0] stored addr 65492
a[1] stored addr 65498
```

Finding array element position, value, address:

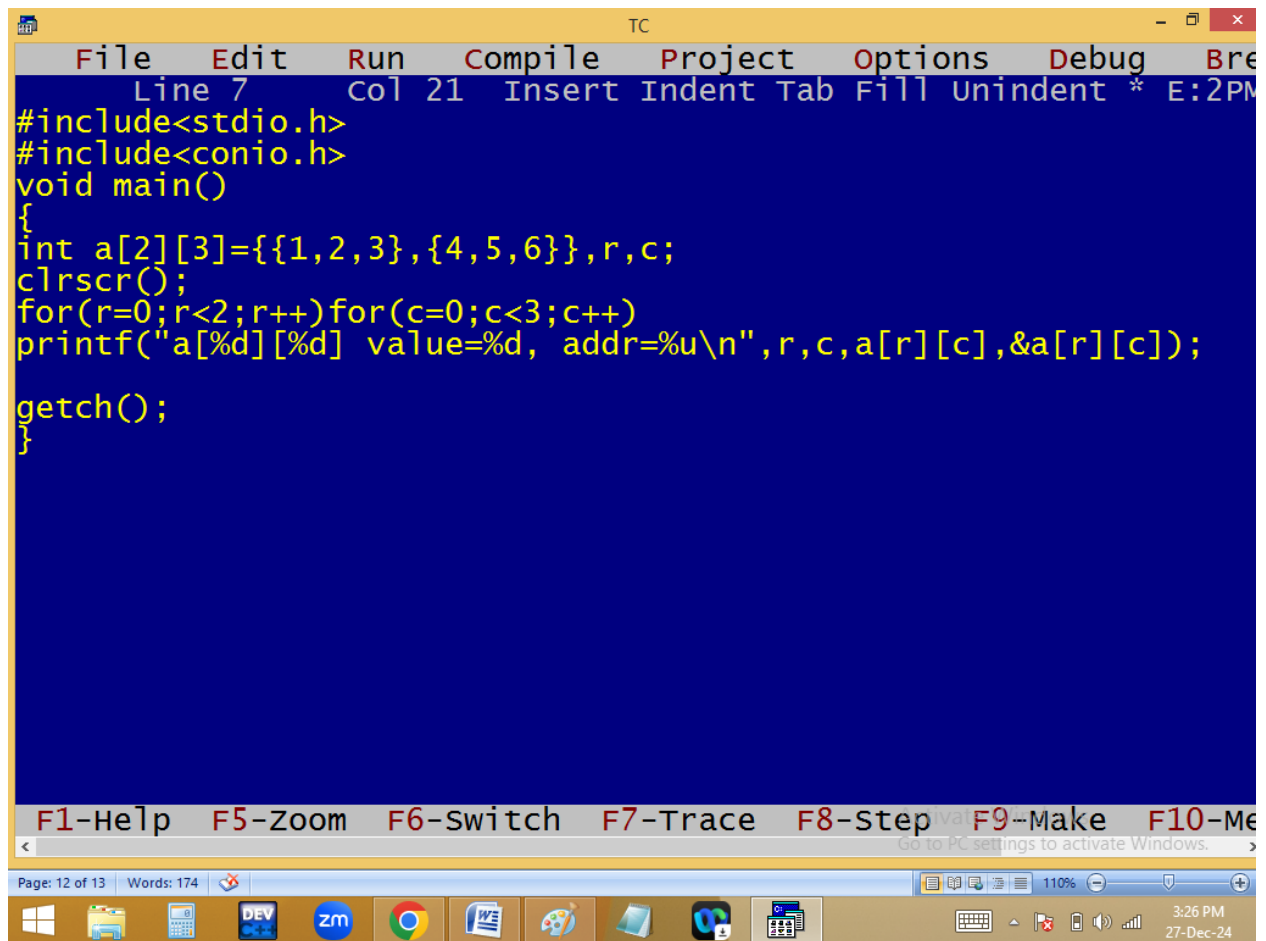

The image shows a screenshot of the Turbo C++ (TC) IDE. The main window has a dark blue background with yellow text. The menu bar at the top includes File, Edit, Run, Compile, Project, Options, Debug, and Break. The status bar at the top shows 'Line 7', 'Col 21', and 'Insert Indent Tab Fill Unindent * E:2PM'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[2][3]={{1,2,3},{4,5,6}},r,c;
clrscr();
for(r=0;r<2;r++)for(c=0;c<3;c++)
printf("a[%d][%d] value=%d, addr=%u\n",r,c,a[r][c],&a[r][c]);

getch();
}
```


Below the code editor, there is a toolbar with icons for various functions. The status bar at the bottom shows 'Page: 12 of 13' and 'Words: 174'. The Windows taskbar at the very bottom shows the Start button, several application icons (including DEV, zm, Chrome, Word, and others), and the system clock showing '3:26 PM' and '27-Dec-24'.

```
TC
a[0][0] value=1, addr=65492
a[0][1] value=2, addr=65494
a[0][2] value=3, addr=65496
a[1][0] value=4, addr=65498
a[1][1] value=5, addr=65500
a[1][2] value=6, addr=65502
```

Activate Windows
Go to PC settings to activate Windows.

Page: 13 of 14 Words: 174 110% 3:26 PM 27-Dec-24


Direct initialization of array elements:

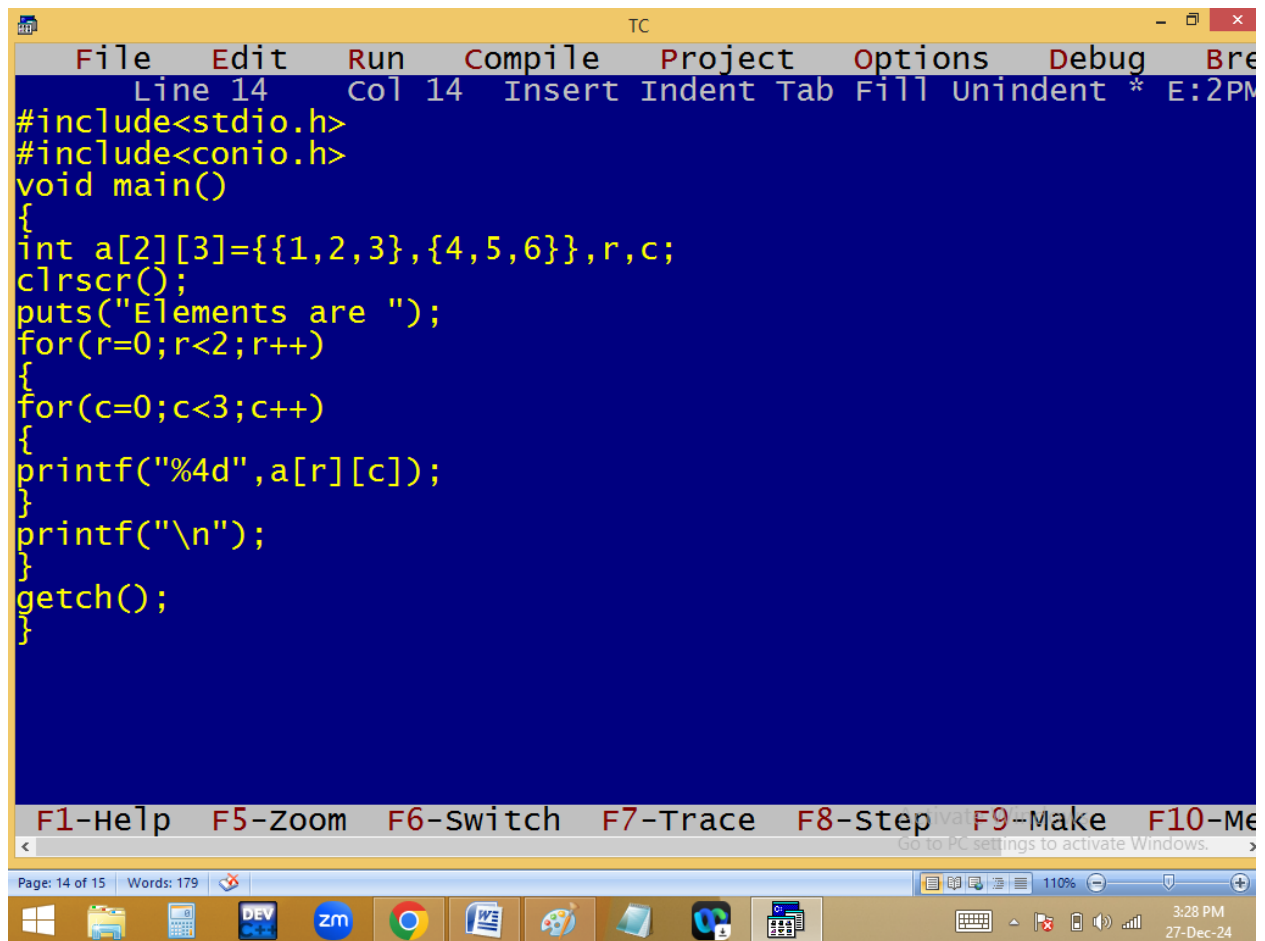


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", "Debug", and "Break". The status bar at the top indicates "Line 14", "Col 14", and "Insert Indent Tab Fill Unindent * E:2PM". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[2][3]={1,2,3},{4,5,6},r,c;
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```

Below the code, a toolbar contains function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Me". A status bar at the bottom of the IDE shows "Page: 14 of 15" and "Words: 179". The Windows taskbar at the very bottom displays various application icons (Windows Start, File Explorer, Calculator, DEV C++, Zoom, Chrome, Word, Paint, VS Code, and a task view icon) and the system clock showing "3:28 PM" and "27-Dec-24".

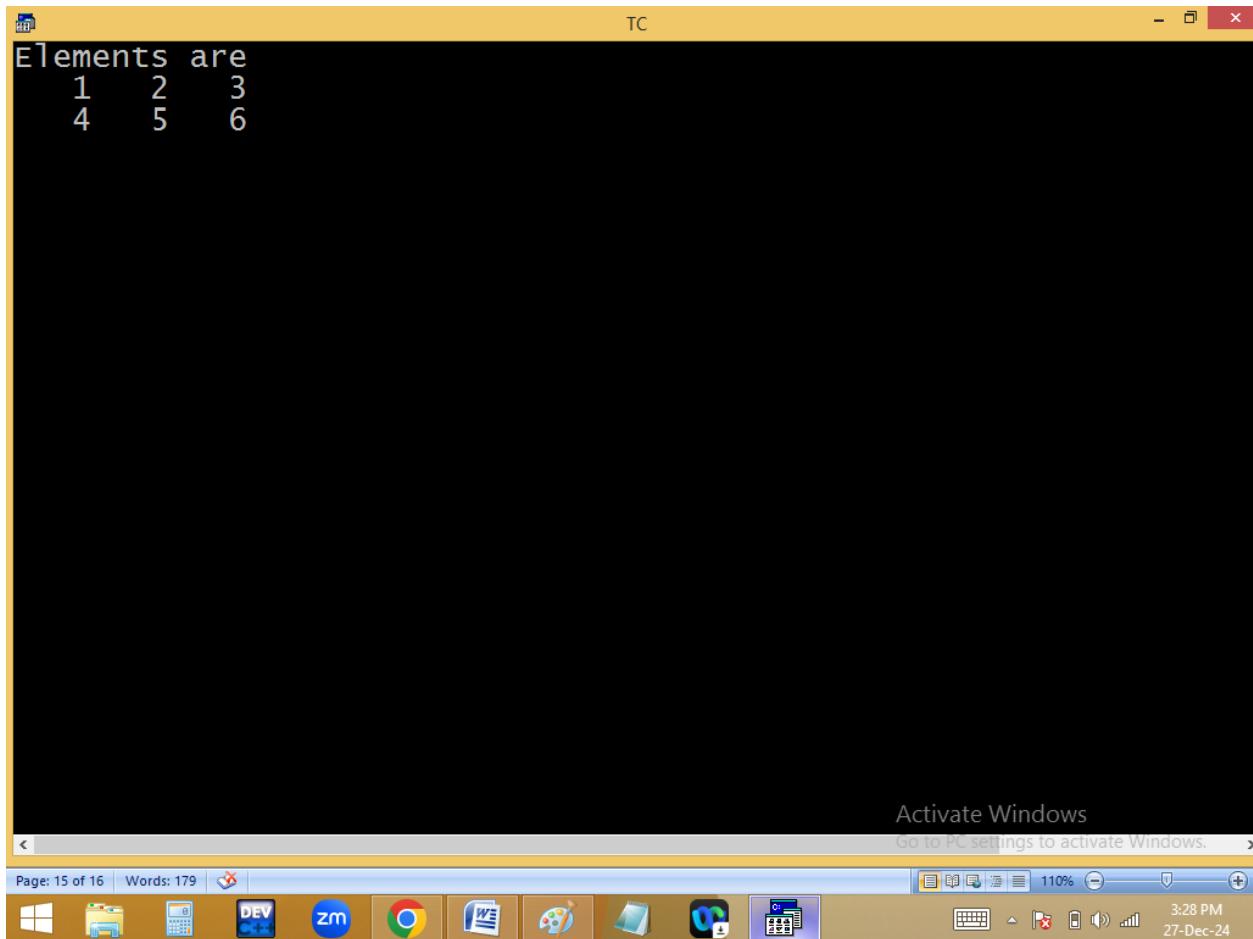


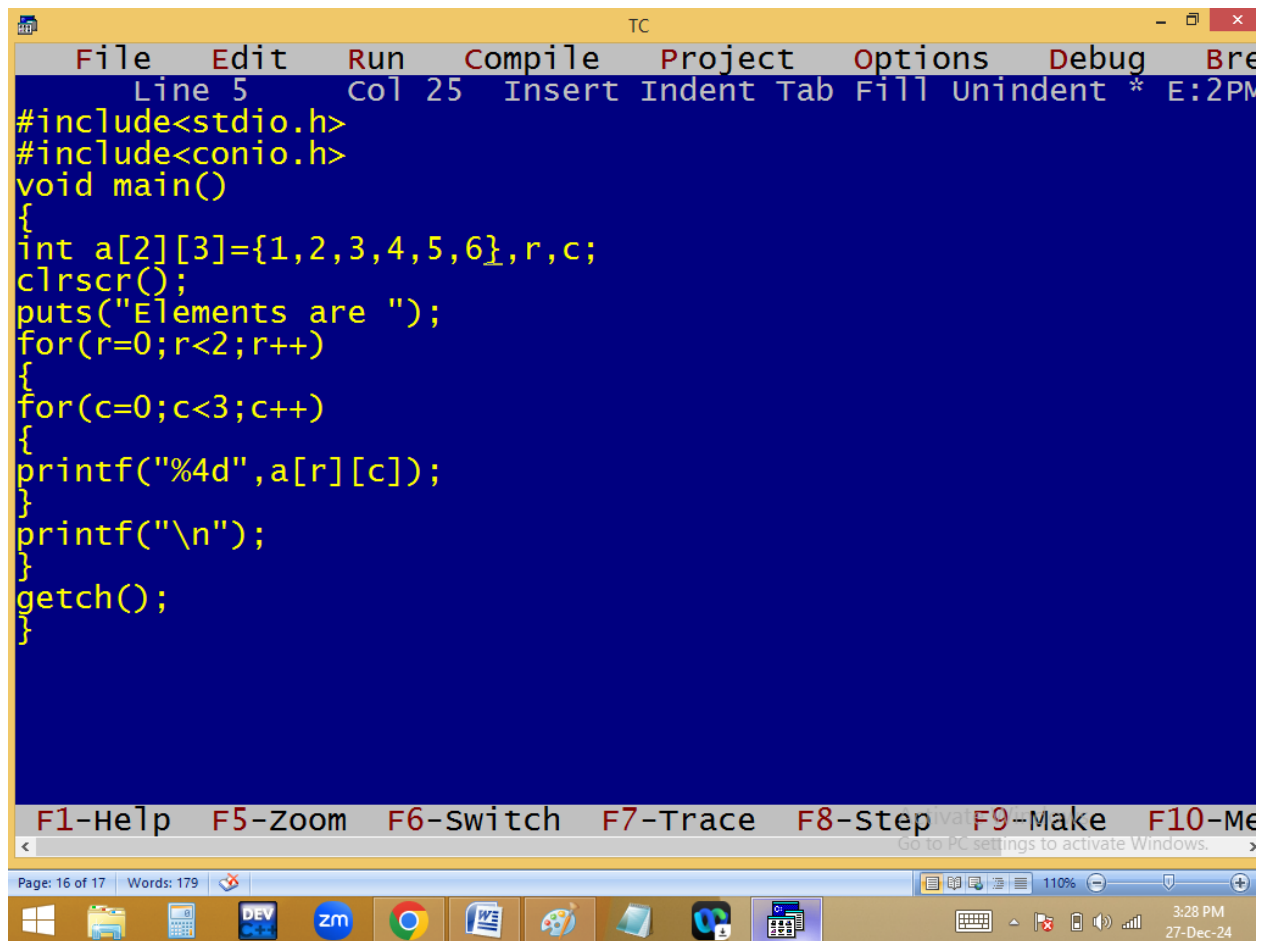

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", "Debug", and "Break". The status bar at the top indicates "Line 5", "Col 25", and "Insert Indent Tab Fill Unindent * E:2PM". The main editing area has a blue background with yellow text containing the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[2][3]={1,2,3,4,5,6},r,c;
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```

Below the code editor, there is a toolbar with icons for various functions. The bottom status bar shows "Page: 16 of 17" and "Words: 179". The Windows taskbar at the very bottom displays the Start button, several application icons (including File Explorer, Calculator, DEV C++, Zoom, Chrome, Word, Paint, and VS Code), and the system clock showing "3:28 PM" and "27-Dec-24".

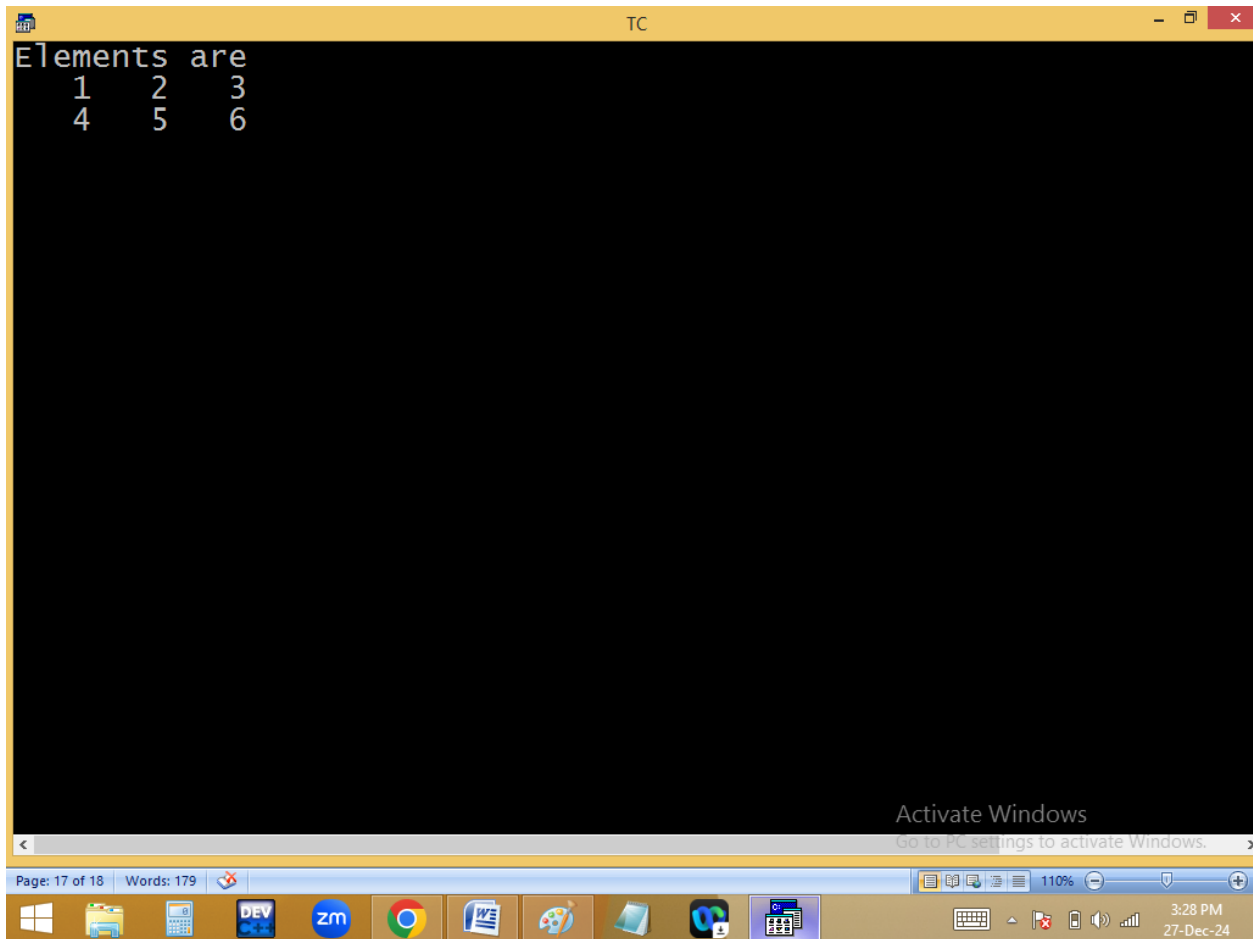

TC

File Edit Run Compile Project Options Debug Break

Error: Initializer syntax error in function main


```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[2][3]={1},{}},r,c;
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Me

Go to PC settings to activate Windows.

Page: 18 of 19 Words: 179 110%


3:30 PM 27-Dec-24

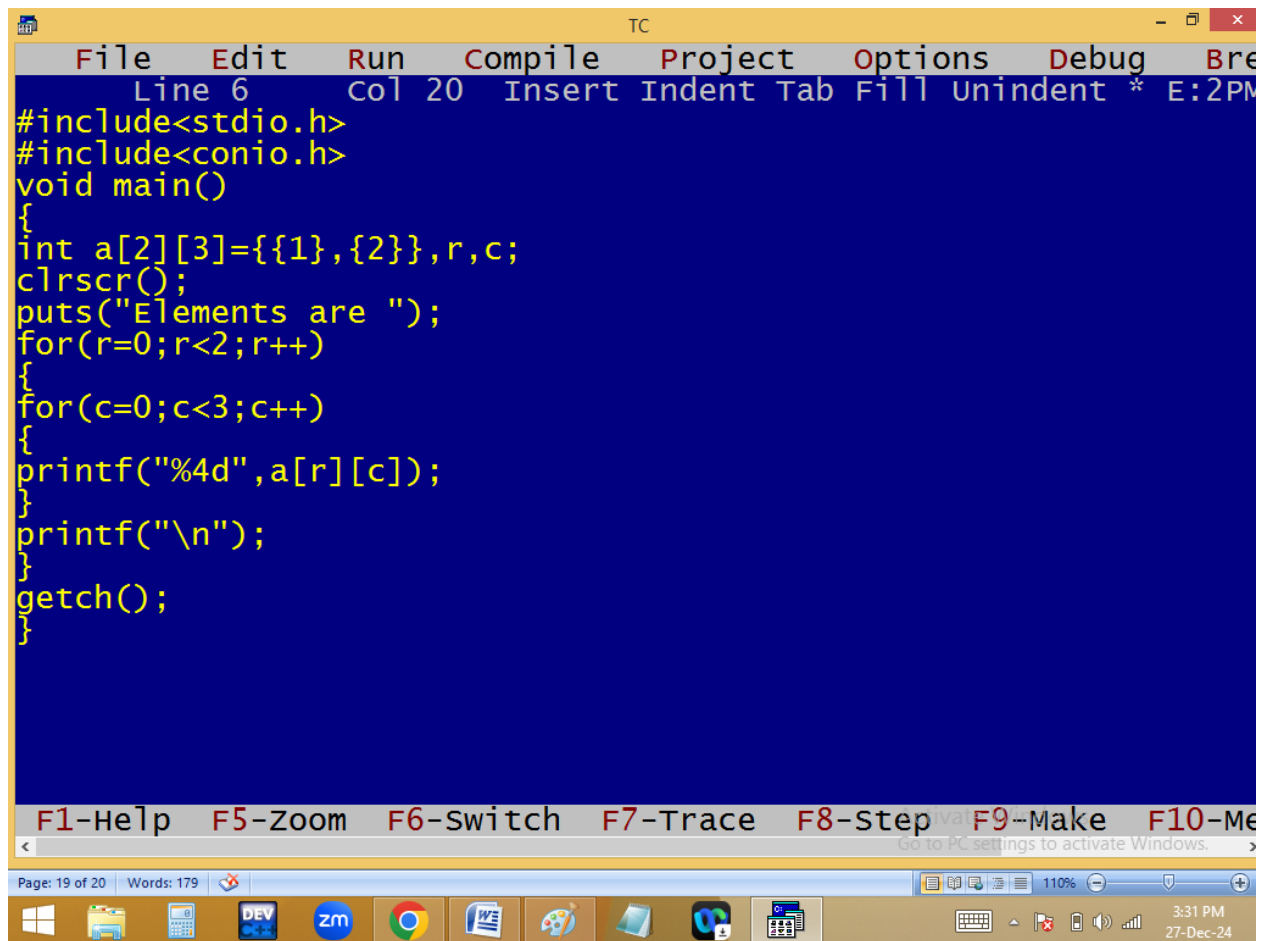


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", "Debug", and "Break". The status bar at the top indicates "Line 6", "Col 20", and "Insert Indent Tab Fill Unindent * E:2PM". The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[2][3]={{1},{2}},r,c;
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```

Below the code, a toolbar contains function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Me". A status bar at the bottom of the IDE shows "Page: 19 of 20" and "Words: 179". The Windows taskbar at the very bottom displays various application icons, including File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and VS Code. The system clock in the bottom right corner shows "3:31 PM" and "27-Dec-24".

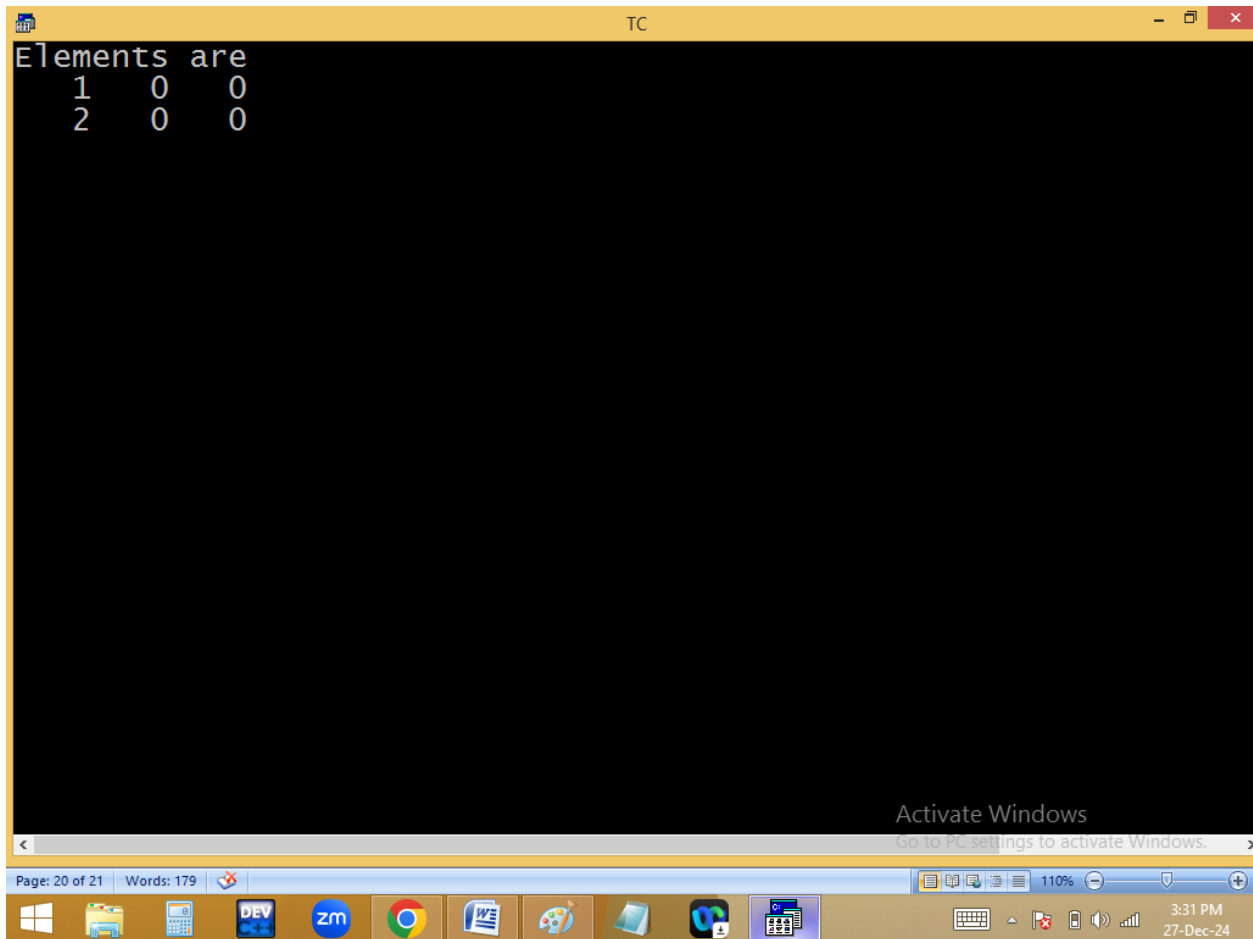

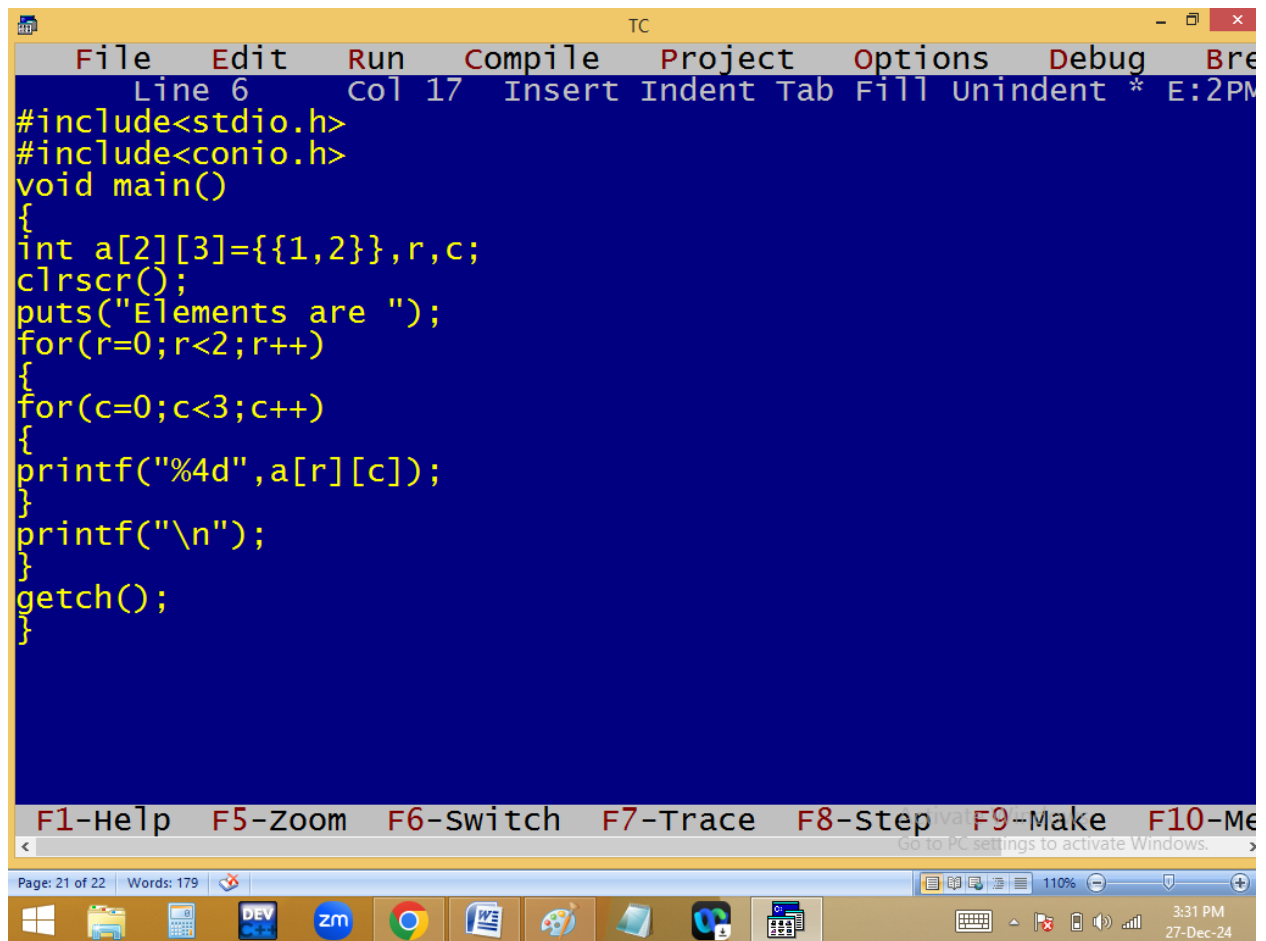

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", "Debug", and "Break". The status bar at the top indicates "Line 6", "Col 17", and "Insert Indent Tab Fill Unindent * E:2PM". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[2][3]={1,2},r,c;
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```


Below the code, there is a toolbar with icons for various functions. The status bar at the bottom of the IDE shows "Page: 21 of 22" and "Words: 179". The Windows taskbar is visible at the very bottom, showing the Start button, taskbar icons for File Explorer, Calculator, DEV C++, Zoom, Chrome, Word, Paint, and VS Code, and the system tray with the time "3:31 PM" and date "27-Dec-24".


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Me

Go to PC settings to activate Windows.

Page: 21 of 22 Words: 179 110%

3:31 PM 27-Dec-24

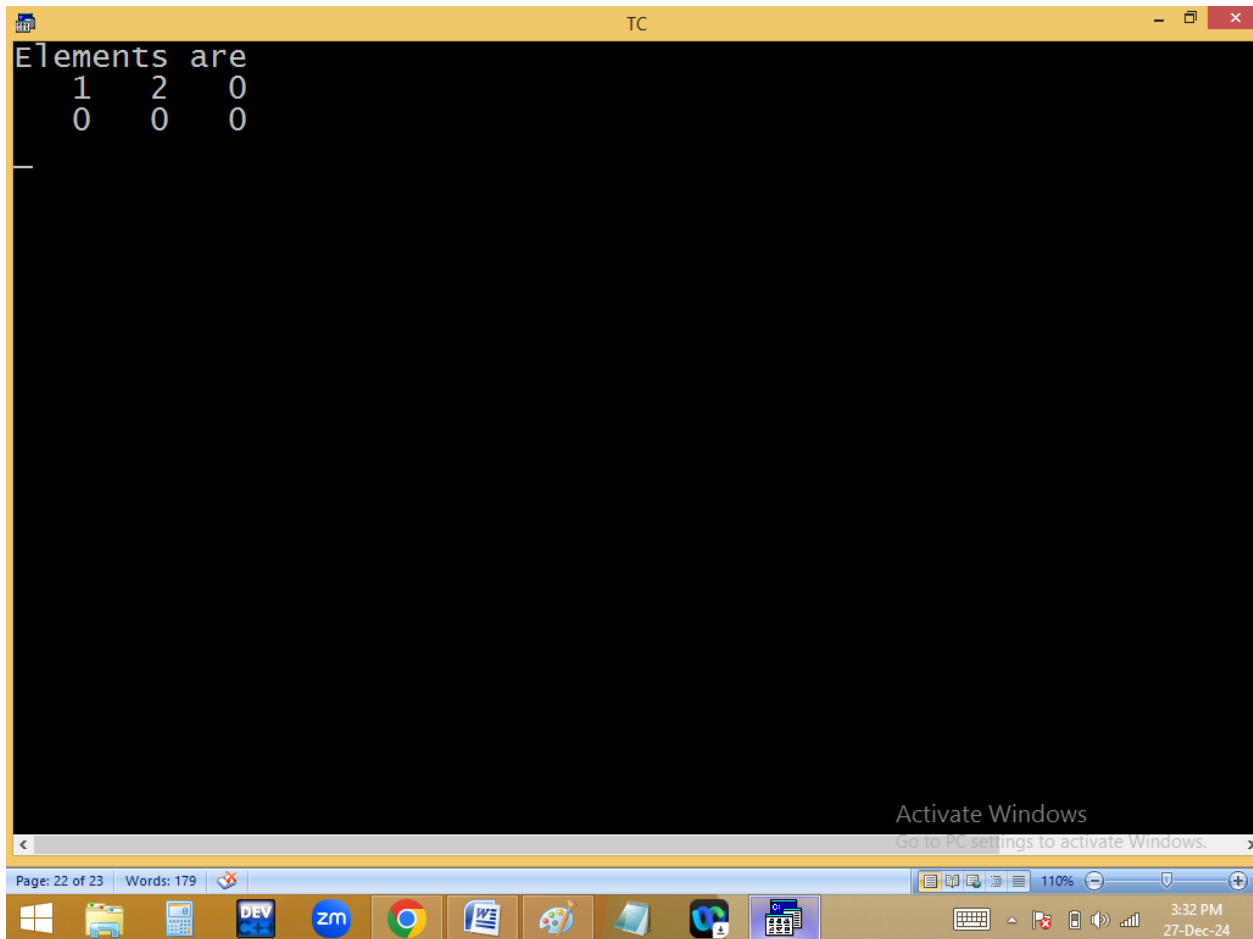

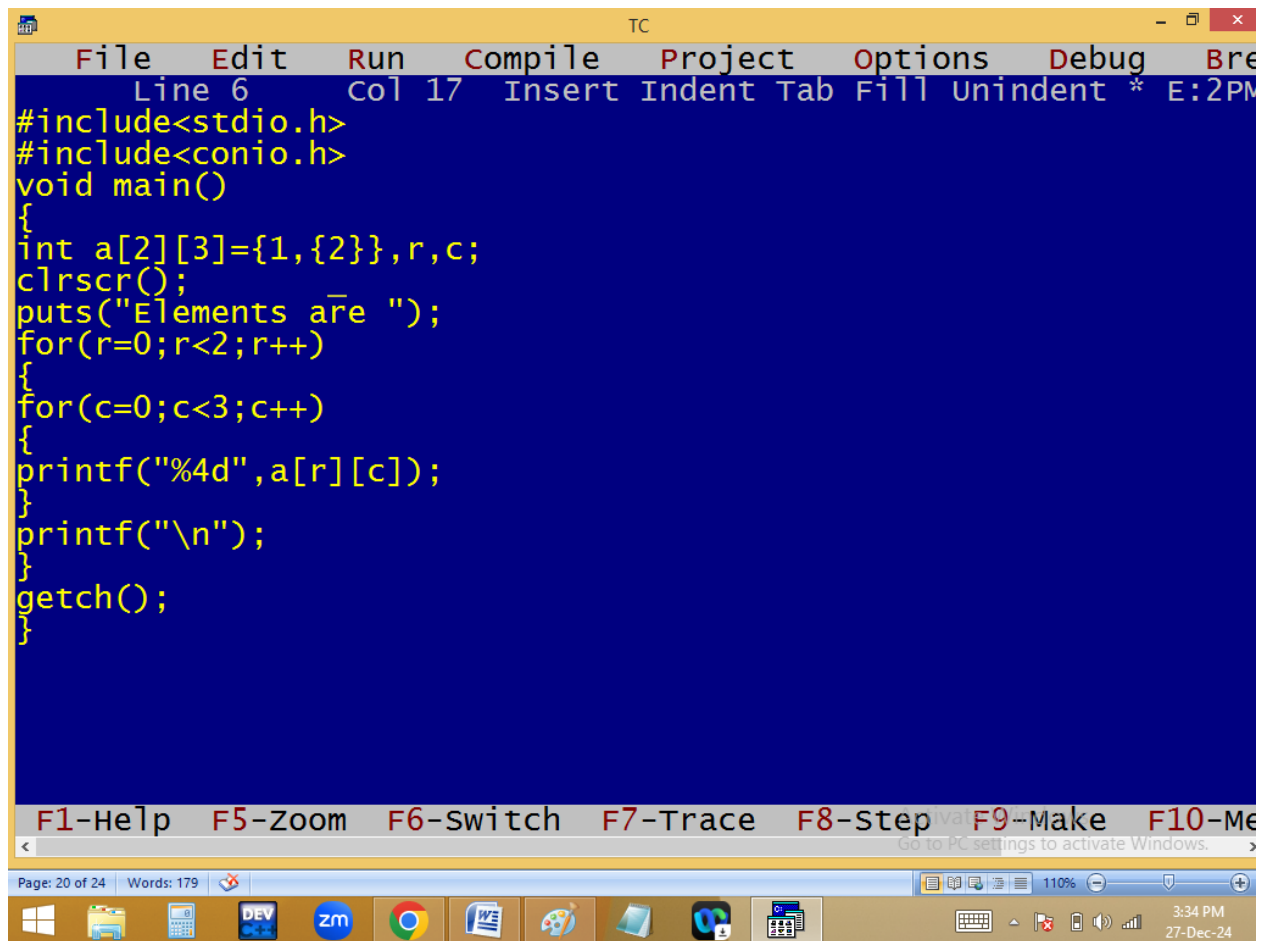

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", "Debug", and "Breakpoint". The status bar at the top indicates "Line 6", "Col 17", and "Insert Indent Tab Fill Unindent * E:2PM". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[2][3]={1,{2}},r,c;
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```

Below the code editor, there is a toolbar with icons for various functions. The status bar at the bottom of the IDE shows "Page: 20 of 24" and "Words: 179". The Windows taskbar is visible at the very bottom, showing the Start button, taskbar buttons for File Explorer, Calculator, DEV C++, Zoom, Chrome, Word, Paint, and VS Code, and the system tray with the date and time "3:34 PM 27-Dec-24".


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Me

Go to PC settings to activate Windows.

Page: 20 of 24 Words: 179

110%


3:34 PM 27-Dec-24

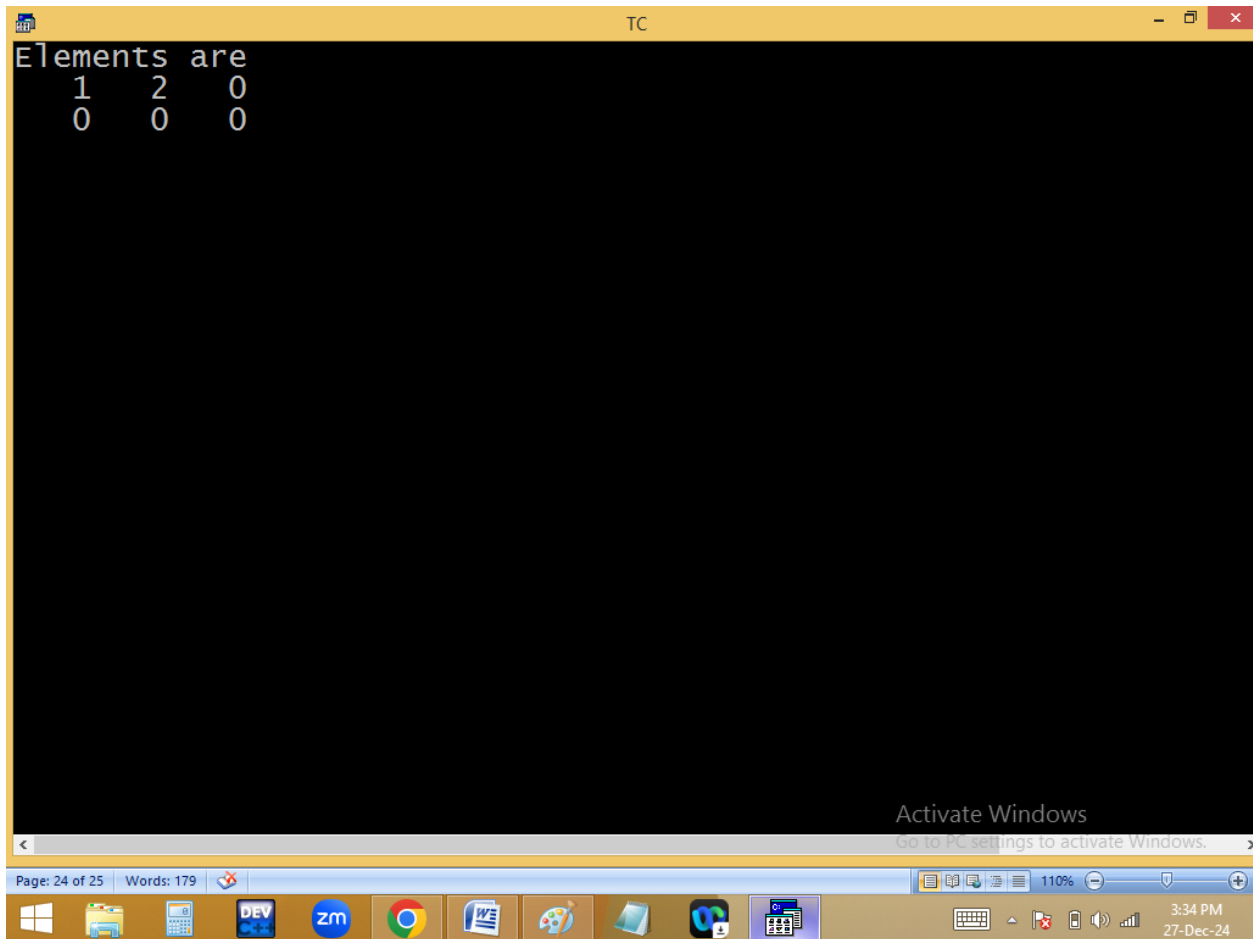

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", "Debug", and "Break". The status bar at the top indicates "Line 5", "Col 19", and "Insert Indent Tab Fill Unindent * E:2PM". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[2][3]={1,2,3,4,5,6};
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```


Below the code editor, there is a toolbar with icons for various functions. The bottom status bar shows "Page: 25 of 26" and "Words: 179". The Windows taskbar at the very bottom displays the Start button, several application icons (including File Explorer, Calculator, DEV C++, Zoom, Chrome, Word, Paint, and VS Code), and the system clock showing "3:35 PM" and "27-Dec-24".

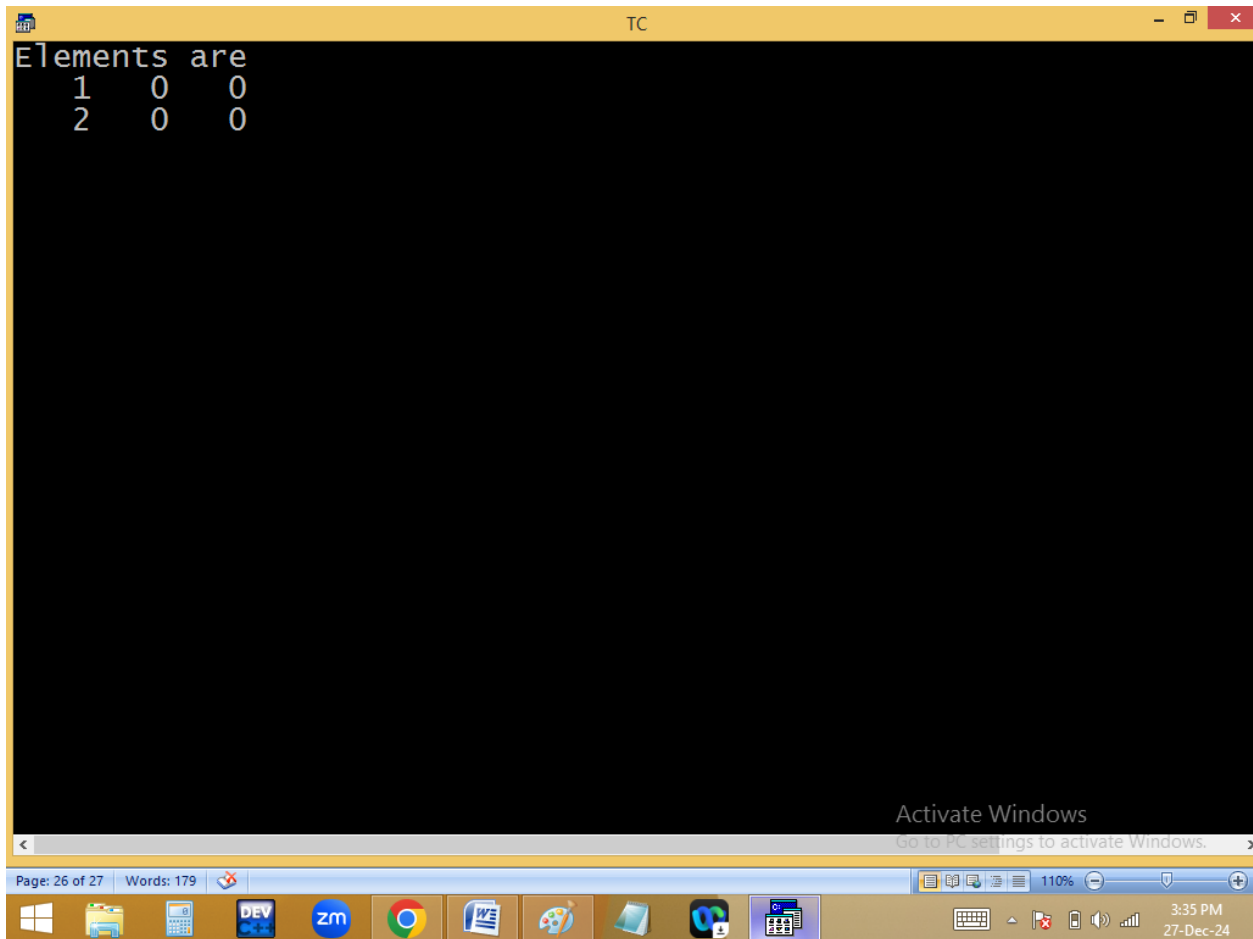

```
TC
File Edit Run Compile Project Options Debug Bre
Line 5 Col 23 Insert Indent Tab Fill Unindent * E:2PM
#include<stdio.h>
#include<conio.h>
void main()
{
int a[2][3]={1,2,3},r,c;
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Me

Page: 27 of 28 Words: 179 110% 3:36 PM 27-Dec-24

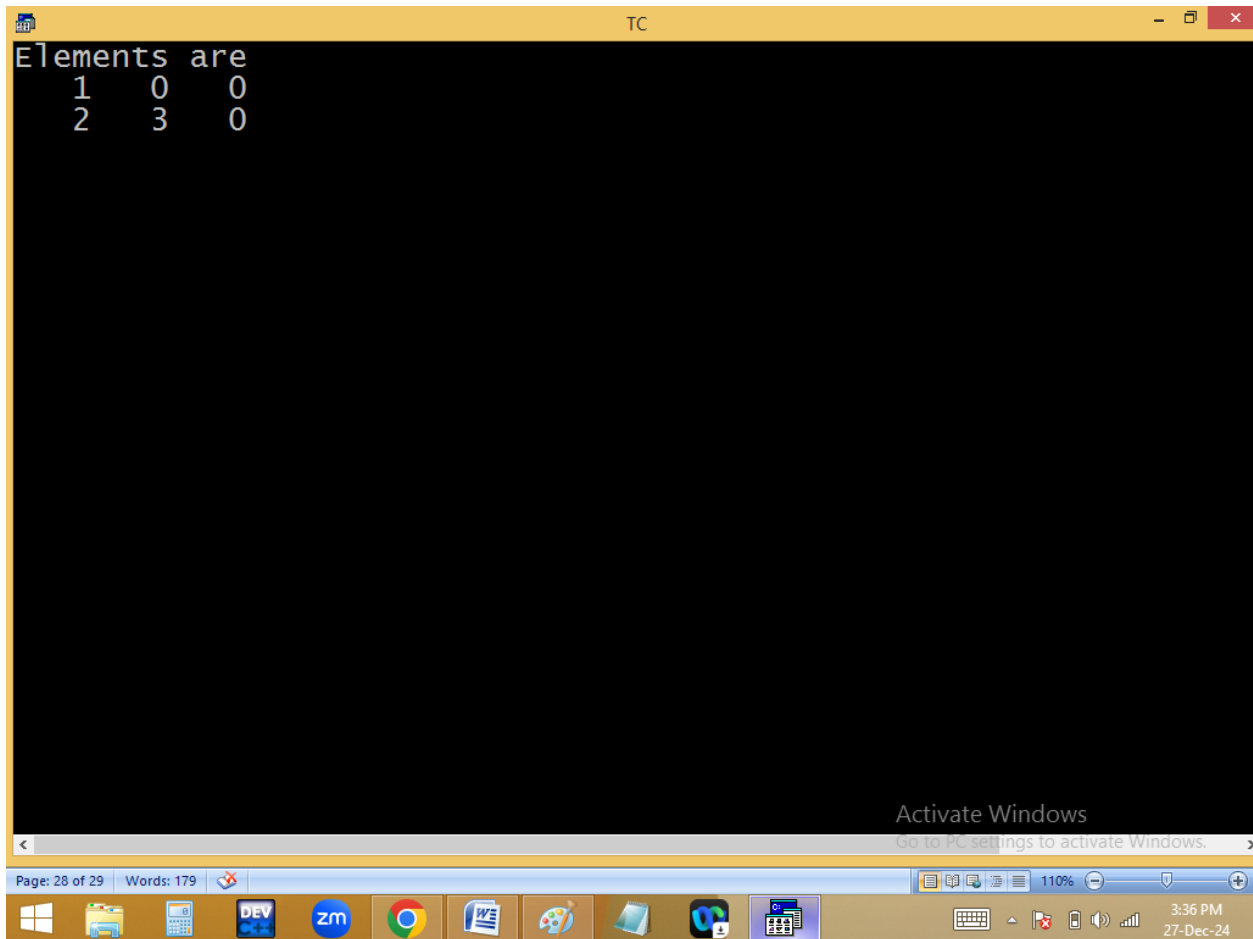

TC

File Edit Run Compile Project Options Debug Break

Error: Too many initializers in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[2][3]={{1},{2},{3}},r,c;
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Me

Go to PC settings to activate Windows.

Page: 29 of 30 Words: 179 110%

3:37 PM 27-Dec-24

TC

File Edit Run Compile Project Options Debug Break

Error: Too many initializers in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[2][3]={1,2,3,4},r,c;
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Me

Go to PC settings to activate Windows.

Page: 30 of 31 Words: 179 110%

3:38 PM 27-Dec-24

TC

File Edit Run Compile Project Options Debug Break

Line 5 Col 25 Insert Indent Tab Fill Unindent * E:2PM

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[2][3]={1,2,3,4,{5}},r,c;
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Me

Go to PC settings to activate Windows.

Page: 31 of 32 Words: 179

110%

3:40 PM 27-Dec-24

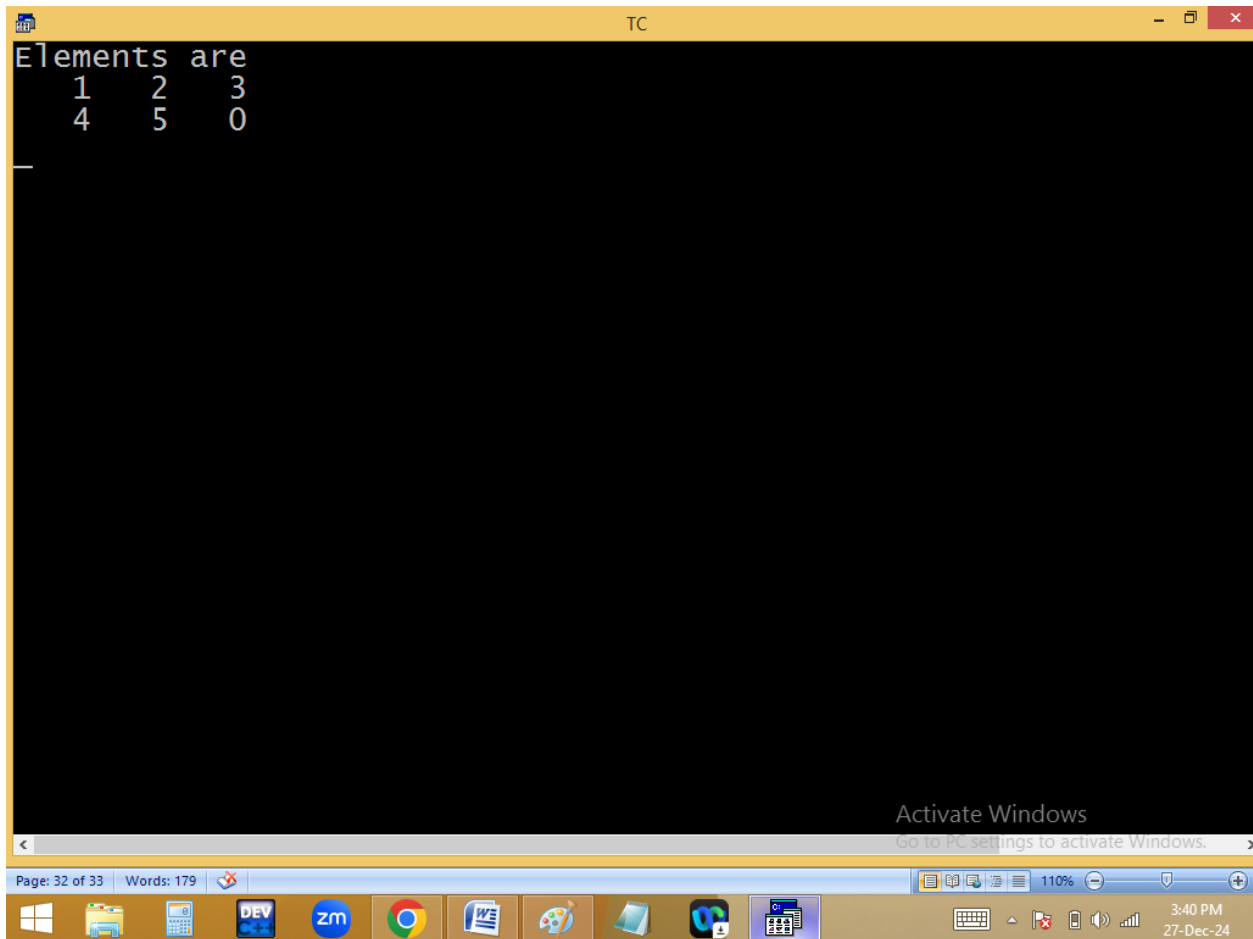

TC

File Edit Run Compile Project Options Debug Break

Error: Too many initializers in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[2][3]={1,2,3,{4},5},r,c;
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Me

Go to PC settings to activate Windows.

Page: 33 of 34 Words: 179 110%

3:41 PM 27-Dec-24

TC

File Edit Run Compile Project Options Debug Break

Error: Size of structure or array not known in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[][]={1,2,3,4,5,6},r,c;
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Me

Go to PC settings to activate Windows.

Page: 34 of 35 Words: 179 110%

3:43 PM 27-Dec-24

TC

File Edit Run Compile Project Options Debug Break

Error: Size of structure or array not known in function main


```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[2][]={1,2,3,4,5,6},r,c;
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Me

Go to PC settings to activate Windows.

Page: 35 of 36 Words: 179 110%

3:43 PM 27-Dec-24

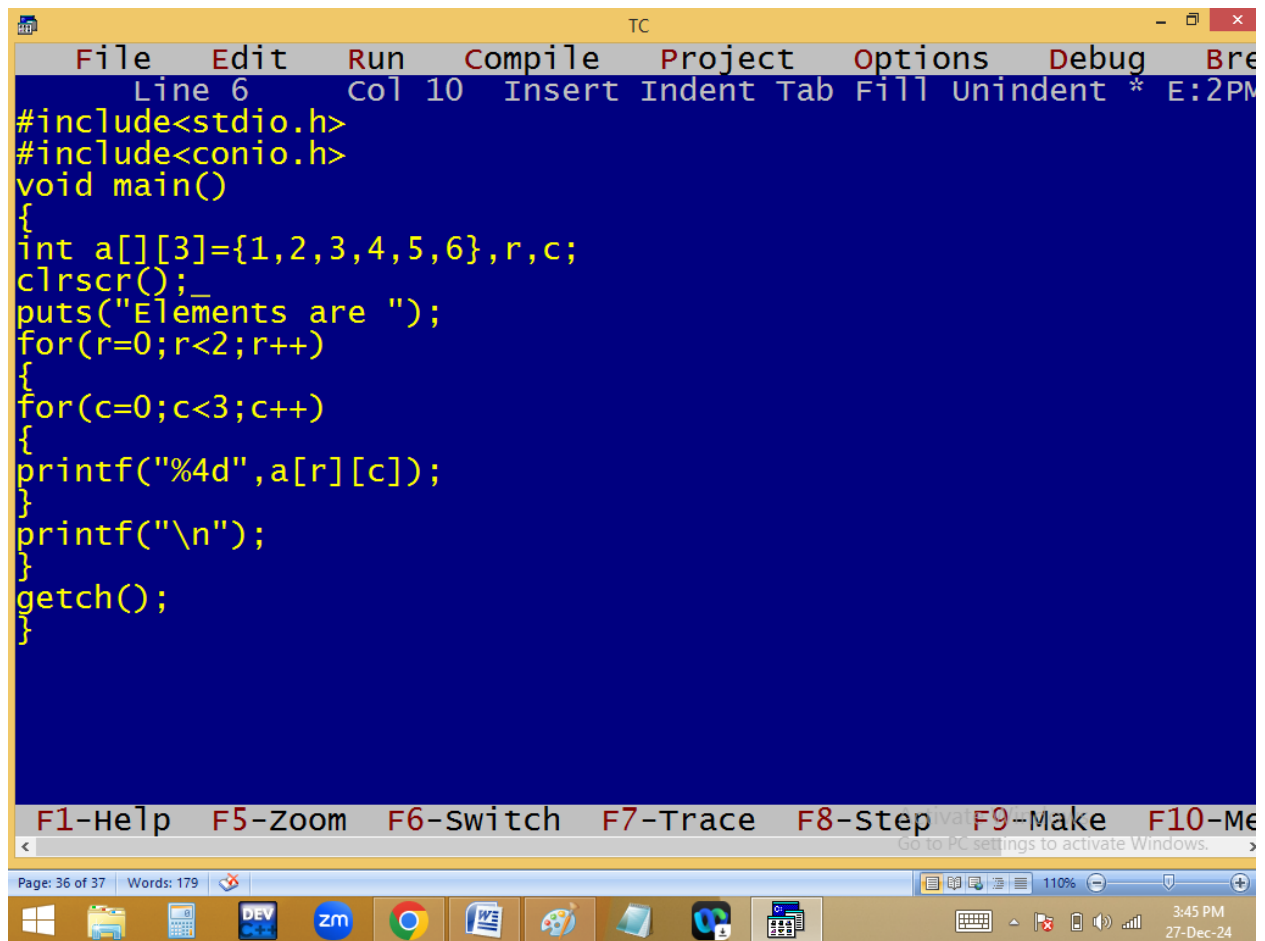

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", "Debug", and "Break". The status bar at the top indicates "Line 6", "Col 10", and "Insert Indent Tab Fill Unindent * E:2PM". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[][3]={1,2,3,4,5,6},r,c;
clrscr();_
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```


Below the code, there is a toolbar with icons for various functions. The status bar at the bottom of the IDE shows "Page: 36 of 37" and "Words: 179". The Windows taskbar is visible at the very bottom, showing icons for Windows, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and other applications. The system clock in the bottom right corner shows "3:45 PM" and "27-Dec-24".


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Me

Go to PC settings to activate Windows.

Page: 36 of 37 Words: 179 110%

3:45 PM 27-Dec-24

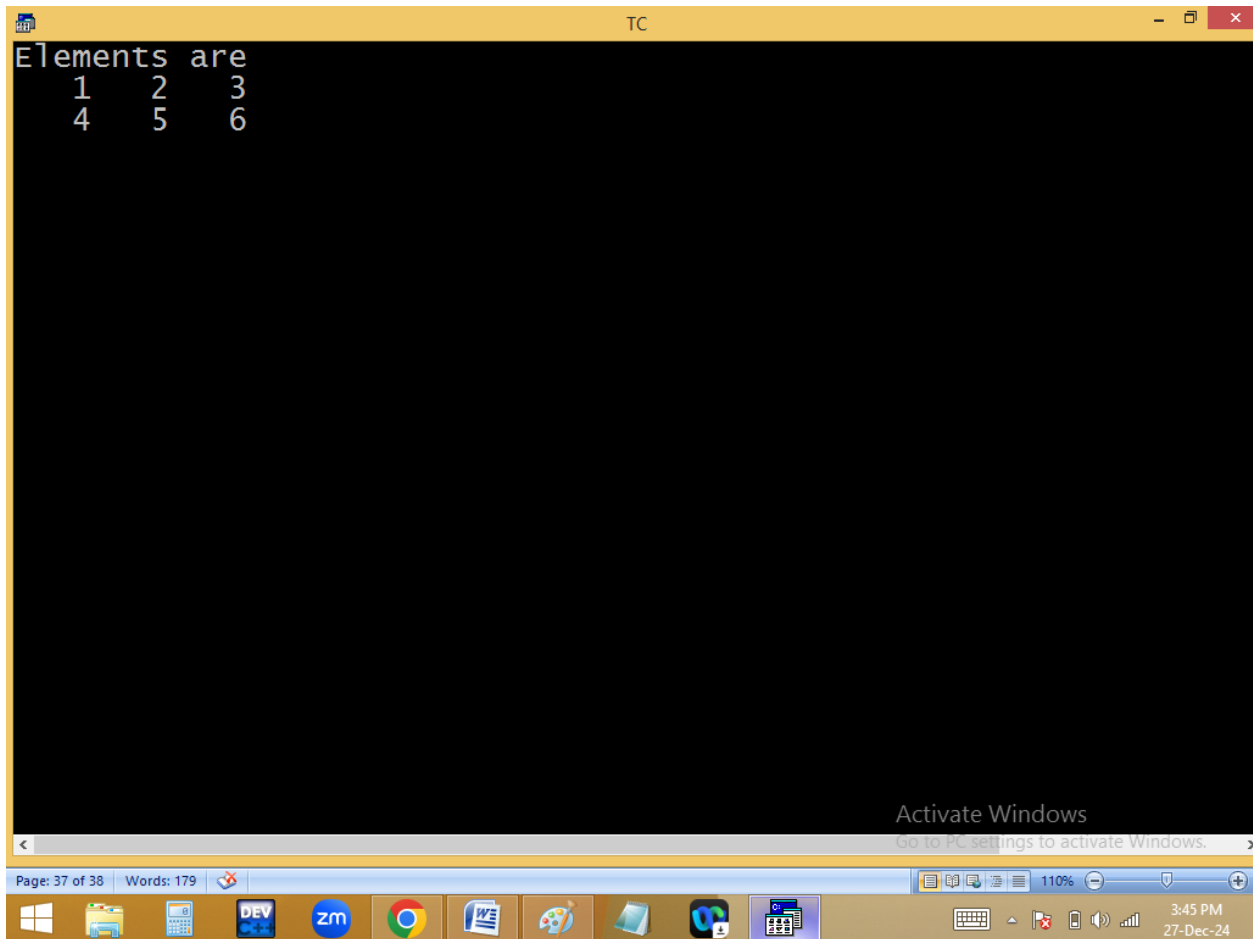


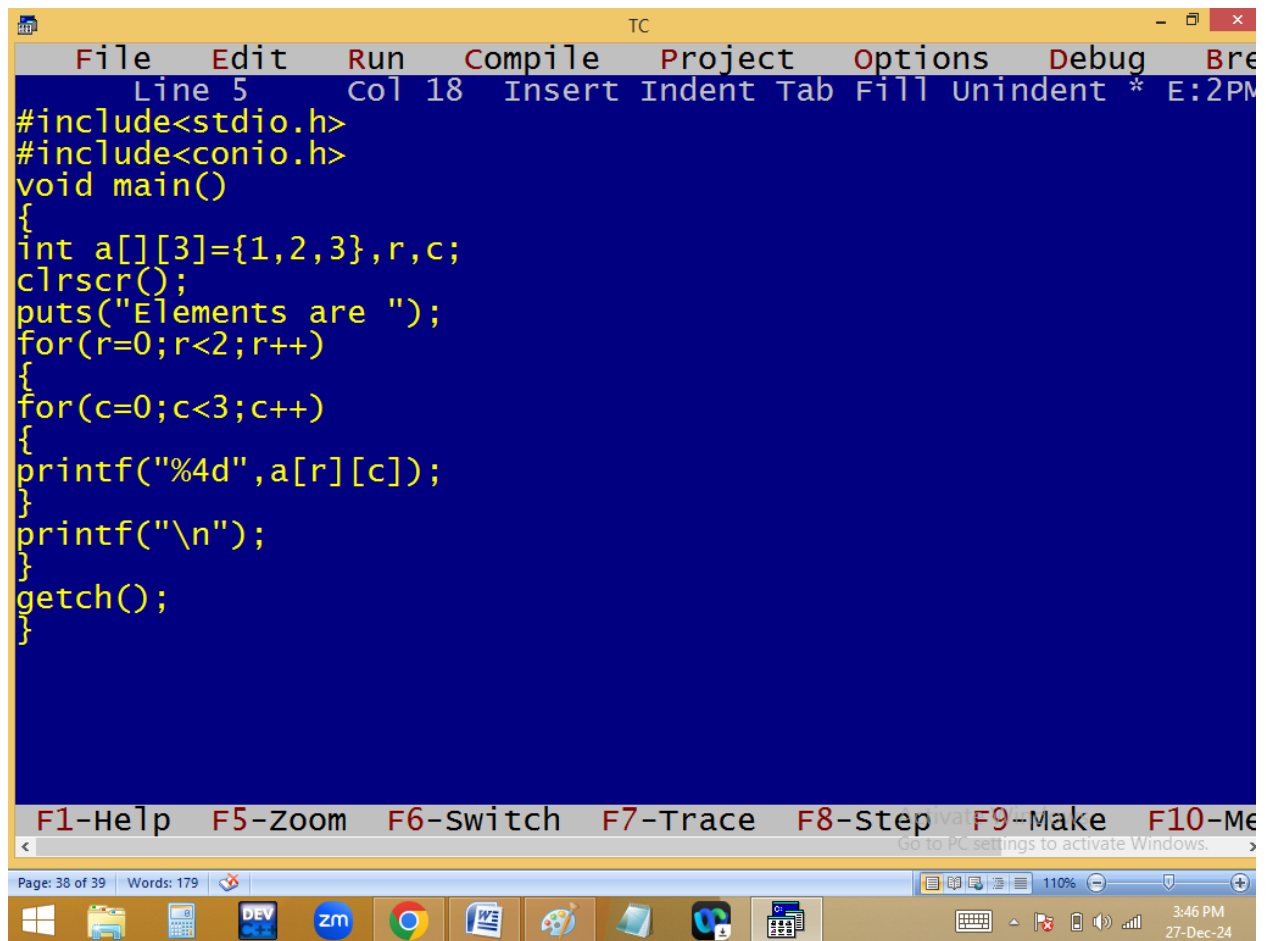

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", "Debug", and "Break". The status bar at the top indicates "Line 5", "Col 18", and "Insert Indent Tab Fill Unindent * E:2PM". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[][3]={1,2,3},r,c;
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```

Below the code, a toolbar contains function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Me". A status bar at the bottom of the IDE shows "Page: 38 of 39" and "Words: 179". The Windows taskbar at the very bottom displays various application icons, including File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and VS Code. The system clock in the bottom right corner shows "3:46 PM" and "27-Dec-24".

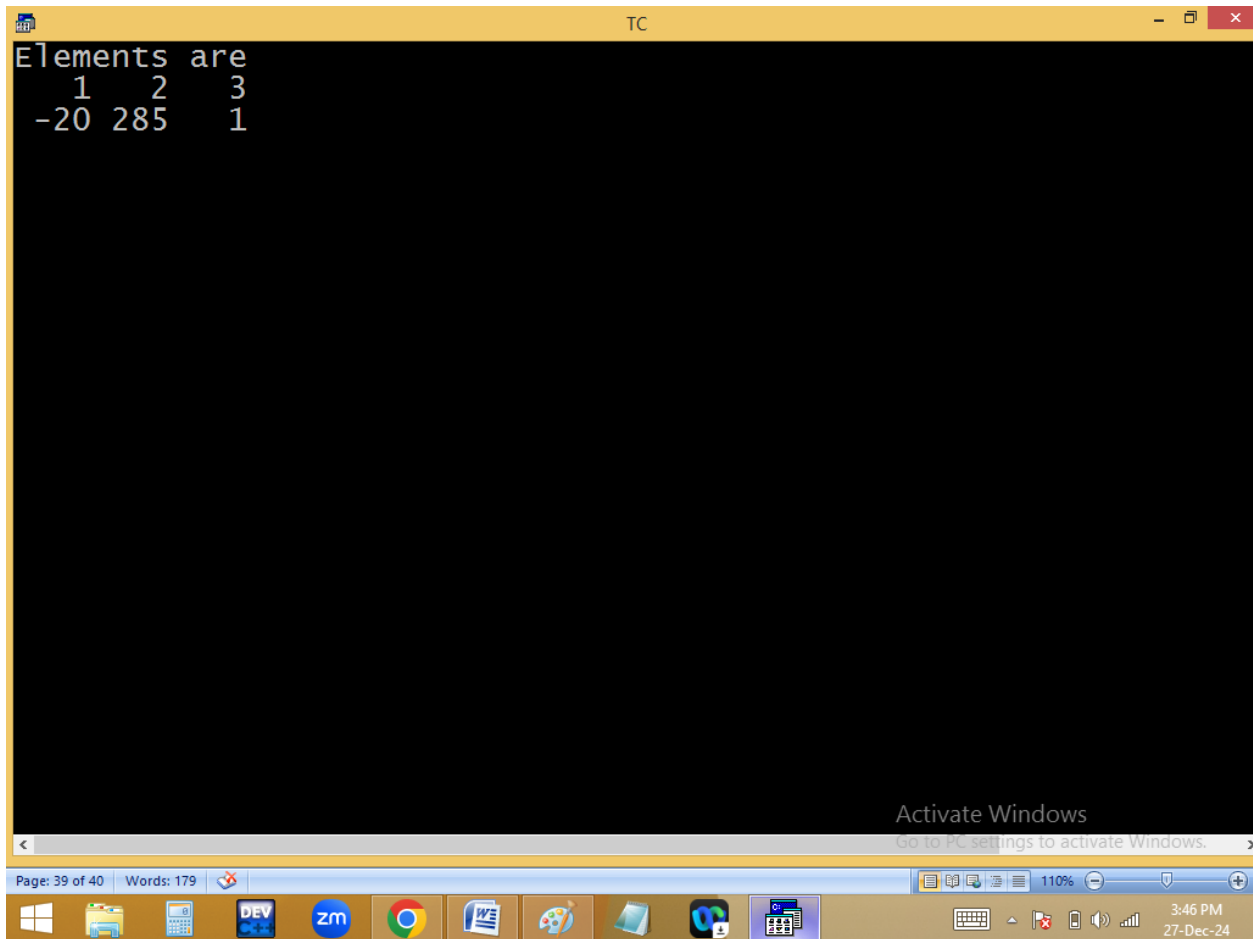

TC

File Edit Run Compile Project Options Debug Break

Line 6 Col 14 Insert Indent Tab Fill Unindent * E:2PM

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[][3]={1},r,c;
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Me

Go to PC settings to activate Windows.

Page: 40 of 41 Words: 179

110%

3:47 PM 27-Dec-24

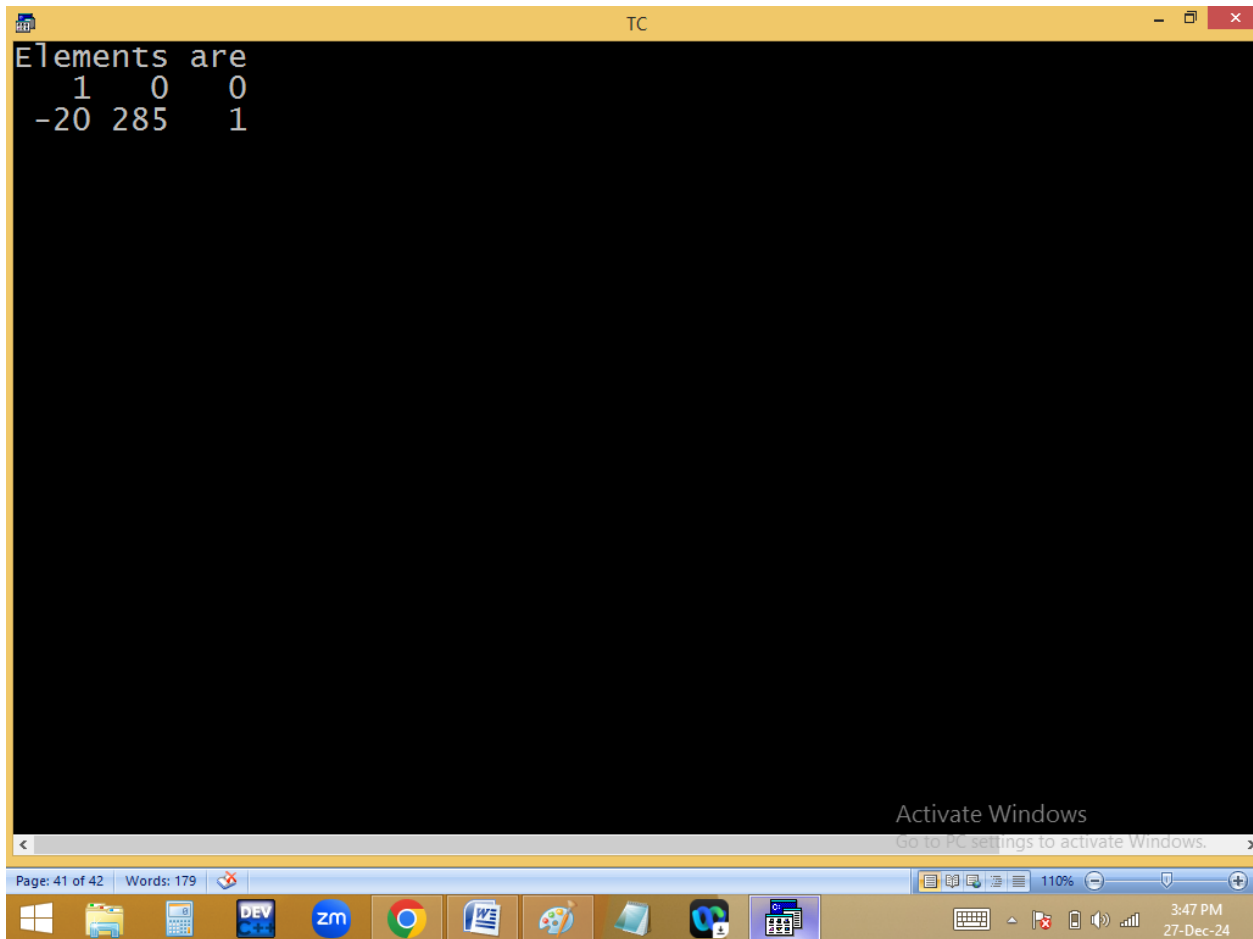

```
TC
File Edit Run Compile Project Options Debug Bre
Line 7 Col 12 Insert Indent Tab Fill Unindent * E:2PM
#include<stdio.h>
#include<conio.h>
void main()
{
int a[2][2]={1,2,3,4},r,c;
a[0][2]=10;
a[1][2]=20;_
clrscr();
puts("Elements are ");
for(r=0;r<2;r++)
{
for(c=0;c<3;c++)
{
printf("%4d",a[r][c]);
}
printf("\n");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Me

Page: 42 of 43 Words: 179 110% 3:53 PM 27-Dec-24

