


Finding salesman gross salary:

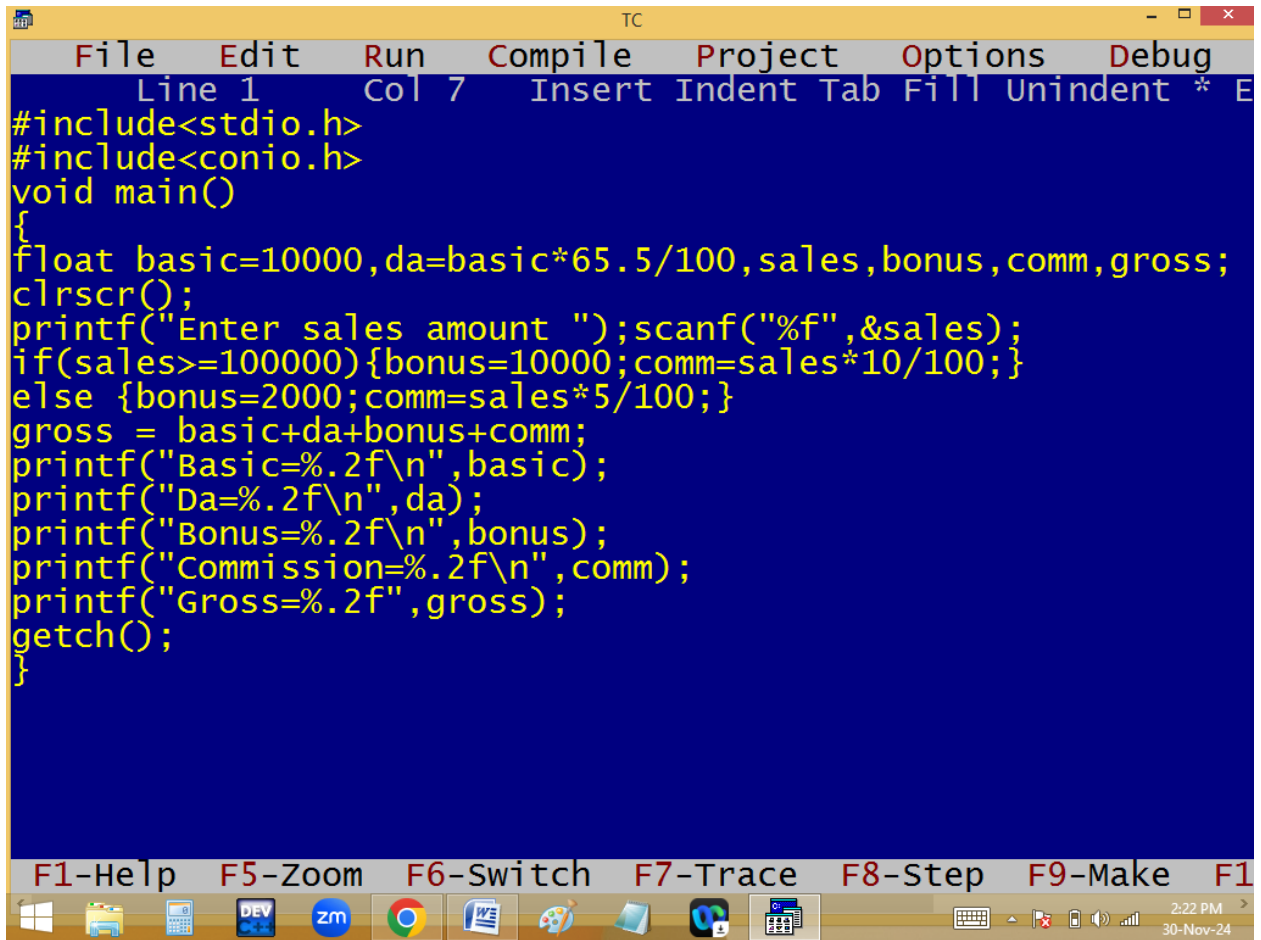

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 1 Col 7" and lists keyboard shortcuts: Insert, Indent, Tab, Fill, Unindent, and *. The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
float basic=10000,da=basic*65.5/100,sales,bonus,comm,gross;
clrscr();
printf("Enter sales amount ");scanf("%f",&sales);
if(sales>=100000){bonus=10000;comm=sales*10/100;}
else {bonus=2000;comm=sales*5/100;}
gross = basic+da+bonus+comm;
printf("Basic=%.2f\n",basic);
printf("Da=%.2f\n",da);
printf("Bonus=%.2f\n",bonus);
printf("Commission=%.2f\n",comm);
printf("Gross=%.2f",gross);
getch();
}
```


The bottom status bar shows function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F1. The Windows taskbar at the bottom includes icons for File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, and other applications. The system clock shows 2:22 PM on 30-Nov-24.

```
TC
Enter sales amount 100000
Basic=10000.00
Da=6550.00
Bonus=10000.00
Commission=10000.00
Gross=36550.00
```



```
TC
Enter sales amount 99999
Basic=10000.00
Da=6550.00
Bonus=2000.00
Commission=4999.95
Gross=23549.95_
```


Finding special char or not?

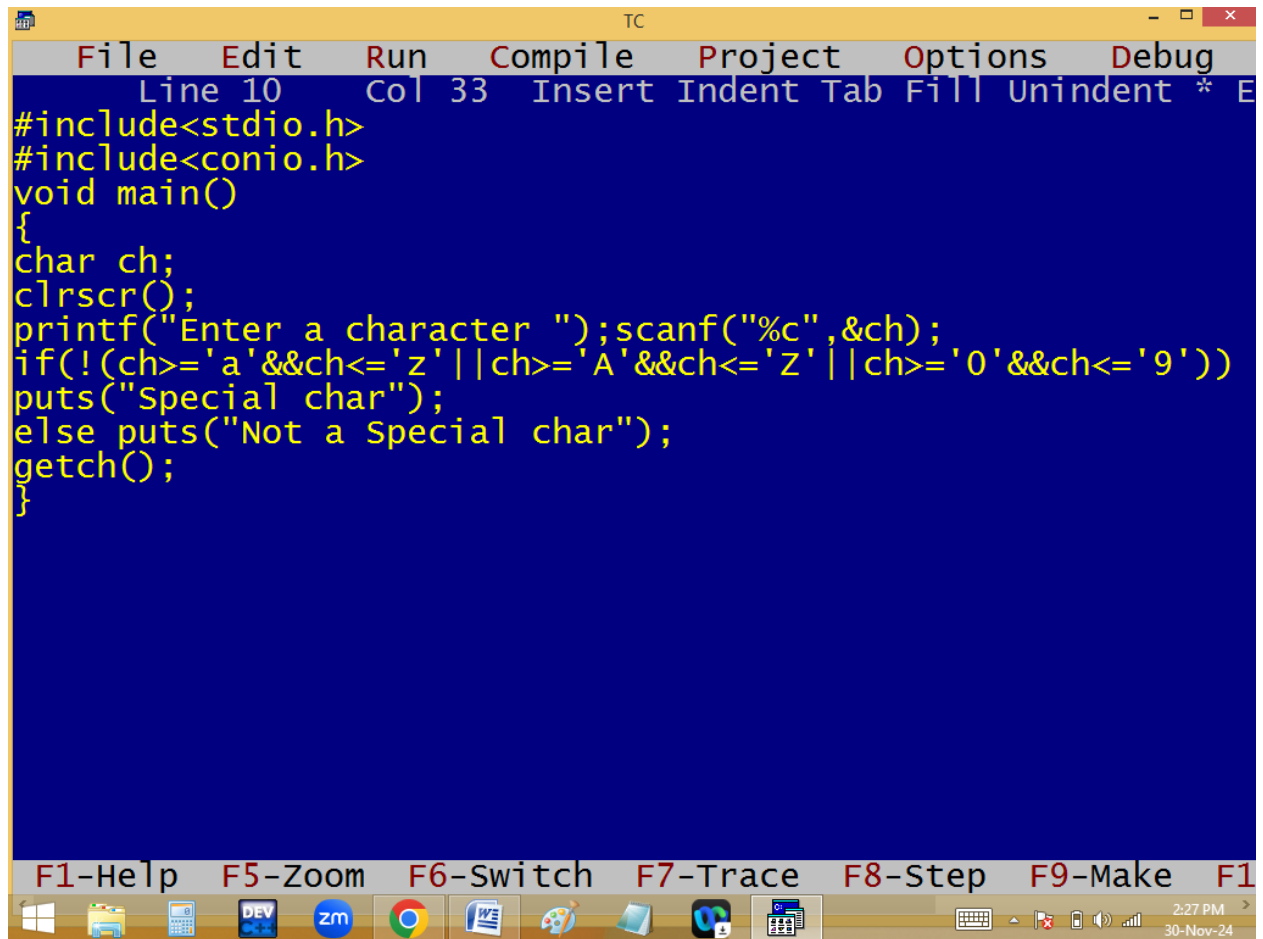



The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. Below the title bar is a menu bar with the following items: File, Edit, Run, Compile, Project, Options, and Debug. Under the "Run" menu, there is a submenu with the following items: Line 10, Col 33, Insert, Indent, Tab, Fill, Unindent, and *. The main editing area has a dark blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
char ch;
clrscr();
printf("Enter a character ");scanf("%c",&ch);
if(!(ch>='a'&&ch<='z' || ch>='A'&&ch<='Z' || ch>='0'&&ch<='9'))
puts("Special char");
else puts("Not a Special char");
getch();
}
```


At the bottom of the window, there is a status bar with the following text: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F1. Below the status bar is a Windows taskbar with various icons, including the Start button, File Explorer, Calculator, DEV, zm, Chrome, Word, Paint, and a folder icon. The system clock in the bottom right corner shows the time as 2:27 PM and the date as 30-Nov-24.

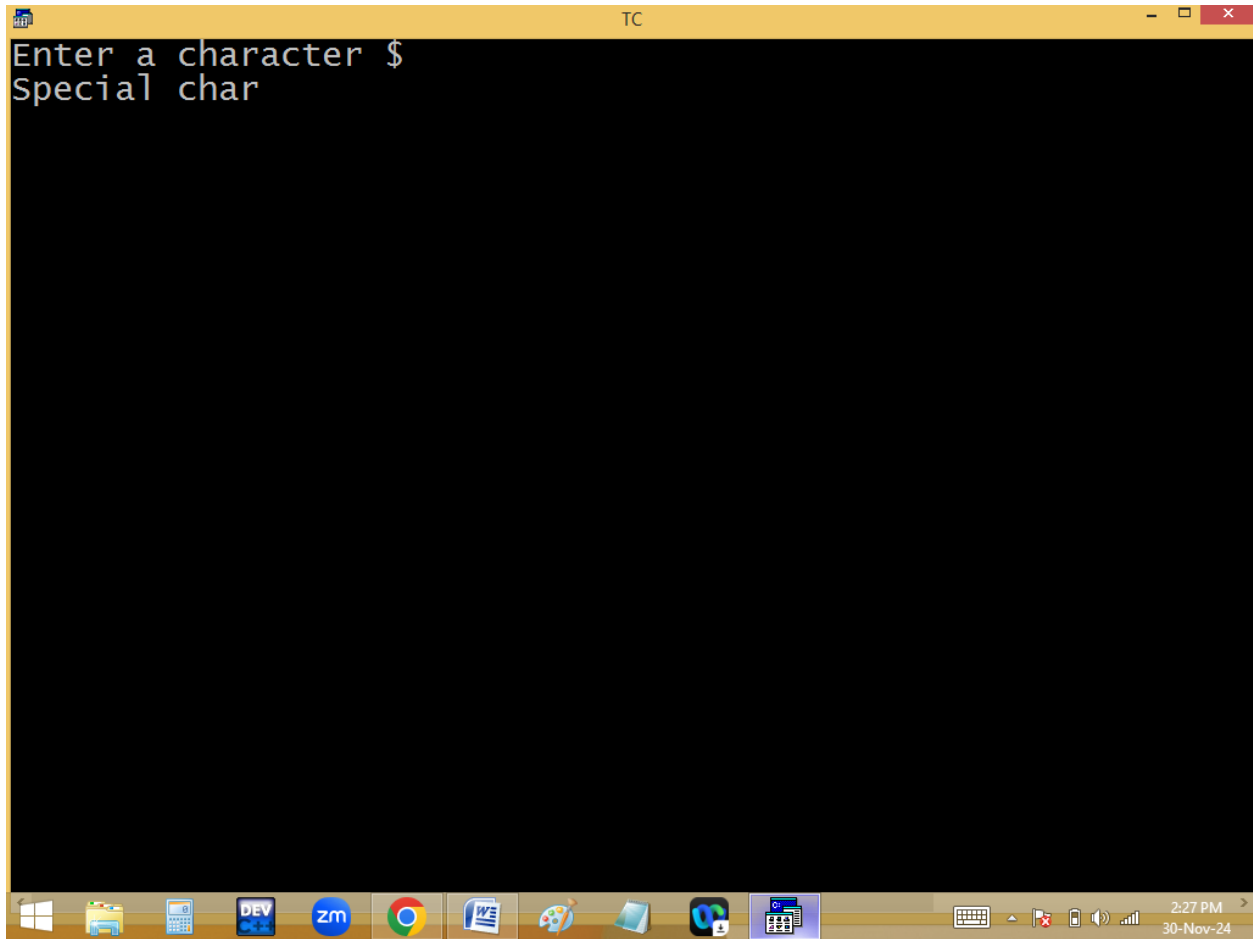


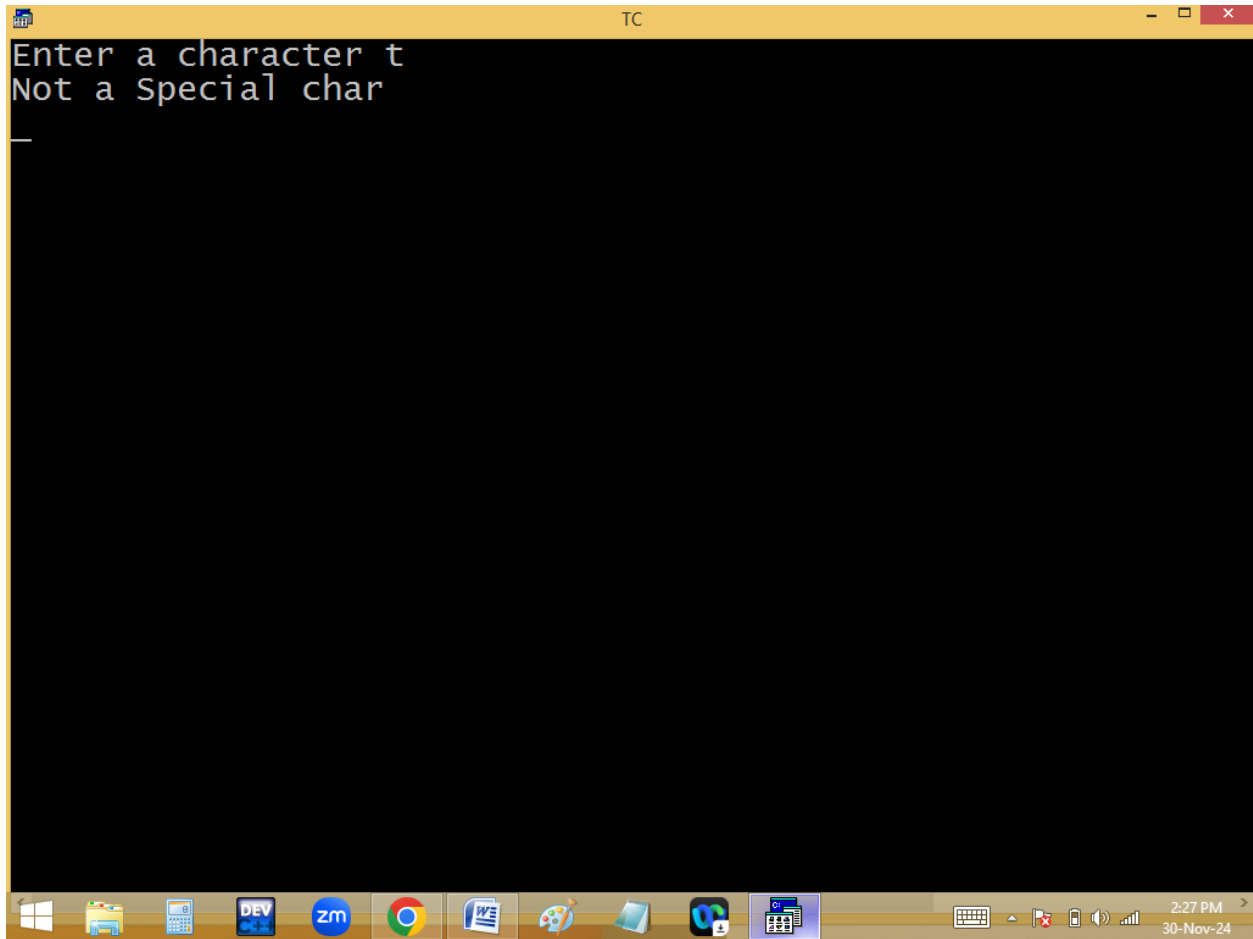

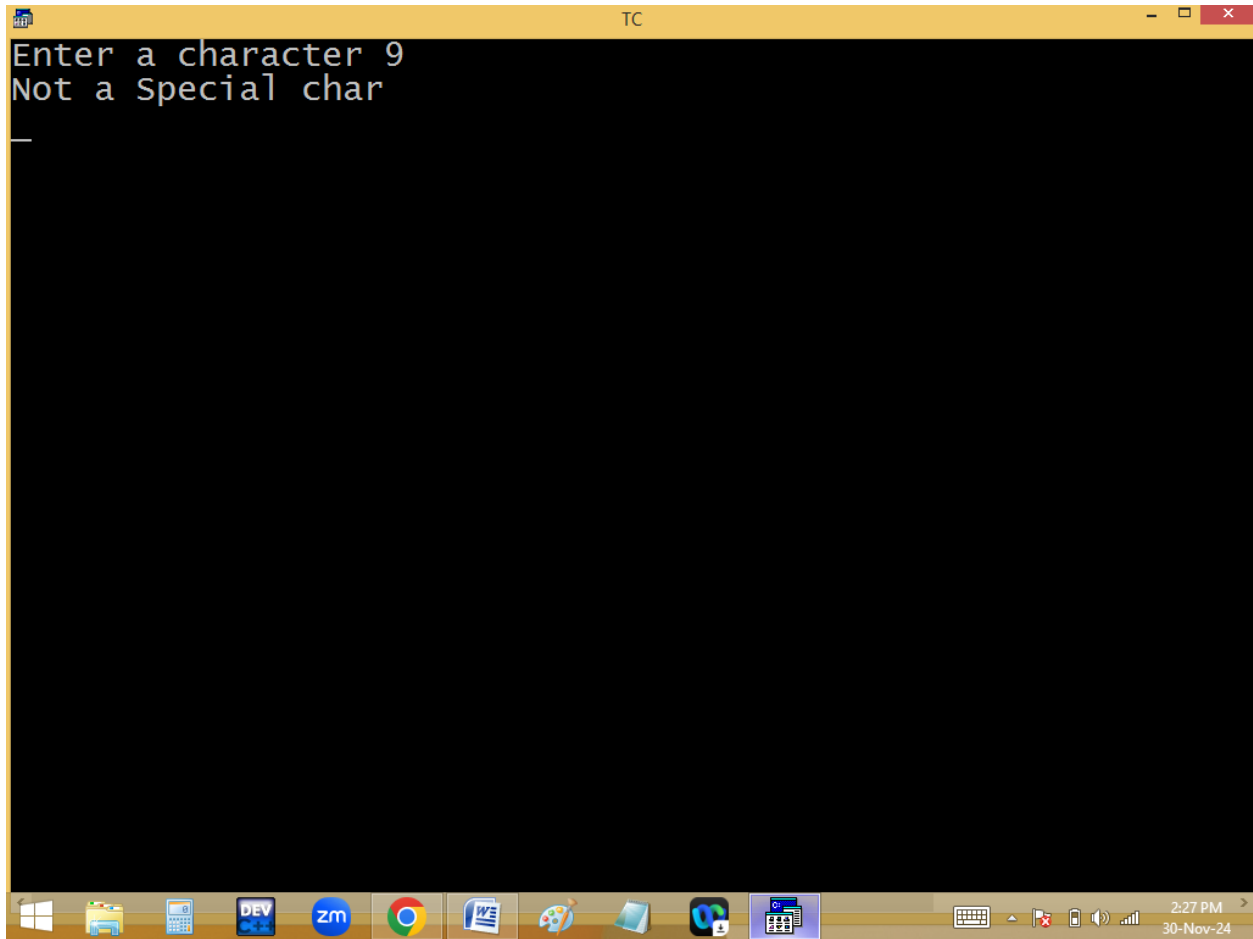

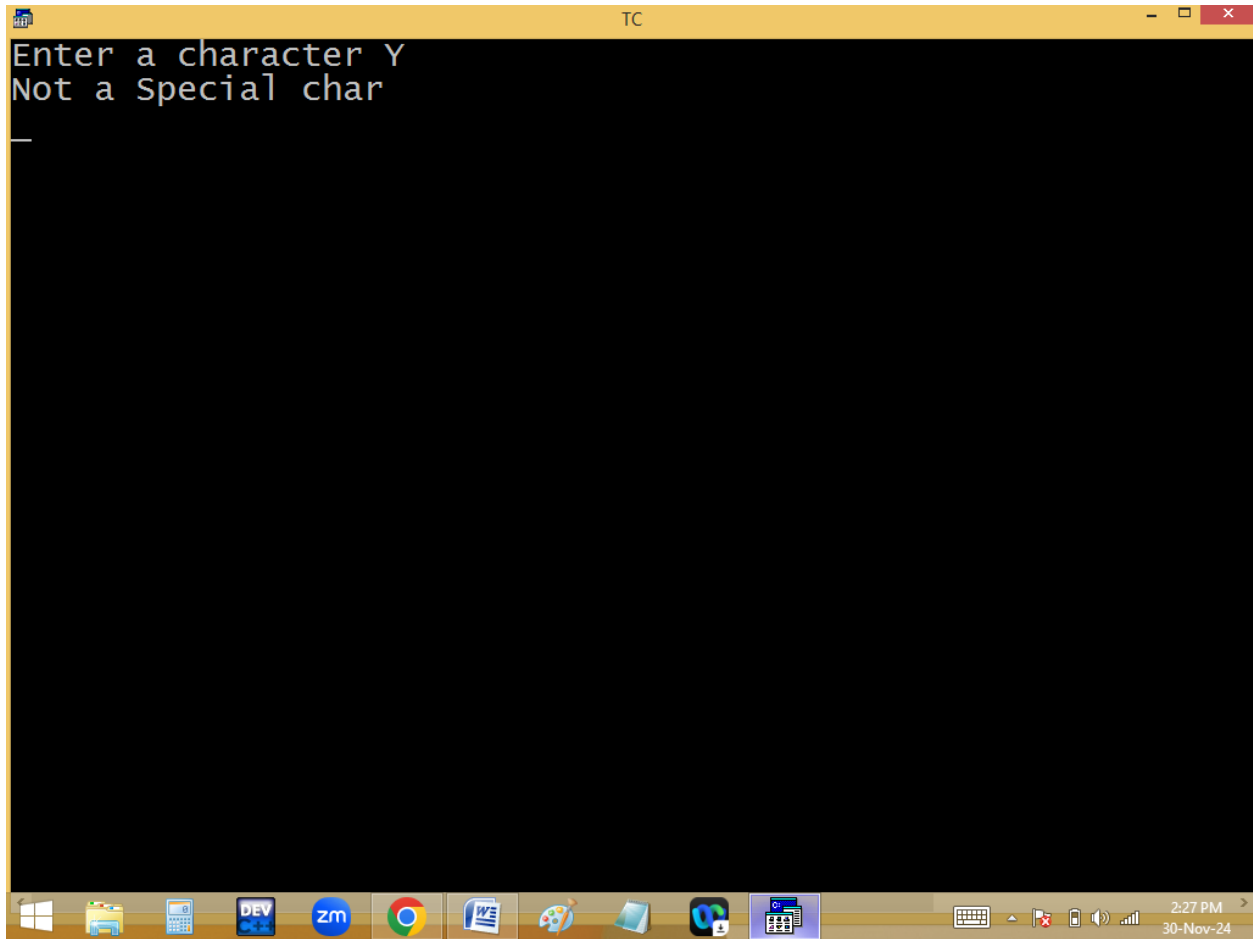

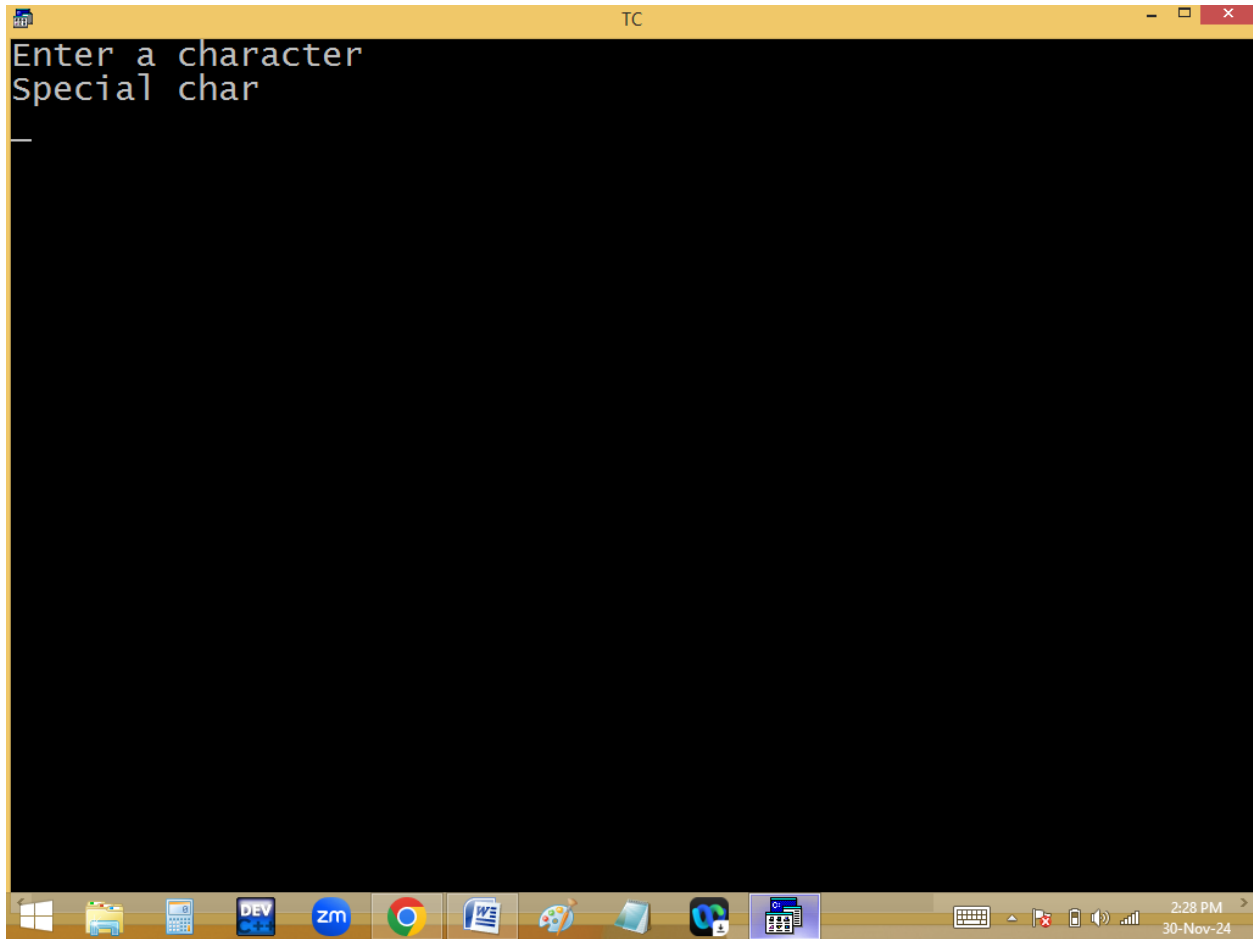


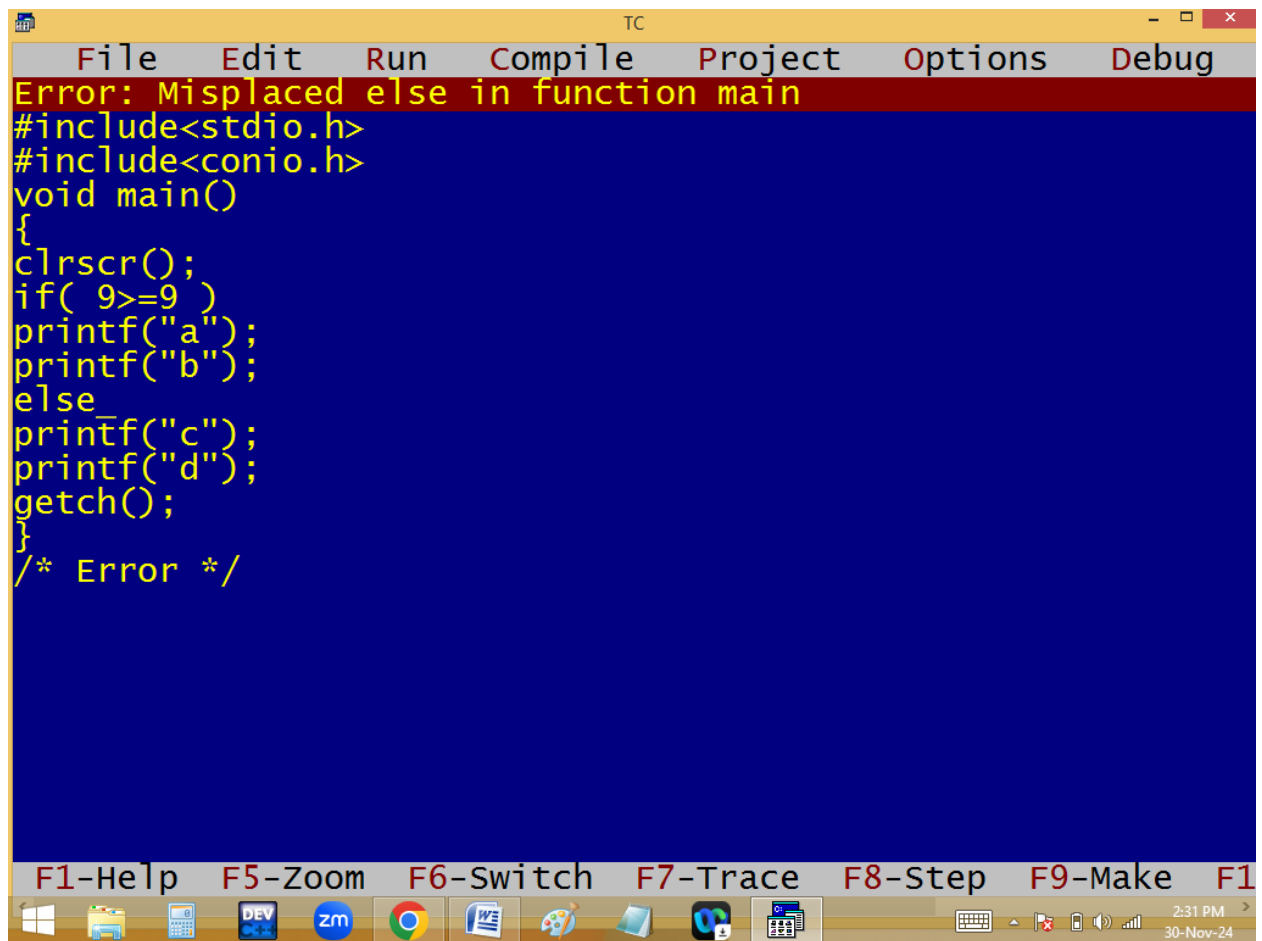

The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top of the code editor states: "Error: Misplaced else in function main". The code in the editor is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 9>=9 )
printf("a");
printf("b");
else
printf("c");
printf("d");
getch();
}
/* Error */
```

Below the code editor, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar at the bottom shows various application icons, including the Start button, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and a folder icon. The system tray on the right indicates the time is 2:31 PM and the date is 30-Nov-24.

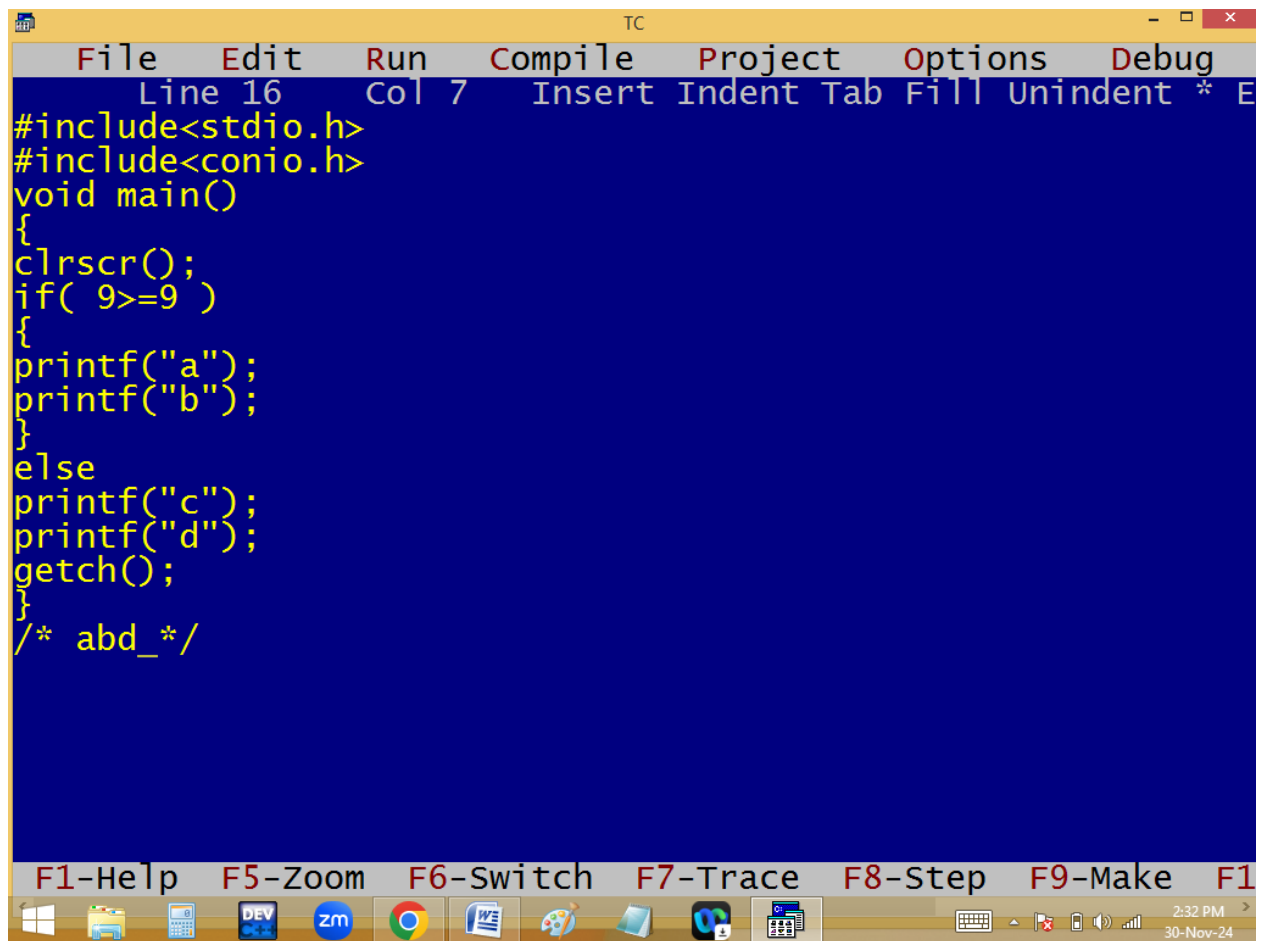


```
TC
File Edit Run Compile Project Options Debug
Line 16 Col 7 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 9>=9 )
{
printf("a");
printf("b");
}
else
printf("c");
printf("d");
getch();
}
/* abd_*/

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F1
2:32 PM
30-Nov-24
```

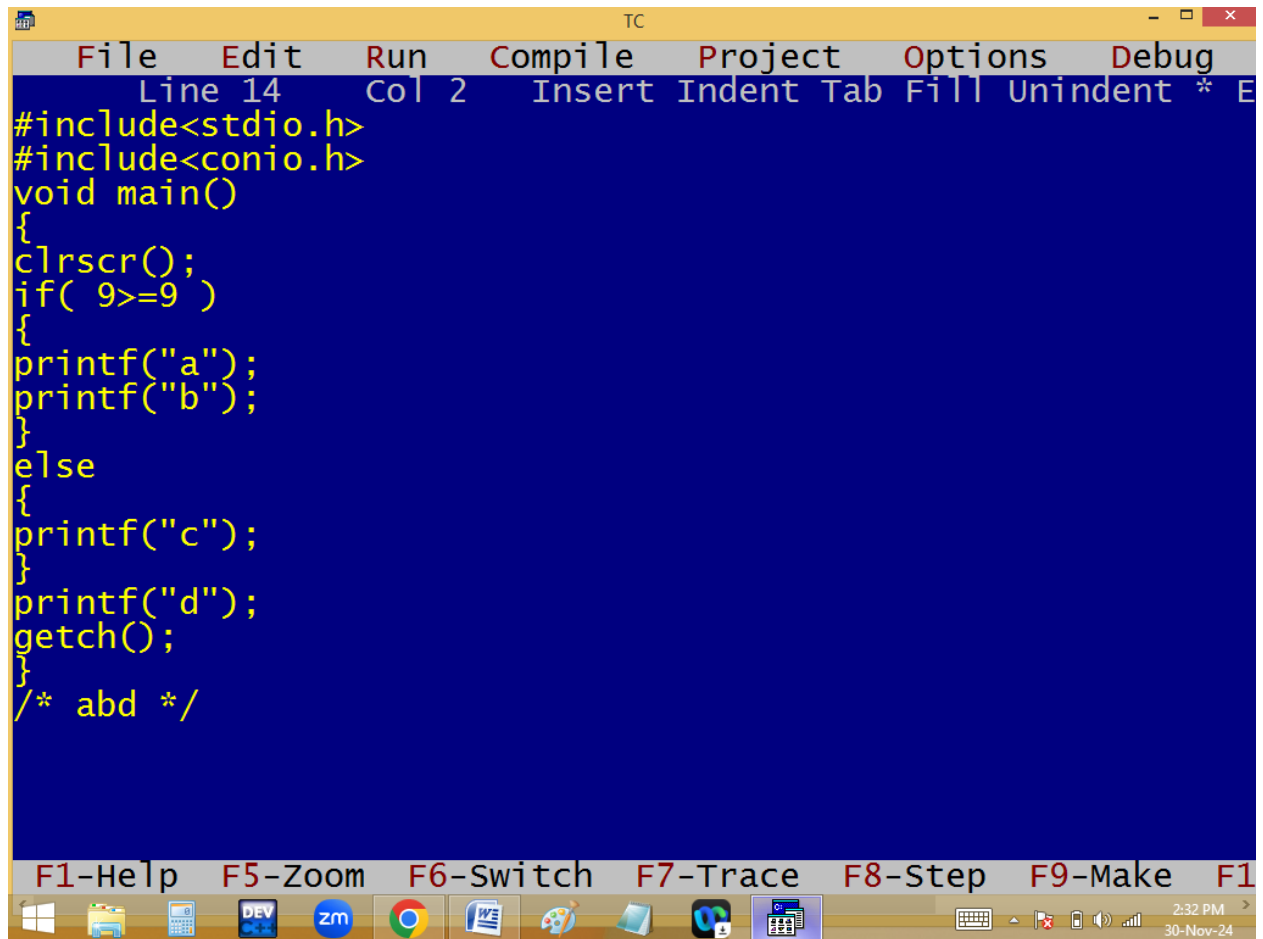

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 2 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 9>=9 )
{
printf("a");
printf("b");
}
else
{
printf("c");
printf("d");
getch();
}
/* abd */


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit
2:32 PM 30-Nov-24
```

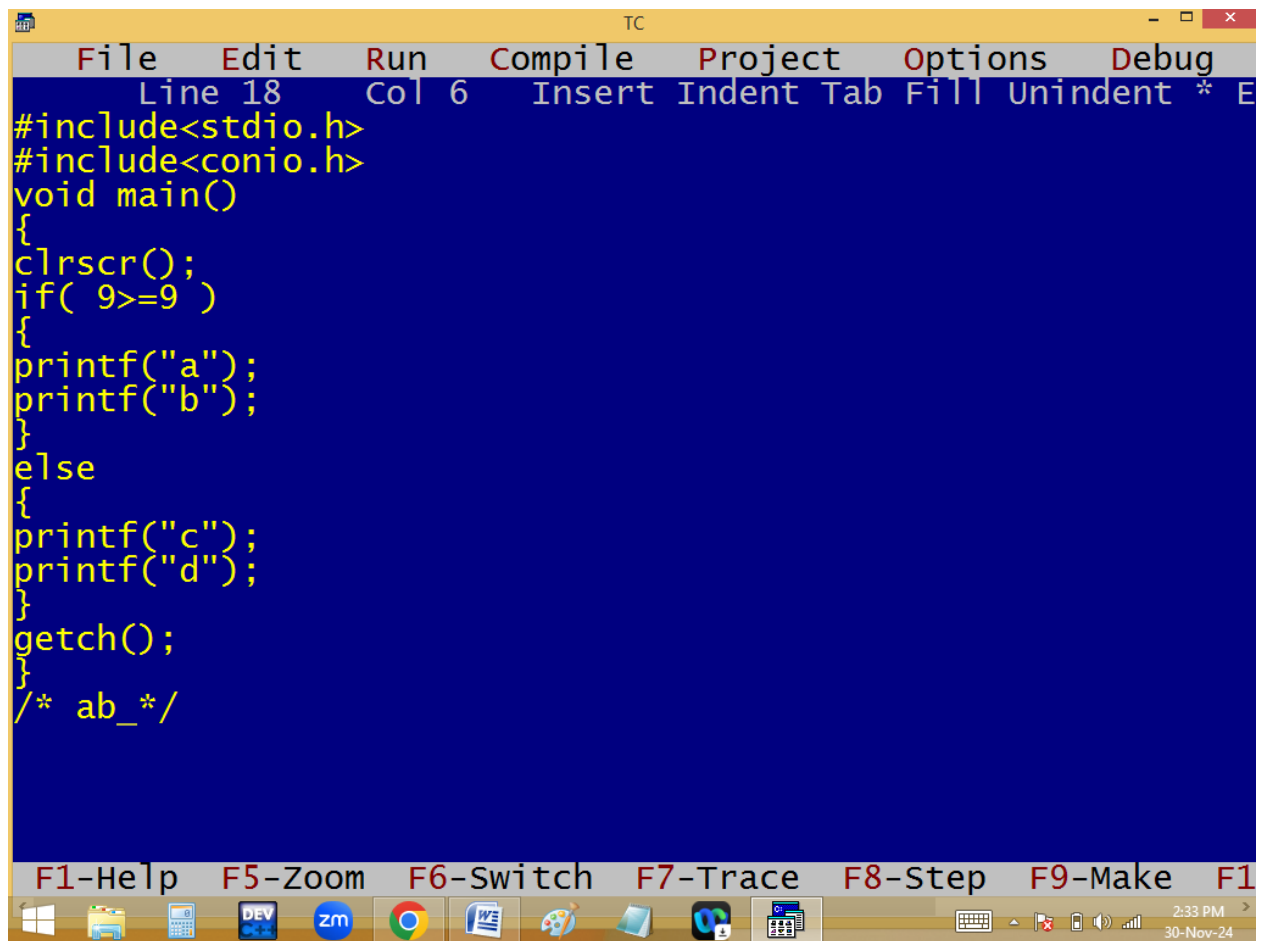

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 18", "Col 6", and lists editing options: "Insert", "Indent", "Tab", "Fill", "Unindent", and a cursor icon. The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 9>=9 )
{
printf("a");
printf("b");
}
else
{
printf("c");
printf("d");
}
getch();
}
/* ab_*/
```


The bottom of the window features a toolbar with icons for various functions and a row of function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar at the very bottom shows the Start button, several application icons (including File Explorer, Calculator, DEV C++, Zoom, Chrome, Word, and Paint), and the system tray with the date and time "2:33 PM 30-Nov-24".

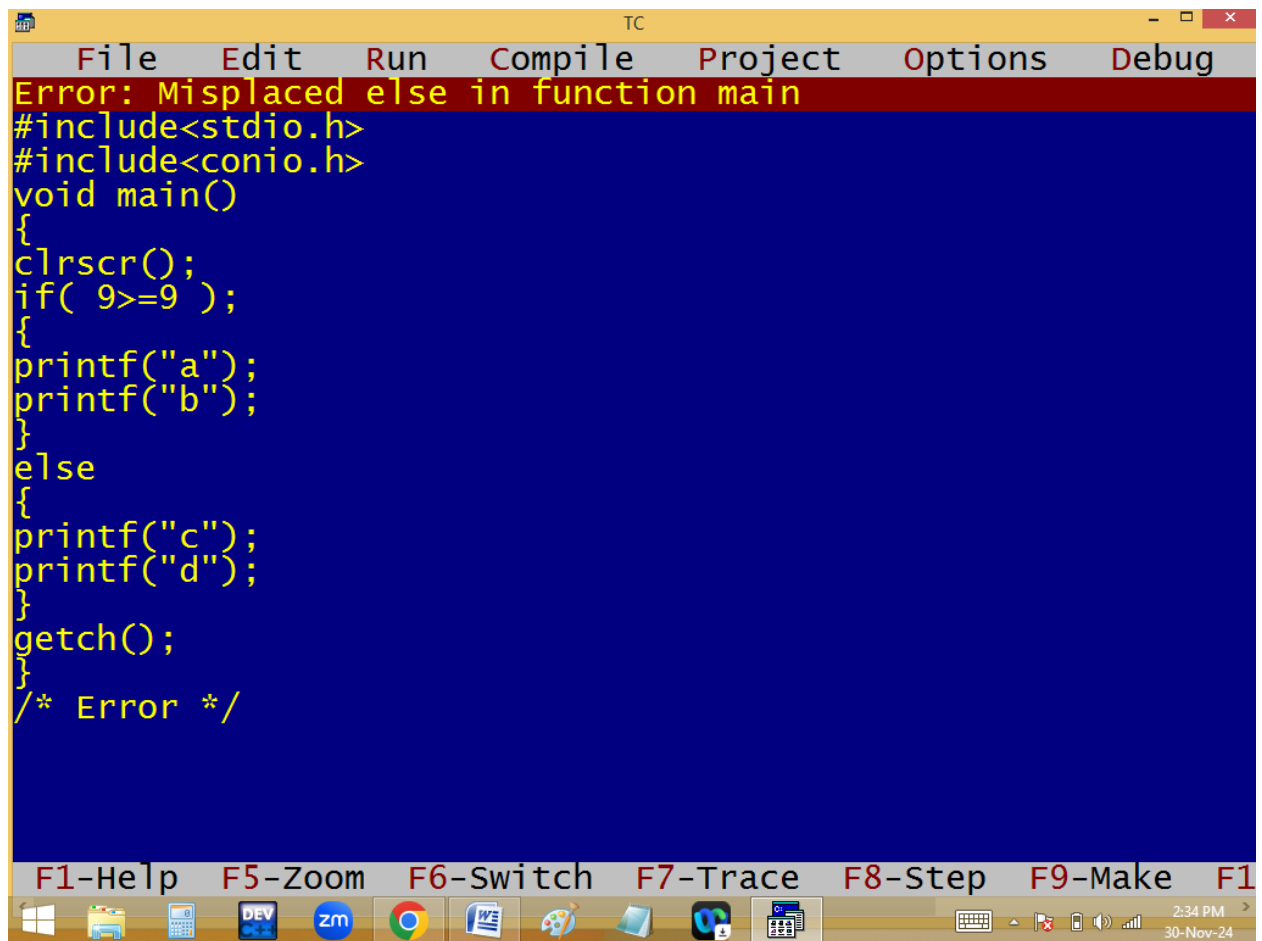

The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top of the code editor states: "Error: Misplaced else in function main". The code in the editor is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 9>=9 );
}
printf("a");
printf("b");
}
else
{
printf("c");
printf("d");
}
getch();
}
/* Error */
```

Below the code editor, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar at the bottom displays various application icons, including the Start button, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and VS Code. The system clock in the bottom right corner shows "2:34 PM" and "30-Nov-24".

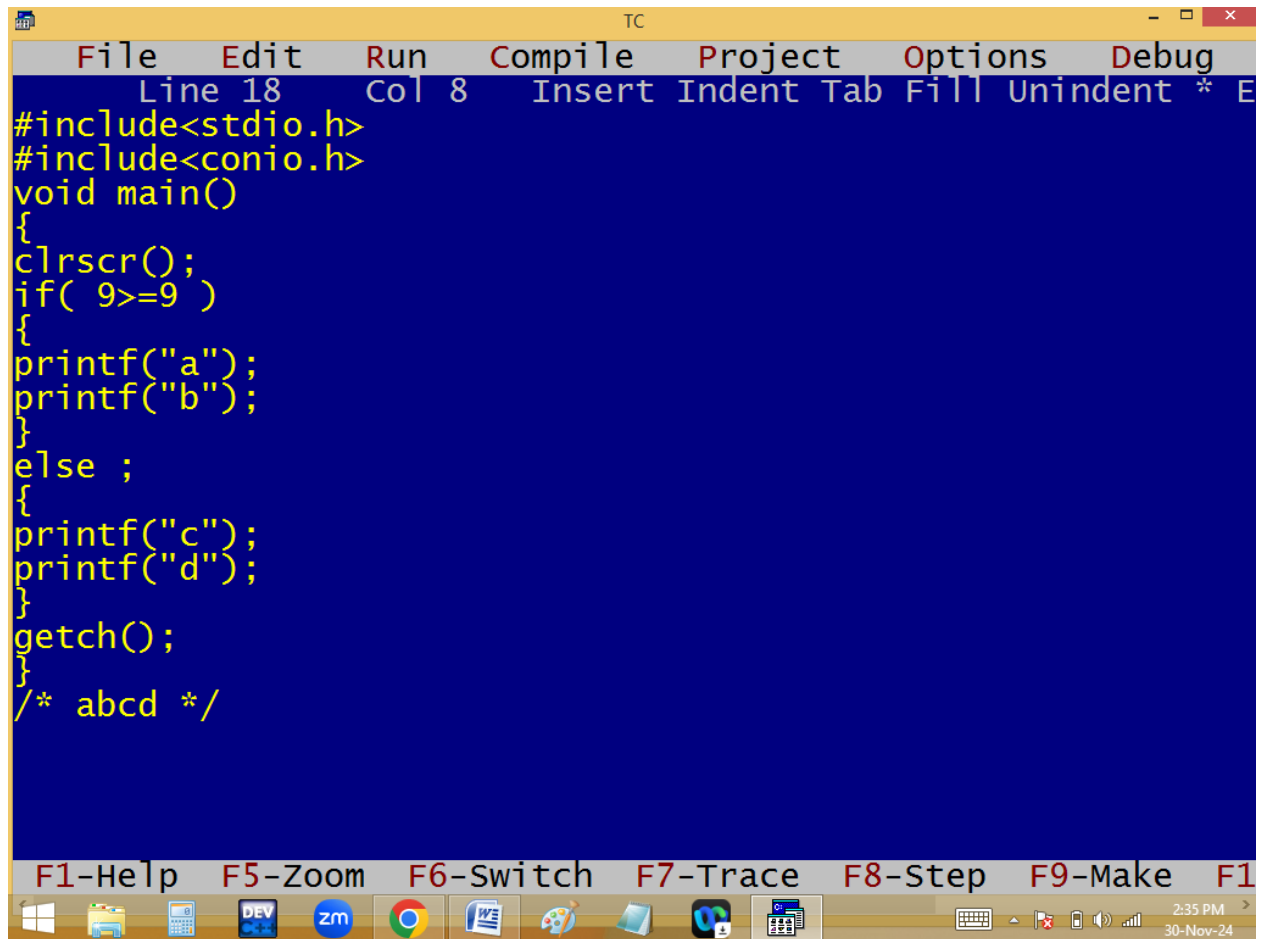

```
TC
File Edit Run Compile Project Options Debug
Line 18 Col 8 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 9>=9 )
{
printf("a");
printf("b");
}
else ;
{
printf("c");
printf("d");
}
getch();
}
/* abcd */


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F1
2:35 PM
30-Nov-24
```

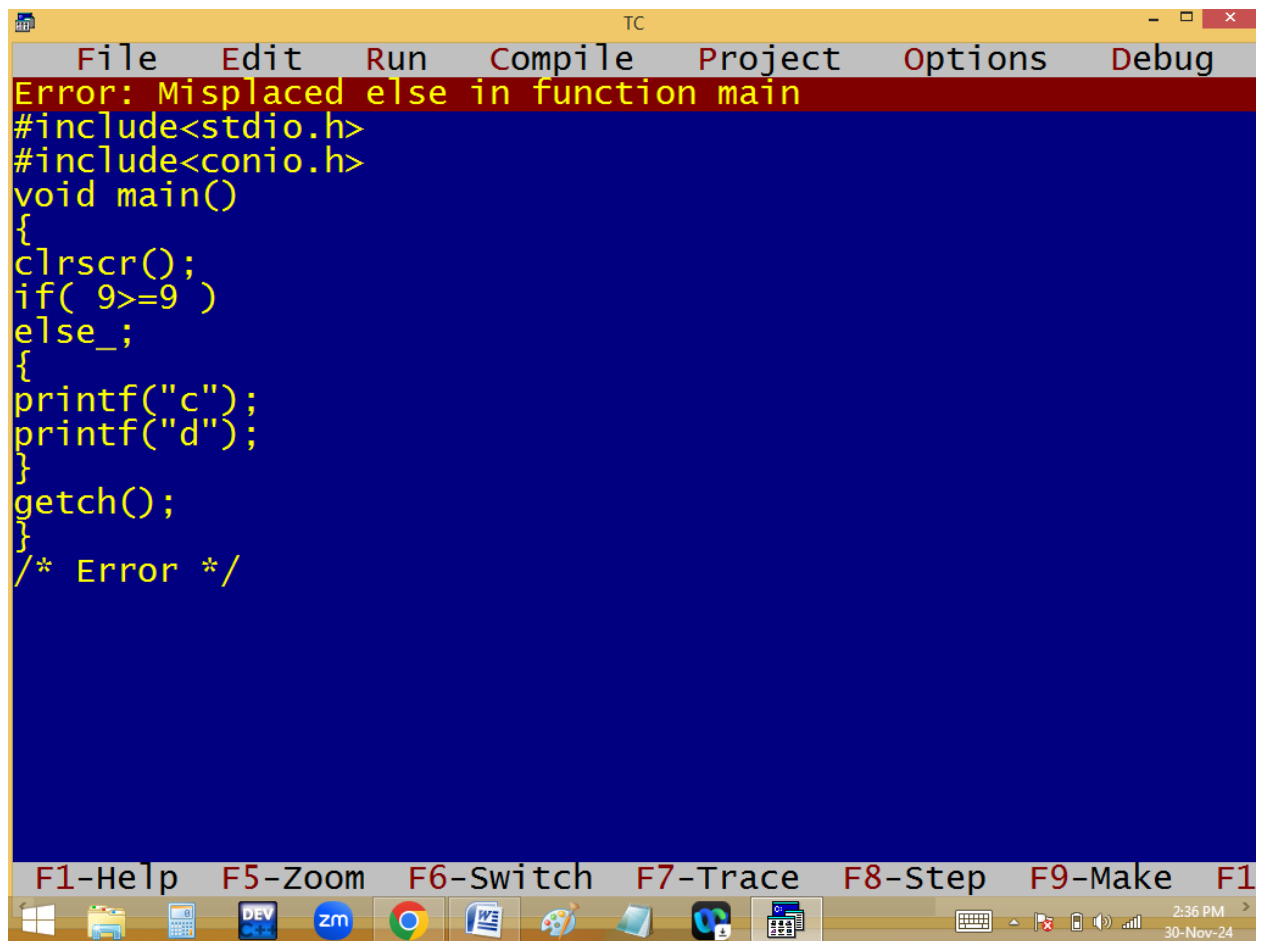

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top reads "Error: Misplaced else in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 9>=9 )
else_
{
printf("c");
printf("d");
}
getch();
}
/* Error */
```

Below the code editor, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar at the bottom shows various application icons, including the Start button, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and a folder icon. The system tray on the right shows the time as 2:36 PM and the date as 30-Nov-24.

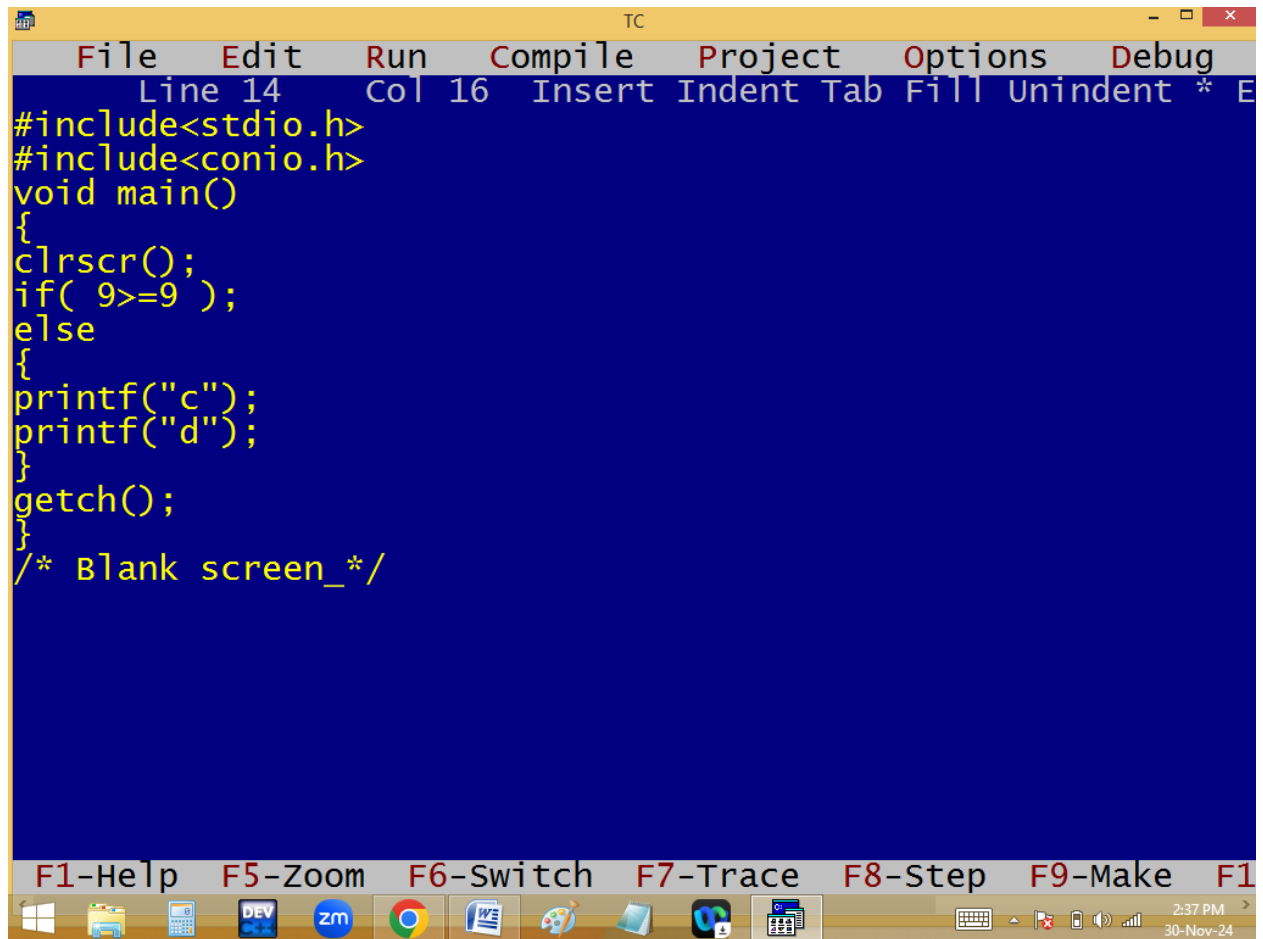


```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 16 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 9>=9 );
else
{
printf("c");
printf("d");
}
getch();
}
/* Blank screen_*/

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F1
2:37 PM
30-Nov-24
```


```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 6 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 9>=9 );
else;
{
printf("c");
printf("d");
}
getch();
}
/* cd */

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Go To
2:37 PM
30-Nov-24
```

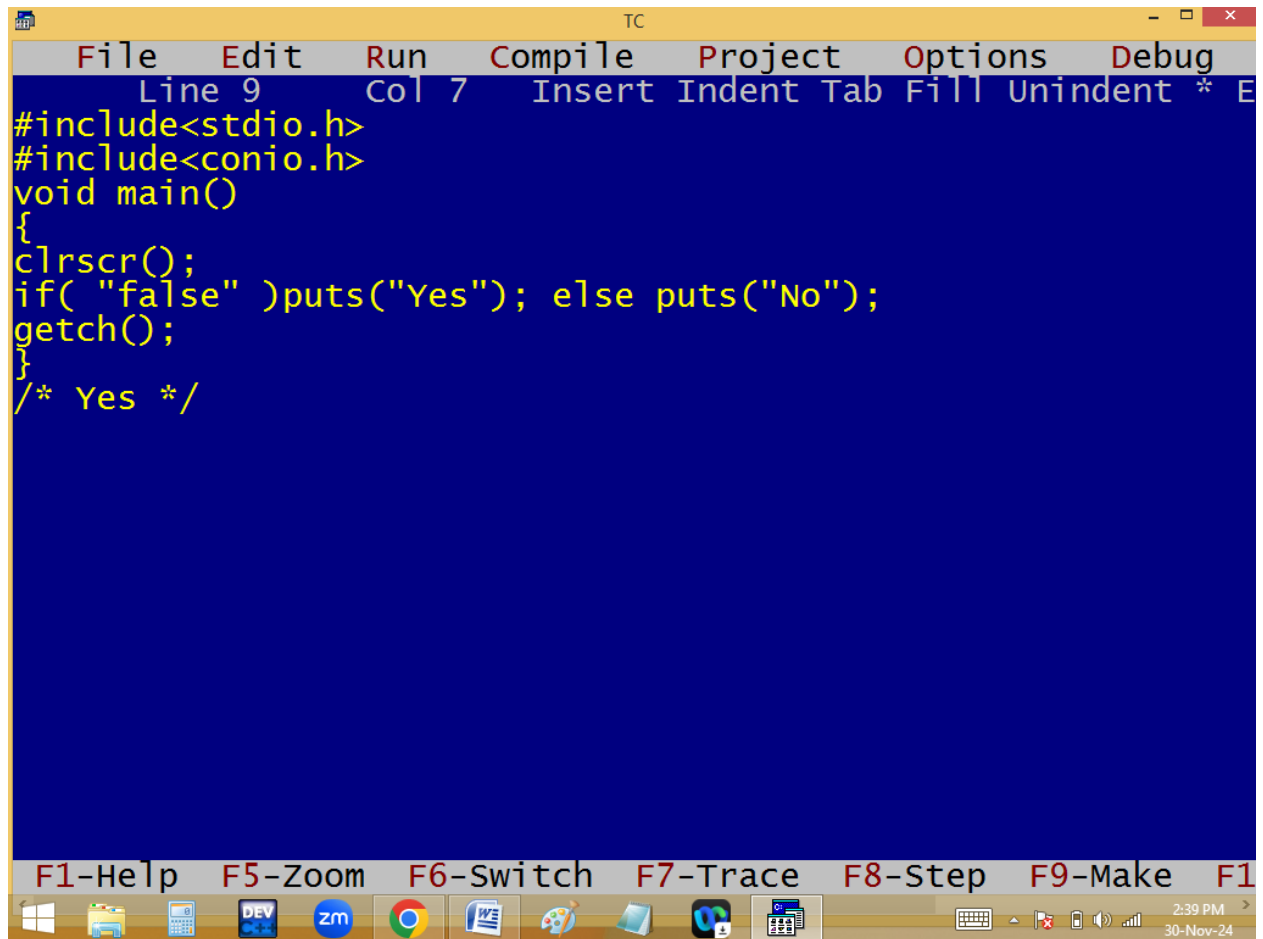

```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 7 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( "false" )puts("Yes"); else puts("No");
getch();
}
/* Yes */


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F1
2:39 PM
30-Nov-24
```

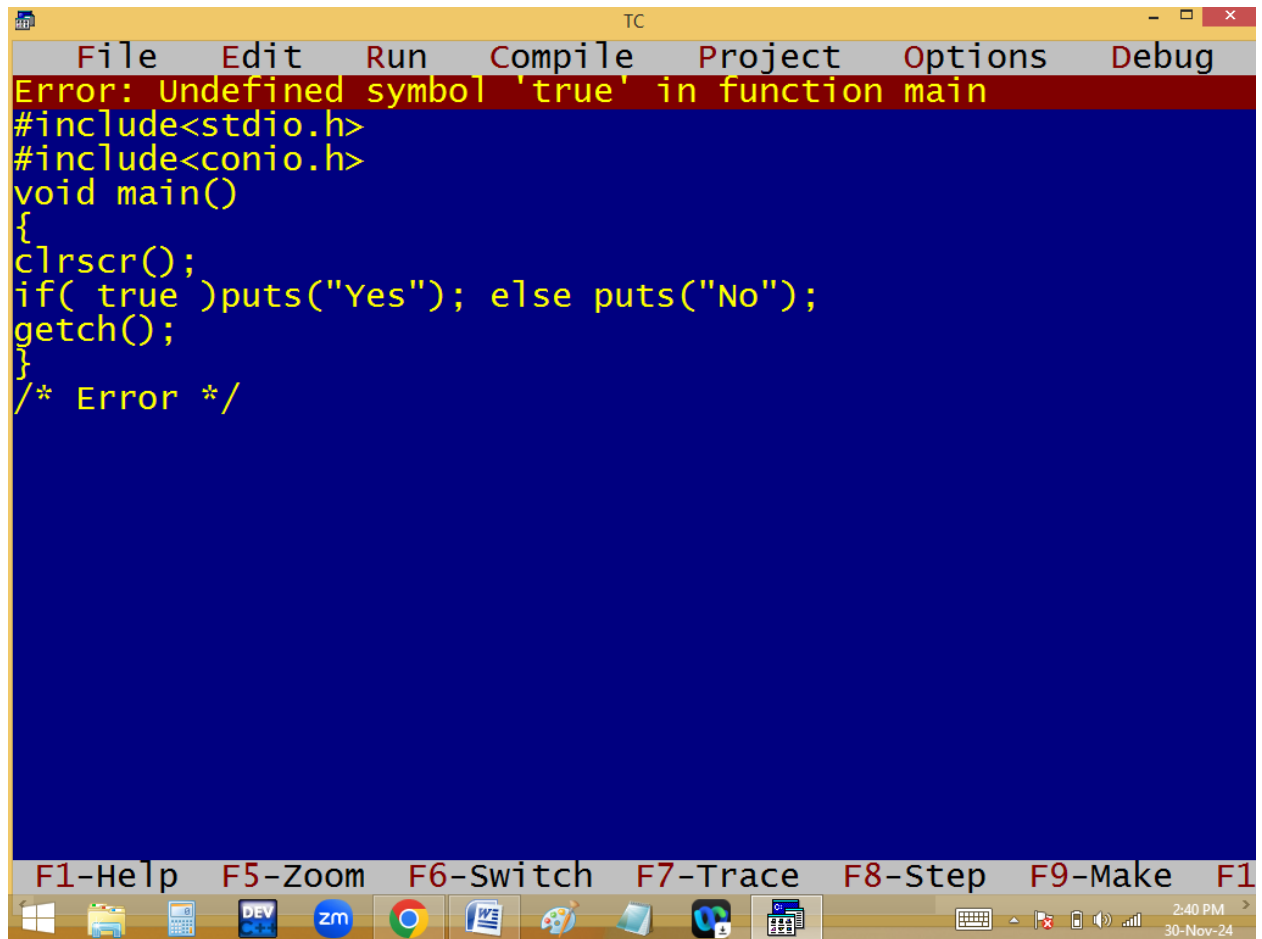

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top reads: "Error: Undefined symbol 'true' in function main". The main editing area has a blue background and contains the following C code:


```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( true )puts("Yes"); else puts("No");
getch();
}
/* Error */
```

At the bottom of the IDE, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". Below the toolbar is the Windows taskbar, which includes icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and other applications. The system tray on the right shows the time as "2:40 PM" and the date as "30-Nov-24".

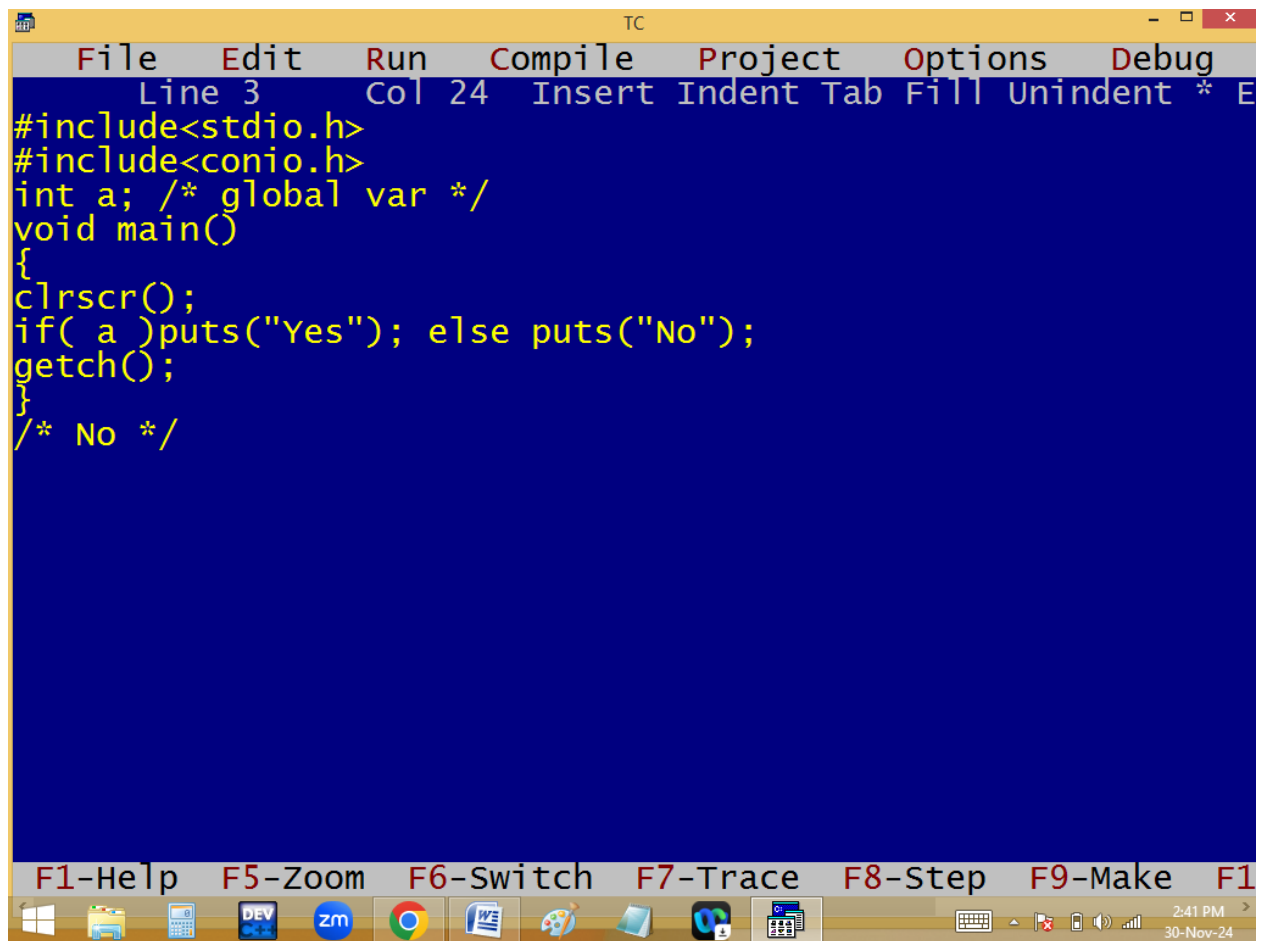


```
TC
File Edit Run Compile Project Options Debug
Line 3 Col 24 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
int a; /* global var */
void main()
{
clrscr();
if( a )puts("Yes"); else puts("No");
getch();
}
/* No */

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F1
2:41 PM
30-Nov-24
```

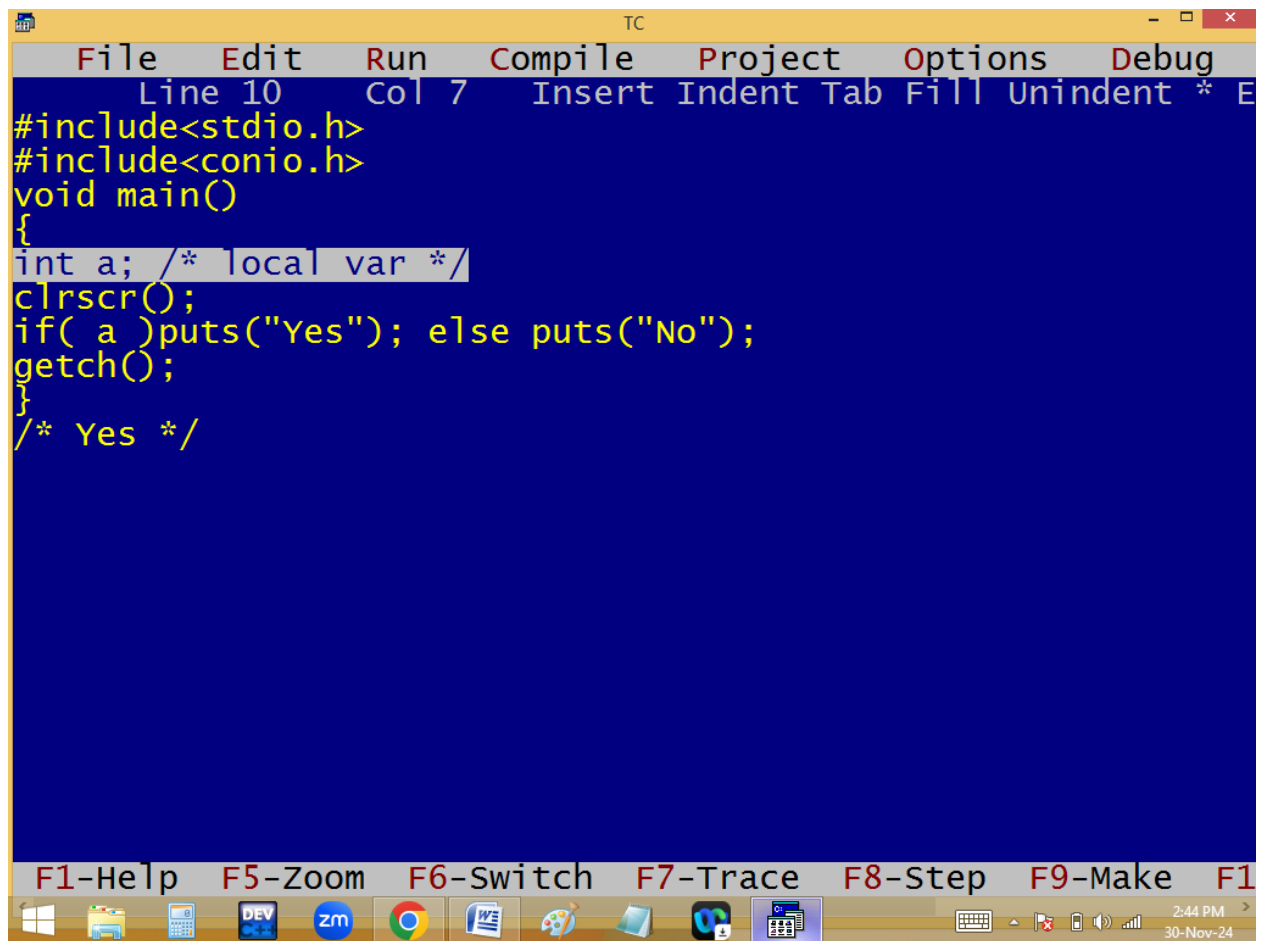

```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 7 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a; /* local var */
clrscr();
if( a )puts("Yes"); else puts("No");
getch();
}
/* Yes */


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F1
2:44 PM
30-Nov-24
```

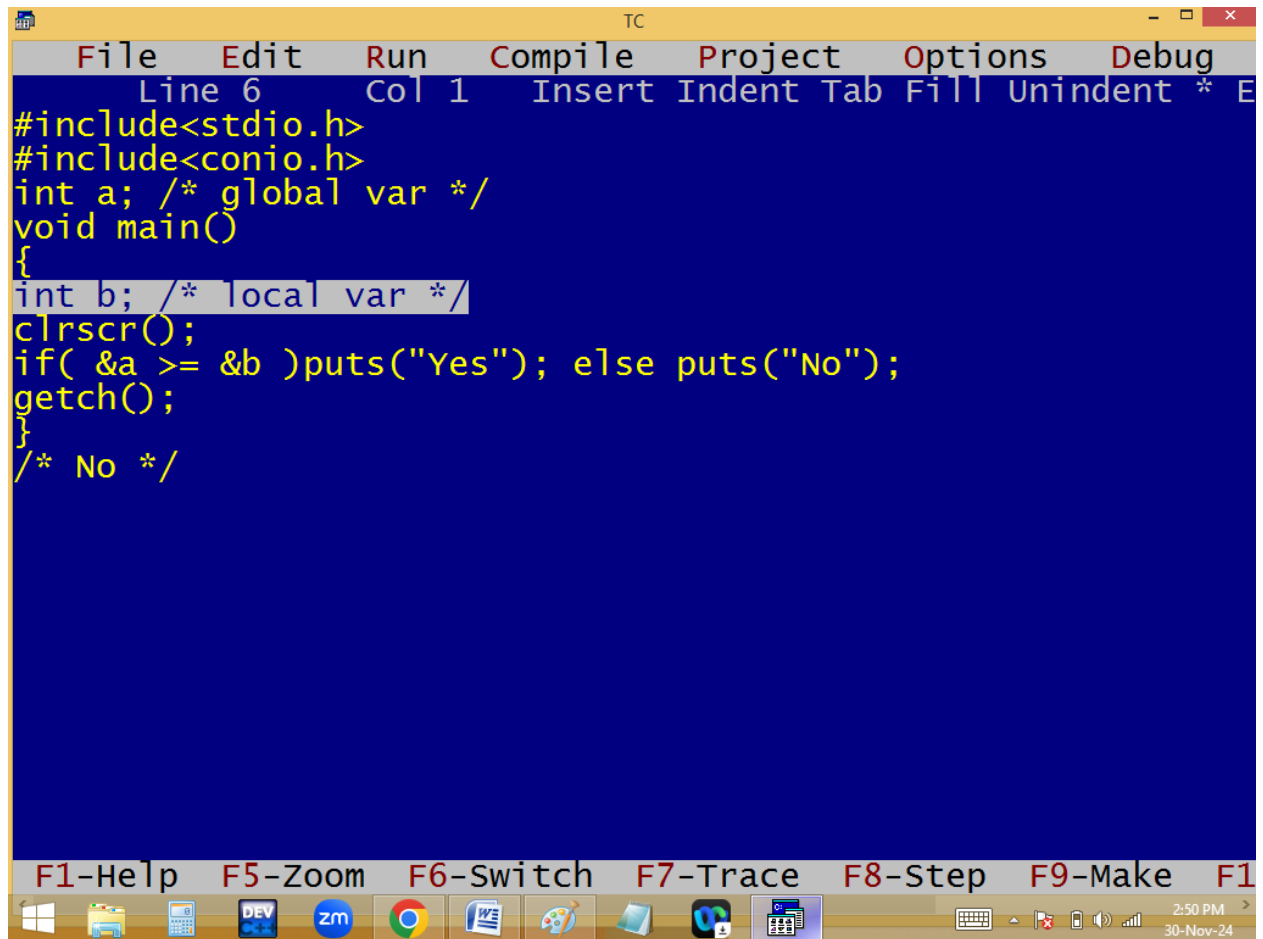

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 6 Col 1" and provides keyboard shortcuts: Insert, Indent, Tab, Fill, Unindent, and *. The code editor has a dark blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
int a; /* global var */
void main()
{
    int b; /* local var */
    clrscr();
    if( &a >= &b )puts("Yes"); else puts("No");
    getch();
}
/* No */
```

The bottom of the window features a toolbar with function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar is visible at the very bottom, showing icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and other applications. The system clock in the bottom right corner shows "2:50 PM" and "30-Nov-24".

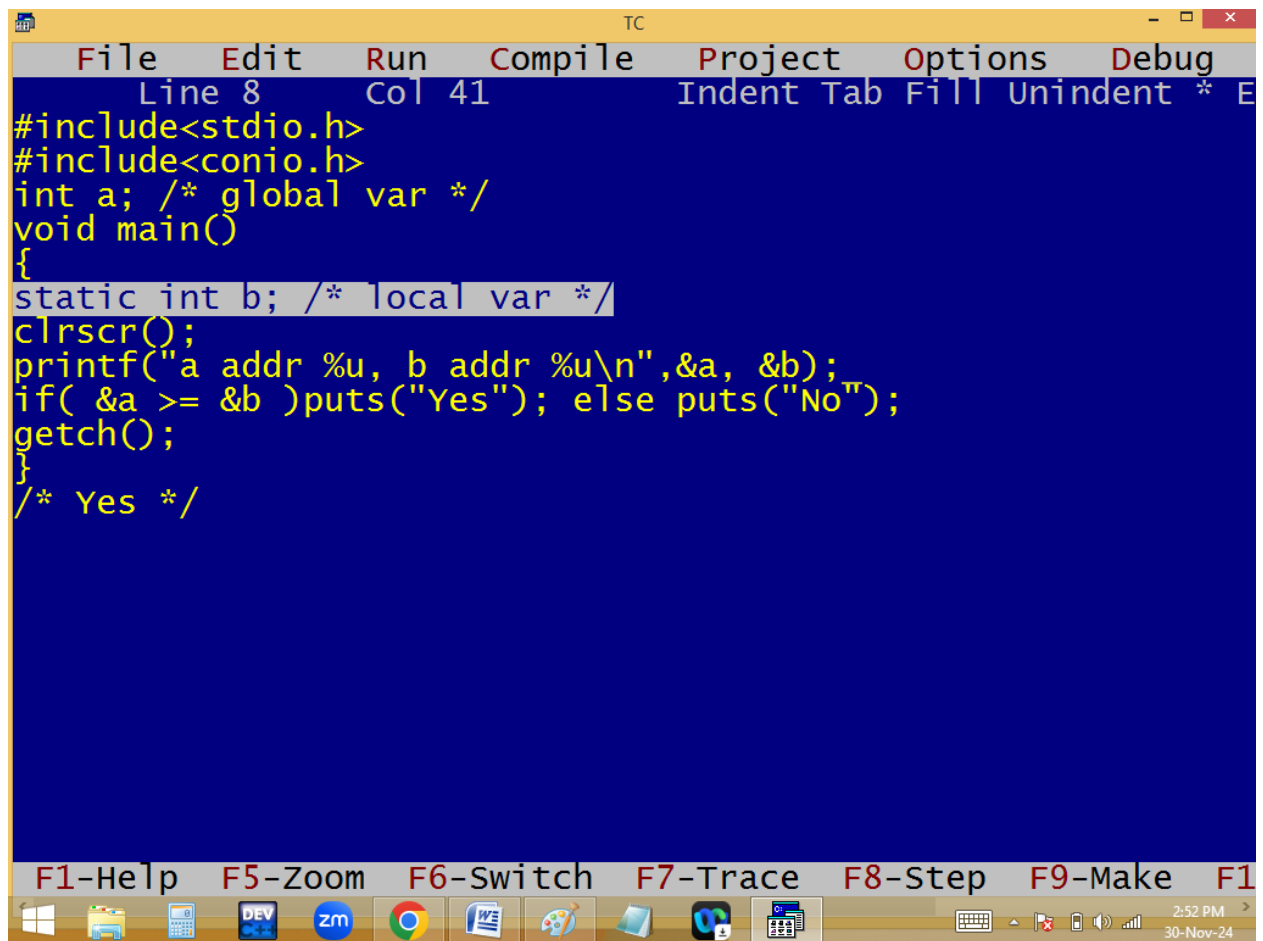

```
TC
File Edit Run Compile Project Options Debug
Line 8 Col 41 Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
int a; /* global var */
void main()
{
static int b; /* local var */
clrscr();
printf("a addr %u, b addr %u\n",&a, &b);
if( &a >= &b )puts("Yes"); else puts("No");
getch();
}
/* Yes */


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit
2:52 PM 30-Nov-24
```

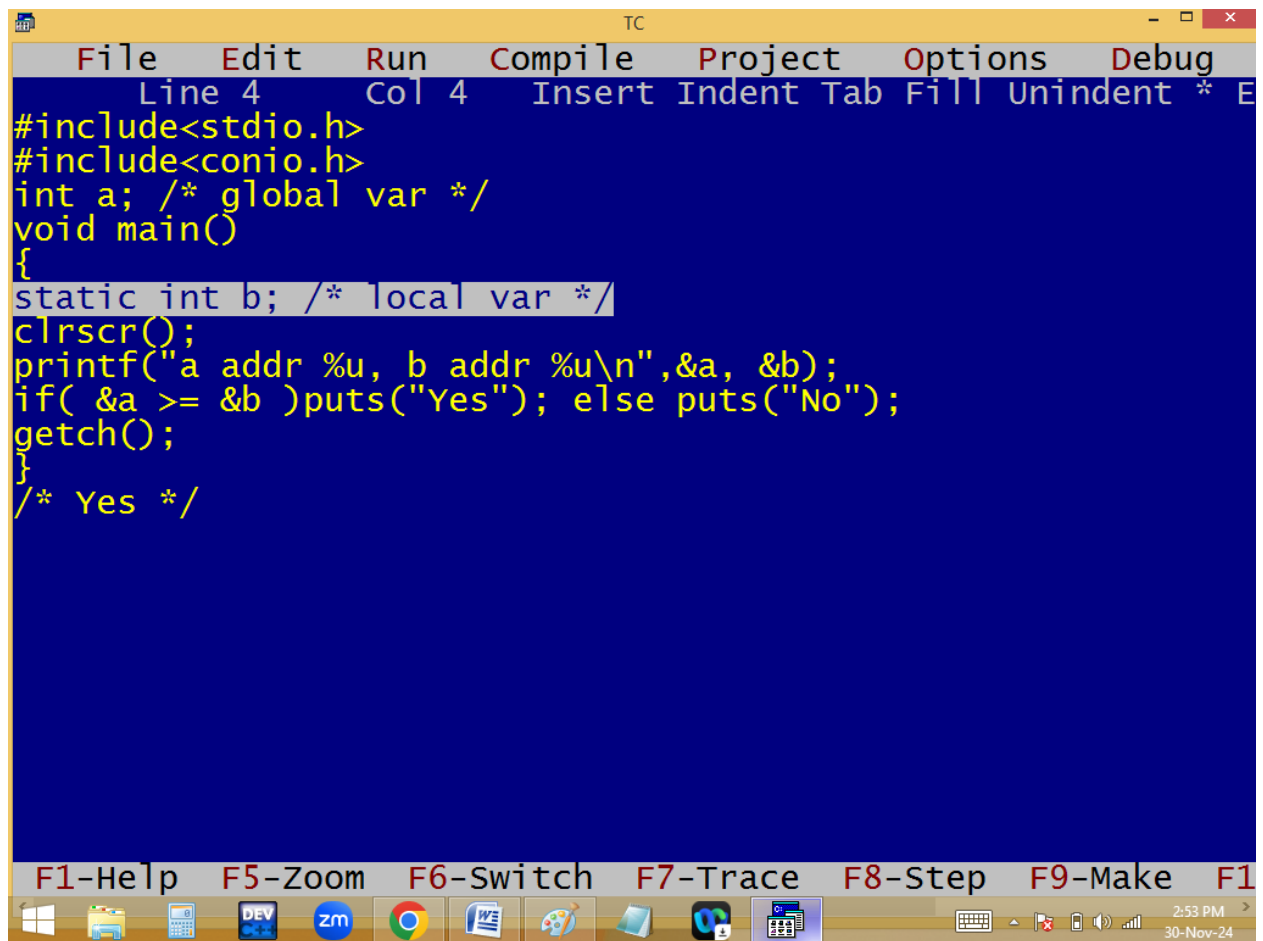



The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 4", "Col 4", and "Insert Indent Tab Fill Unindent * E". The code editor contains the following C program:

```
#include<stdio.h>
#include<conio.h>
int a; /* global var */
void main()
{
static int b; /* local var */
clrscr();
printf("a addr %u, b addr %u\n",&a, &b);
if( &a >= &b )puts("Yes"); else puts("No");
getch();
}
/* Yes */
```

The bottom of the window features a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar at the very bottom shows various application icons and the system clock indicating "2:53 PM" on "30-Nov-24".

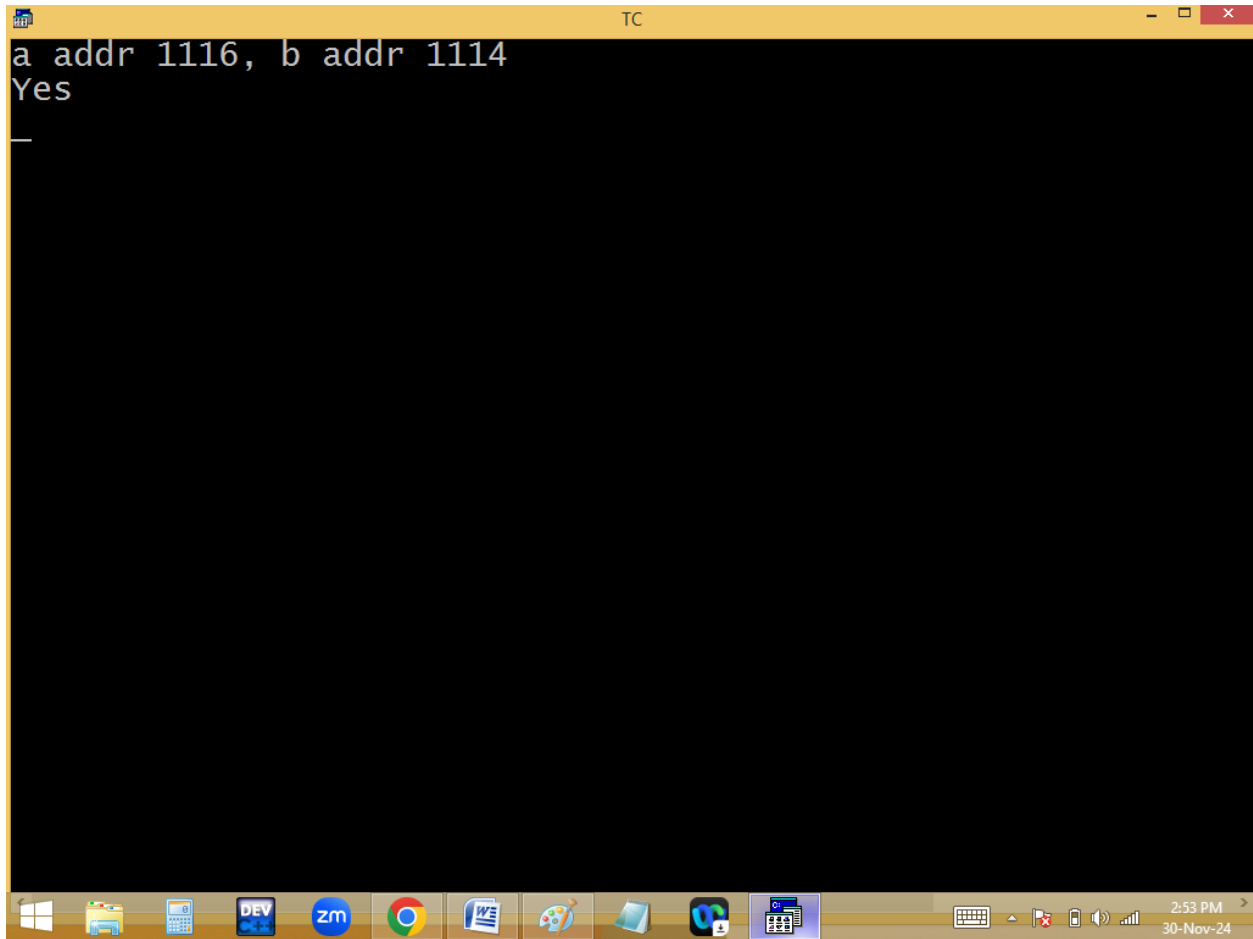

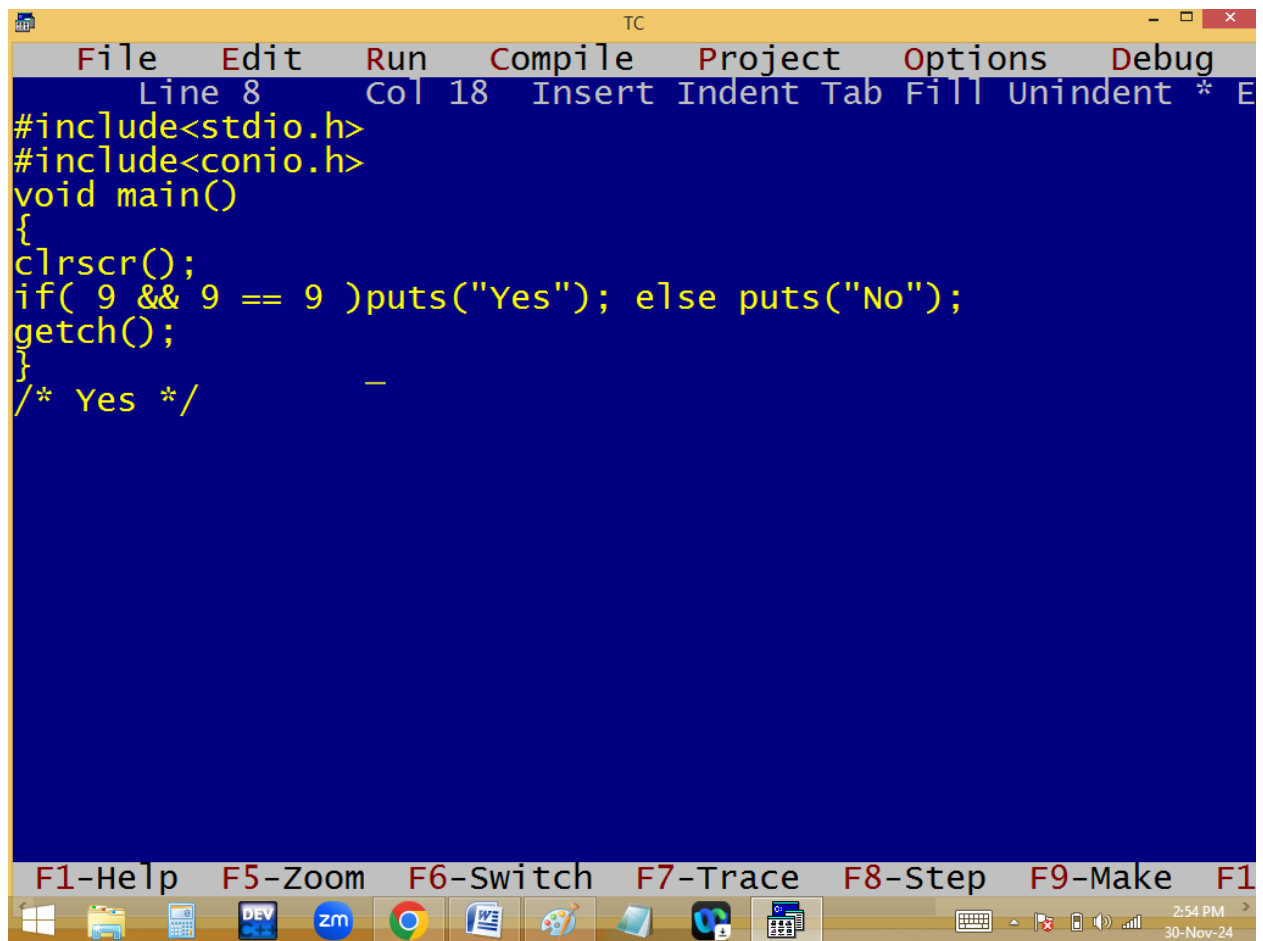

```
TC
File Edit Run Compile Project Options Debug
Line 8 Col 18 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 9 && 9 == 9 )puts("Yes"); else puts("No");
getch();
}
/* Yes */
```


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

2:54 PM 30-Nov-24

```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 6 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( (9 && 9) == 9 )puts("Yes"); else puts("No");
getch();
}
/* No */

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run F11-Exit
2:56 PM 30-Nov-24
```


if(9 && 9 == 9) p(yes); else p(no);
 1 && 1
 1 == 1

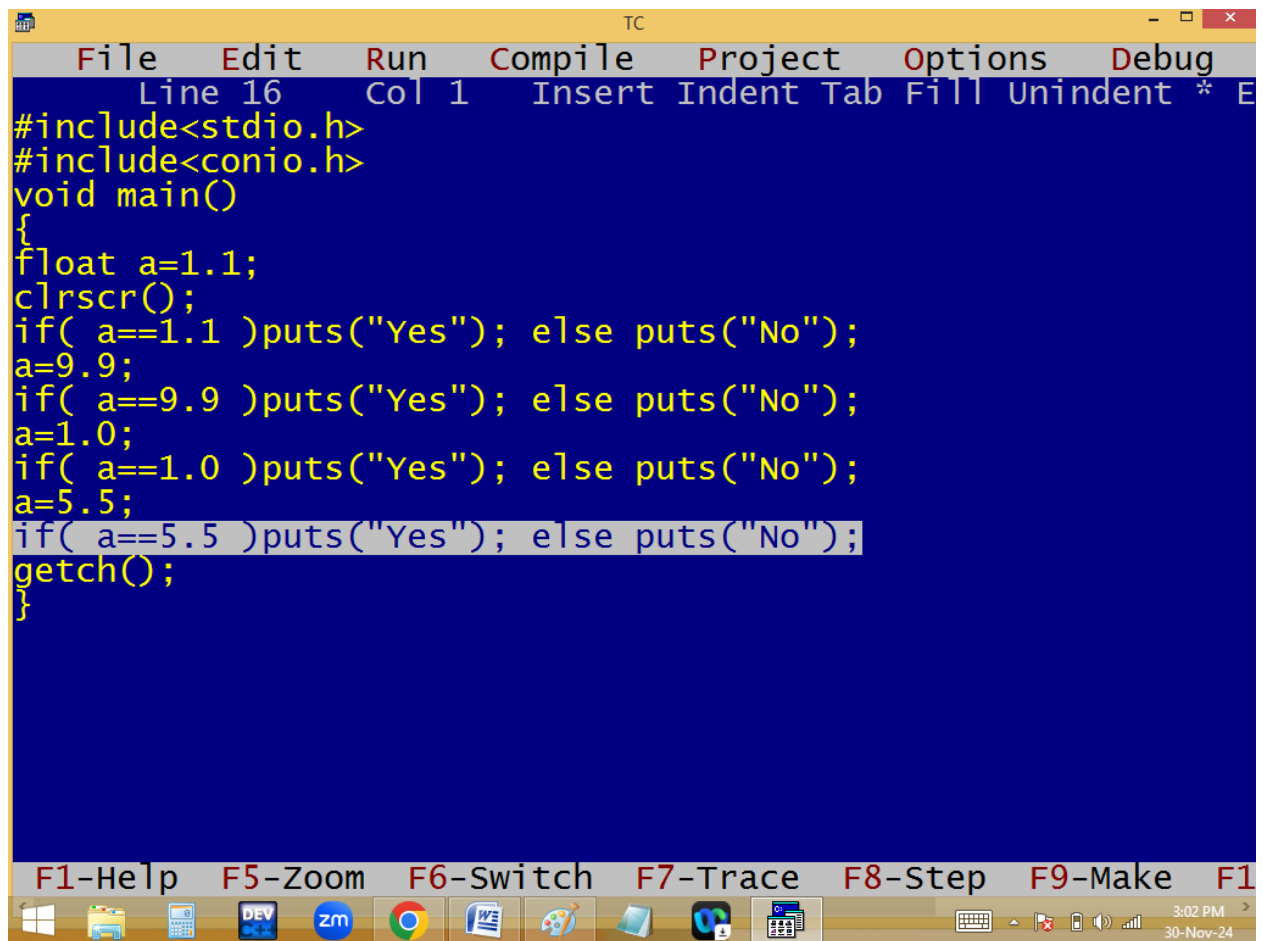


```
TC
File Edit Run Compile Project Options Debug
Line 16 Col 1 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
float a=1.1;
clrscr();
if( a==1.1 )puts("Yes"); else puts("No");
a=9.9;
if( a==9.9 )puts("Yes"); else puts("No");
a=1.0;
if( a==1.0 )puts("Yes"); else puts("No");
a=5.5;
if( a==5.5 )puts("Yes"); else puts("No");
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

3:02 PM 30-Nov-24

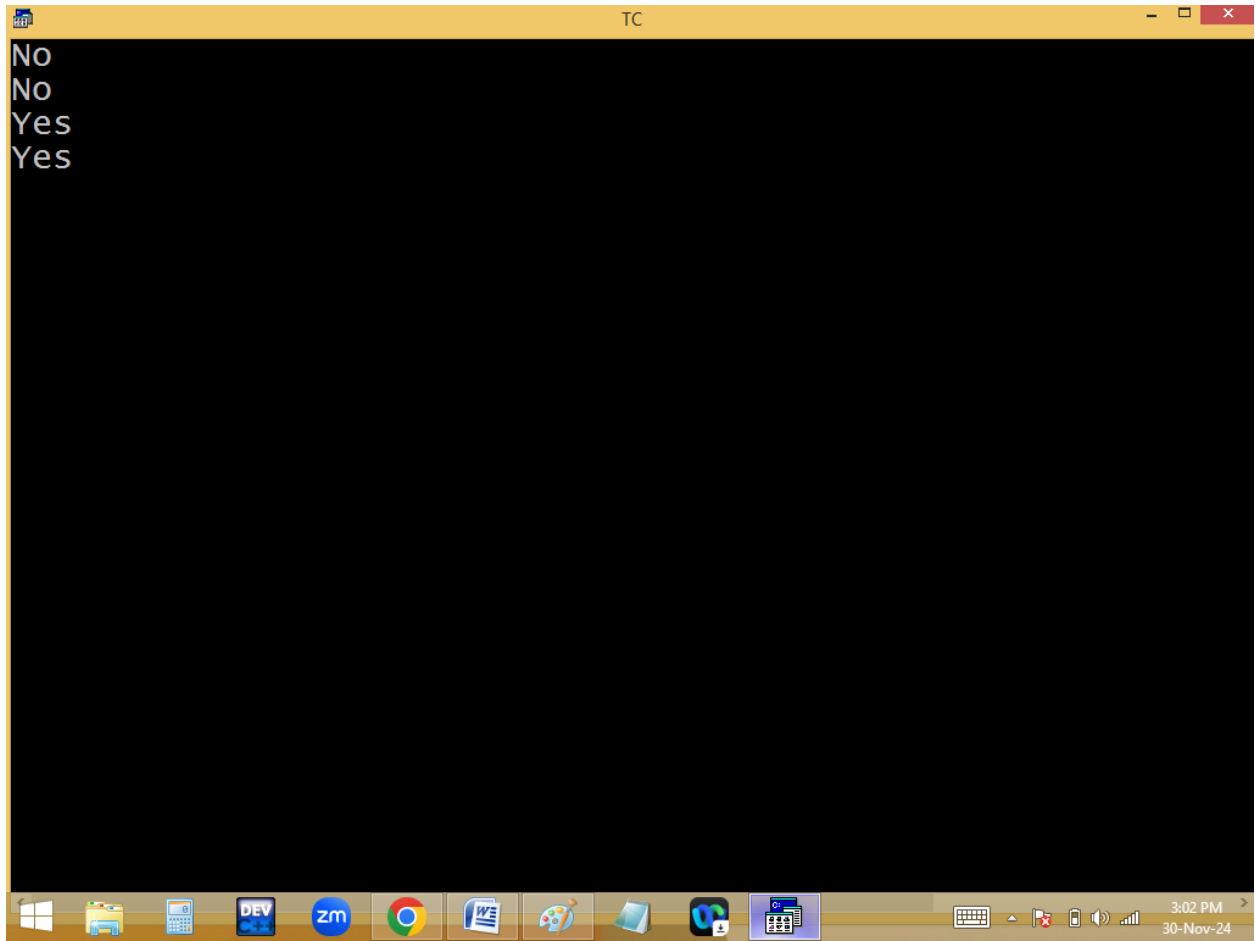

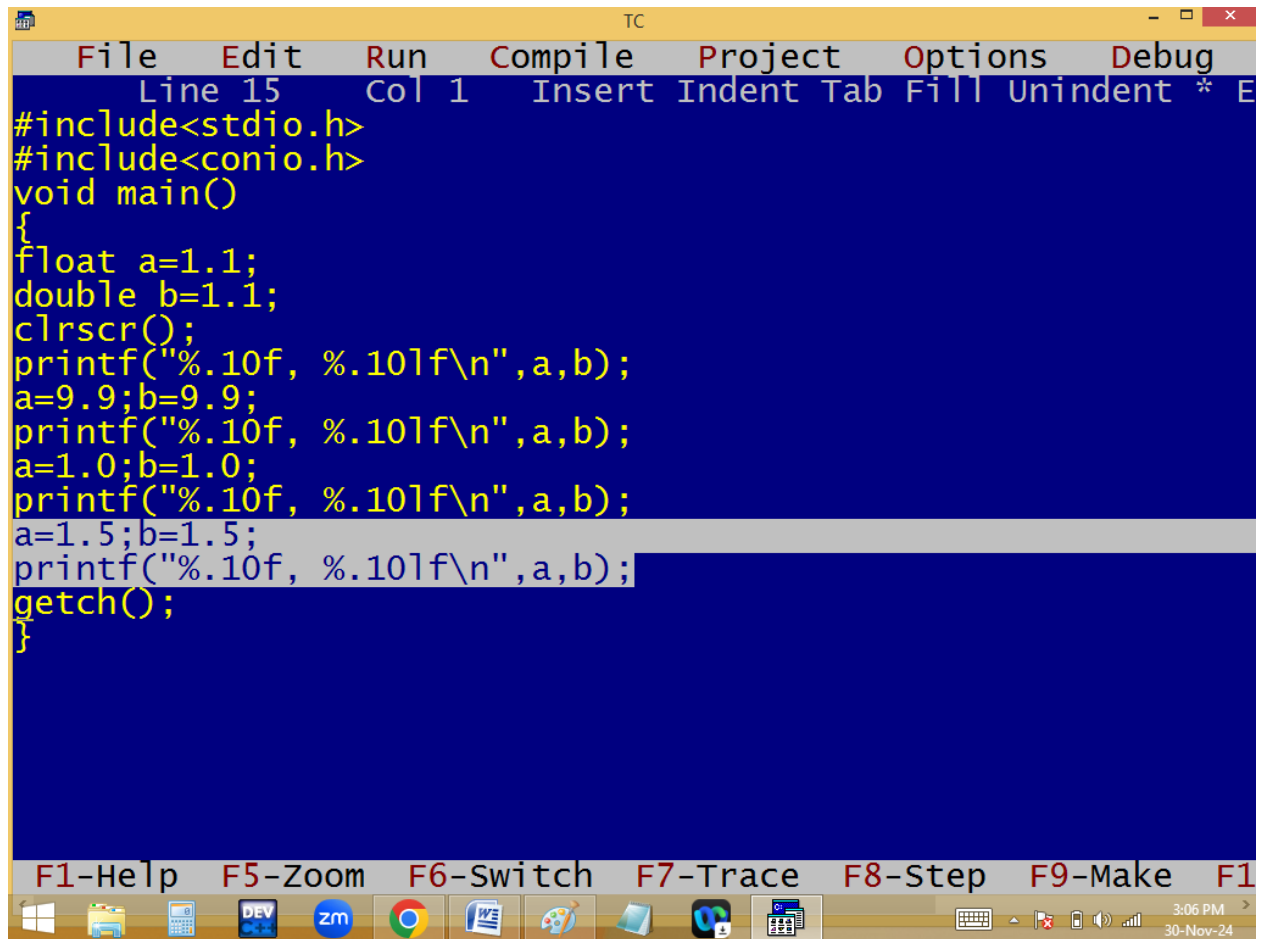


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 15", "Col 1", and "Insert Indent Tab Fill Unindent * E". The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
float a=1.1;
double b=1.1;
clrscr();
printf("%.10f, %.10lf\n",a,b);
a=9.9;b=9.9;
printf("%.10f, %.10lf\n",a,b);
a=1.0;b=1.0;
printf("%.10f, %.10lf\n",a,b);
a=1.5;b=1.5;
printf("%.10f, %.10lf\n",a,b);
getch();
}
```

The bottom of the window features a toolbar with icons for various functions and a status bar. The status bar displays "3:06 PM" and "30-Nov-24".

```
TC
1.1000000238, 1.1000000000
9.8999996185, 9.9000000000
1.0000000000, 1.0000000000
1.5000000000, 1.5000000000
_
```



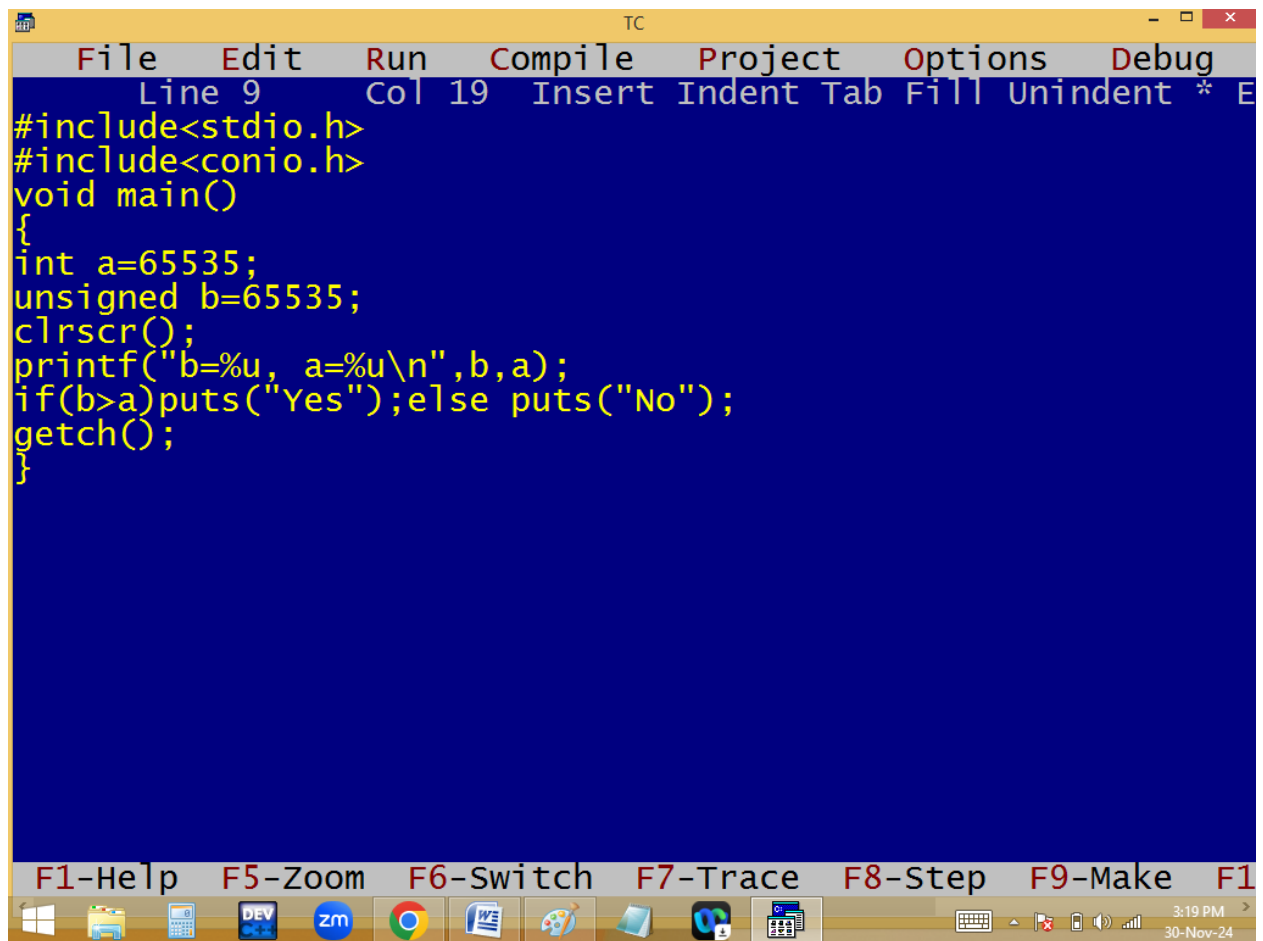


```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 19 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a=65535;
unsigned b=65535;
clrscr();
printf("b=%u, a=%u\n",b,a);
if(b>a)puts("Yes");else puts("No");
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit

3:19 PM 30-Nov-24




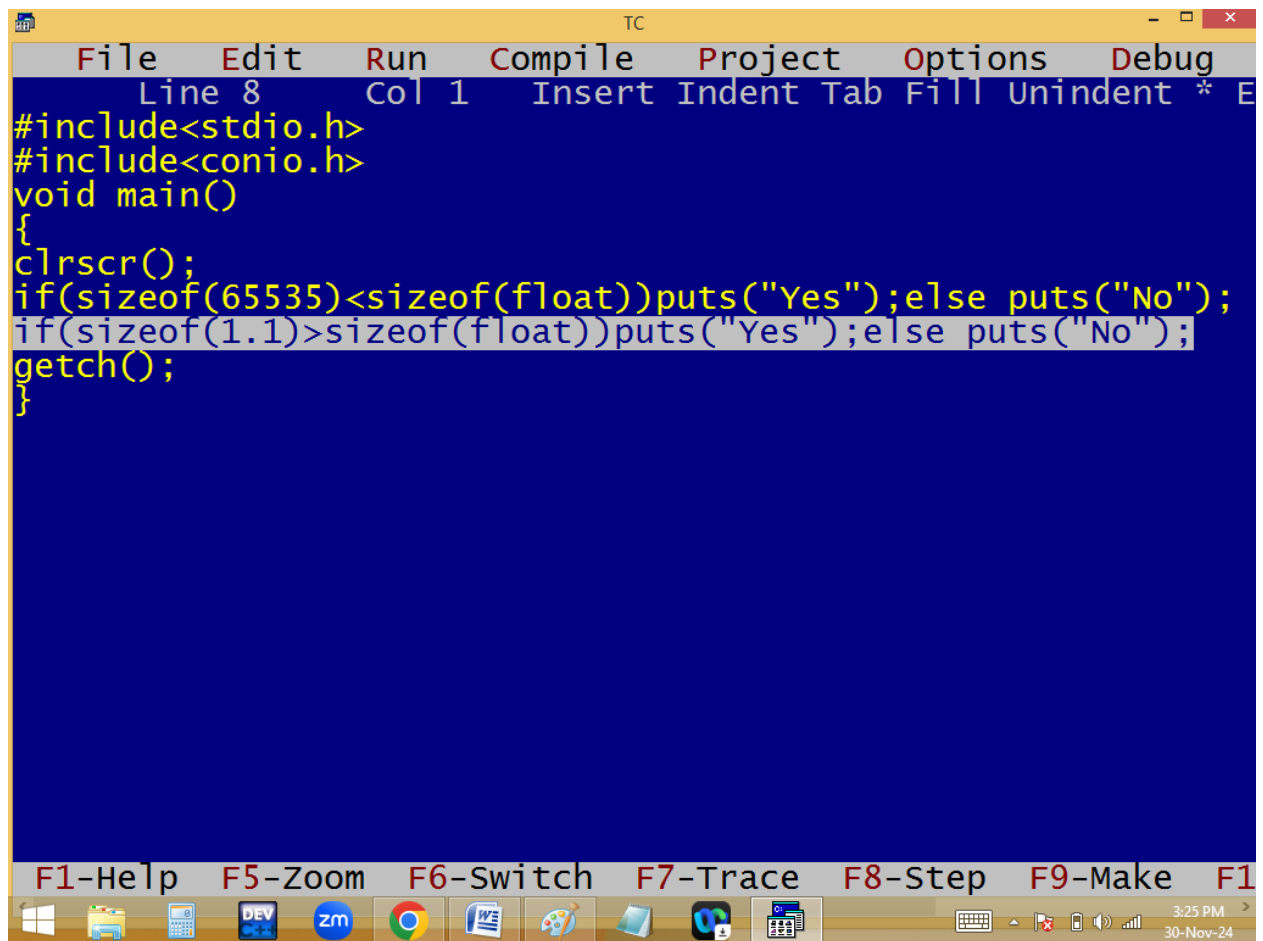

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 8 Col 1" and provides shortcuts for Insert, Indent, Tab, Fill, Unindent, and * E. The code editor contains the following C program:


```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(sizeof(65535)<sizeof(float))puts("Yes");else puts("No");
if(sizeof(1.1)>sizeof(float))puts("Yes");else puts("No");
getch();
}
```

The bottom of the window features a toolbar with function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar at the very bottom shows various application icons and the system clock indicating 3:25 PM on 30-Nov-24.

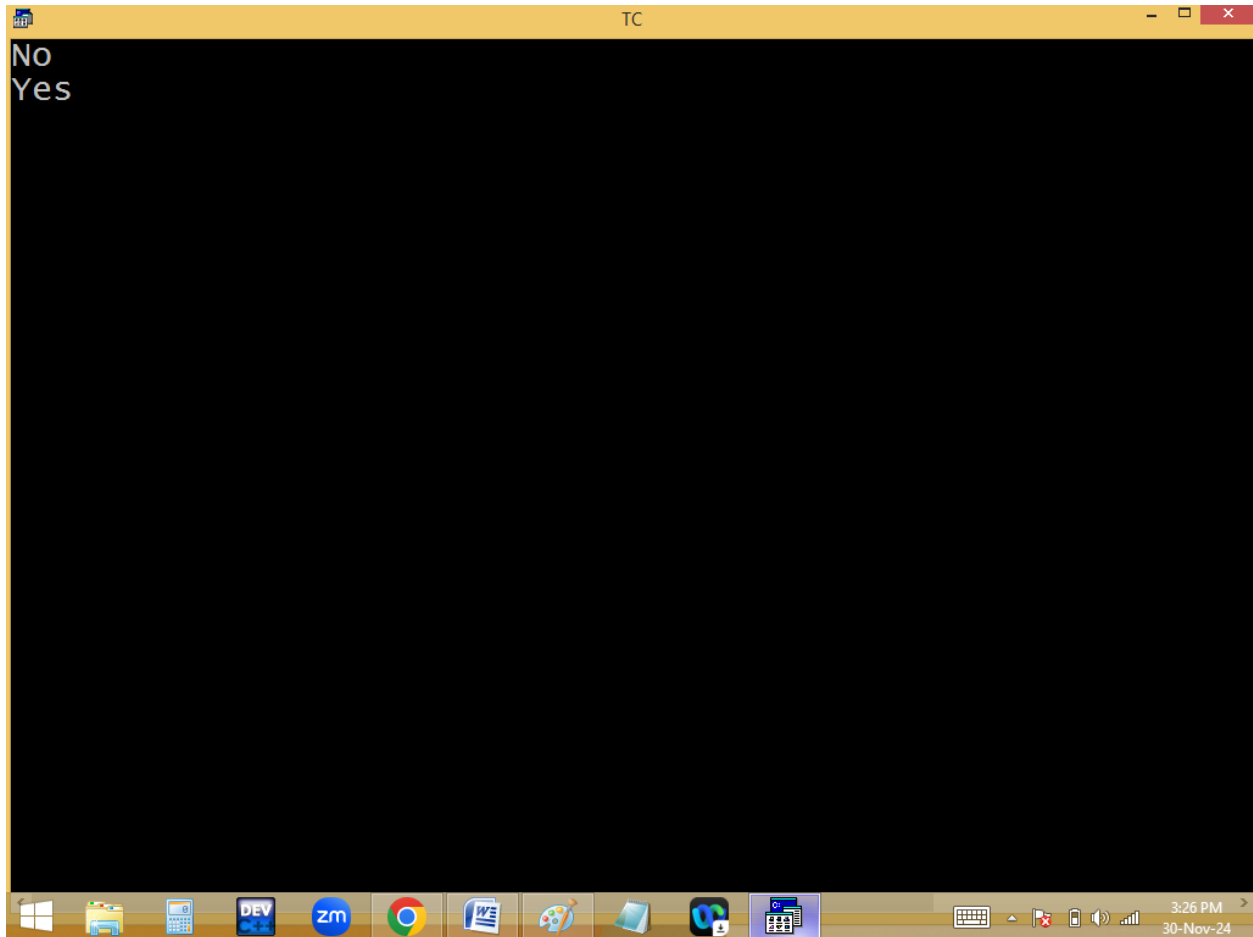


If..else if / ladder if:

When the program contain 3 or more options and user have to select 1 then go for if else if ladder. In if..else if the conditions are tested from top to bottom one by one like the ladder steps and any one condition is true then statements in that if block are executed and program execution jumped to outside the if series. If no condition true then statements in else are executed. Here else is optional.

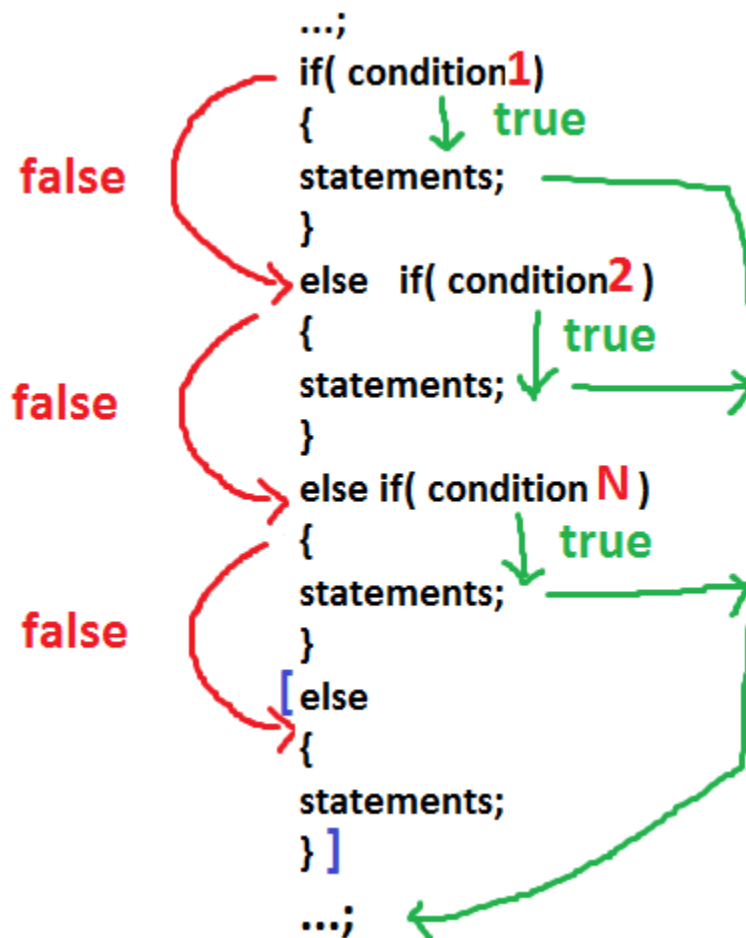


Finding max in 2 no's:

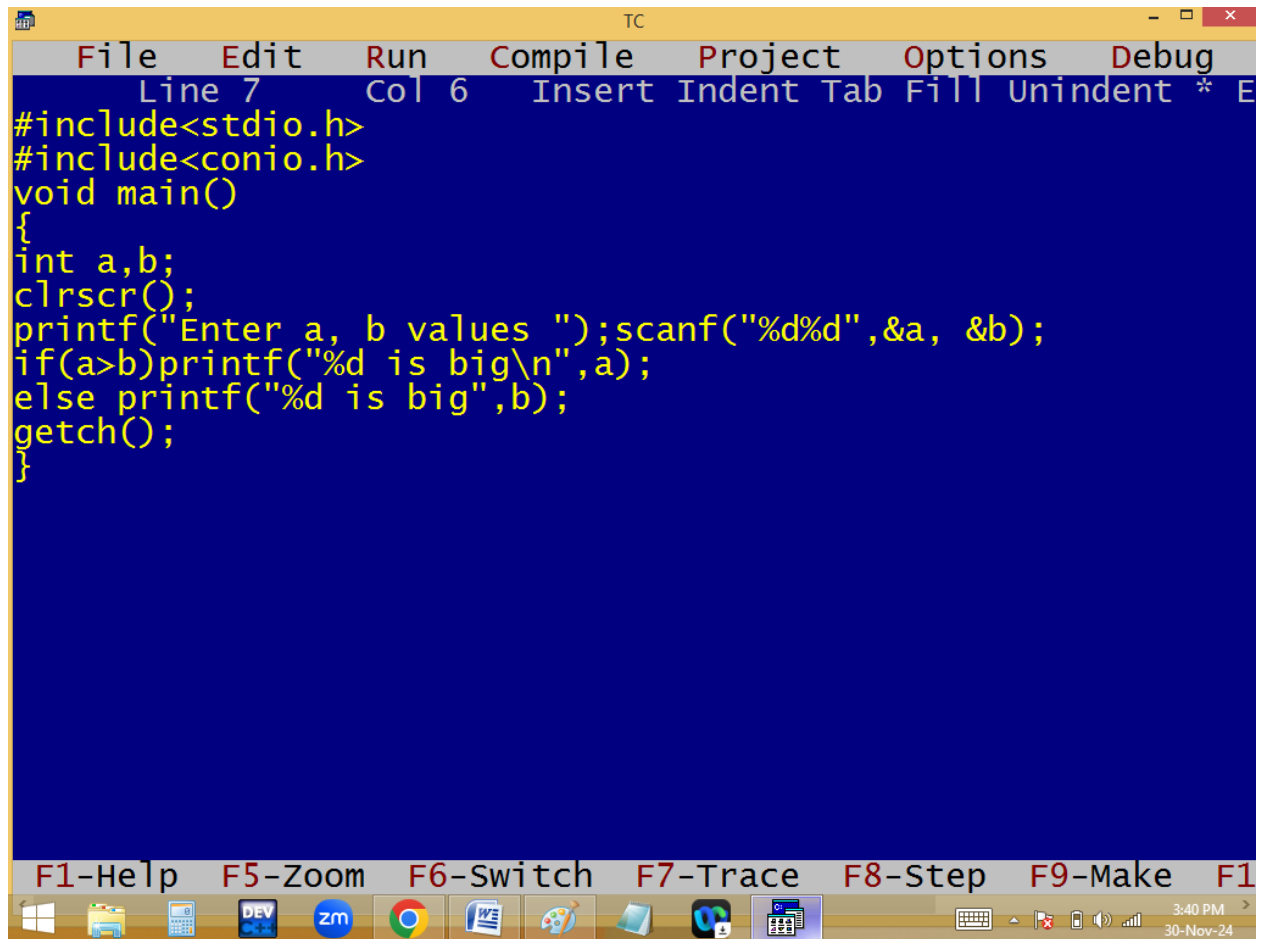



The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 7", "Col 6", and various editing options like "Insert", "Indent", "Tab", "Fill", "Unindent", and a "E" (likely for End). The main editing area has a dark blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b;
clrscr();
printf("Enter a, b values ");scanf("%d%d",&a, &b);
if(a>b)printf("%d is big\n",a);
else printf("%d is big",b);
getch();
}
```

At the bottom of the window, there is a toolbar with icons for various functions, each labeled with a function key: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the very bottom, showing the Start button, several application icons (including File Explorer, Calculator, DEV C++, Zoom, Chrome, Word, and a game controller), and the system tray with the date and time "3:40 PM 30-Nov-24".

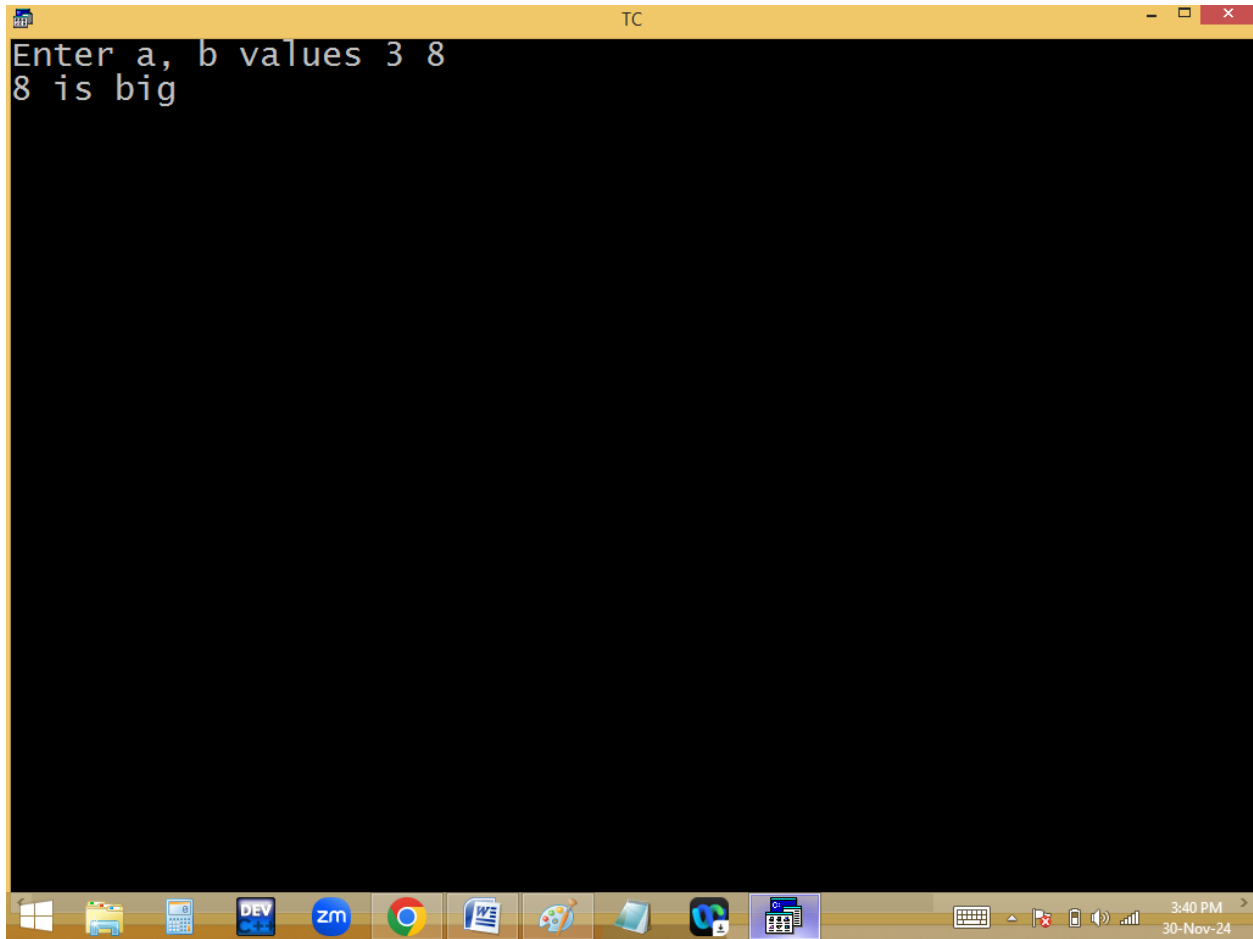

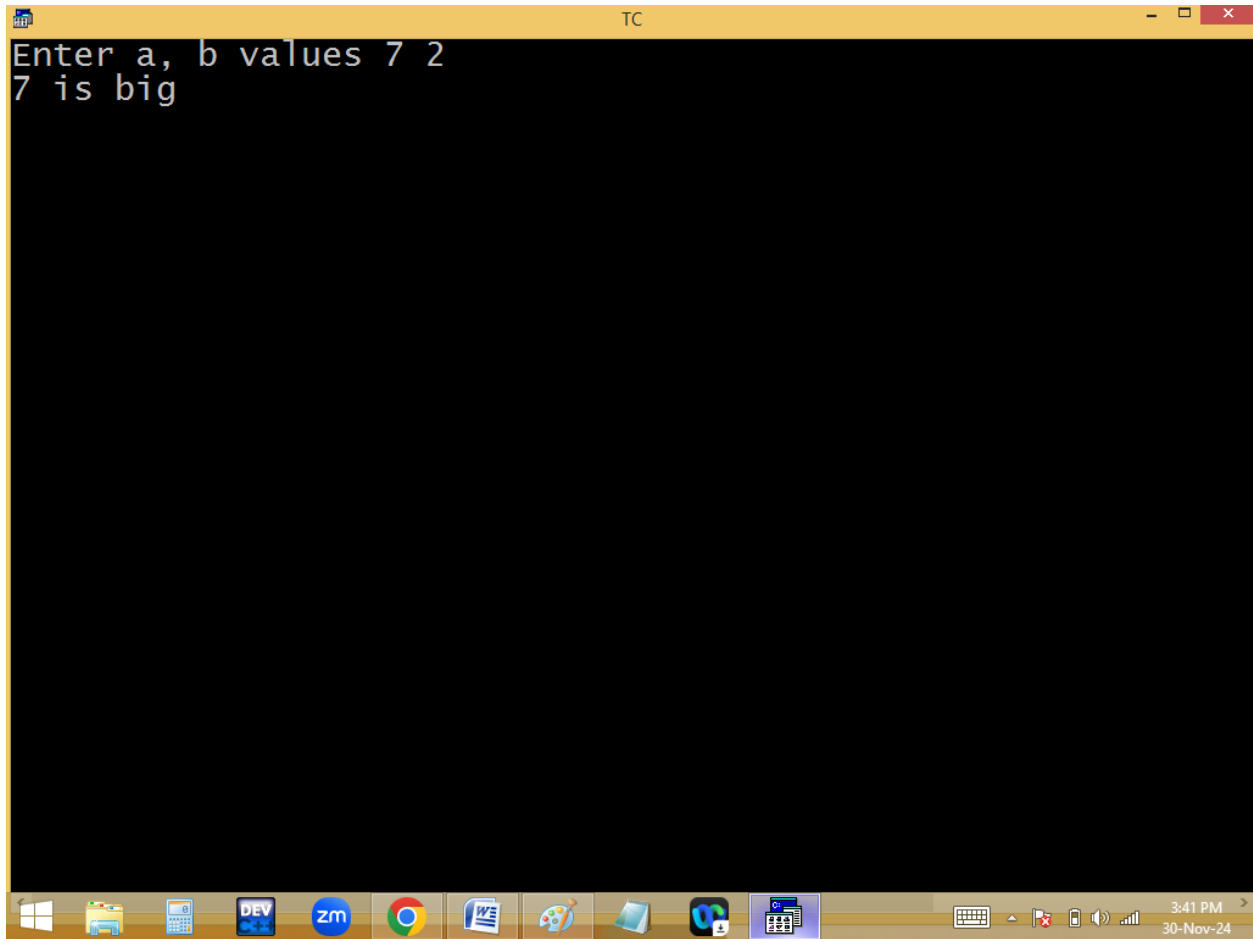

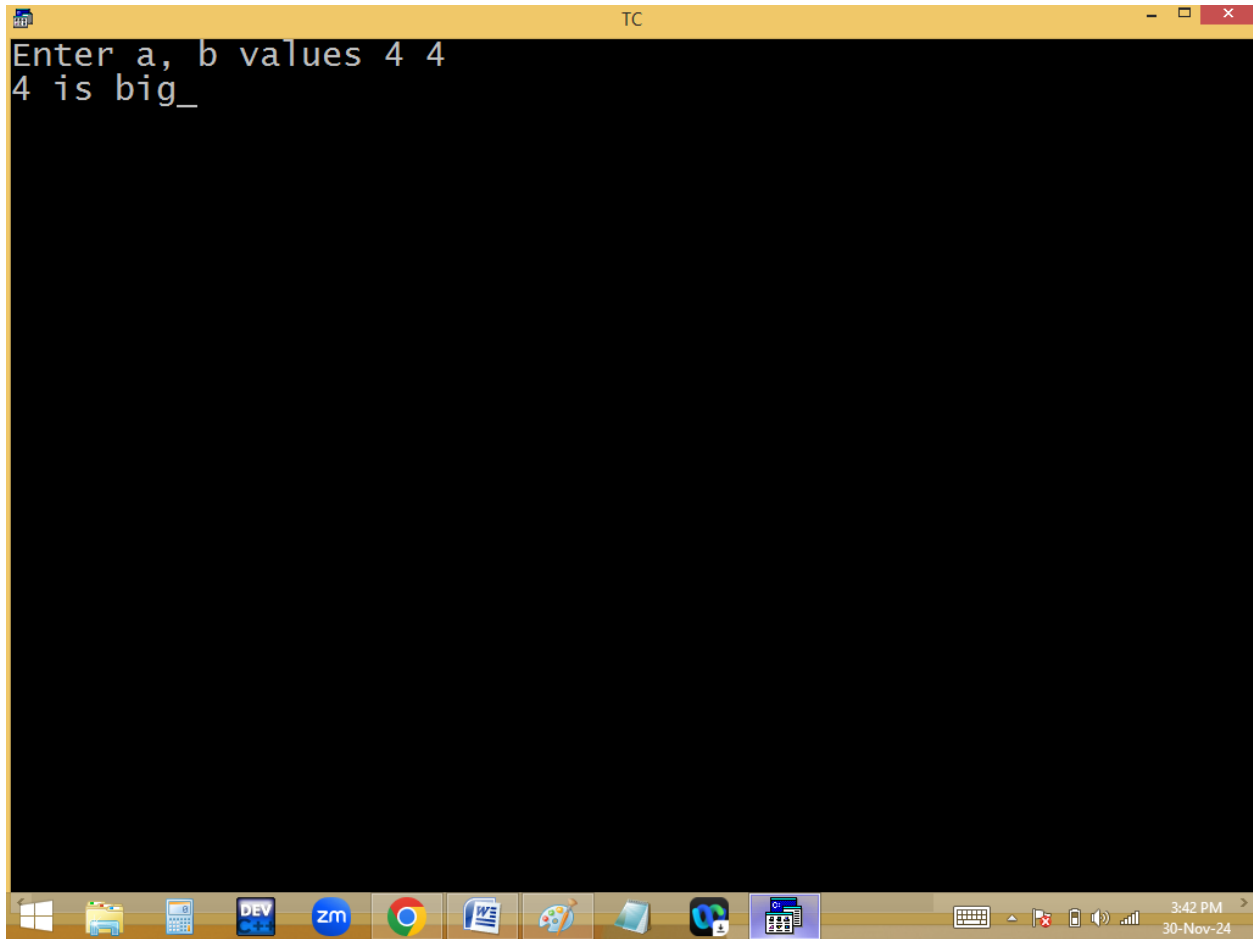


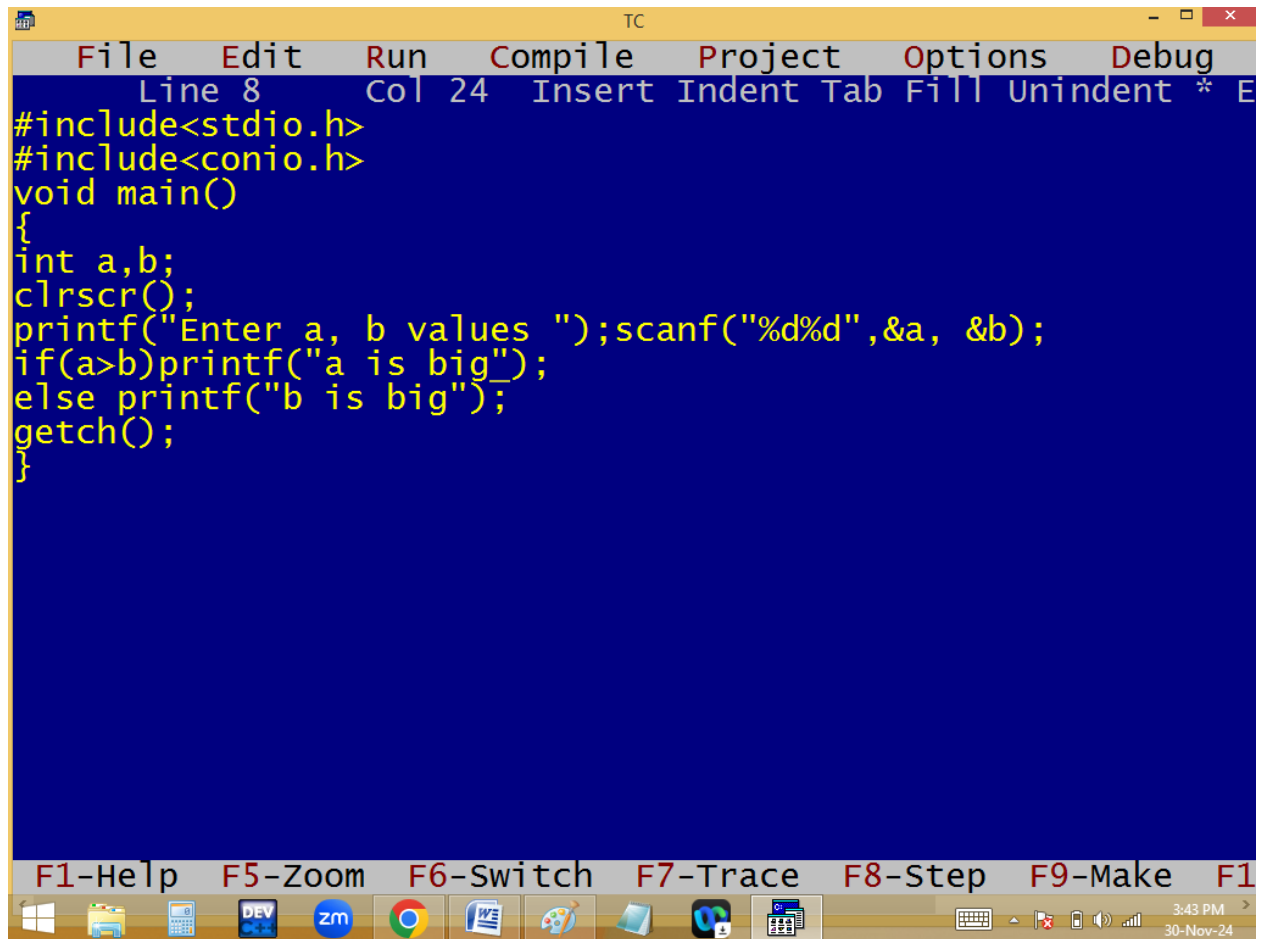



The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status line indicates "Line 8", "Col 24", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and a cursor icon. The main editing area has a dark blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b;
clrscr();
printf("Enter a, b values ");scanf("%d%d",&a, &b);
if(a>b)printf("a is big");
else printf("b is big");
getch();
}
```

At the bottom of the IDE window, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". Below the IDE window is the Windows taskbar, which contains icons for the Start button, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Microsoft Word, a game controller, a folder, and a calendar. The system tray on the right shows the time as "3:43 PM" and the date as "30-Nov-24".

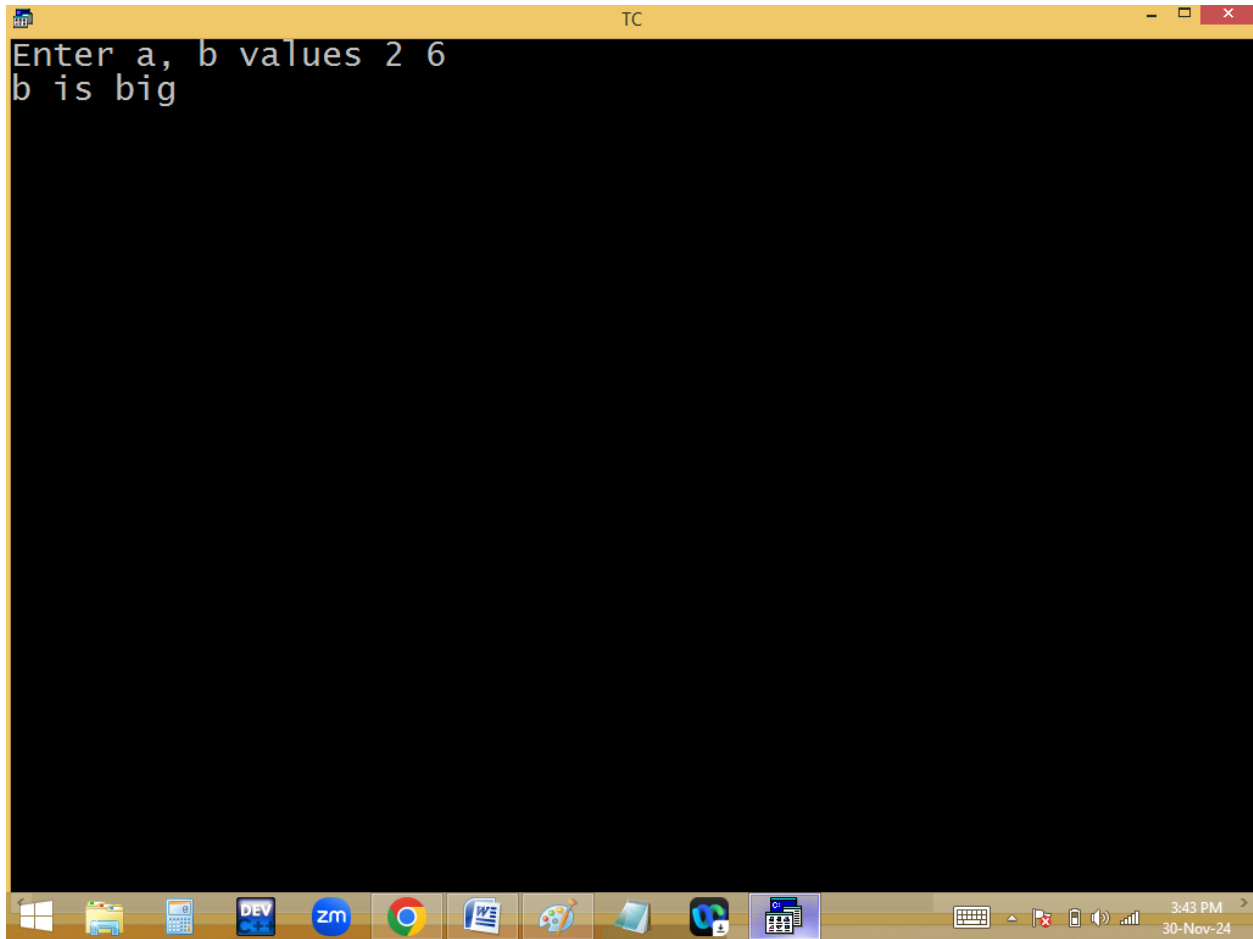

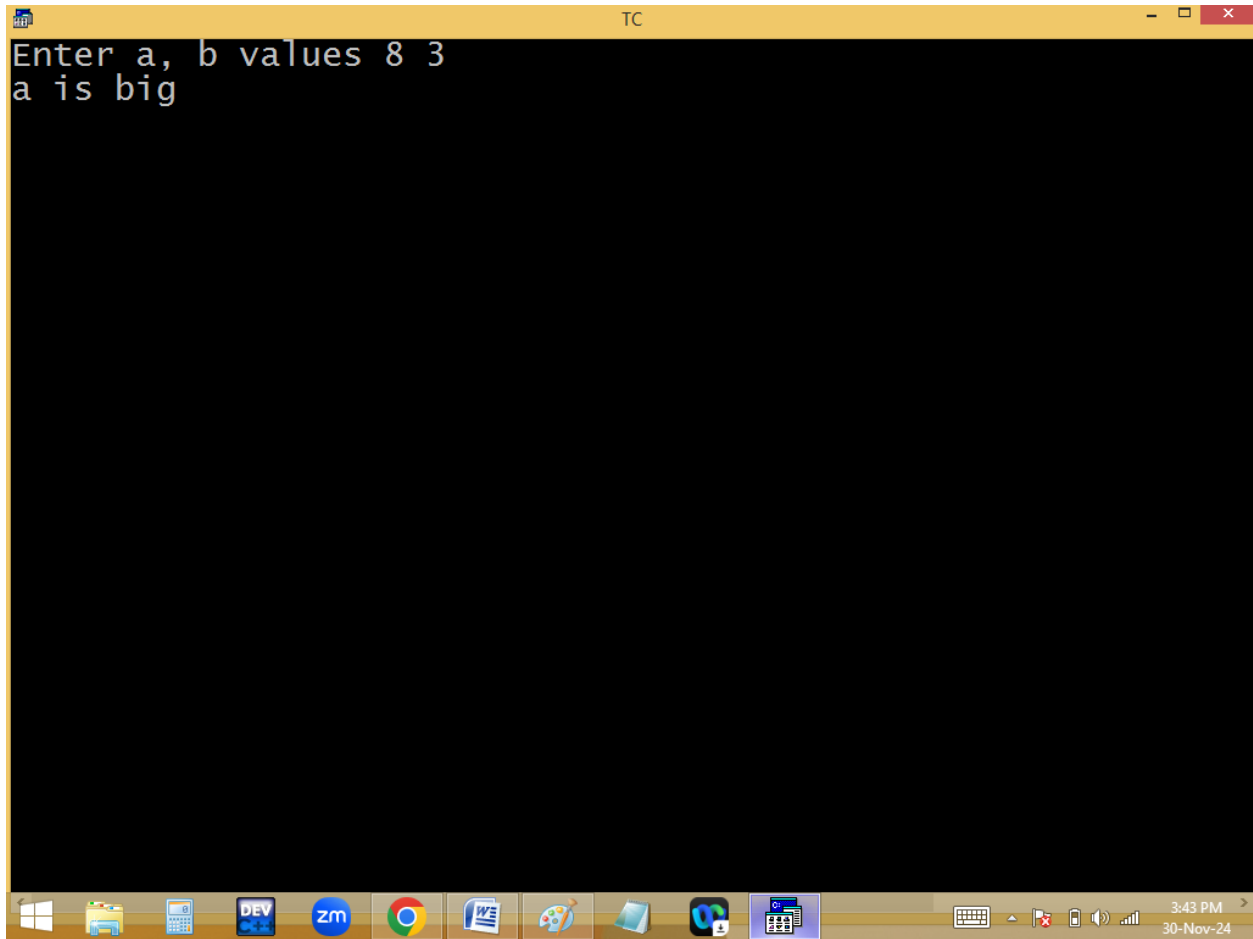

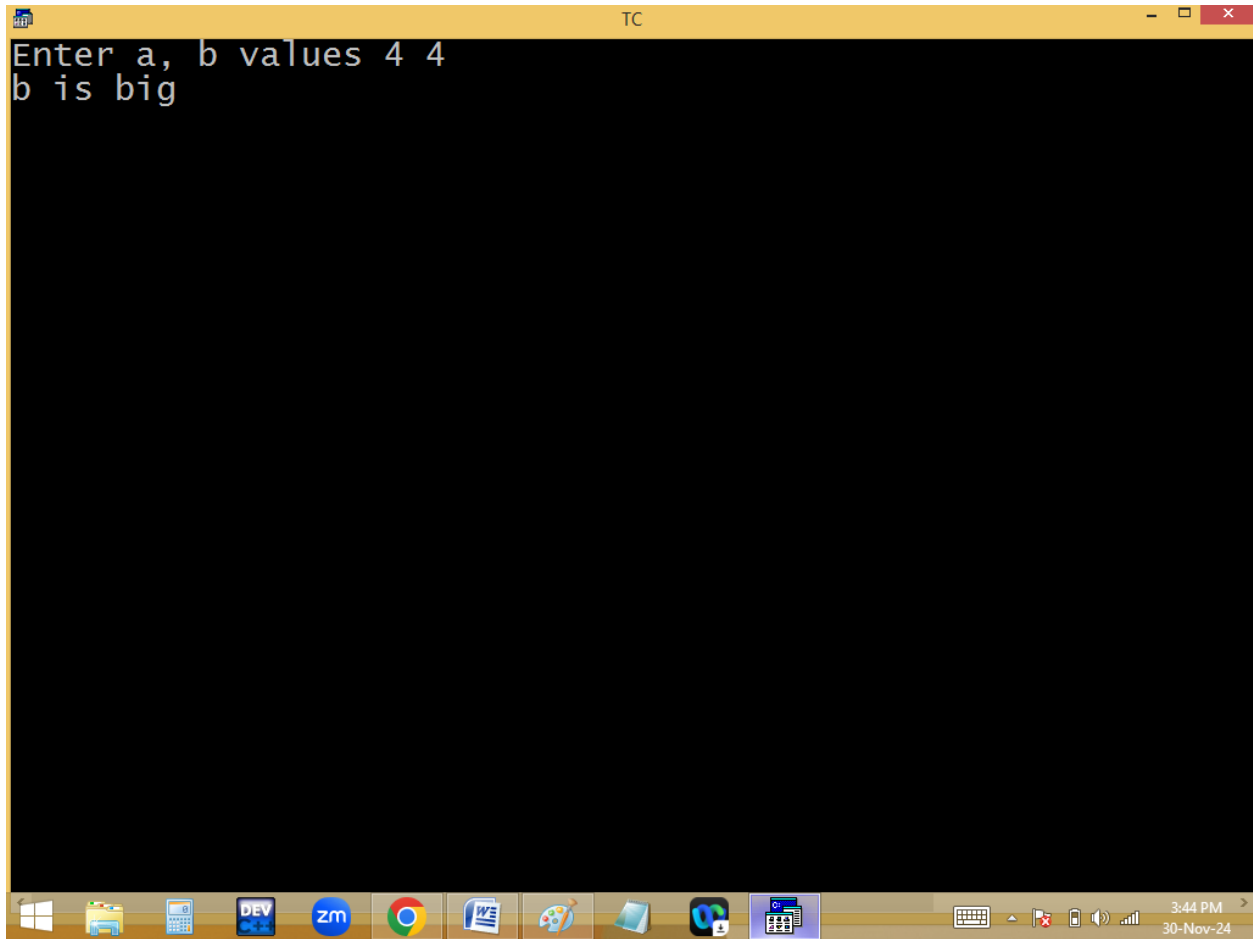


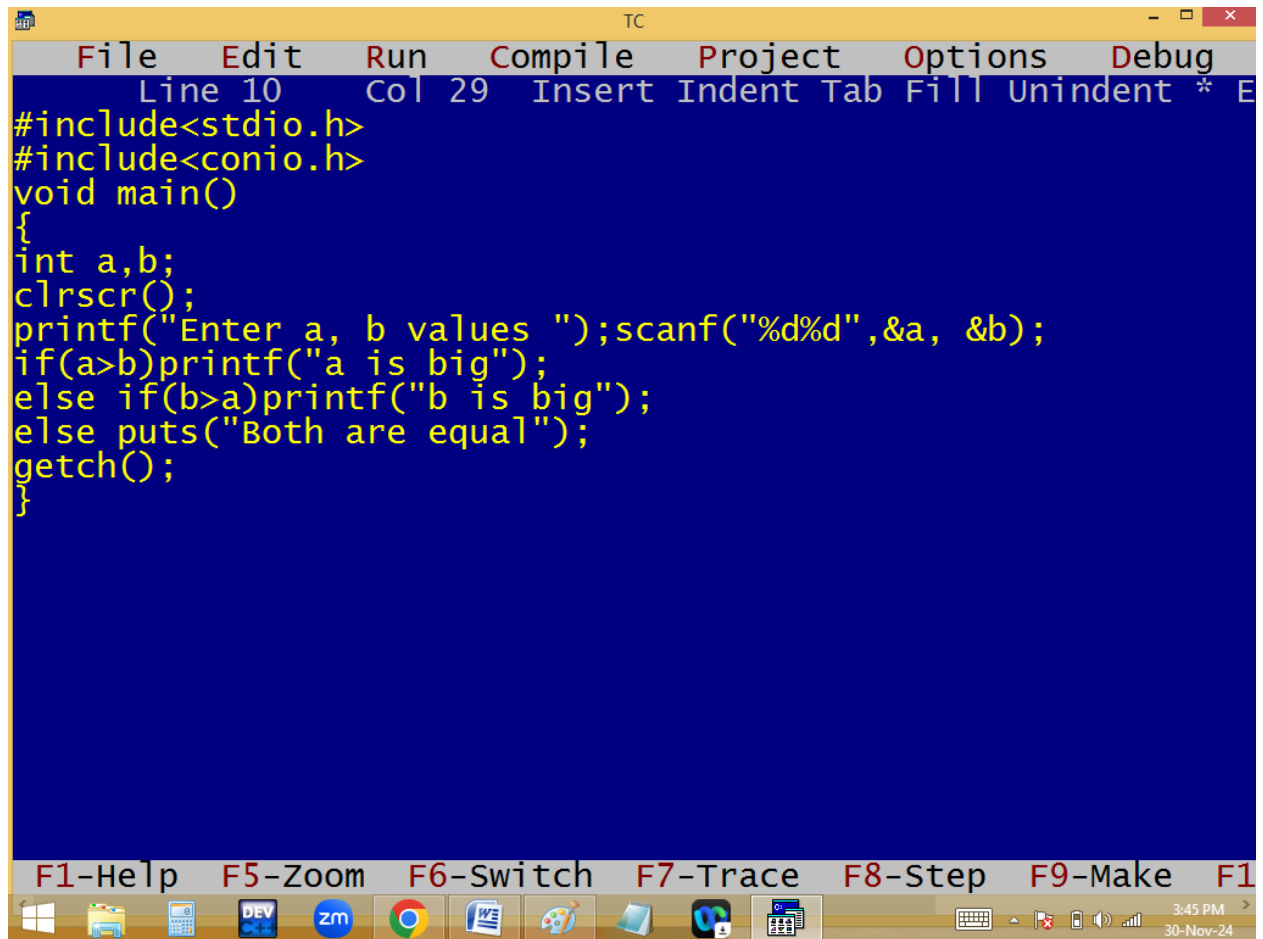


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status line indicates "Line 10 Col 29" and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and a help key marked with an asterisk. The main editing area has a dark blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b;
clrscr();
printf("Enter a, b values ");scanf("%d%d",&a, &b);
if(a>b)printf("a is big");
else if(b>a)printf("b is big");
else puts("Both are equal");
getch();
}
```

At the bottom of the window, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the very bottom, showing icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and other applications. The system clock in the bottom right corner shows "3:45 PM" and "30-Nov-24".

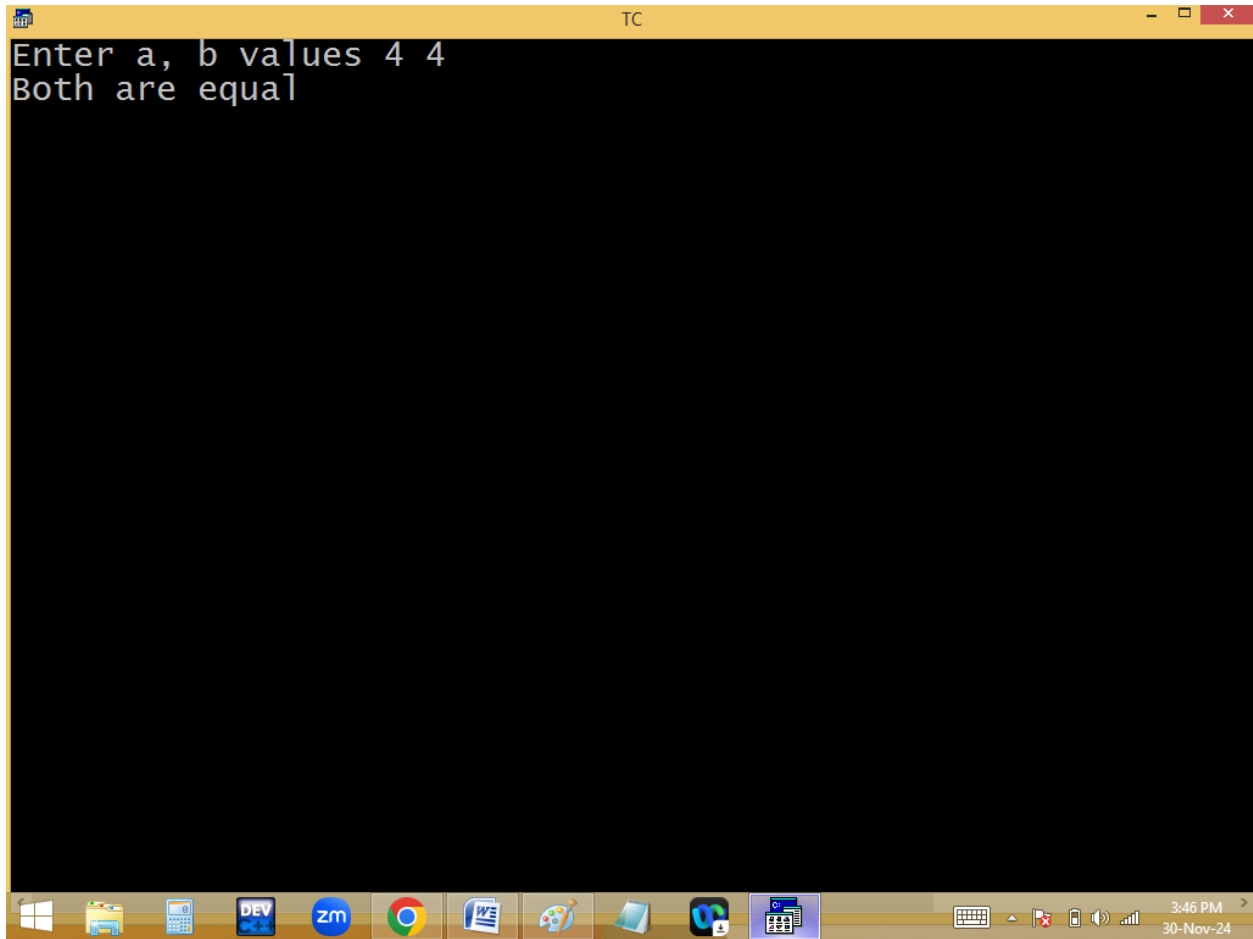


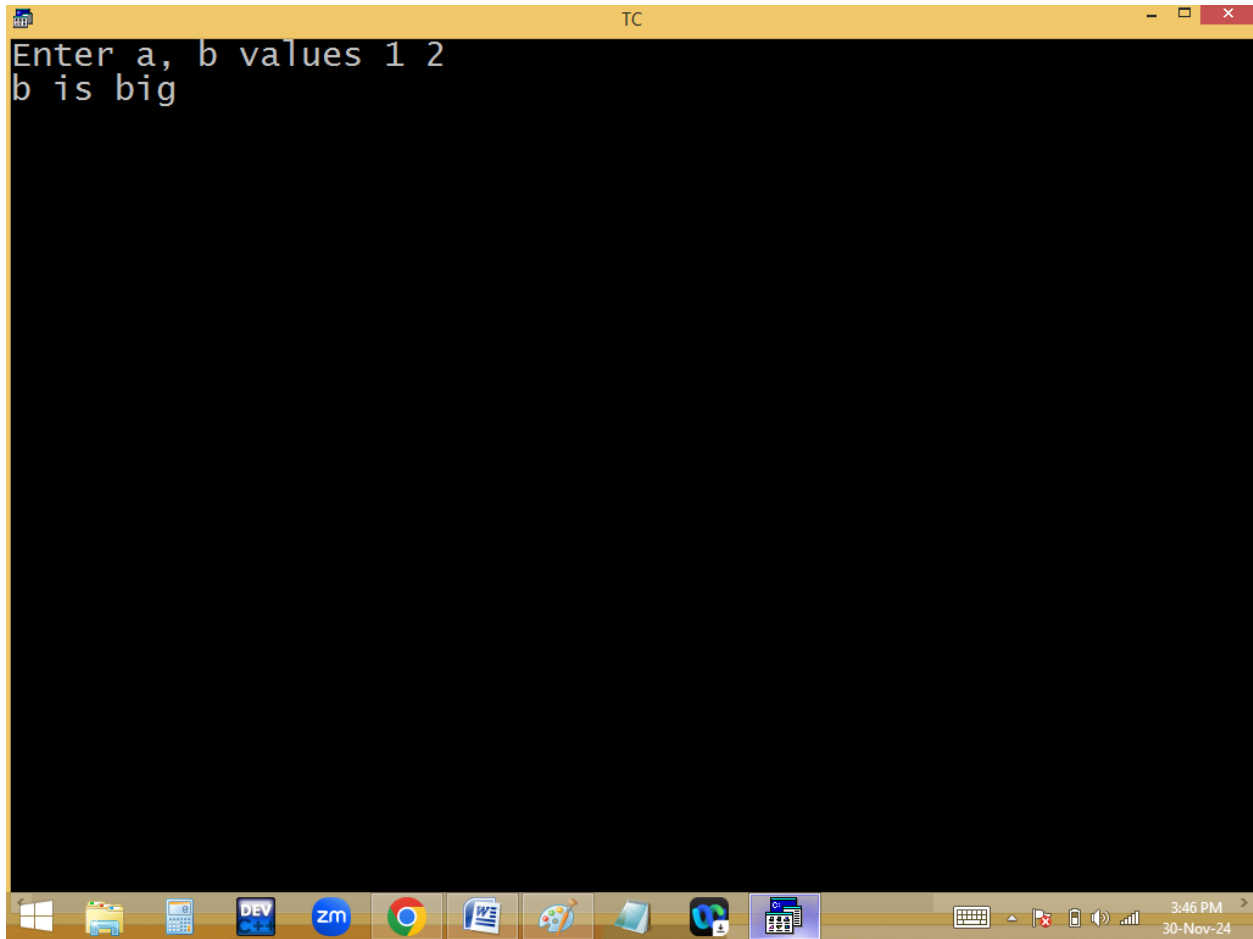


```
TC
Enter a, b values 6 2
a is big
```

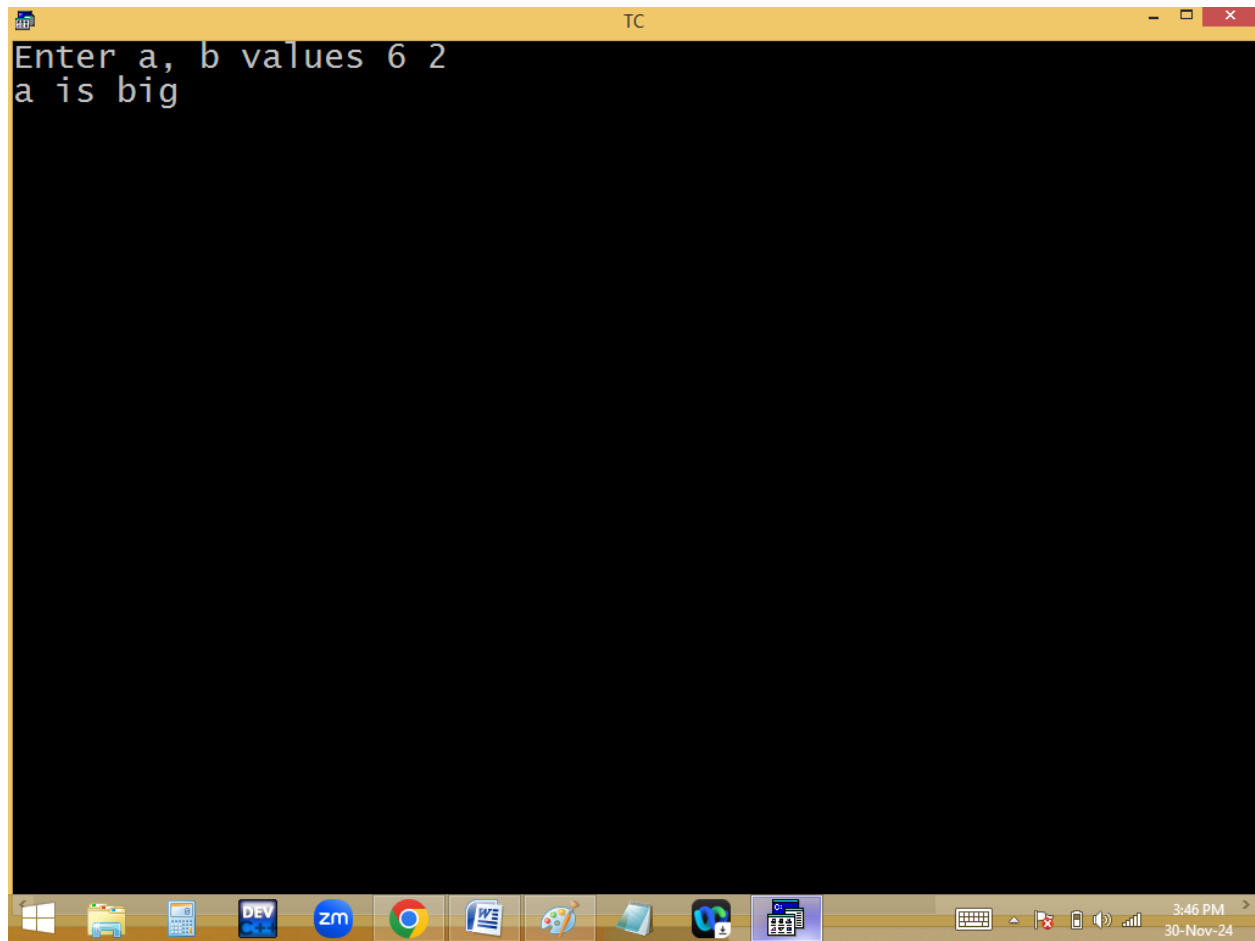


Finding max in 3 no's:

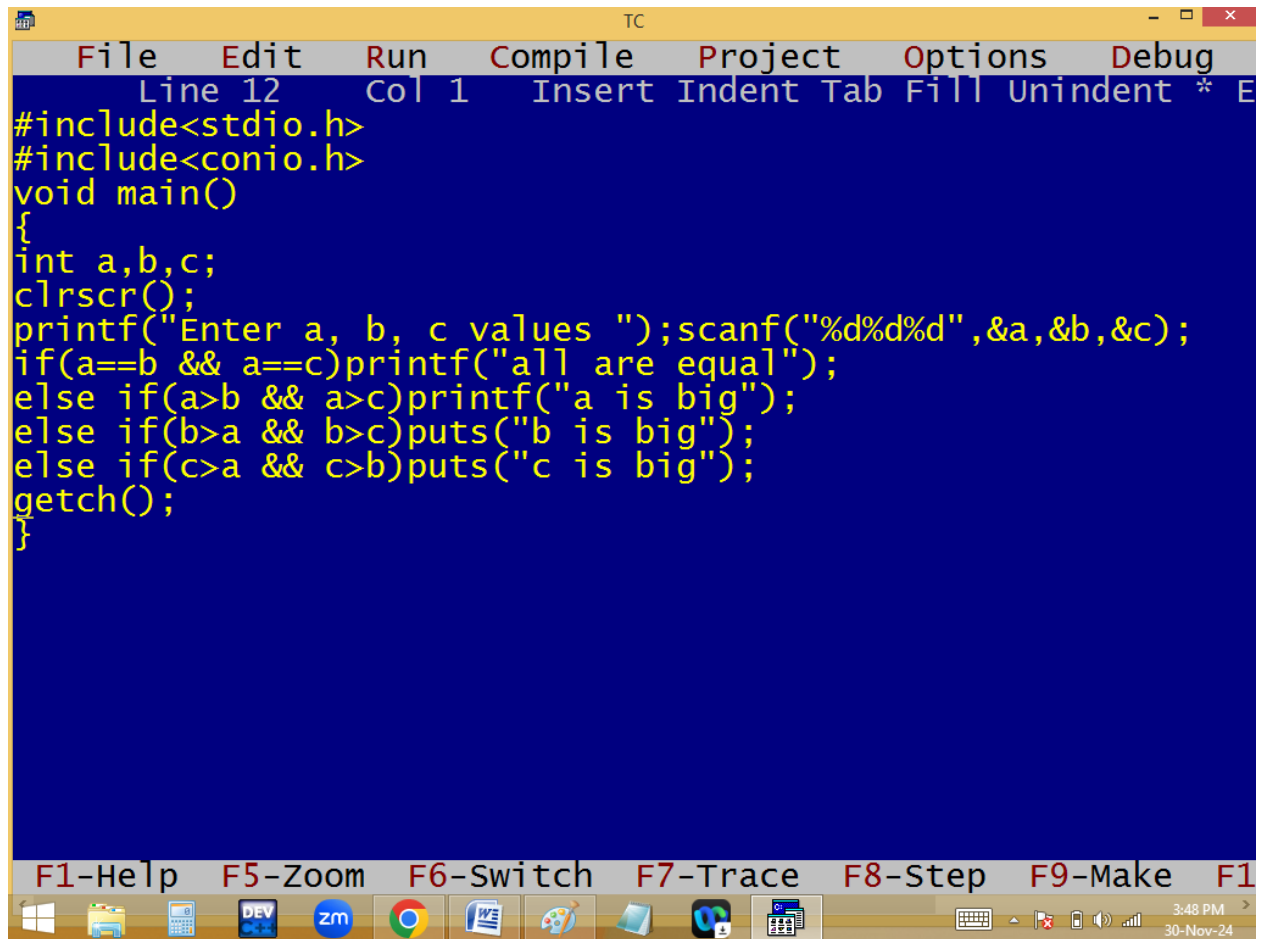



The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. Below the title bar is a menu bar with the following items: File, Edit, Run, Compile, Project, Options, and Debug. Under the "Run" menu, there is a submenu with the following options: Line 12, Col 1, Insert, Indent, Tab, Fill, Unindent, and *. The main editing area has a dark blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b,c;
clrscr();
printf("Enter a, b, c values ");scanf("%d%d%d",&a,&b,&c);
if(a==b && a==c)printf("all are equal");
else if(a>b && a>c)printf("a is big");
else if(b>a && b>c)puts("b is big");
else if(c>a && c>b)puts("c is big");
getch();
}
```


At the bottom of the window, there is a status bar with the following text: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F1. Below the status bar is a Windows taskbar with various icons, including the Start button, File Explorer, Calculator, DEV, zm, Chrome, Word, Paint, and a folder icon. The system tray on the right shows the time as 3:48 PM and the date as 30-Nov-24.

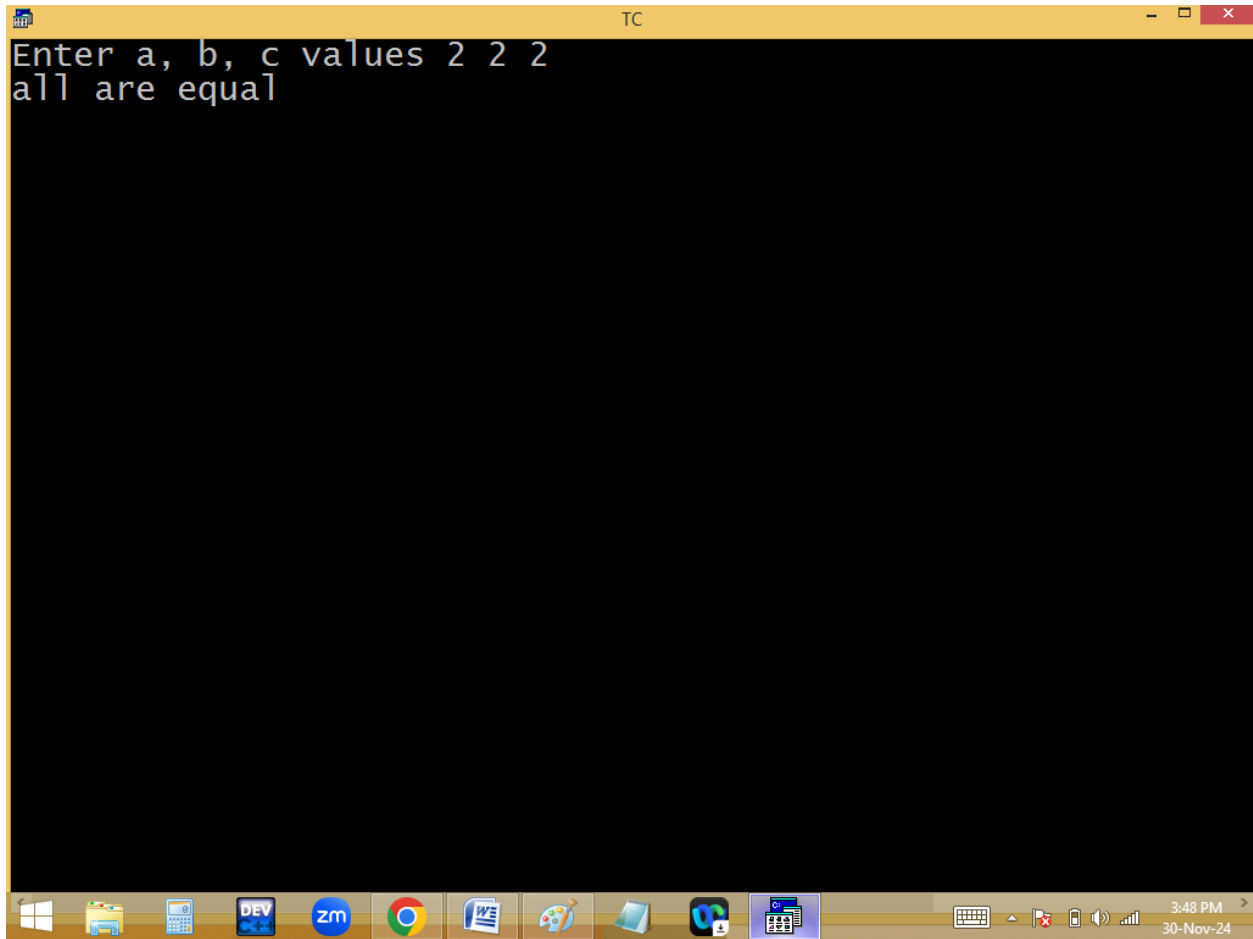

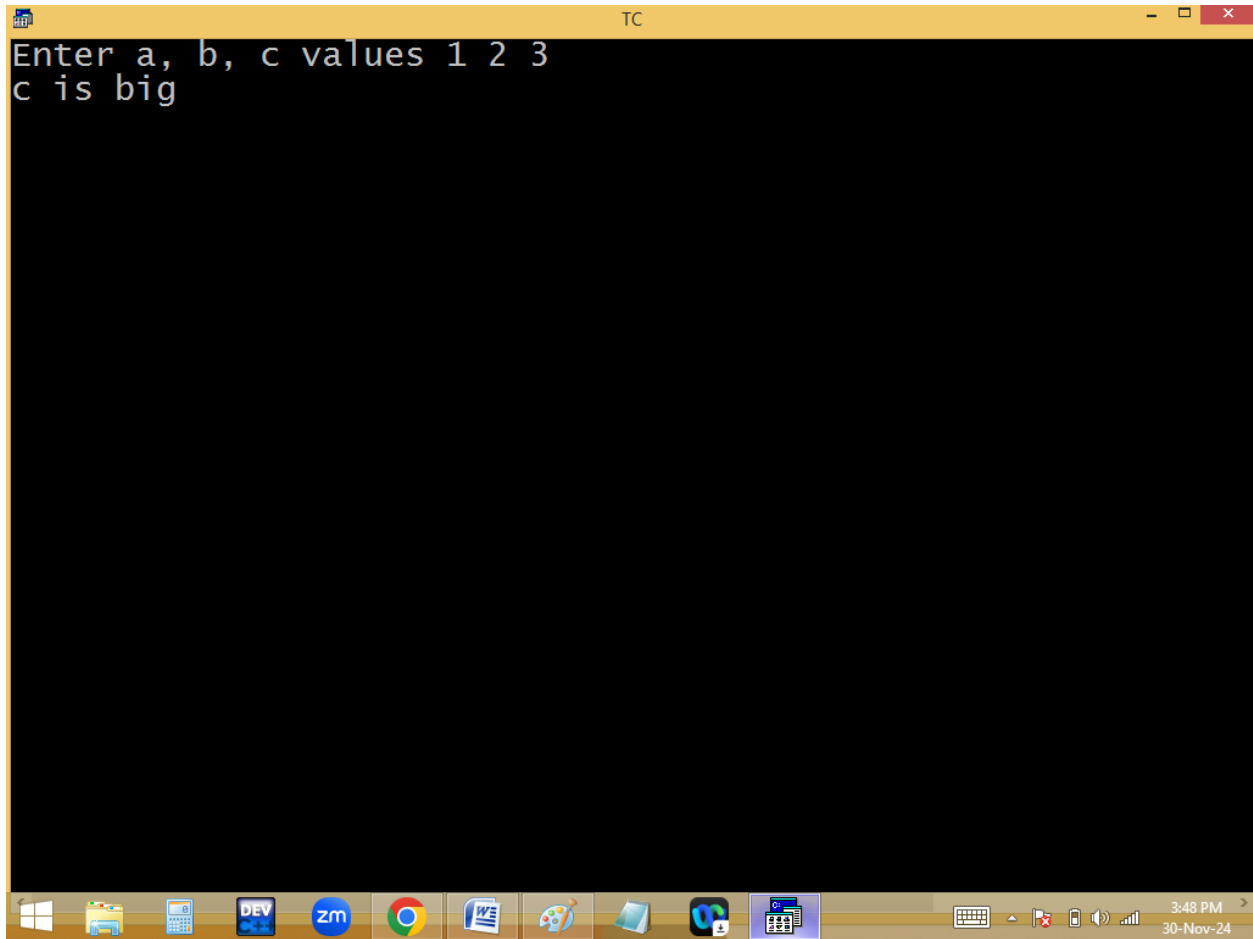

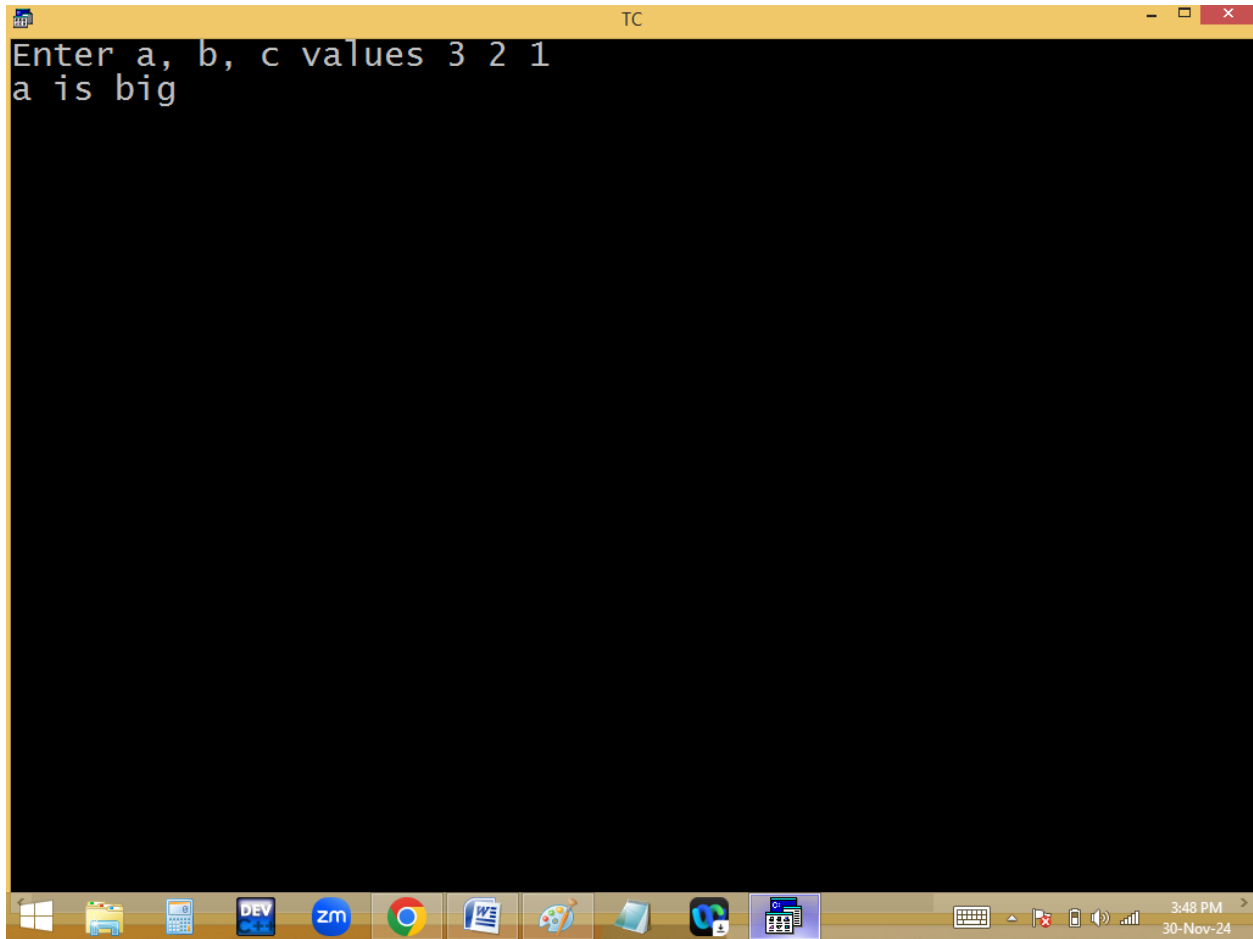

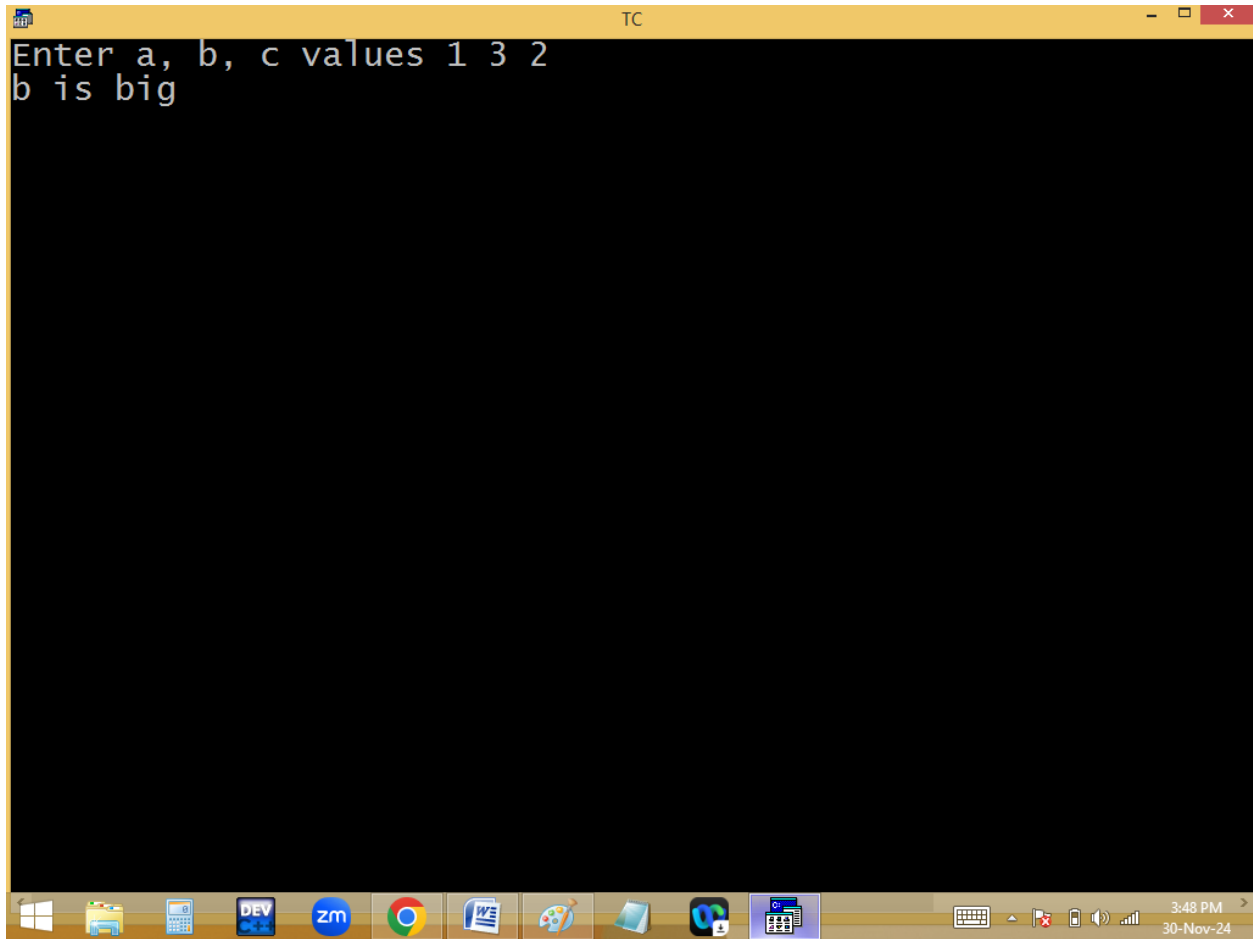


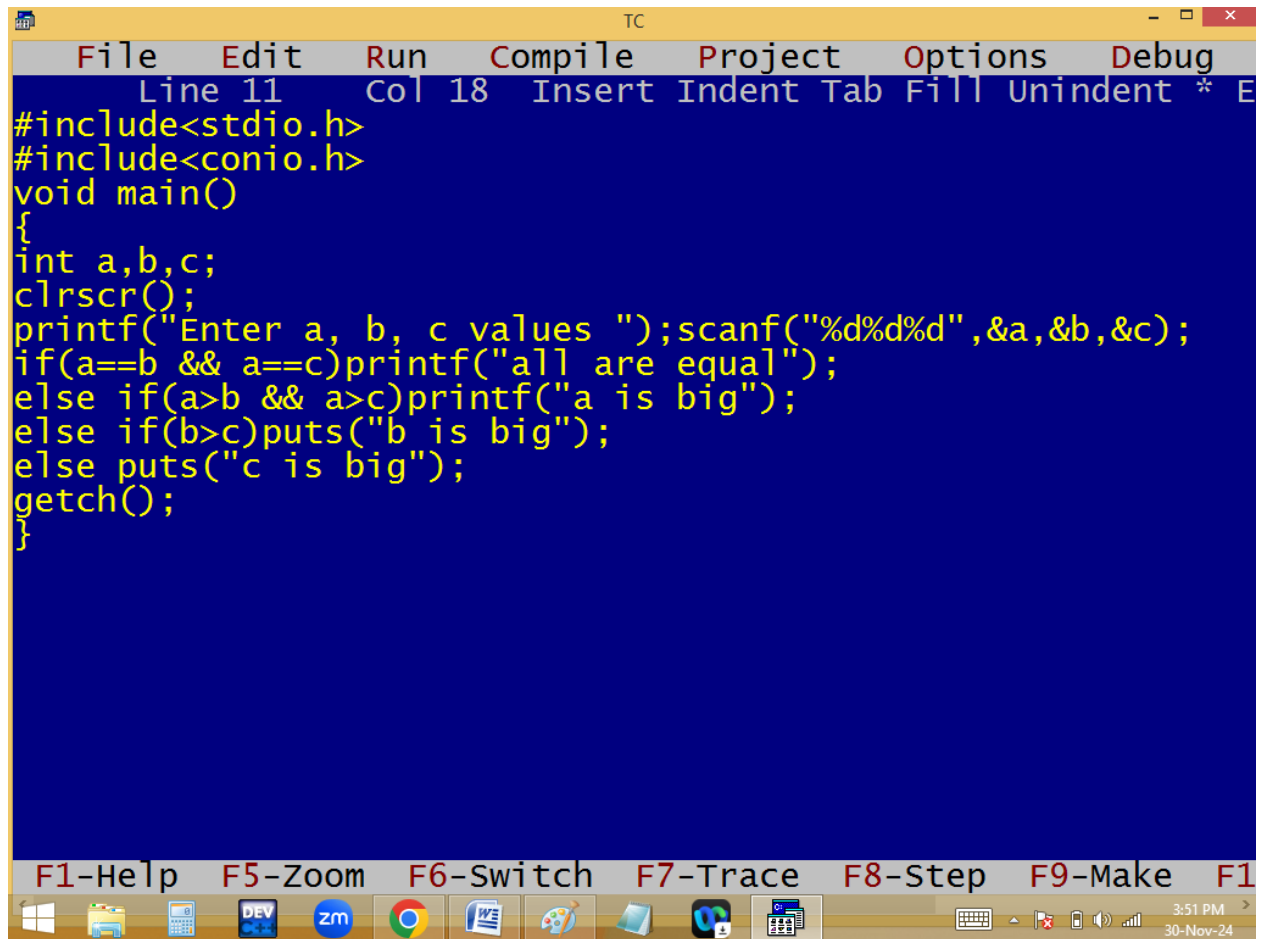



The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. Below the title bar is a menu bar with the following options: File, Edit, Run, Compile, Project, Options, and Debug. A status bar at the top of the editor area shows "Line 11 Col 18" and a list of keyboard shortcuts: Insert, Indent, Tab, Fill, Unindent, *, and E. The main editor area has a dark blue background and contains the following C code in yellow text:


```
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b,c;
clrscr();
printf("Enter a, b, c values ");scanf("%d%d%d",&a,&b,&c);
if(a==b && a==c)printf("all are equal");
else if(a>b && a>c)printf("a is big");
else if(b>c)puts("b is big");
else puts("c is big");
getch();
}
```


Below the editor area is a toolbar with function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. At the very bottom is a Windows taskbar with icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and a folder. The system tray on the right shows the time as 3:51 PM and the date as 30-Nov-24.

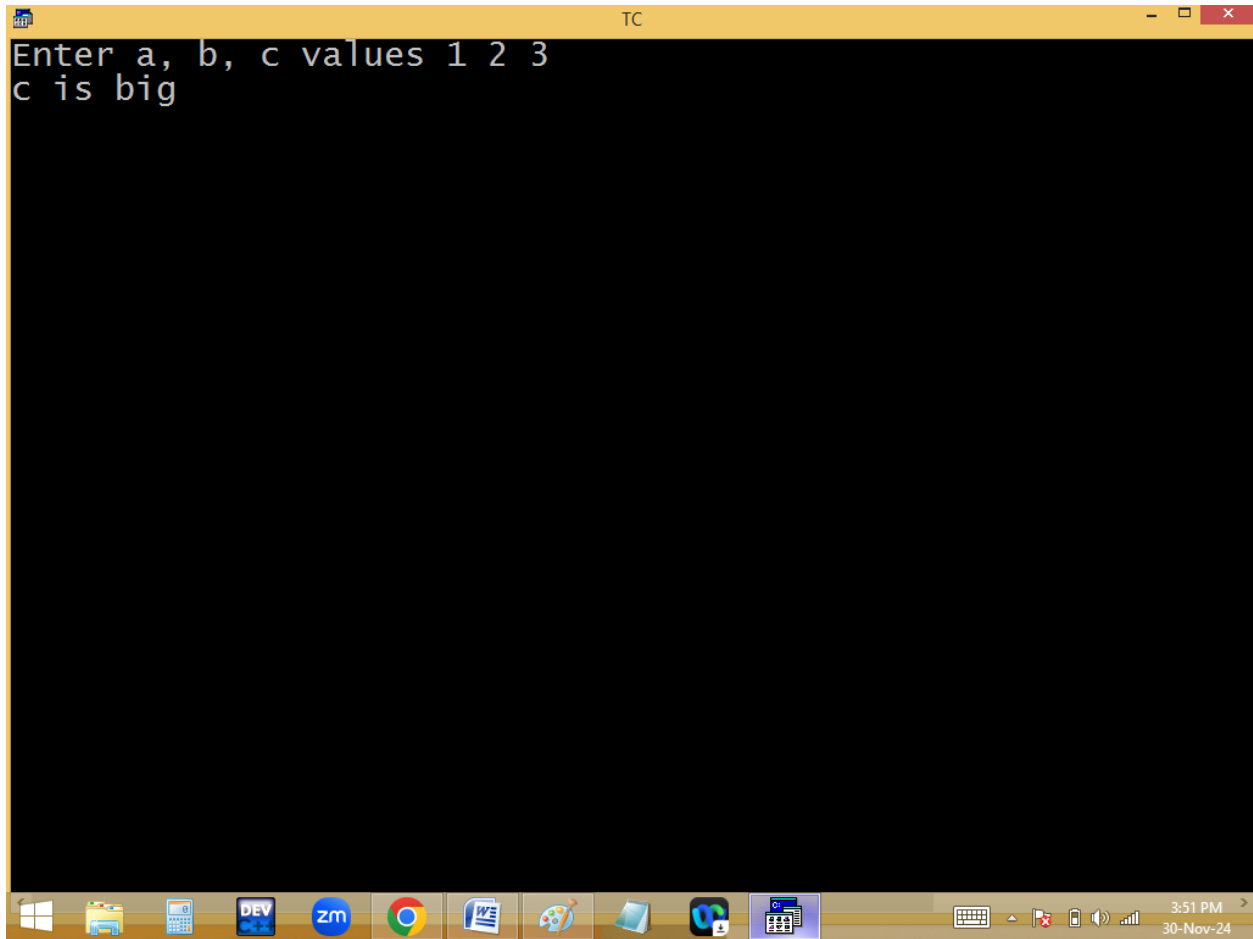


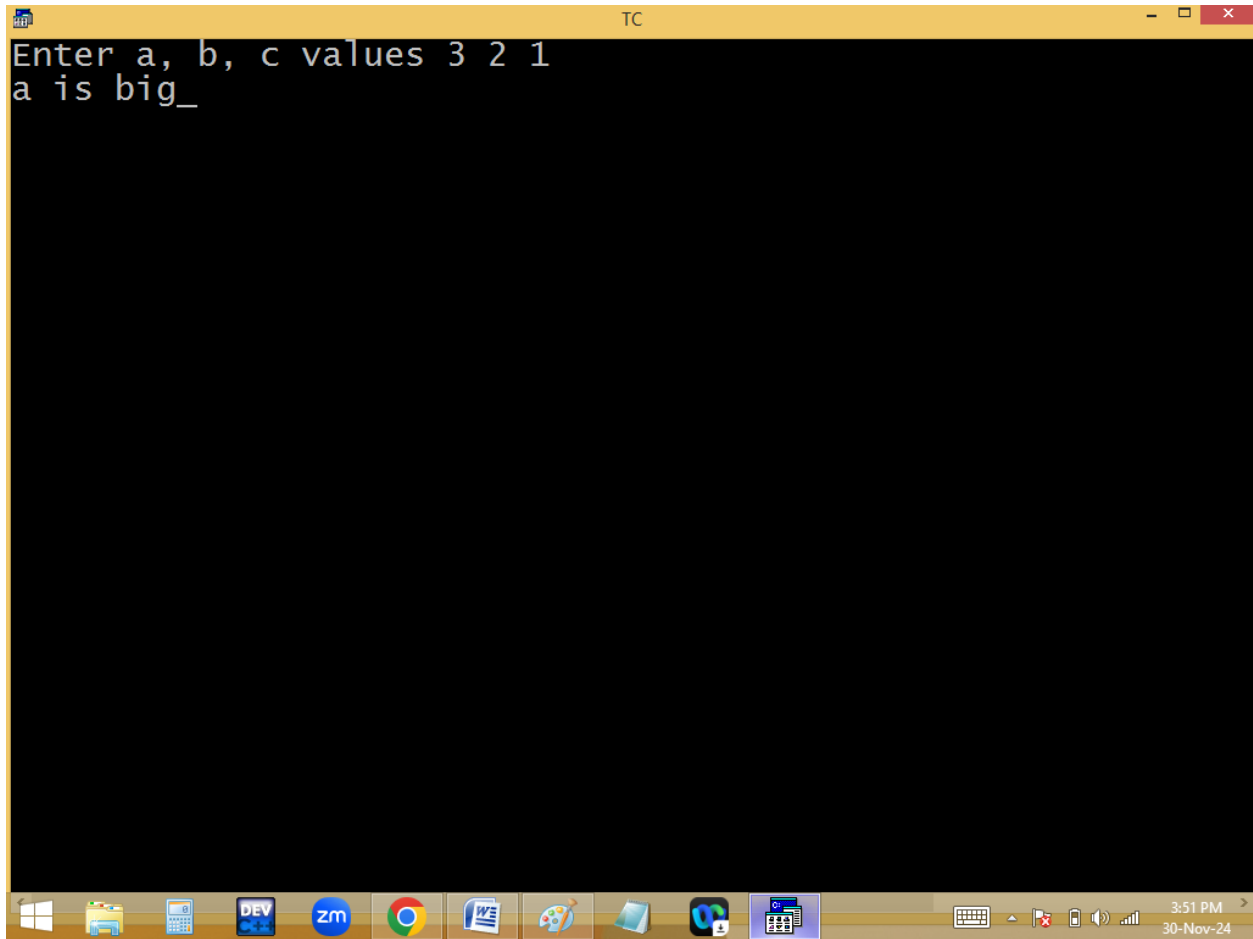


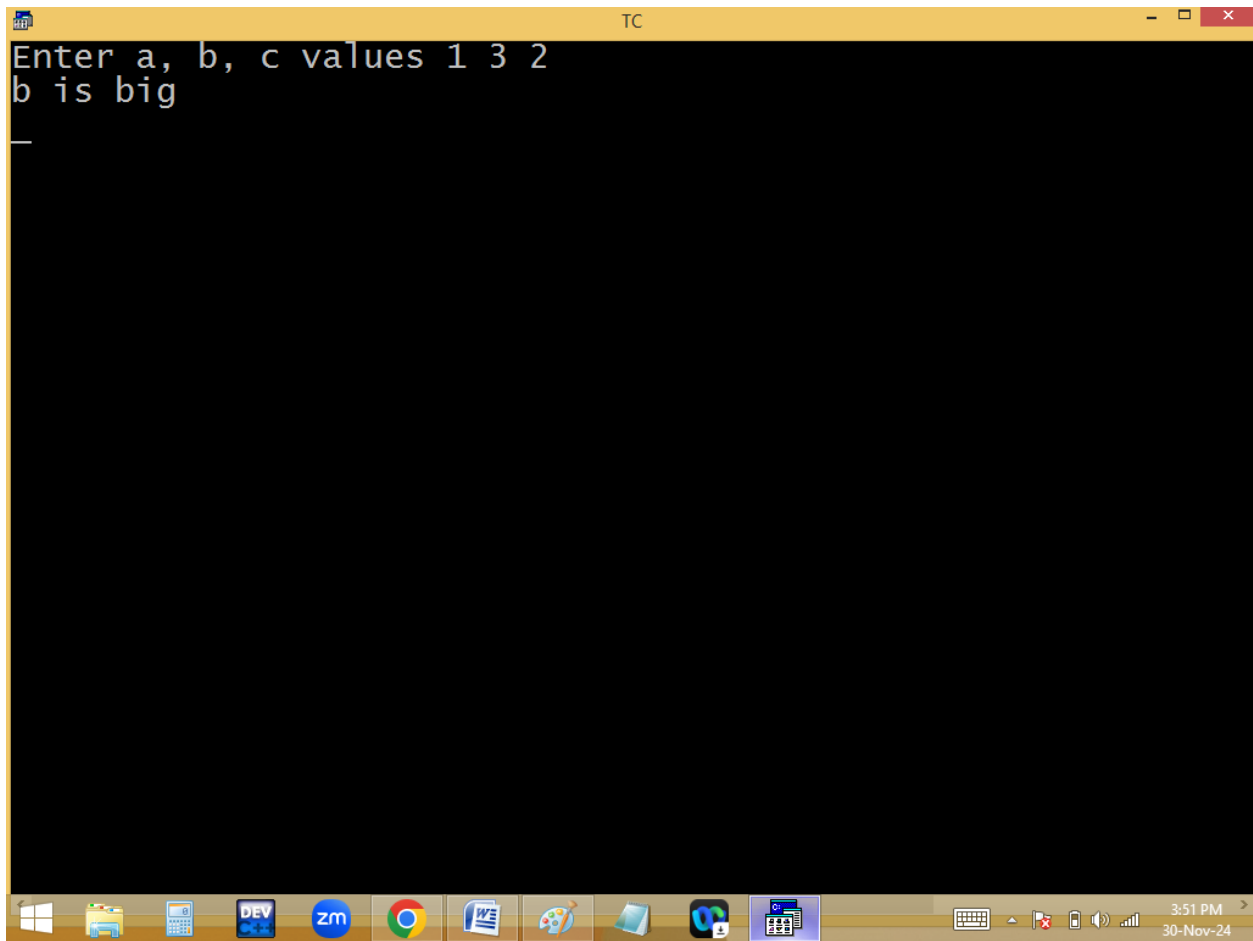

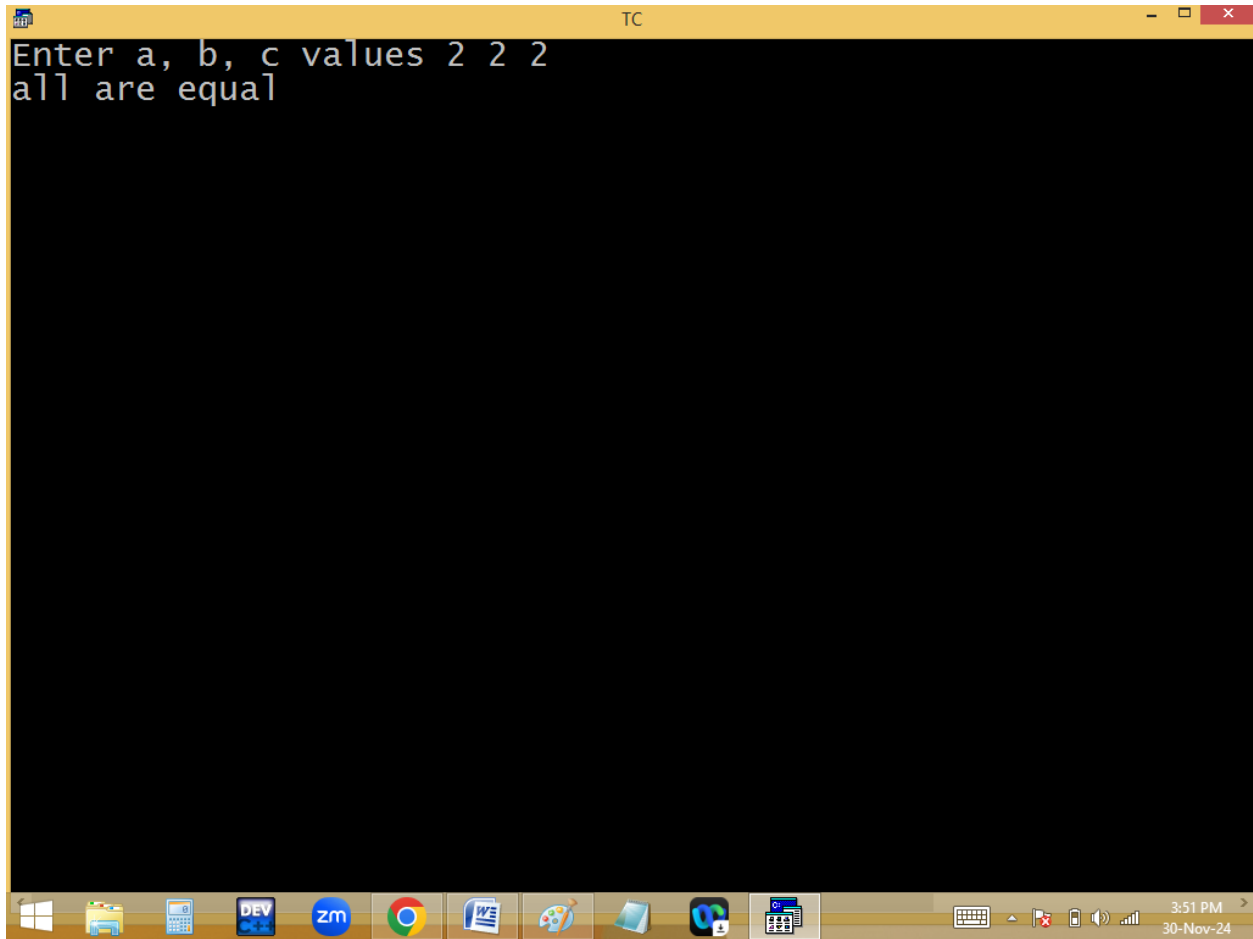

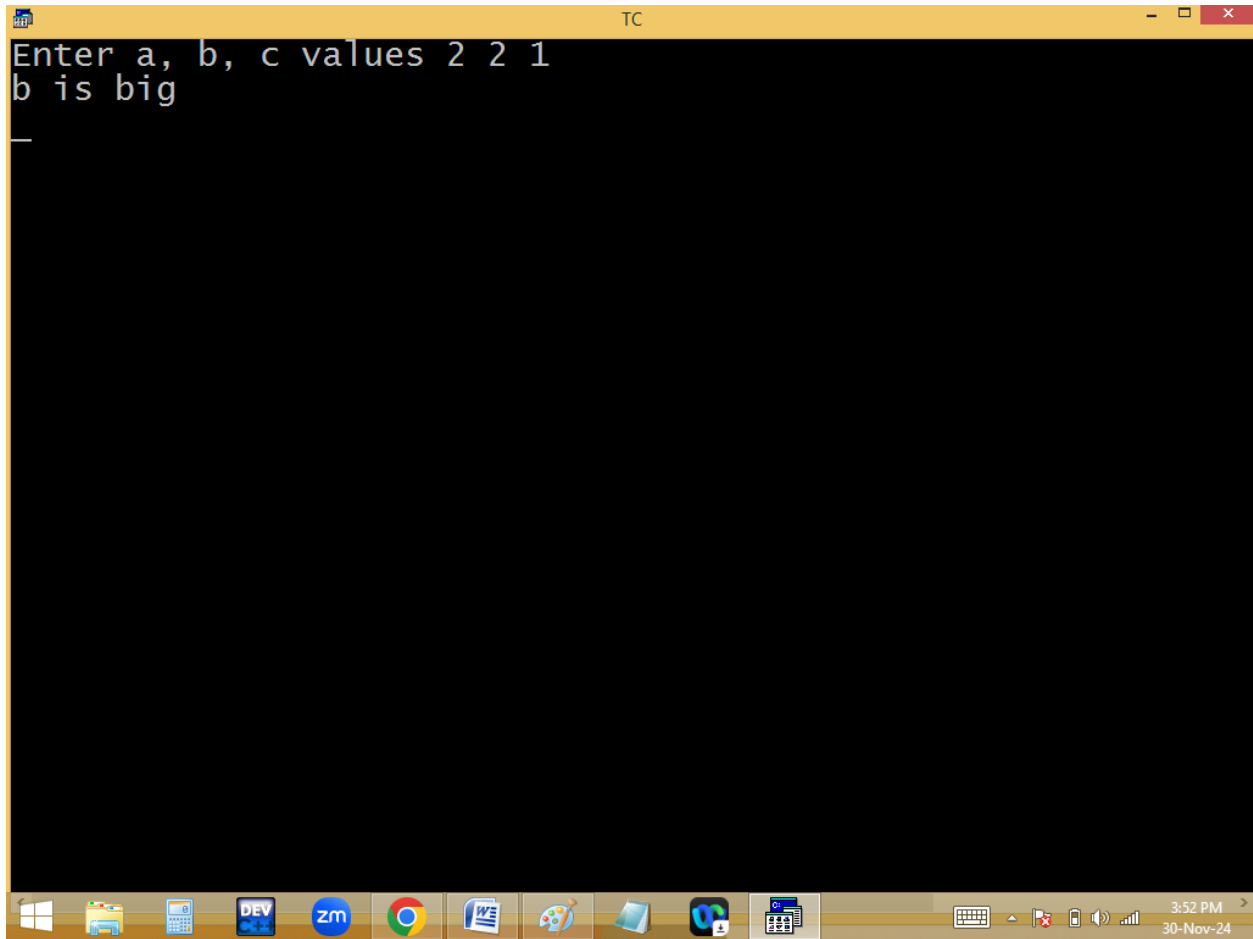

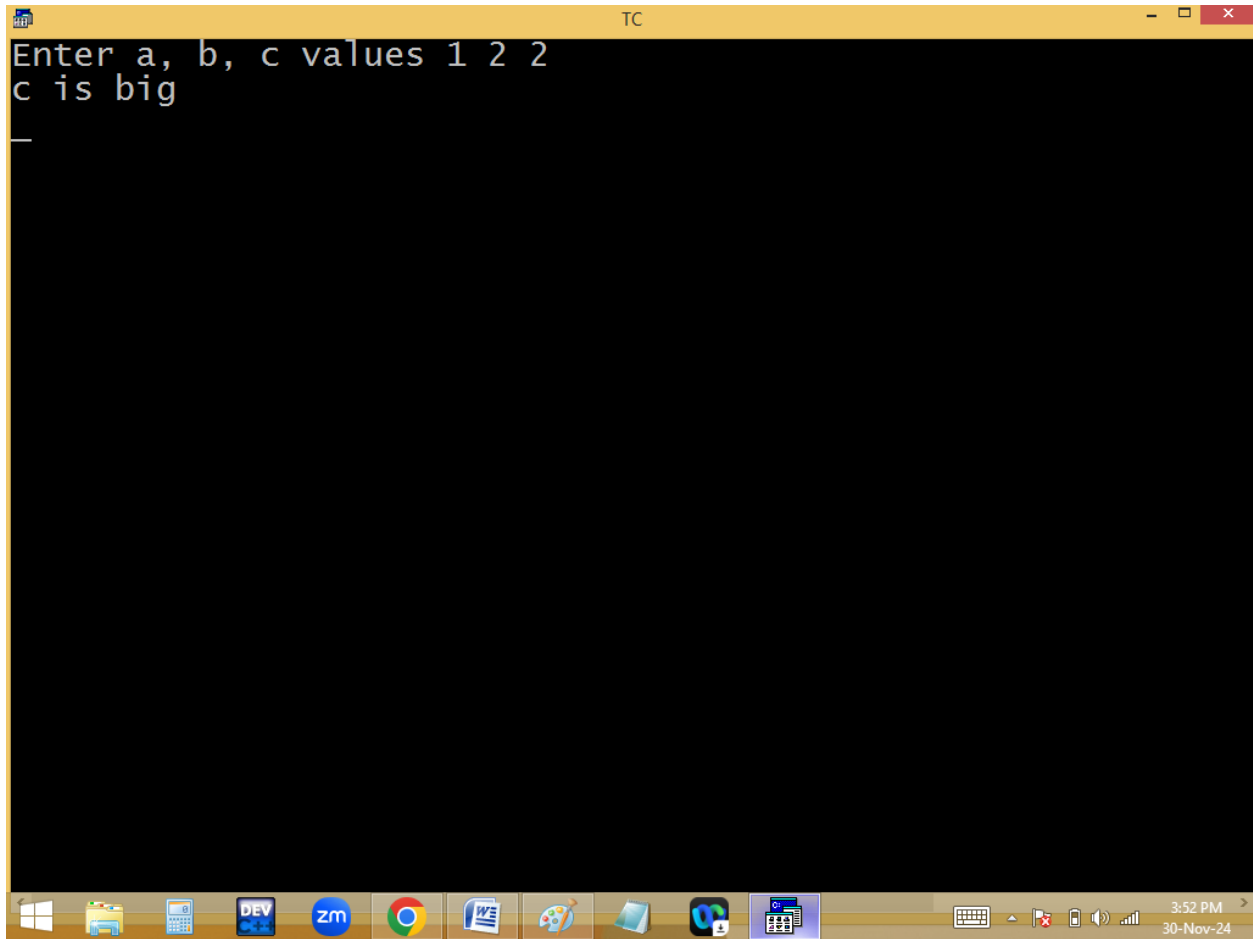

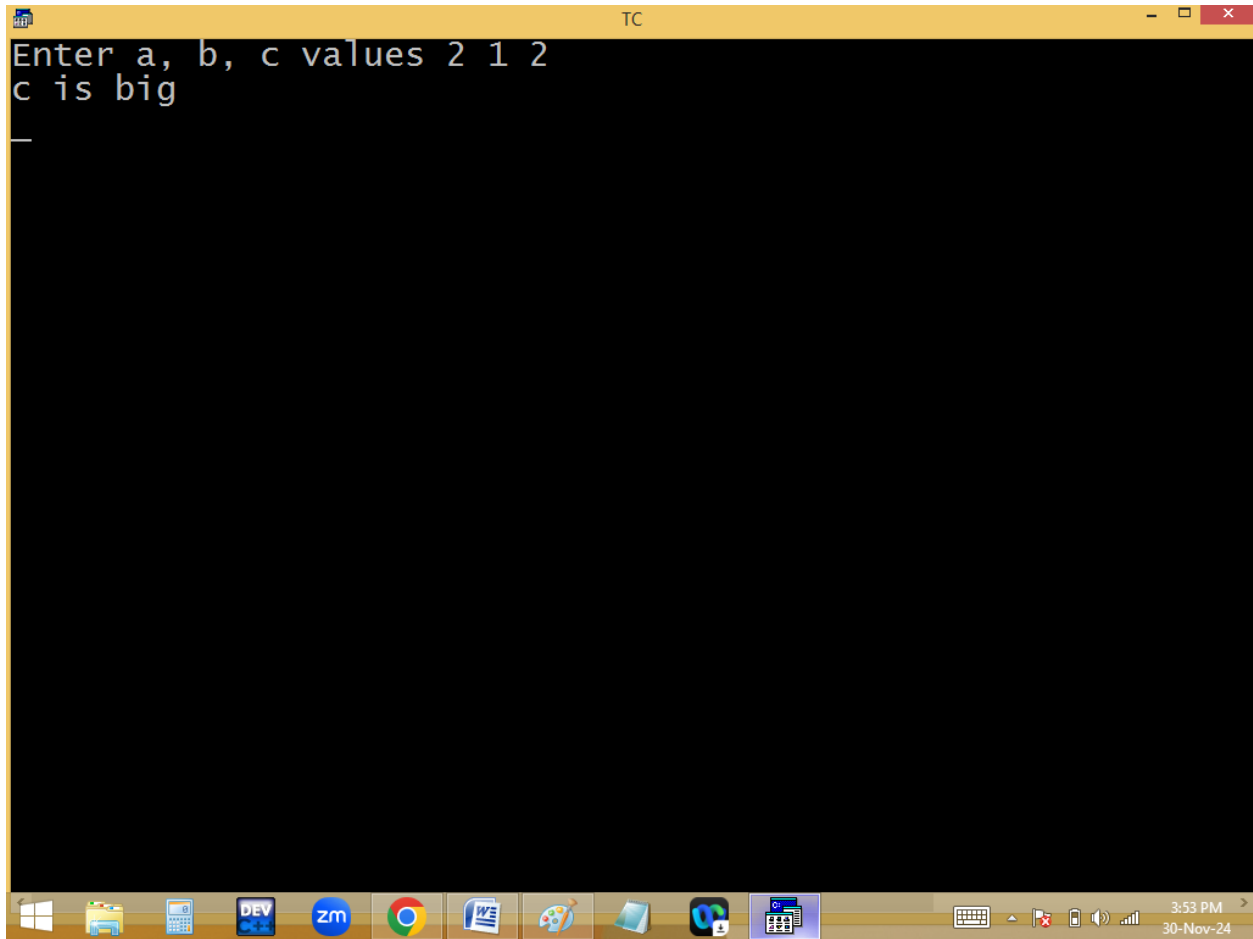

```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 44 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b,c;
clrscr();
printf("Enter a, b, c values ");scanf("%d%d%d",&a,&b,&c);
if(a==b && a==c)printf("all are equal");
else if(a>b && a>c)printf("a is big");
else if(a==b && a>c)puts("a & b are big");
else if(b==c && b>a)puts("b & c are big");
else if(a==c && a>b) puts("a & c are big");
else if(b>c)puts("b is big");
else puts("c is big");
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

3:54 PM 30-Nov-24

