


Direct initialization of string:

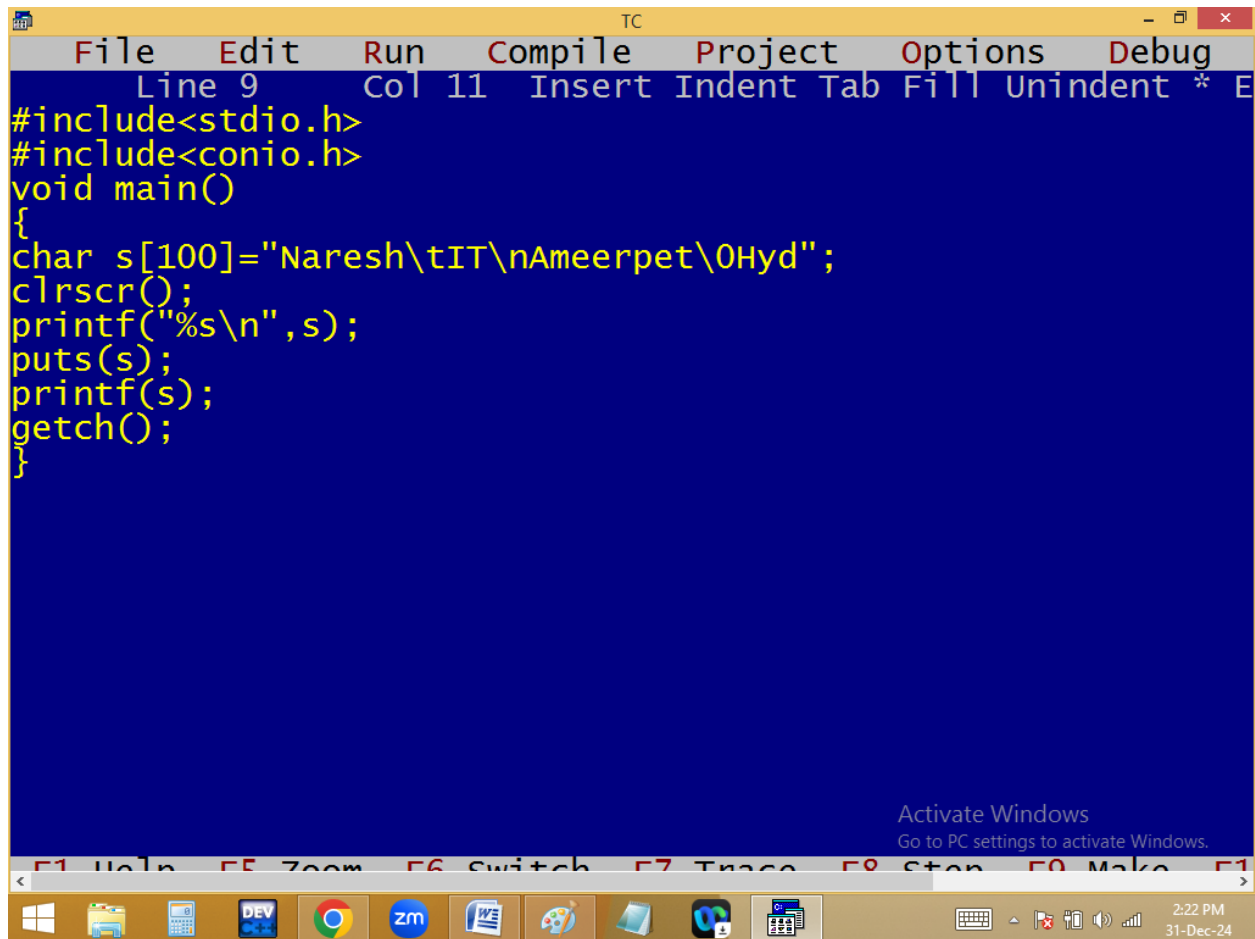



```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 11 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100]="Naresh\tIT\nAmeerpet\0Hyd";
clrscr();
printf("%s\n",s);
puts(s);
printf(s);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

Windows taskbar icons: File Explorer, Calculator, DEV C++, Google Chrome, Zoom, Word, Paint, VS Code, Task View, Keyboard, Mouse, Volume, Network, 2:22 PM, 31-Dec-24

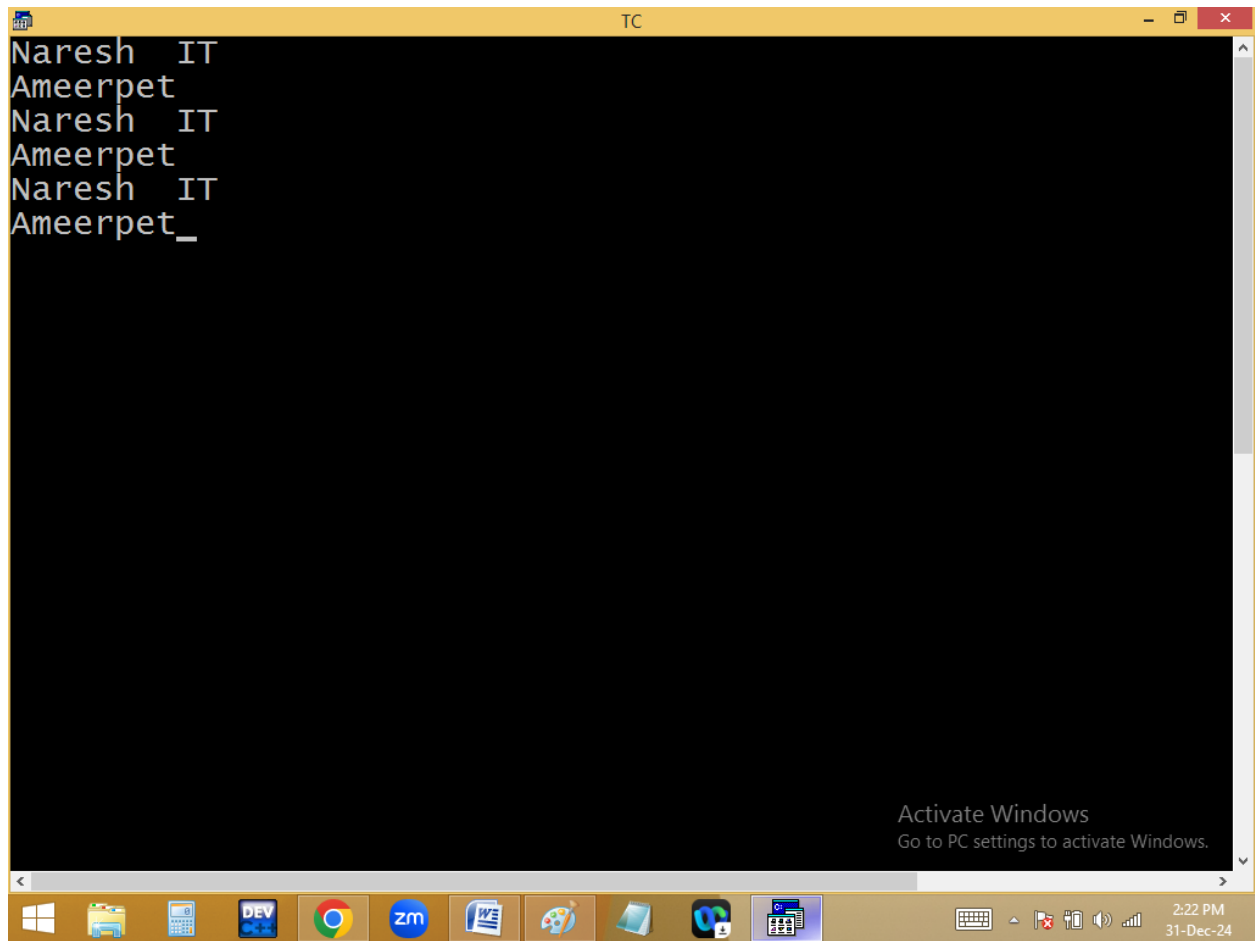

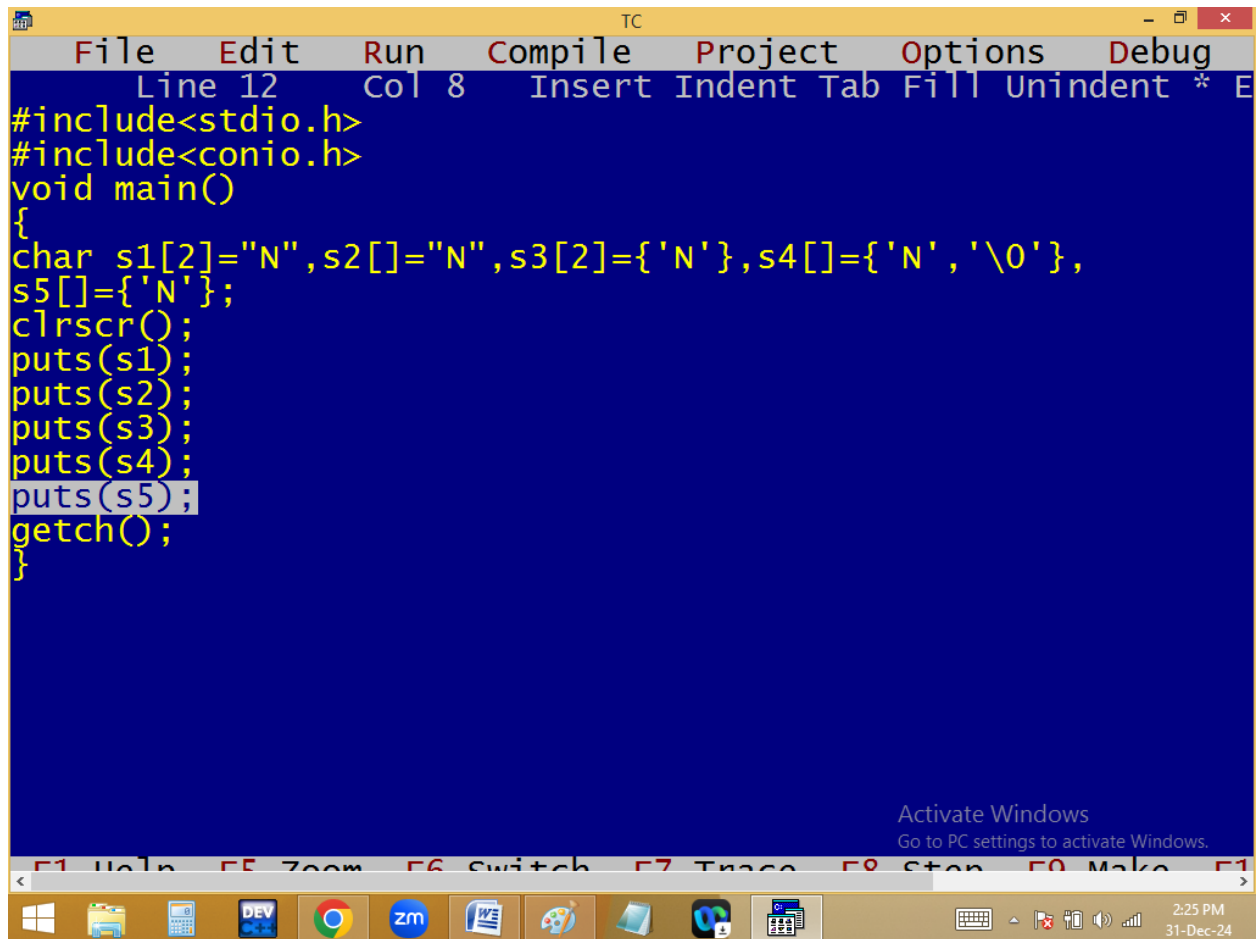


```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 8 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char s1[2]="N",s2[]="N",s3[2]={'N'},s4[]={'N','\0'},
s5[]={'N'};
clrscr();
puts(s1);
puts(s2);
puts(s3);
puts(s4);
puts(s5);
getch();
}
```


Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

Windows taskbar icons: File Explorer, Calculator, DEV C++, Google Chrome, Zoom, Microsoft Word, Paint, VS Code, Task View, System tray (Keyboard, Mouse, Network, Volume, Date/Time: 2:25 PM 31-Dec-24)

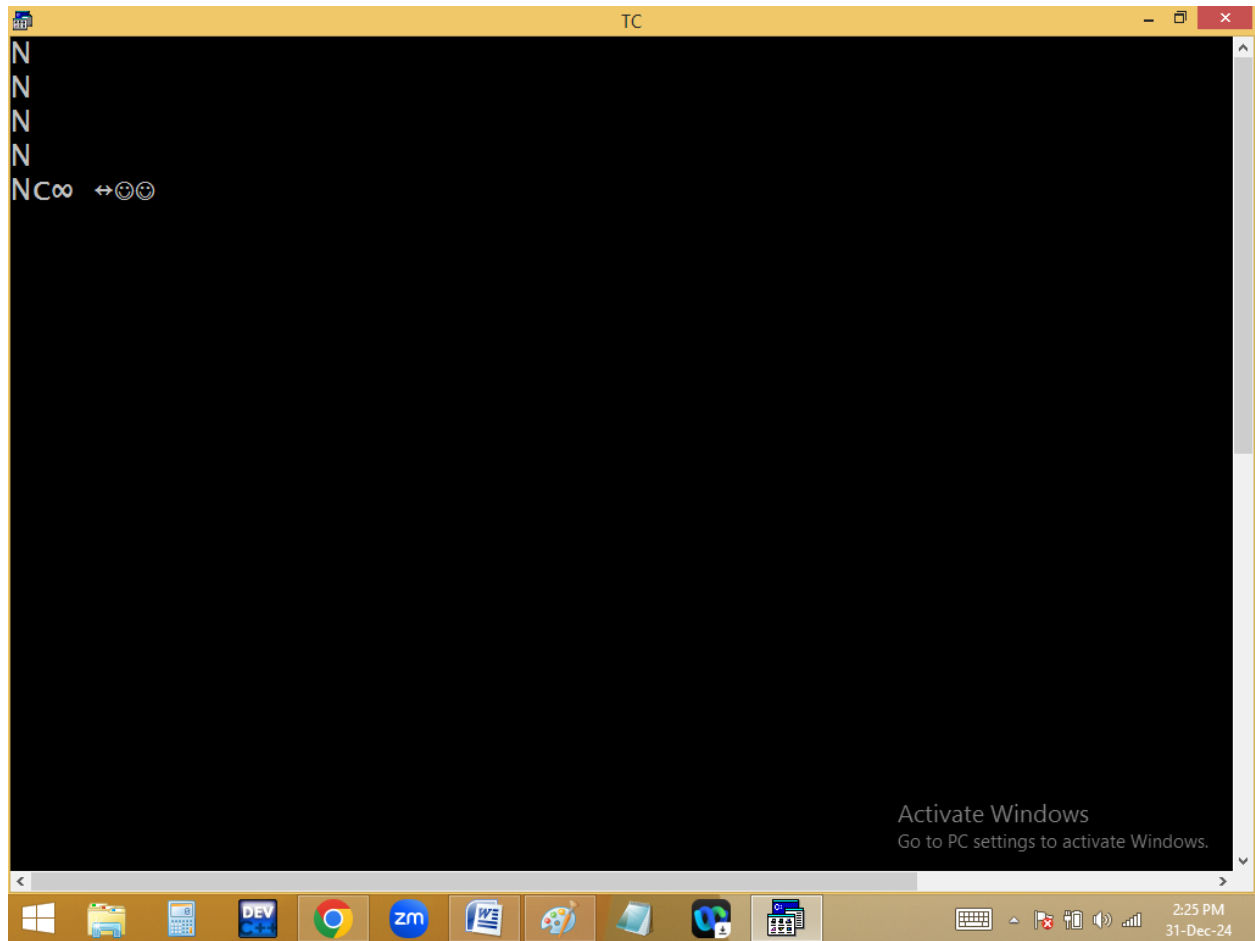

Storing multiple strings:

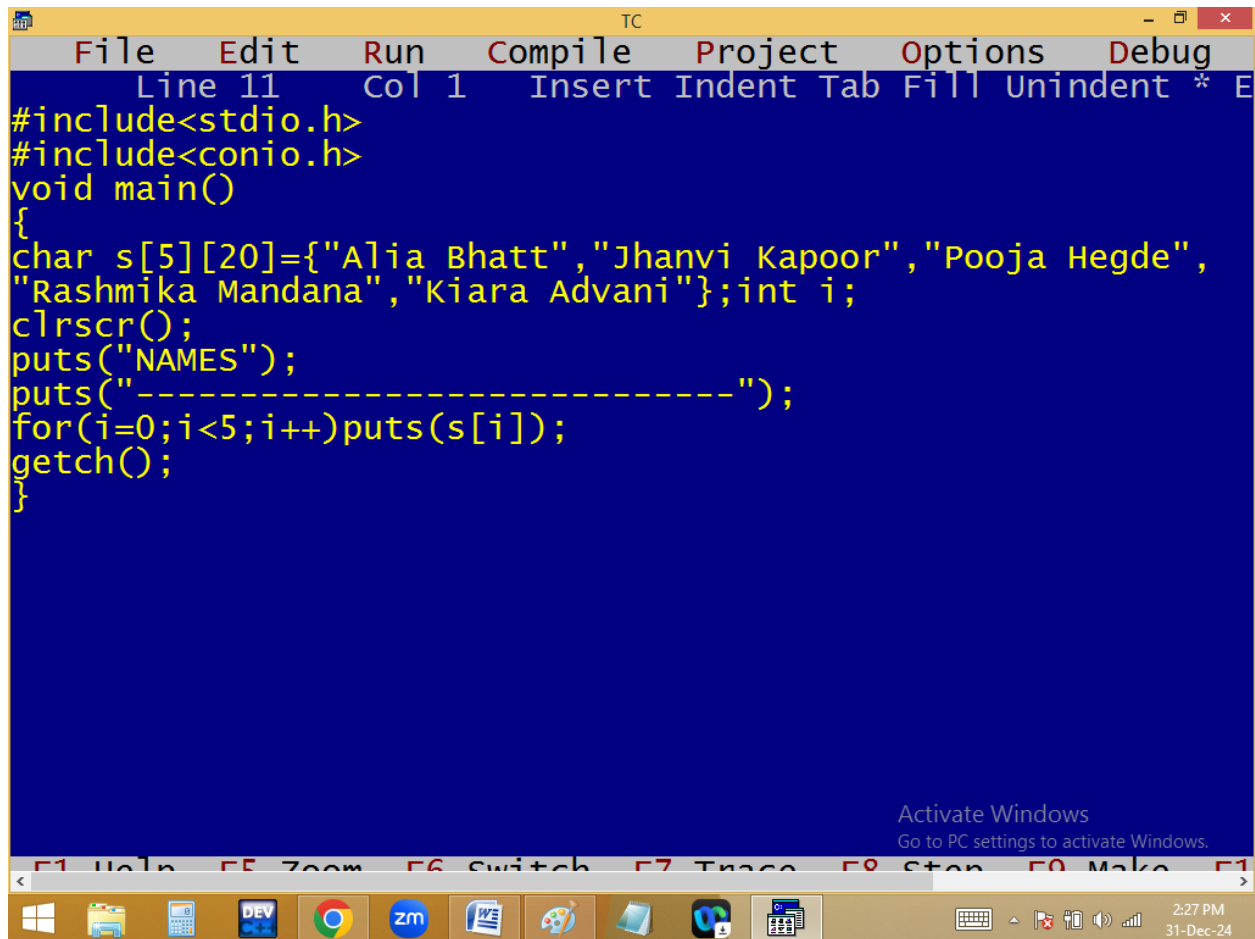


```
TC
File Edit Run Compile Project Options Debug
Line 11 Col 1 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char s[5][20]={"Alia Bhatt","Jhanvi Kapoor","Pooja Hegde",
"Rashmika Mandana","Kiara Advani"};int i;
clrscr();
puts("NAMES");
puts("-----");
for(i=0;i<5;i++)puts(s[i]);
getch();
}
```


Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

Windows taskbar icons: File Explorer, Calculator, DEV C++, Google Chrome, Zoom, Microsoft Word, Paint, VS Code, Task Manager.

System tray: 2:27 PM, 31-Dec-24.

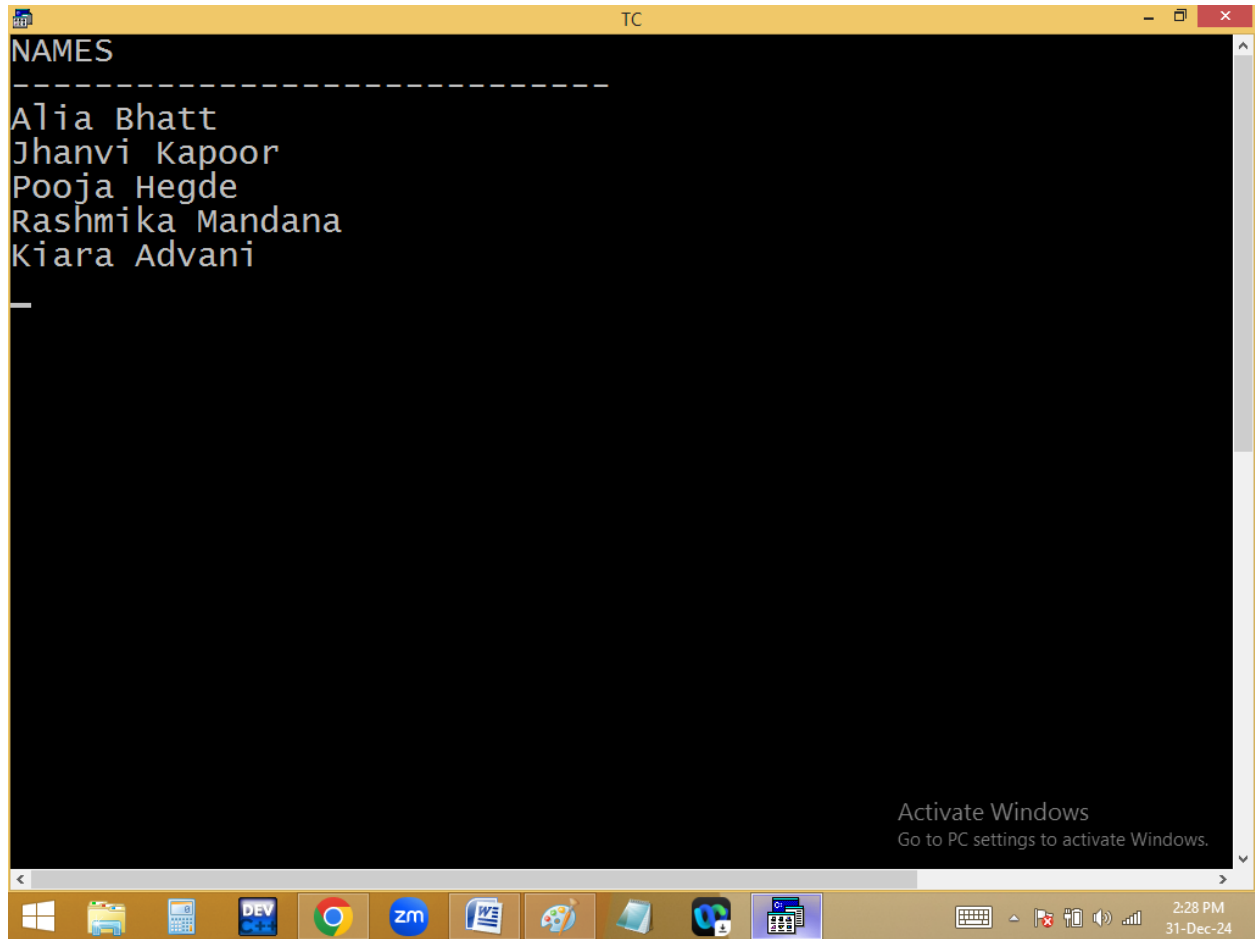


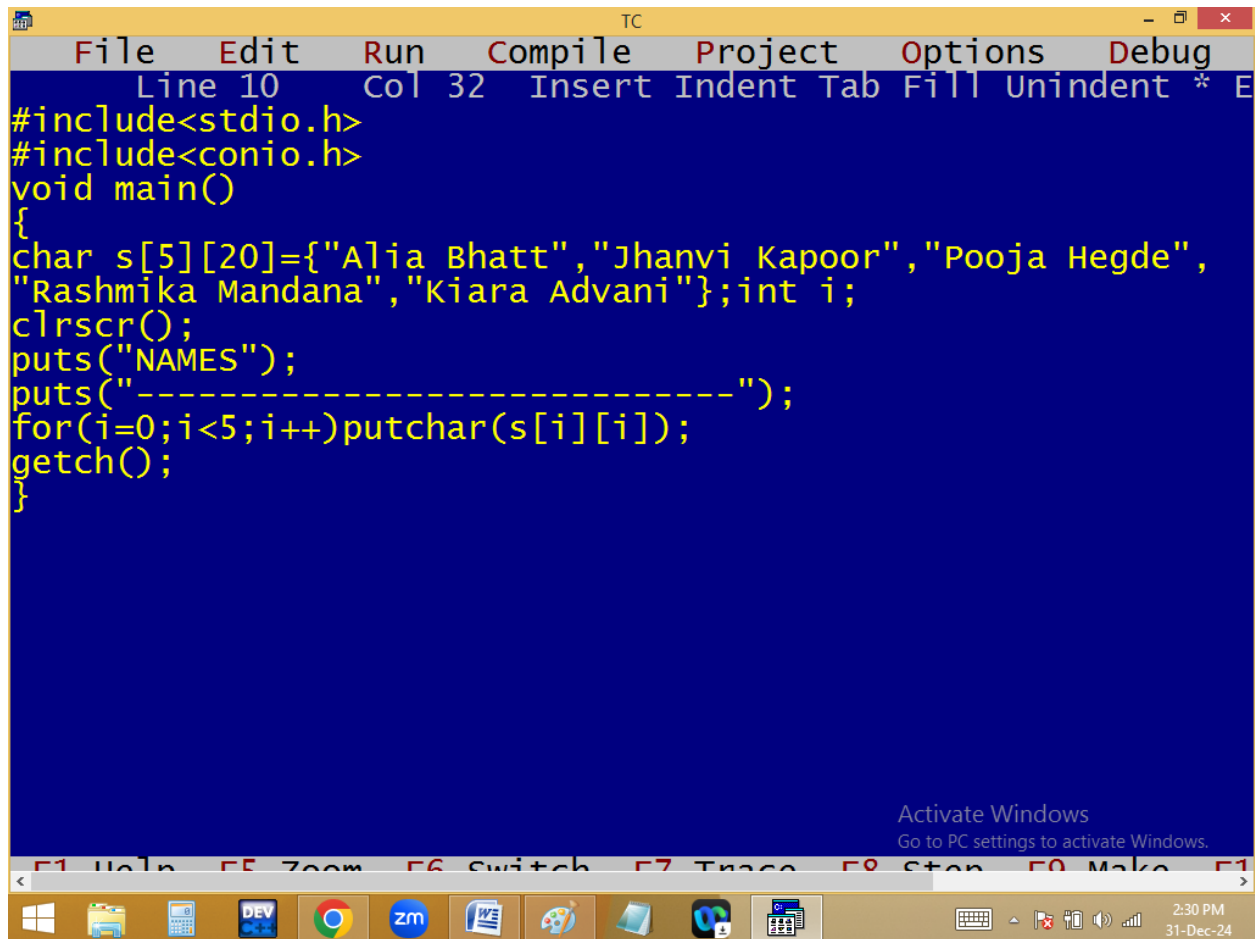


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 10", "Col 32", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
char s[5][20]={"Alia Bhatt","Jhanvi Kapoor","Pooja Hegde",
"Rashmika Mandana","Kiara Advani"};int i;
clrscr();
puts("NAMES");
puts("-----");
for(i=0;i<5;i++)putchar(s[i][i]);
getch();
}
```

At the bottom of the window, there is a taskbar with icons for Windows, File Explorer, Calculator, DEV C++, Google Chrome, Zoom, Word, Paint, and a folder icon. The system tray on the right shows the time as "2:30 PM" and the date as "31-Dec-24". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

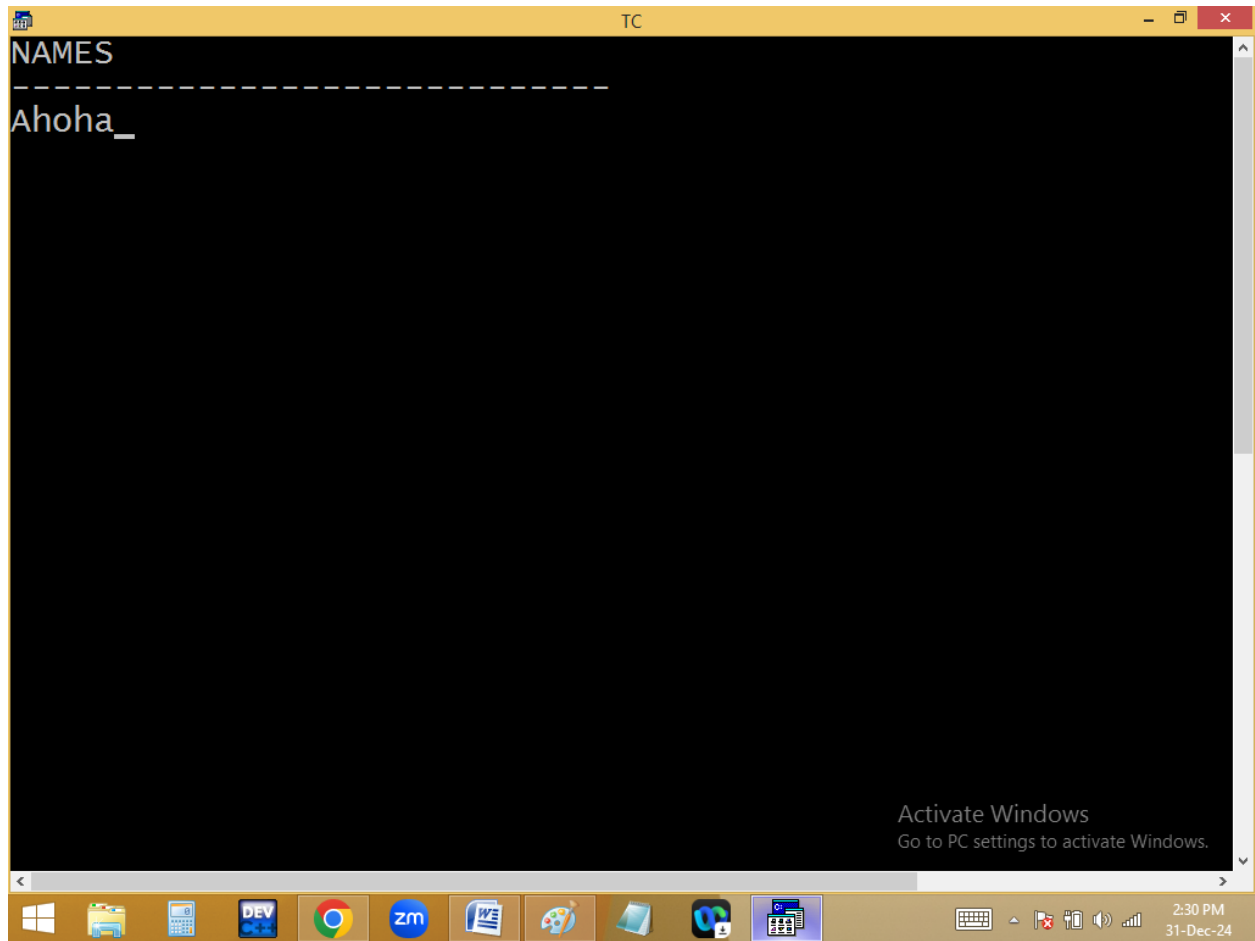

Reading and printing string:

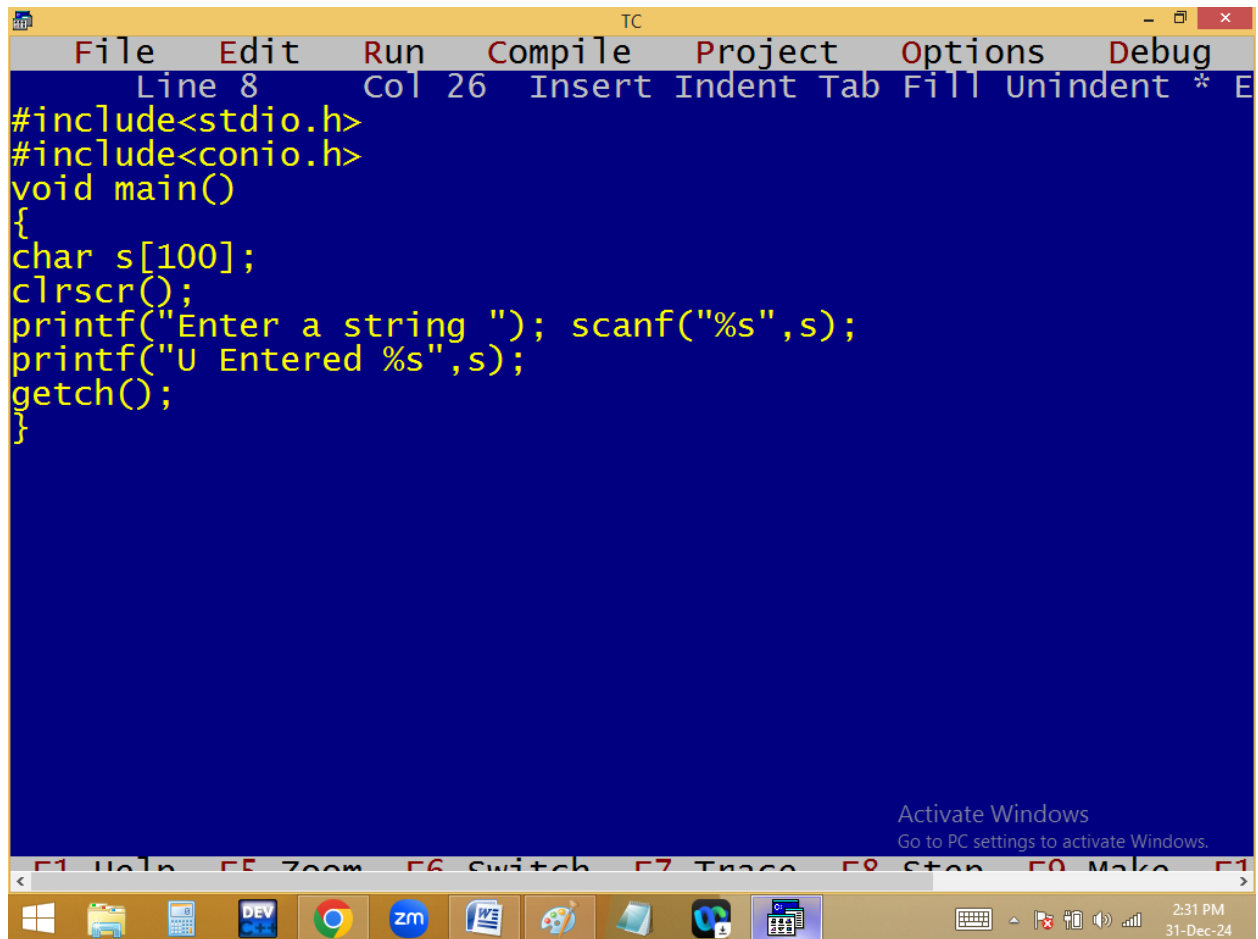



```
TC
File Edit Run Compile Project Options Debug
Line 8 Col 26 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100];
clrscr();
printf("Enter a string "); scanf("%s",s);
printf("U Entered %s",s);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.


F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

2:31 PM
31-Dec-24

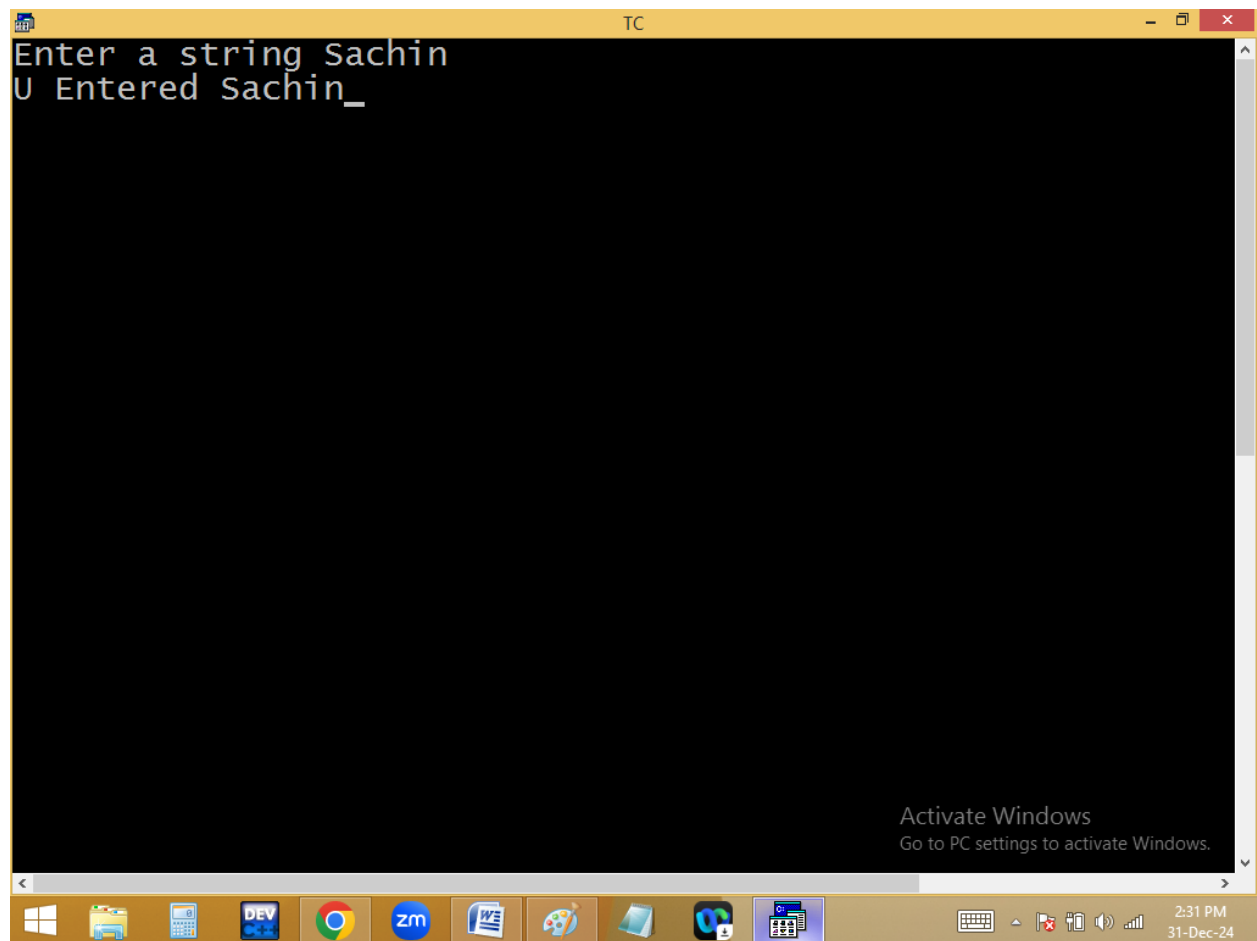

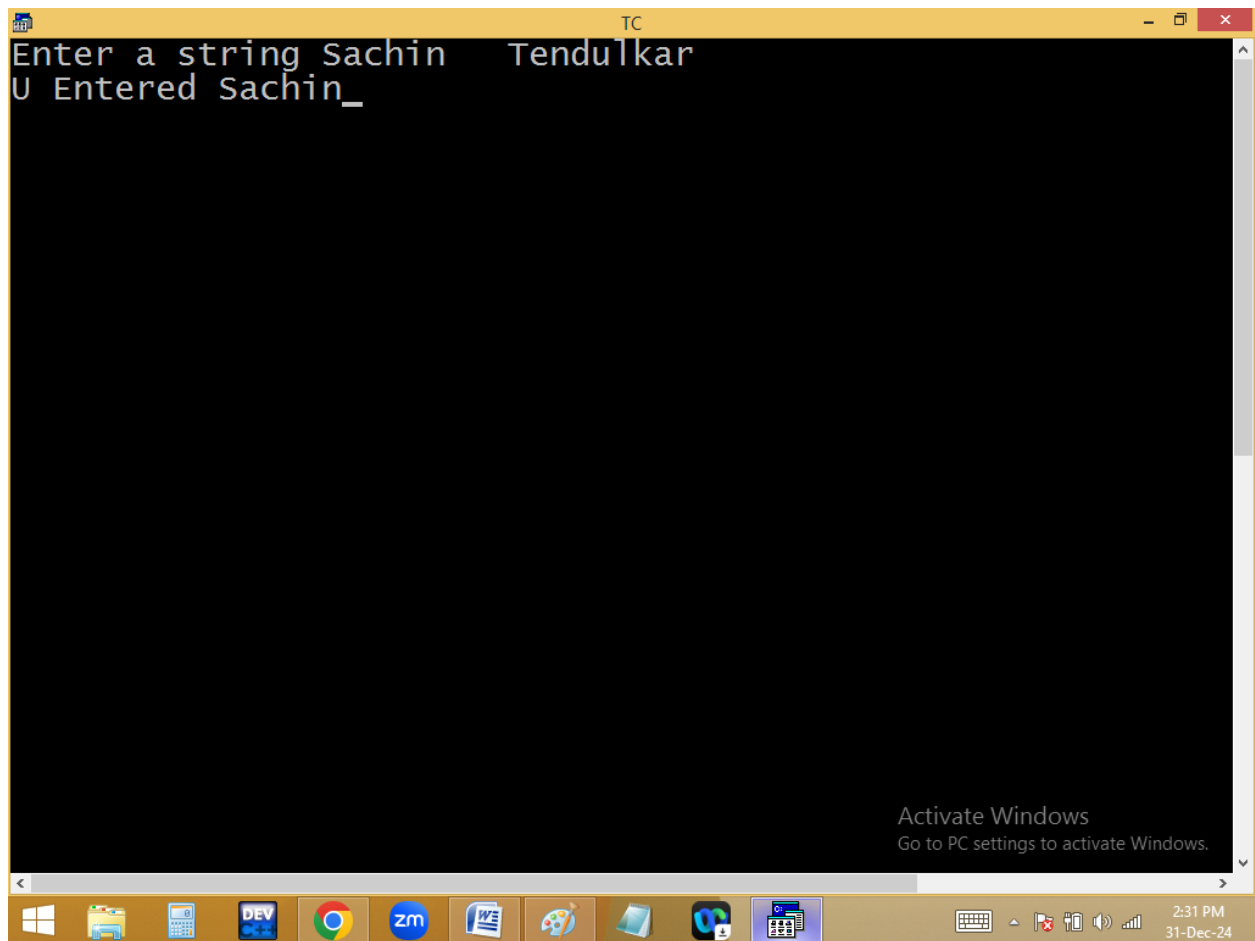


gets(): It reads the string with spaces until pressing enter key.

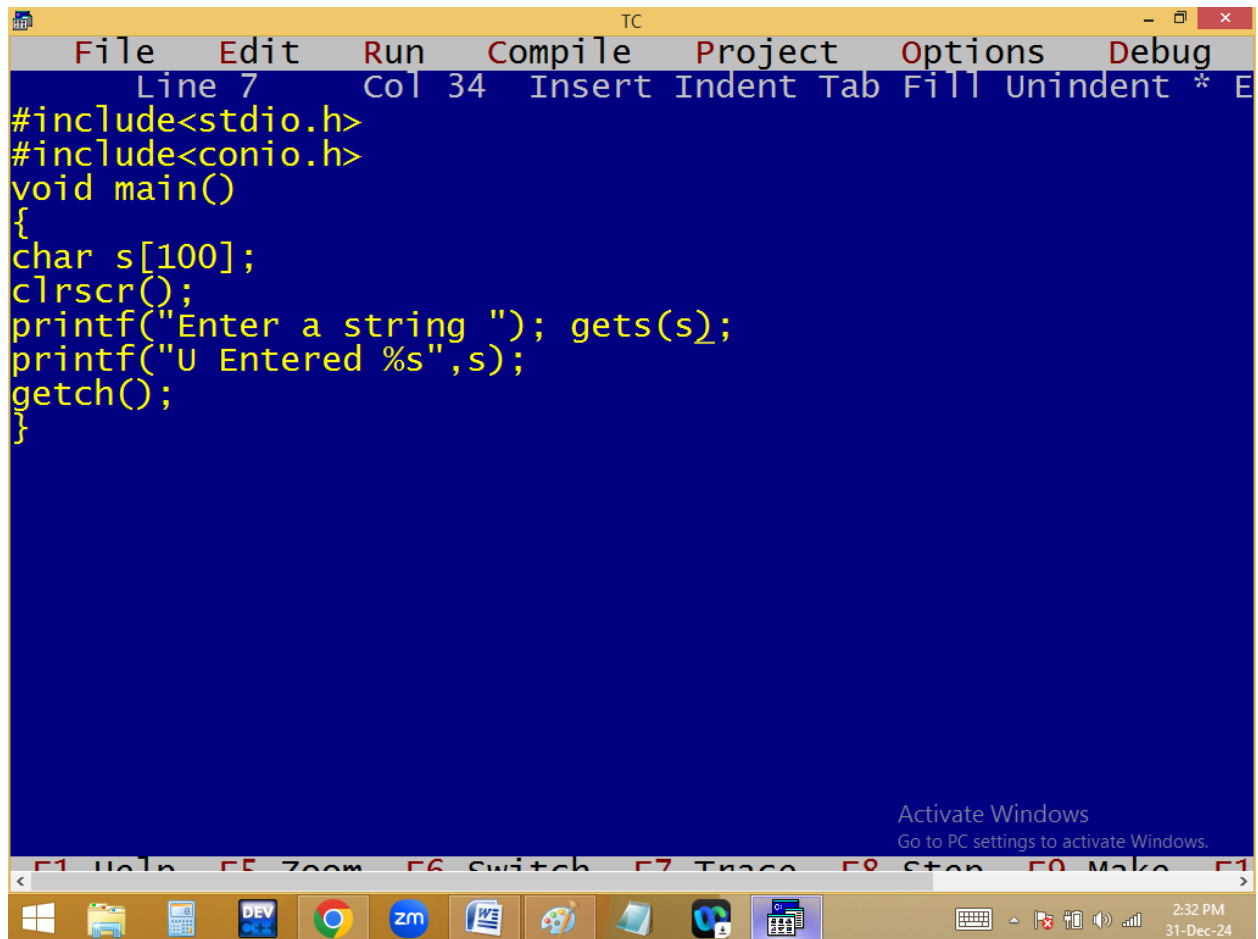


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 7", "Col 34", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100];
clrscr();
printf("Enter a string "); gets(s);
printf("U Entered %s",s);
getch();
}
```

At the bottom of the window, there is a taskbar with various application icons including Windows Explorer, Calculator, DEV C++, Google Chrome, Zoom, Word, and others. The system tray on the right shows the time as "2:32 PM" and the date as "31-Dec-24". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

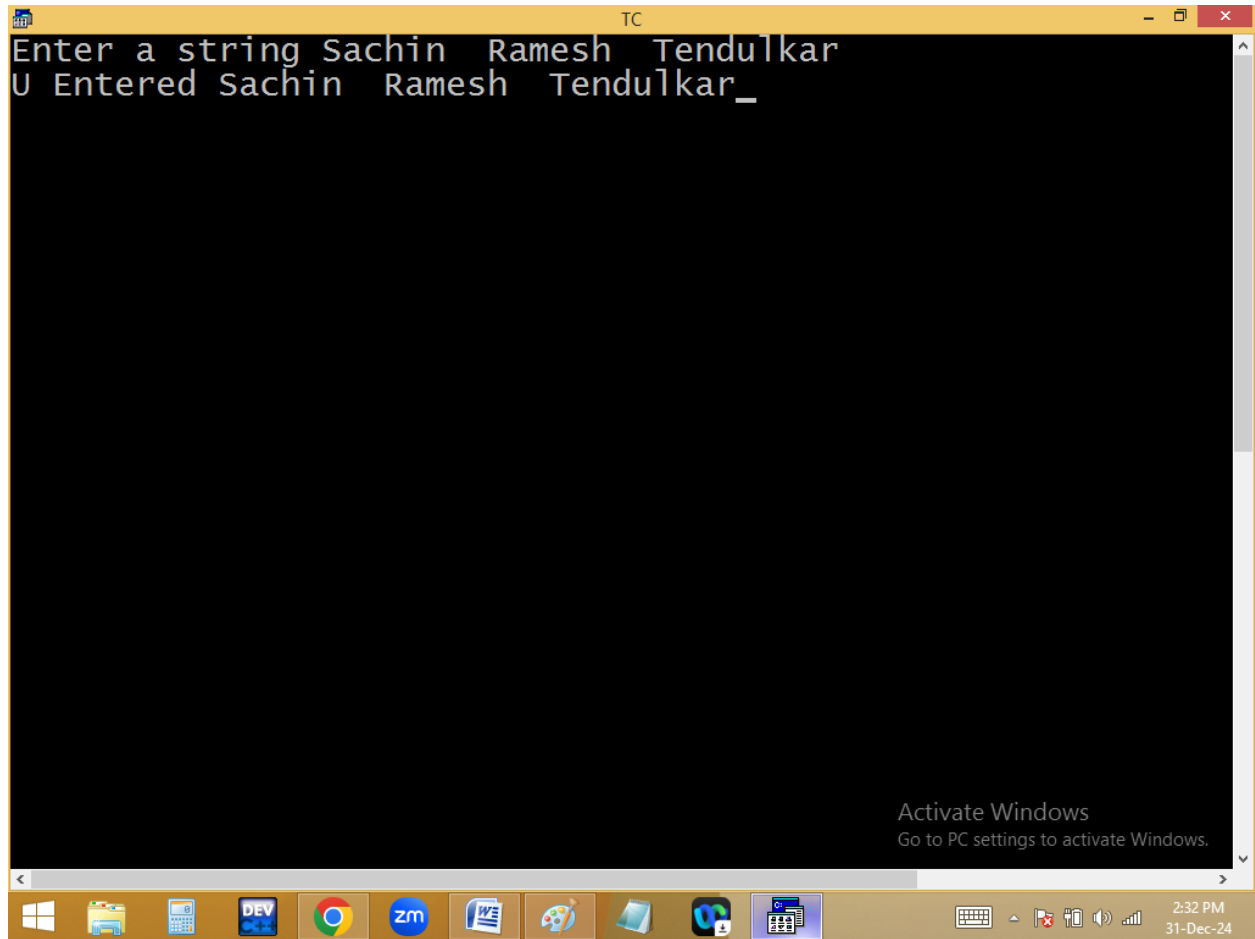


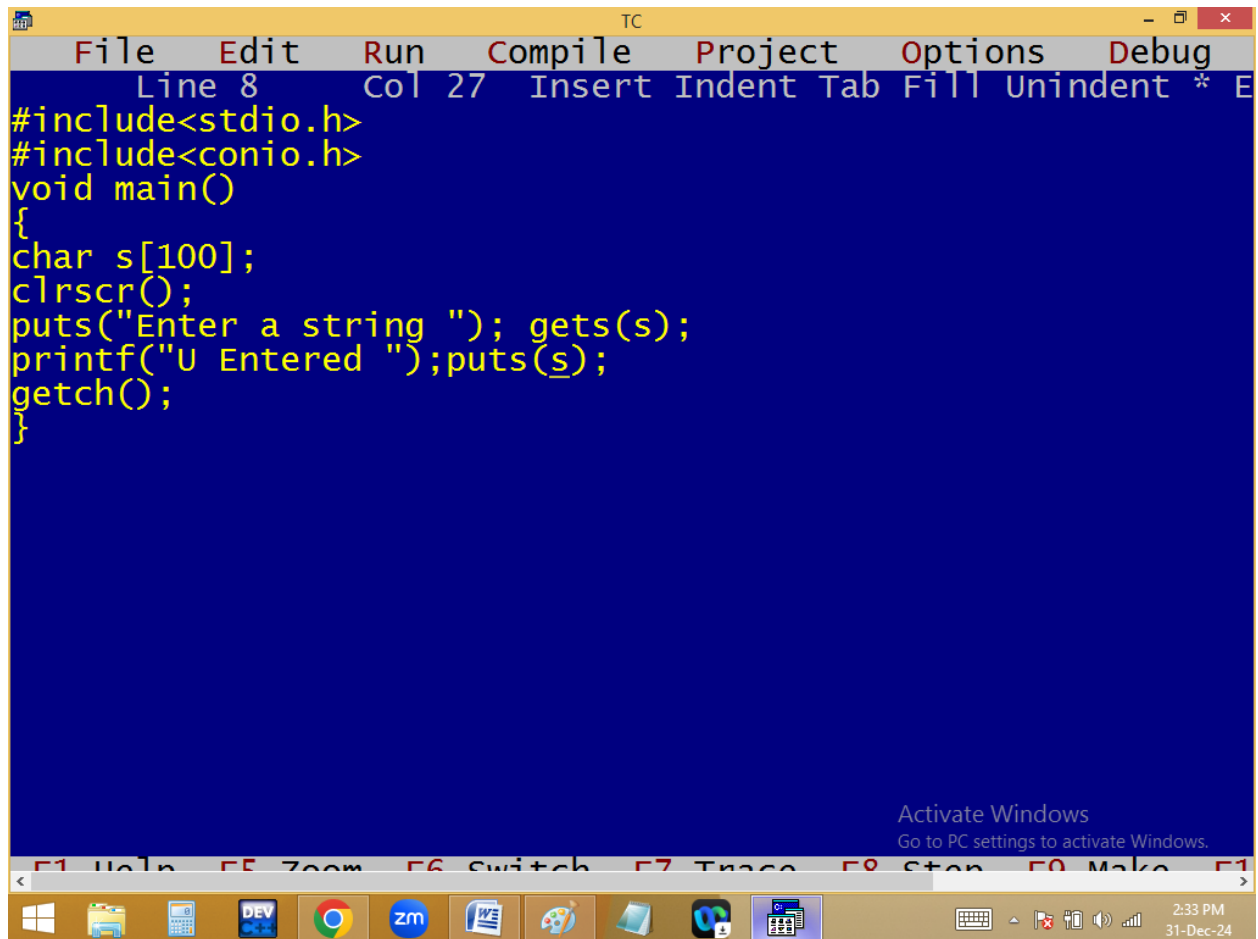


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 8", "Col 27", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code:


```
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100];
clrscr();
puts("Enter a string "); gets(s);
printf("U Entered ");puts(s);
getch();
}
```

At the bottom of the IDE window, there is a text box that says "Activate Windows" and "Go to PC settings to activate Windows." Below the IDE window is the Windows taskbar, which includes icons for the Start menu, File Explorer, Calculator, DEV C++, Google Chrome, Zoom, Word, Paint, and a folder. The system tray on the right shows the time as "2:33 PM" and the date as "31-Dec-24".

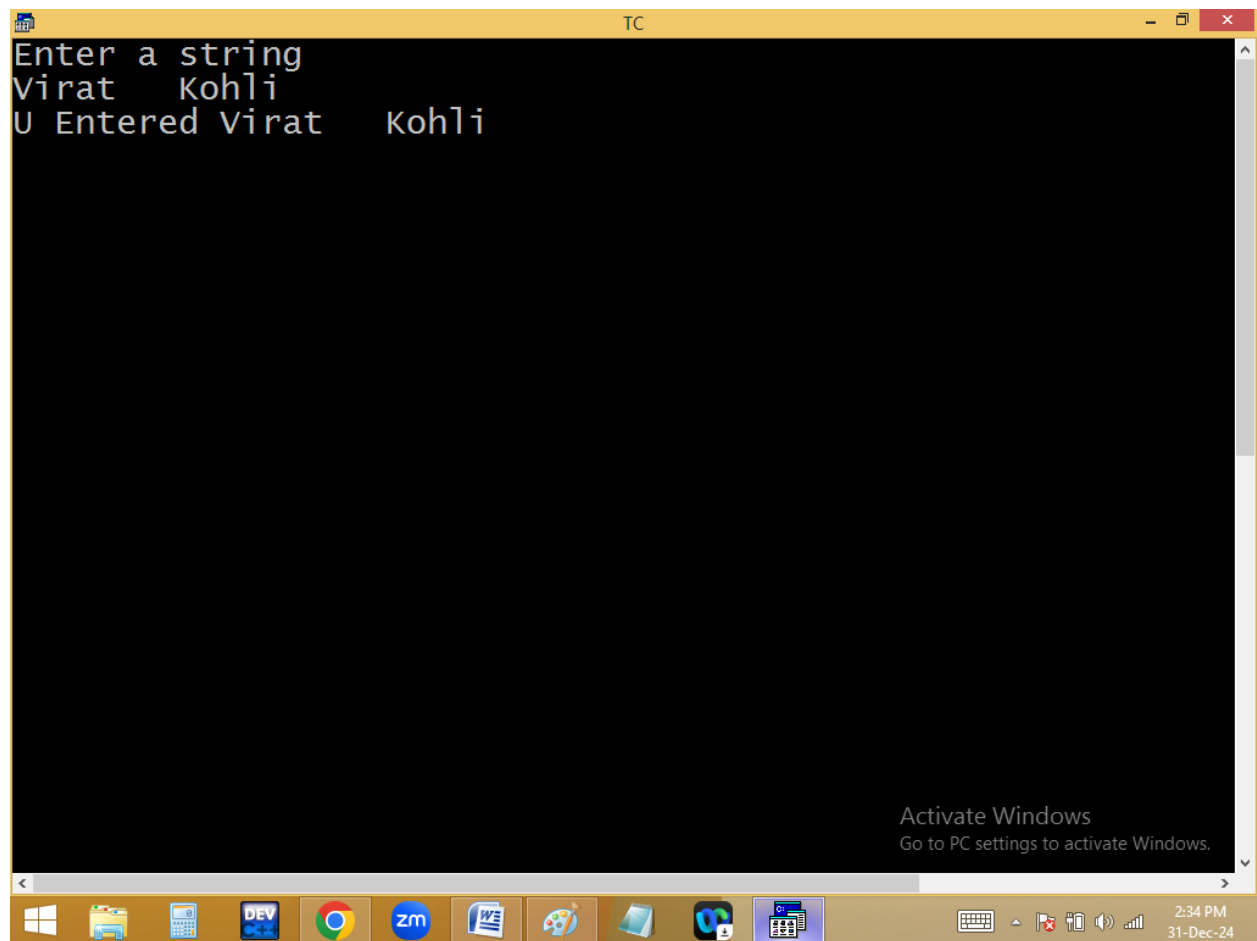

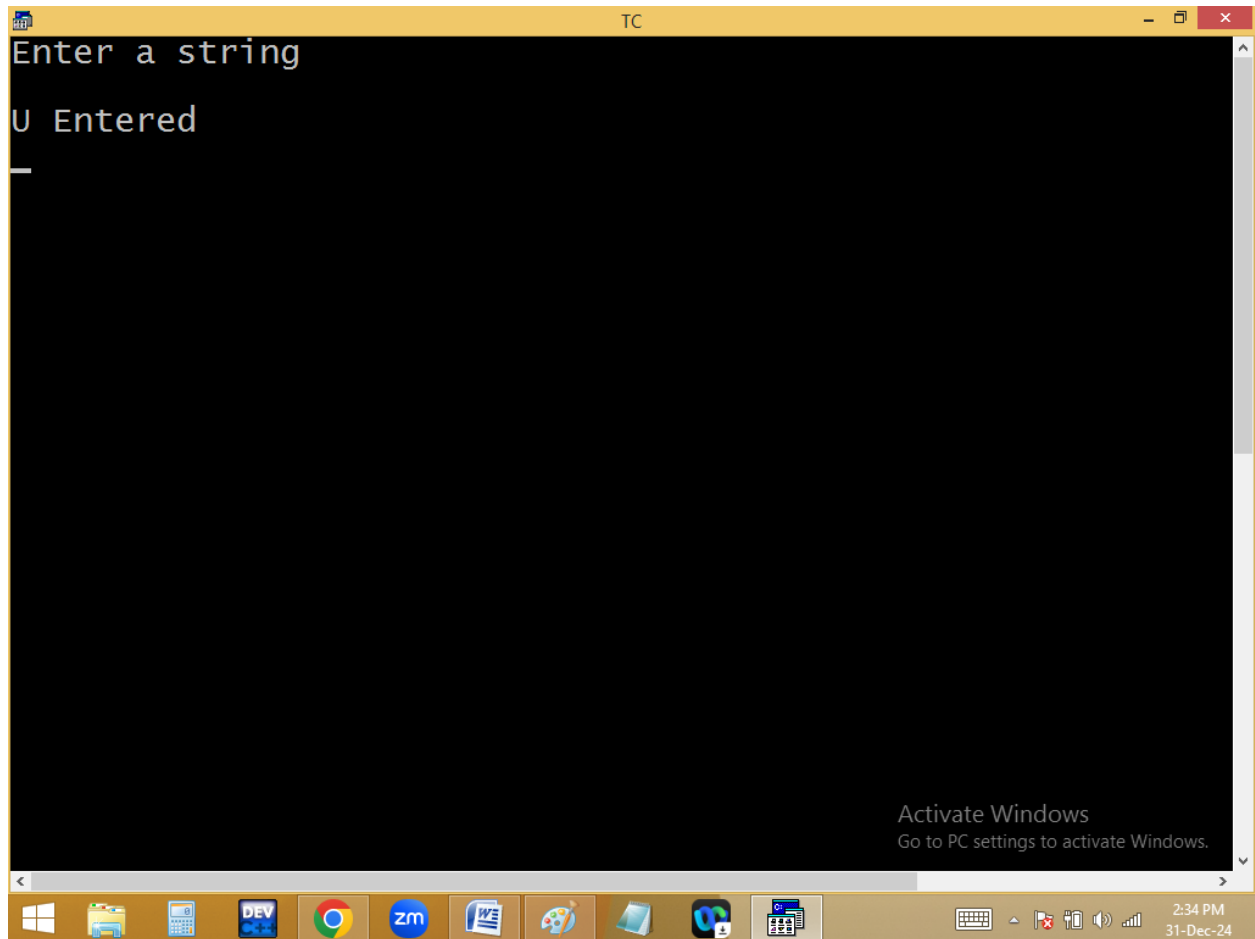

Reading multiple string with gets():

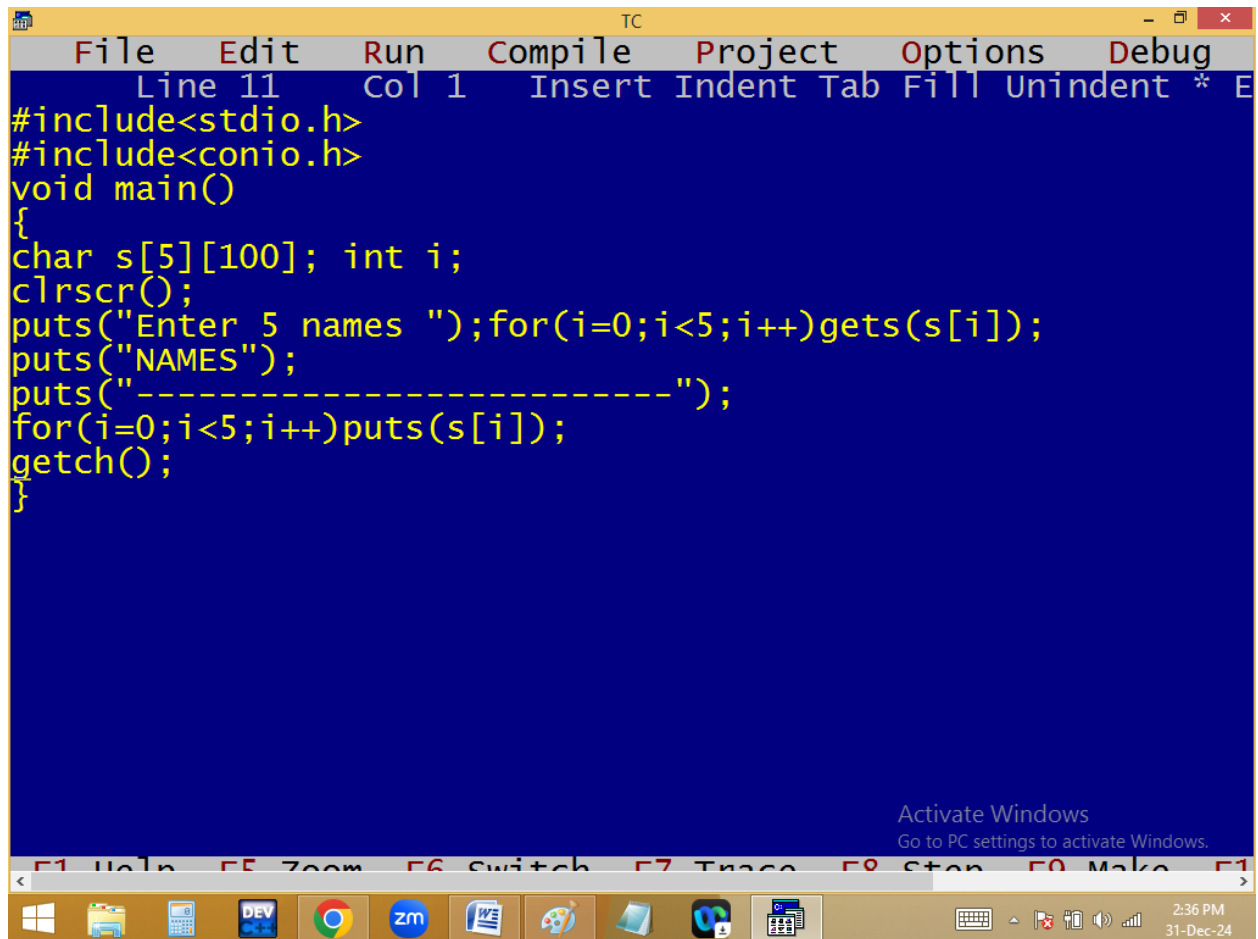

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 11", "Col 1", and "Insert Indent Tab Fill Unindent * E". The main editing area has a blue background and contains the following C code:


```
#include<stdio.h>
#include<conio.h>
void main()
{
char s[5][100]; int i;
clrscr();
puts("Enter 5 names ");for(i=0;i<5;i++)gets(s[i]);
puts("NAMES");
puts("-----");
for(i=0;i<5;i++)puts(s[i]);
getch();
}
```

At the bottom of the window, there is a taskbar with various application icons (Windows, File Explorer, Calculator, DEV C++, Chrome, Zoom, Word, Paint, VS Code, and a calculator). The system tray on the right shows the time "2:36 PM" and the date "31-Dec-24". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

```
TC
Enter 5 names
Rohith sharma
mahendra singh dhoni
virat kohli
jadeja
subhman gill
NAMES
-----
Rohith sharma
mahendra singh dhoni
virat kohli
jadeja
subhman gill
```

Activate Windows
Go to PC settings to activate Windows.


Magic characters / scan set characters:

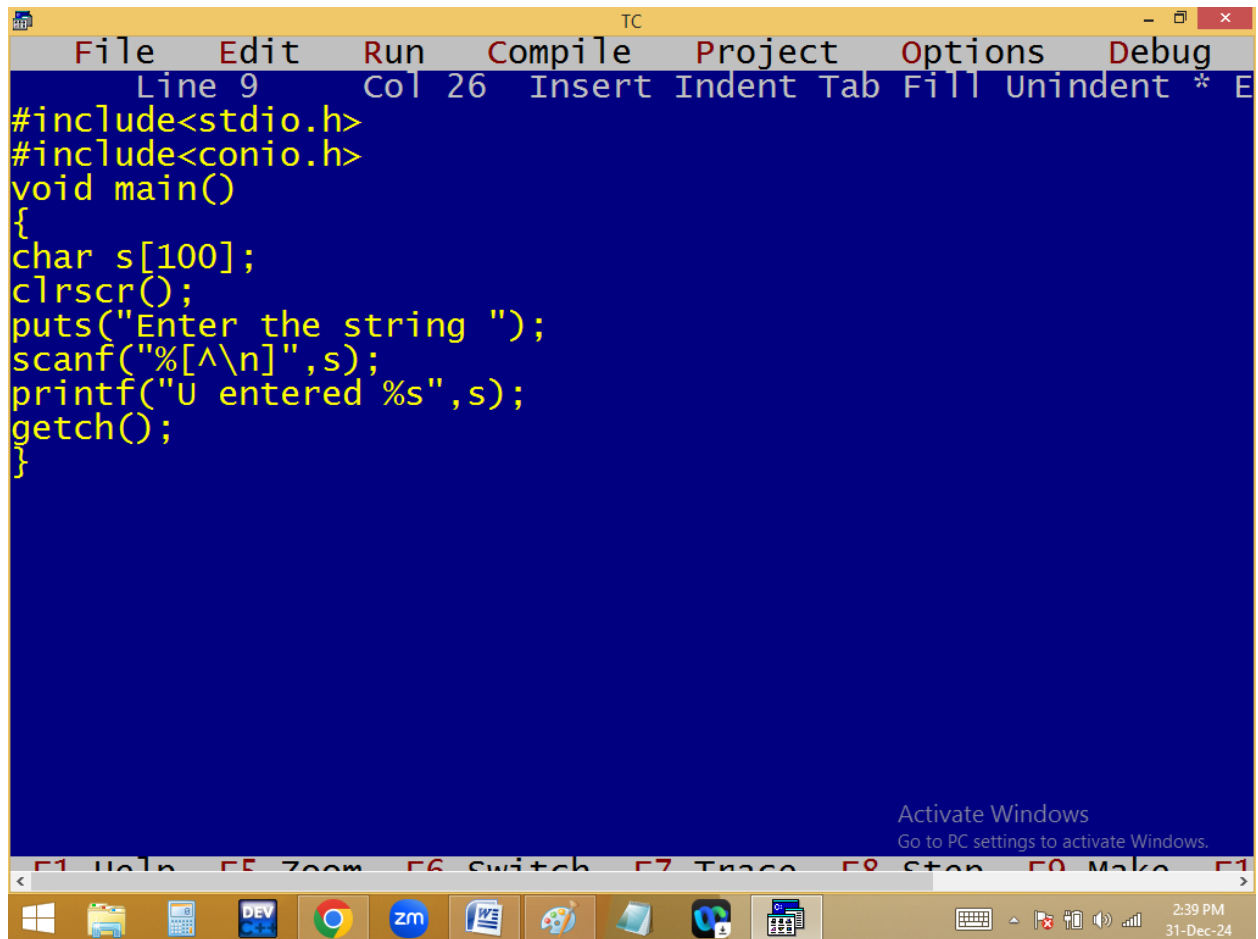



The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 9", "Col 26", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100];
clrscr();
puts("Enter the string ");
scanf("%[^\n]",s);
printf("U entered %s",s);
getch();
}
```

At the bottom of the window, there is a taskbar with various application icons including Windows Explorer, Calculator, DEV C++, Google Chrome, Zoom, Word, and others. The system tray on the right shows the time as 2:39 PM and the date as 31-Dec-24. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

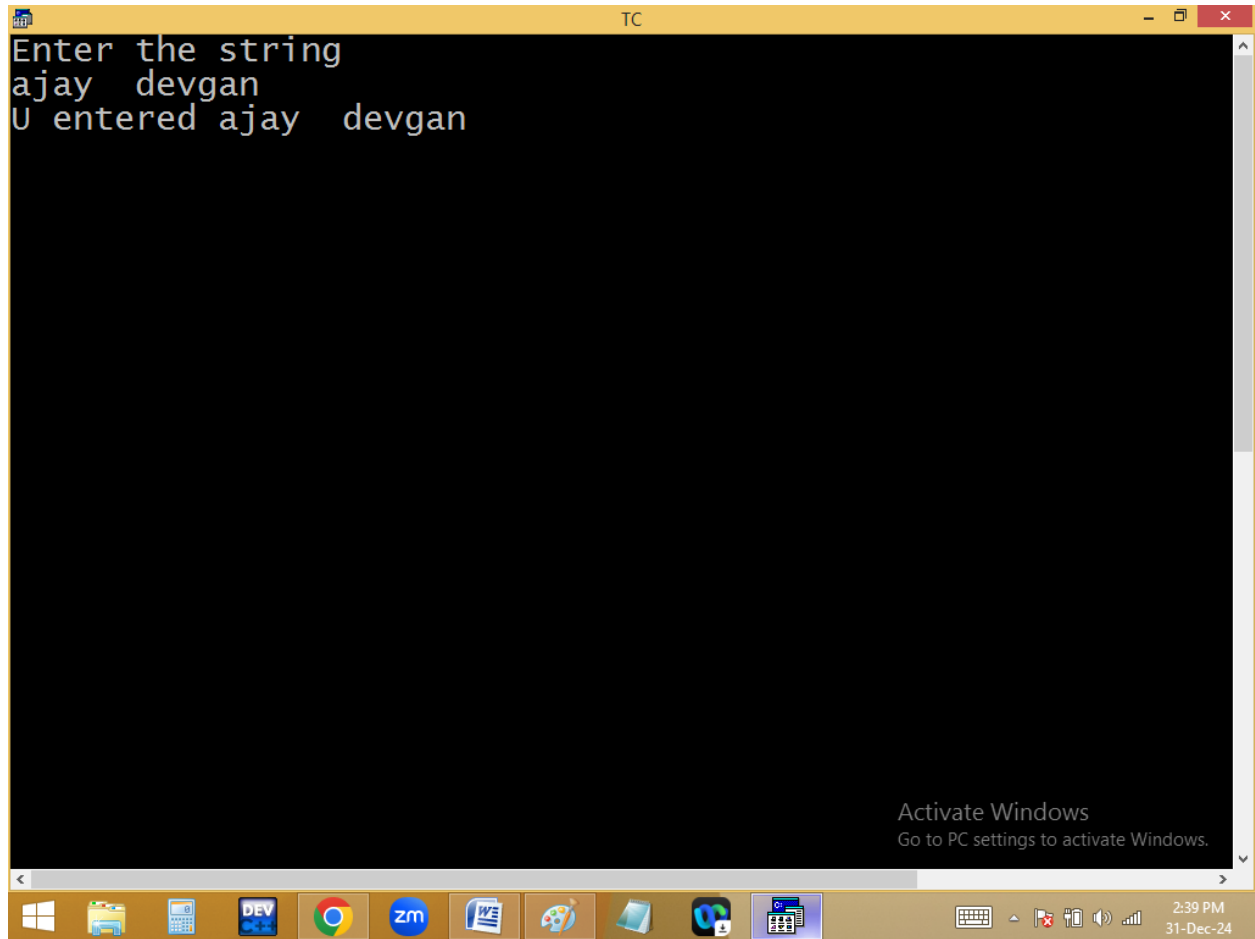

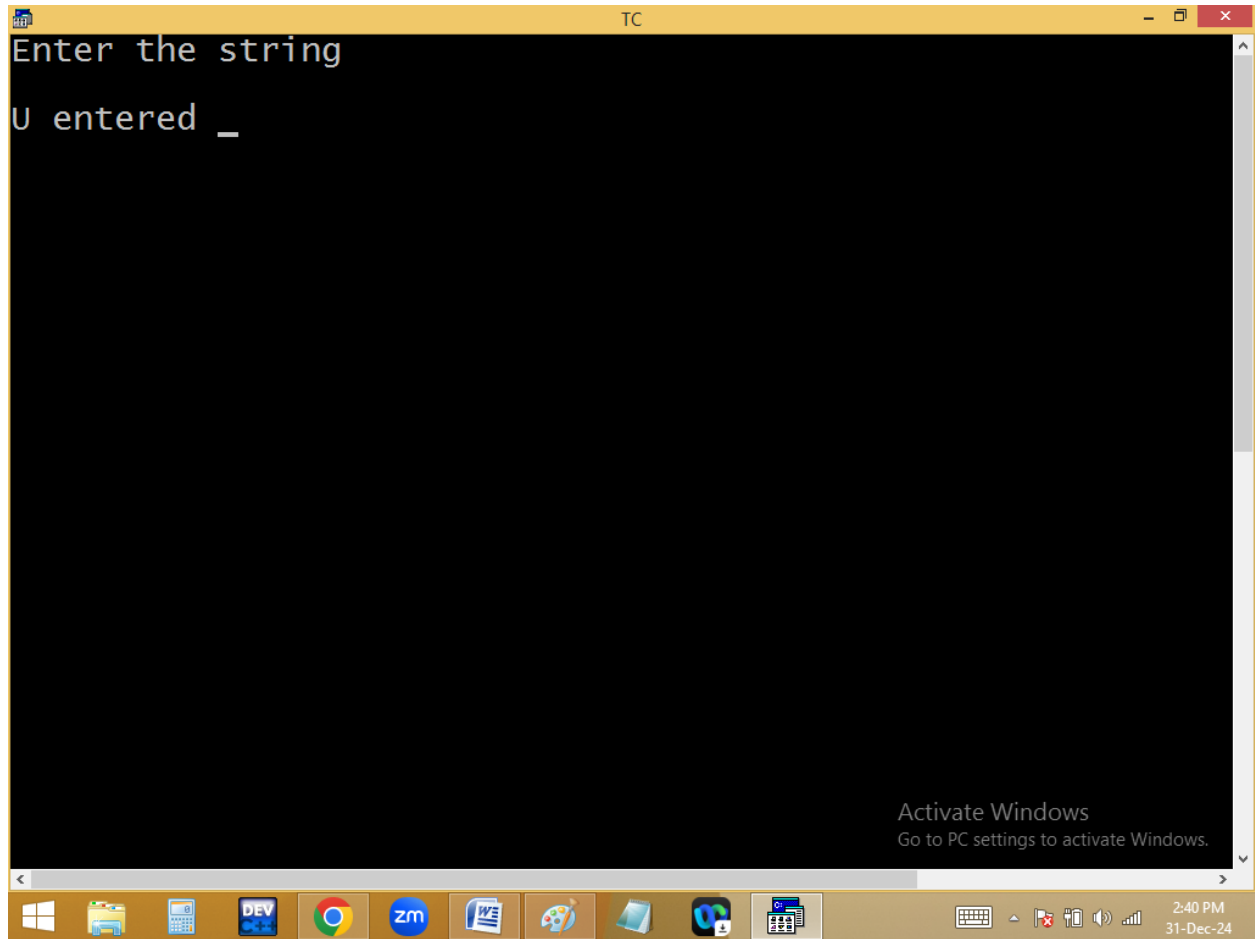


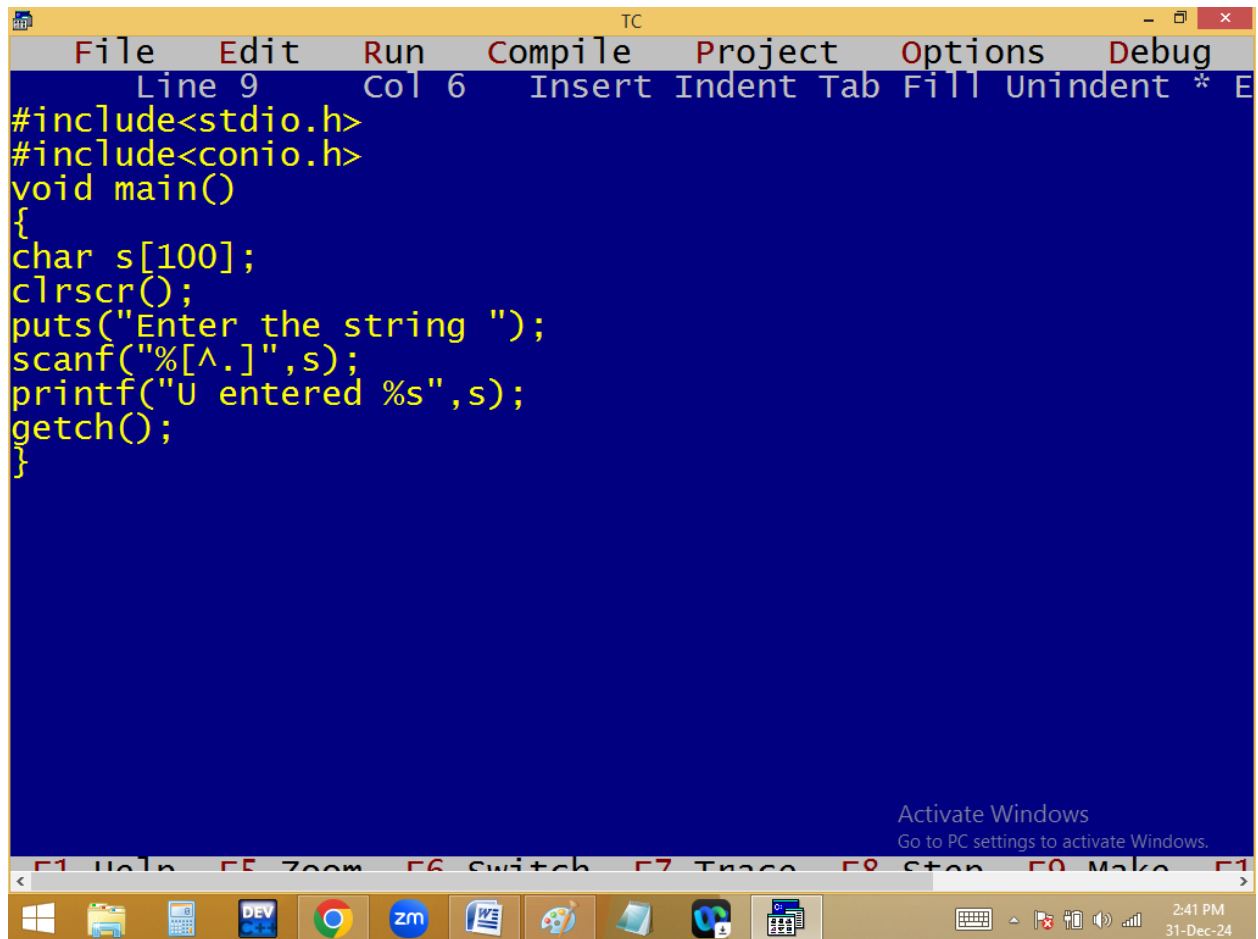


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 9", "Col 6", and lists keyboard shortcuts: Insert, Indent, Tab, Fill, Unindent, *, and E. The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100];
clrscr();
puts("Enter the string ");
scanf("%[^\n]",s);
printf("U entered %s",s);
getch();
}
```

At the bottom right of the IDE, there is a message: "Activate Windows. Go to PC settings to activate Windows." The Windows taskbar is visible at the bottom, showing icons for Windows, File Explorer, Calculator, DEV C++, Google Chrome, Zoom, Word, Paint, and a folder. The system tray on the right shows the date and time: "2:41 PM 31-Dec-24".

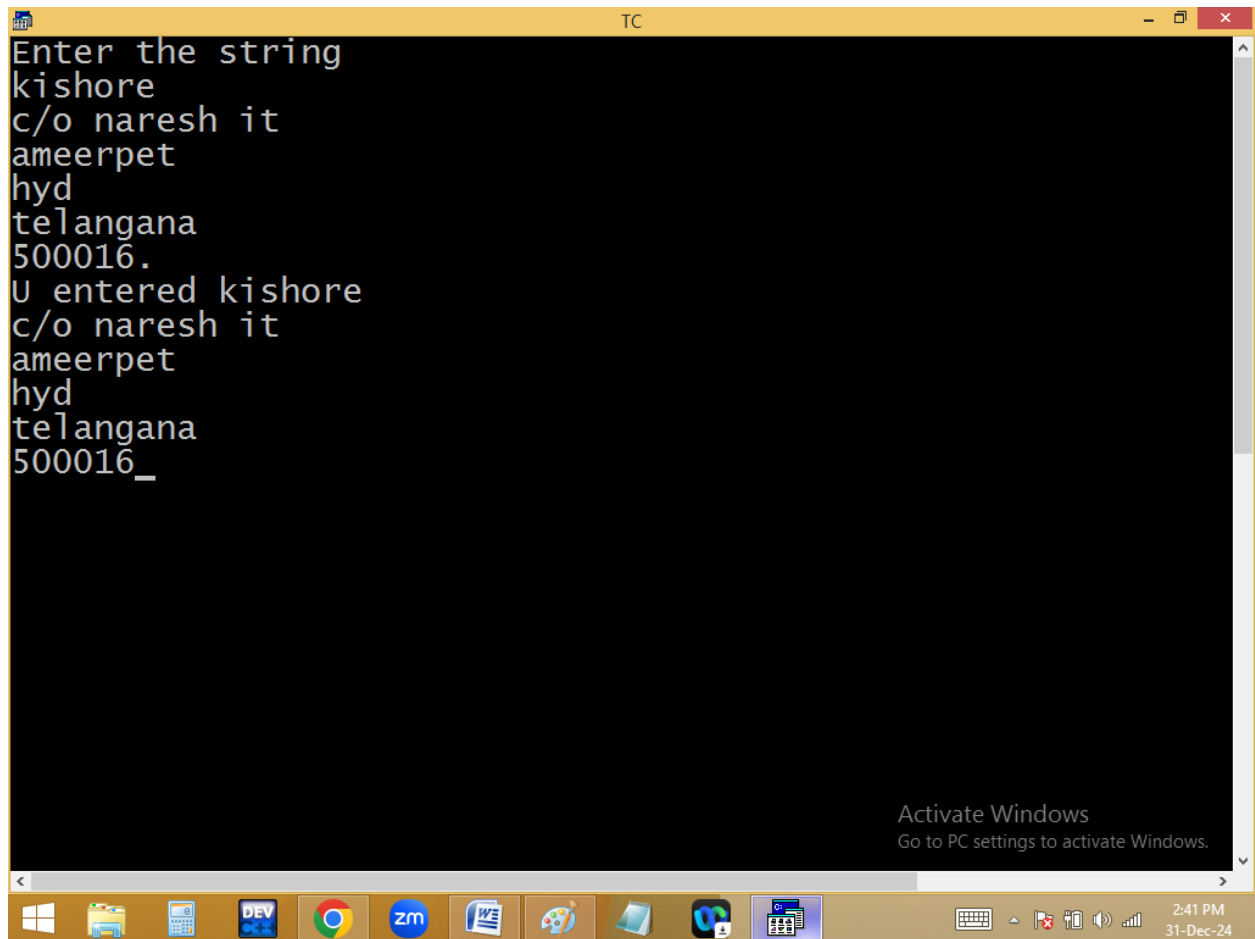


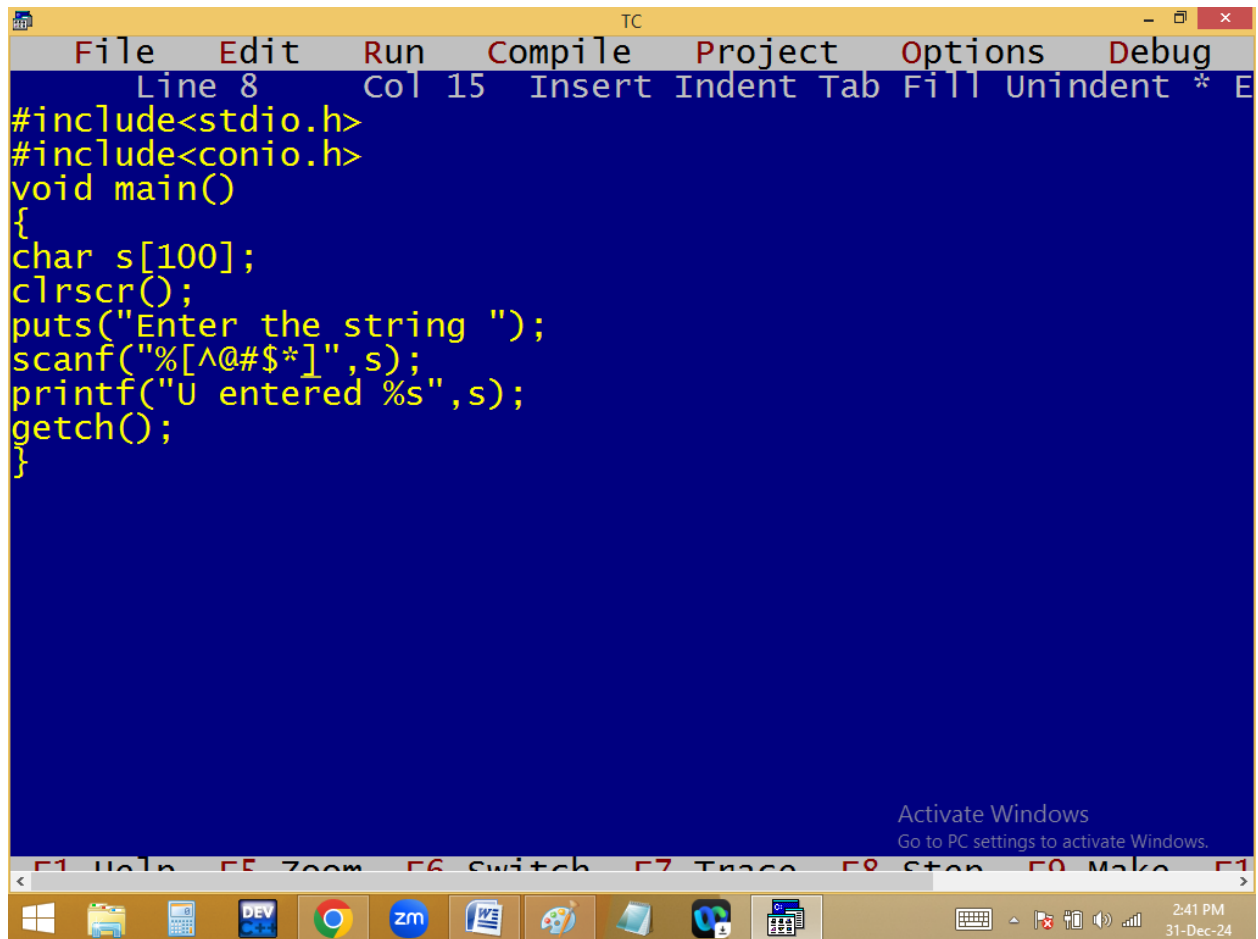



The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. Below the title bar is a menu bar with the following options: File, Edit, Run, Compile, Project, Options, and Debug. Under the "Edit" menu, there is a submenu with the following options: Line 8, Col 15, Insert, Indent, Tab, Fill, Unindent, and *. The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100];
clrscr();
puts("Enter the string ");
scanf("%[^@# $*]",s);
printf("U entered %s",s);
getch();
}
```

At the bottom of the window, there is a status bar with the following text: "F1 Help", "F5 Zoom", "F6 Switch", "F7 Trace", "F8 Stop", "F9 Make", and "F10". To the right of the status bar, there is a message that says "Activate Windows" and "Go to PC settings to activate Windows." The Windows taskbar is visible at the bottom of the screen, showing the Start button, several application icons (including File Explorer, Calculator, DEV, Chrome, Zoom, Word, and a game controller), and the system tray with the date and time (2:41 PM, 31-Dec-24).

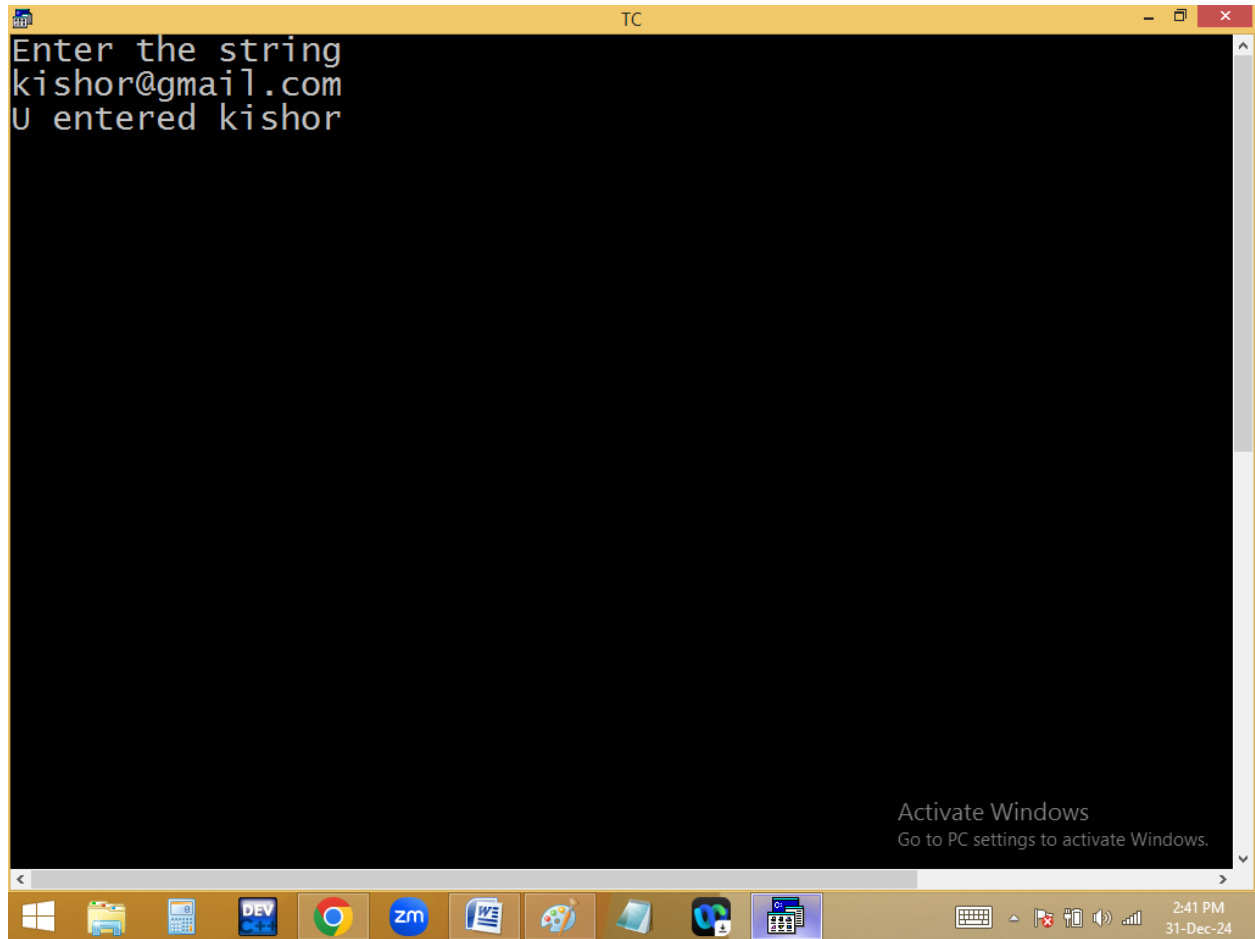

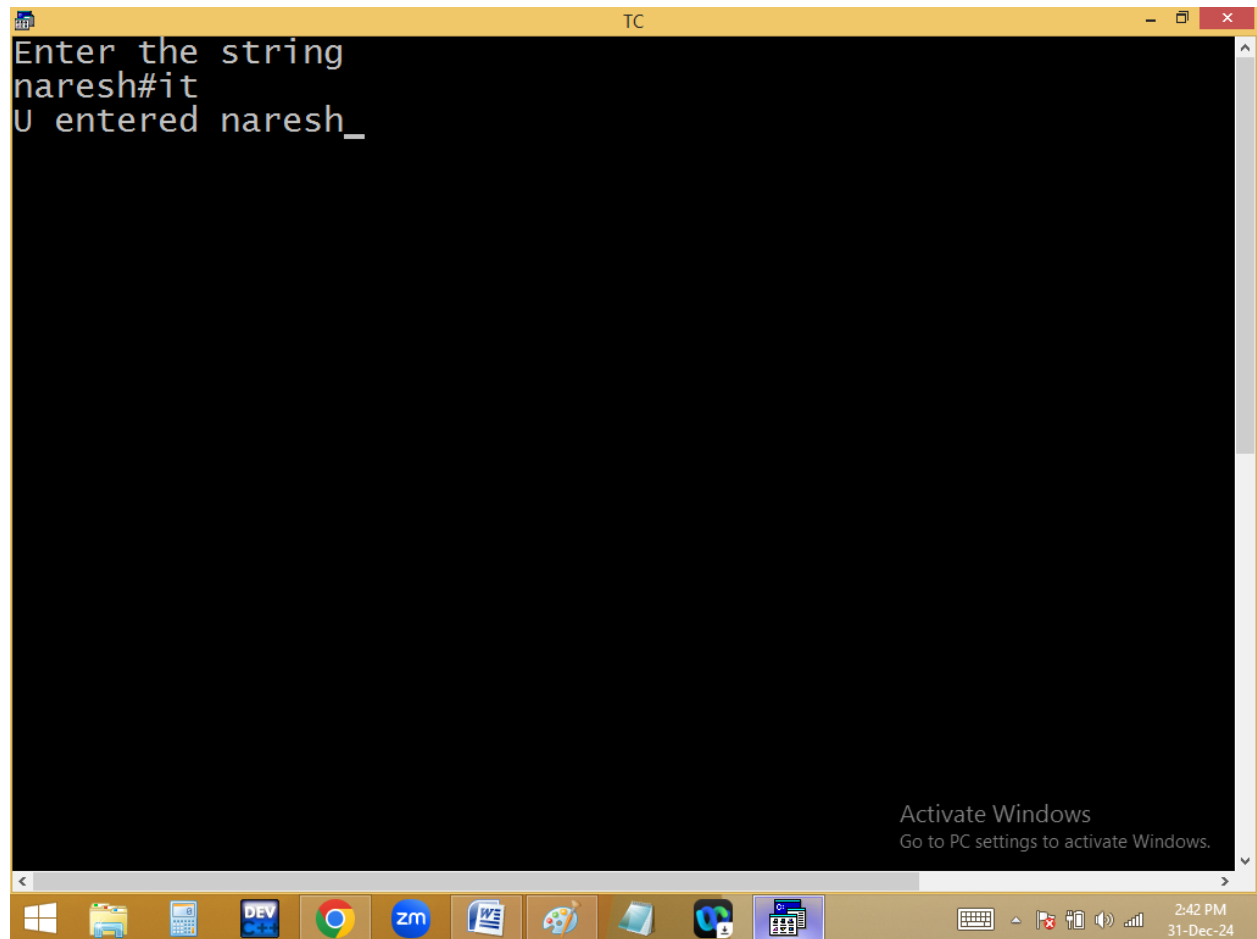


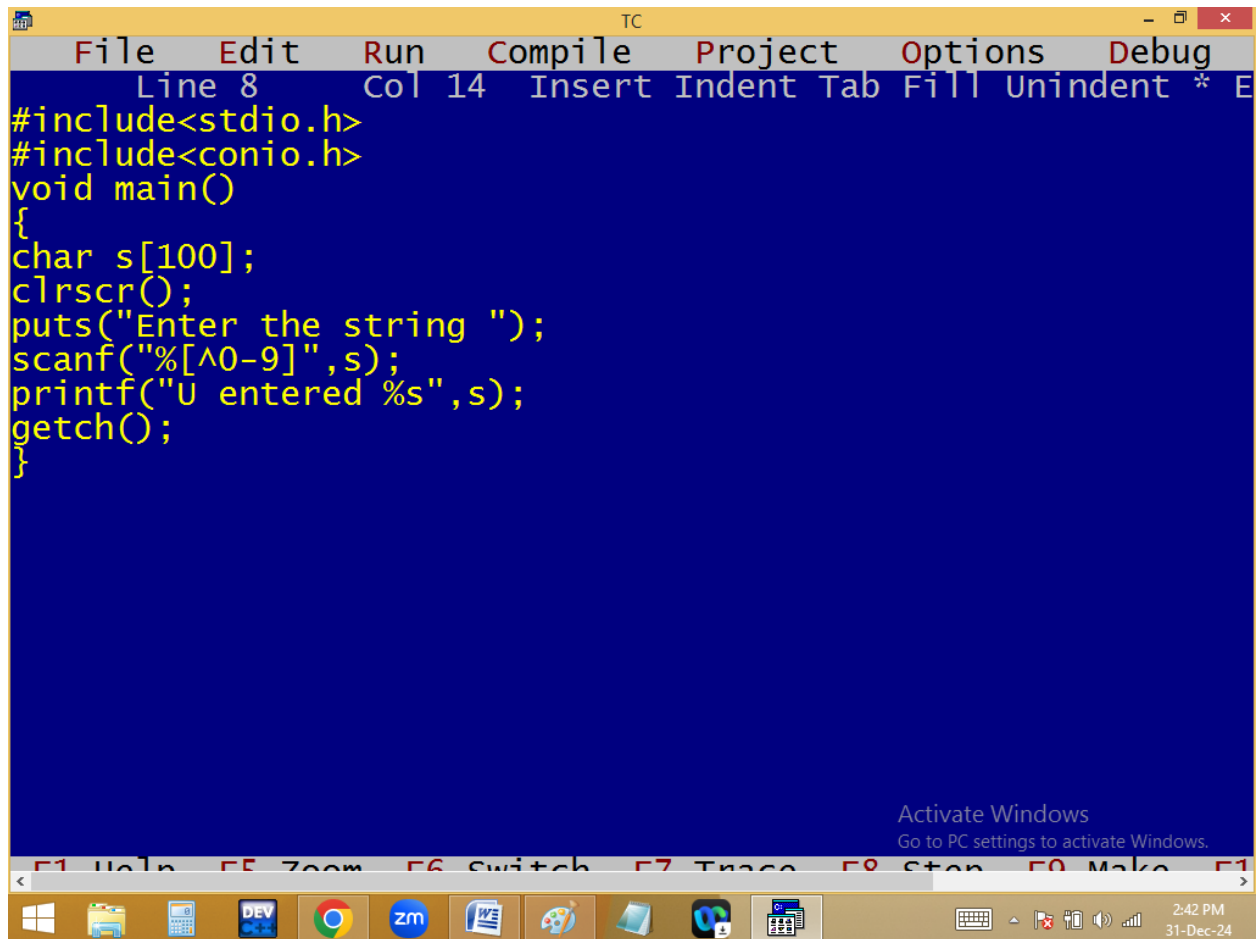


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 8" and "Col 14". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100];
clrscr();
puts("Enter the string ");
scanf("%[^0-9]",s);
printf("U entered %s",s);
getch();
}
```

At the bottom of the window, there is a taskbar with various application icons including Windows Explorer, Calculator, DEV C++, Google Chrome, Zoom, Word, and others. The system tray on the right shows the time as 2:42 PM and the date as 31-Dec-24. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

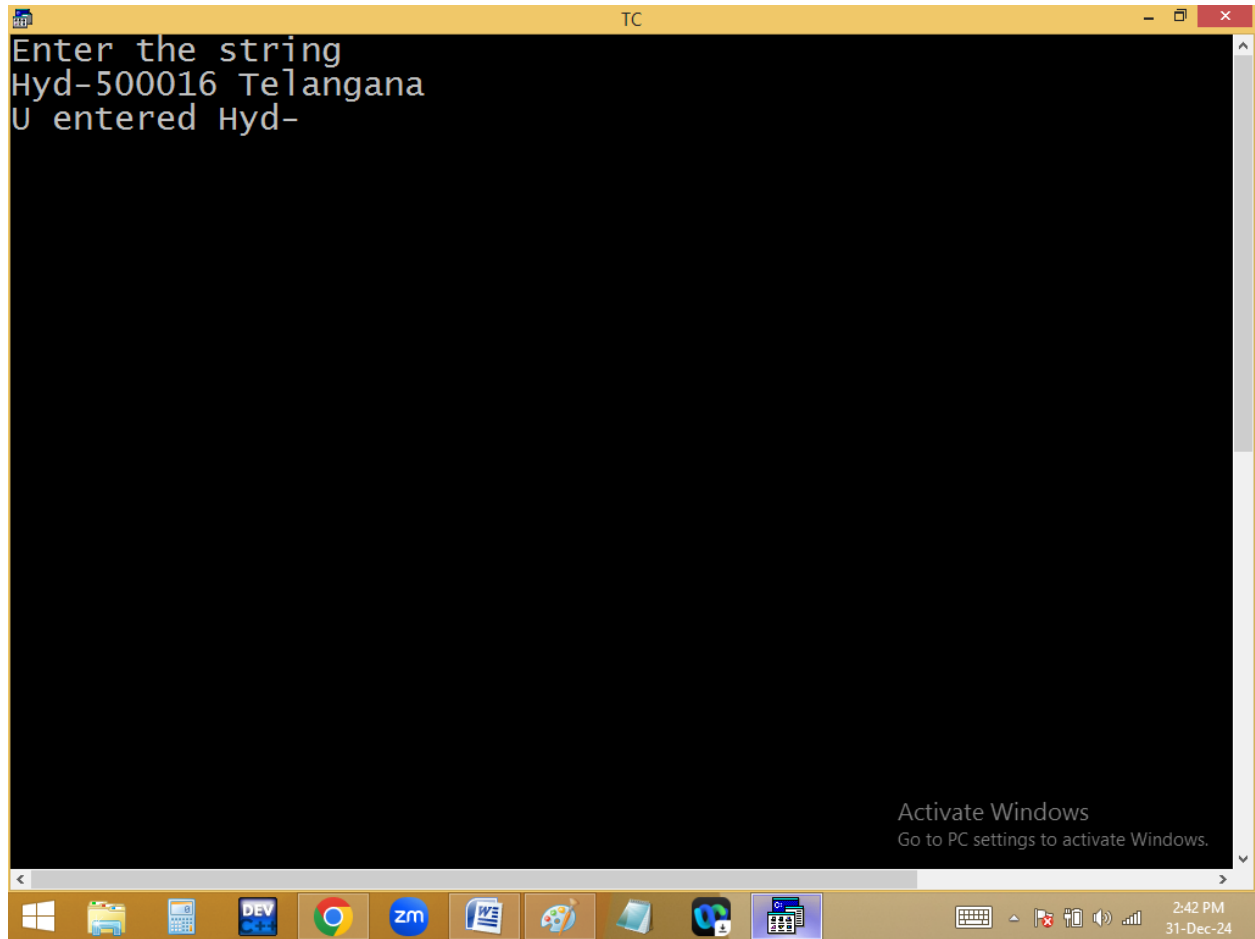


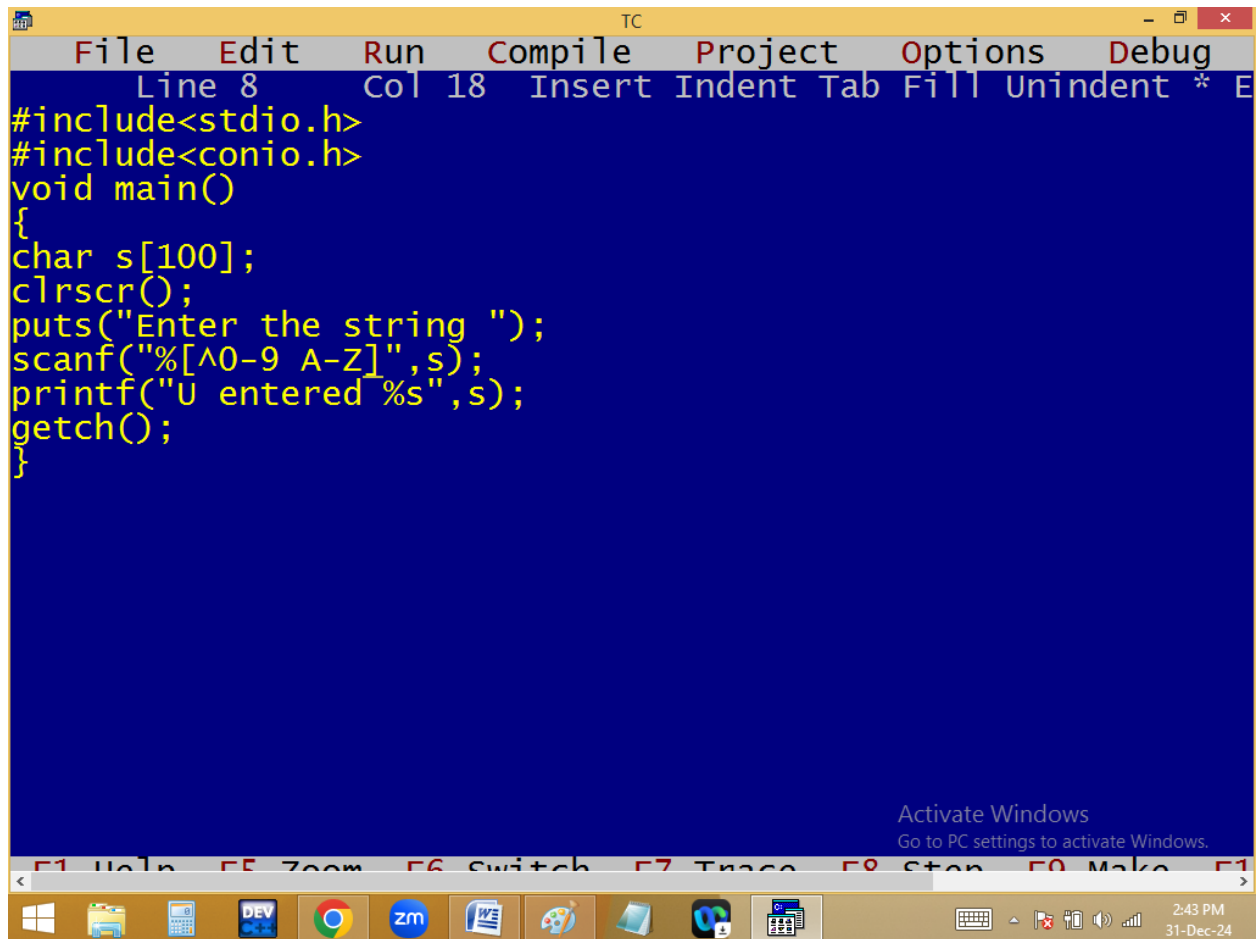



The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 8" and "Col 18". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100];
clrscr();
puts("Enter the string ");
scanf("%[^0-9 A-Z]",s);
printf("U entered %s",s);
getch();
}
```

At the bottom of the window, there is a taskbar with various application icons including Windows Explorer, Calculator, DEV C++, Google Chrome, Zoom, Word, and others. The system tray on the right shows the time as 2:43 PM and the date as 31-Dec-24. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

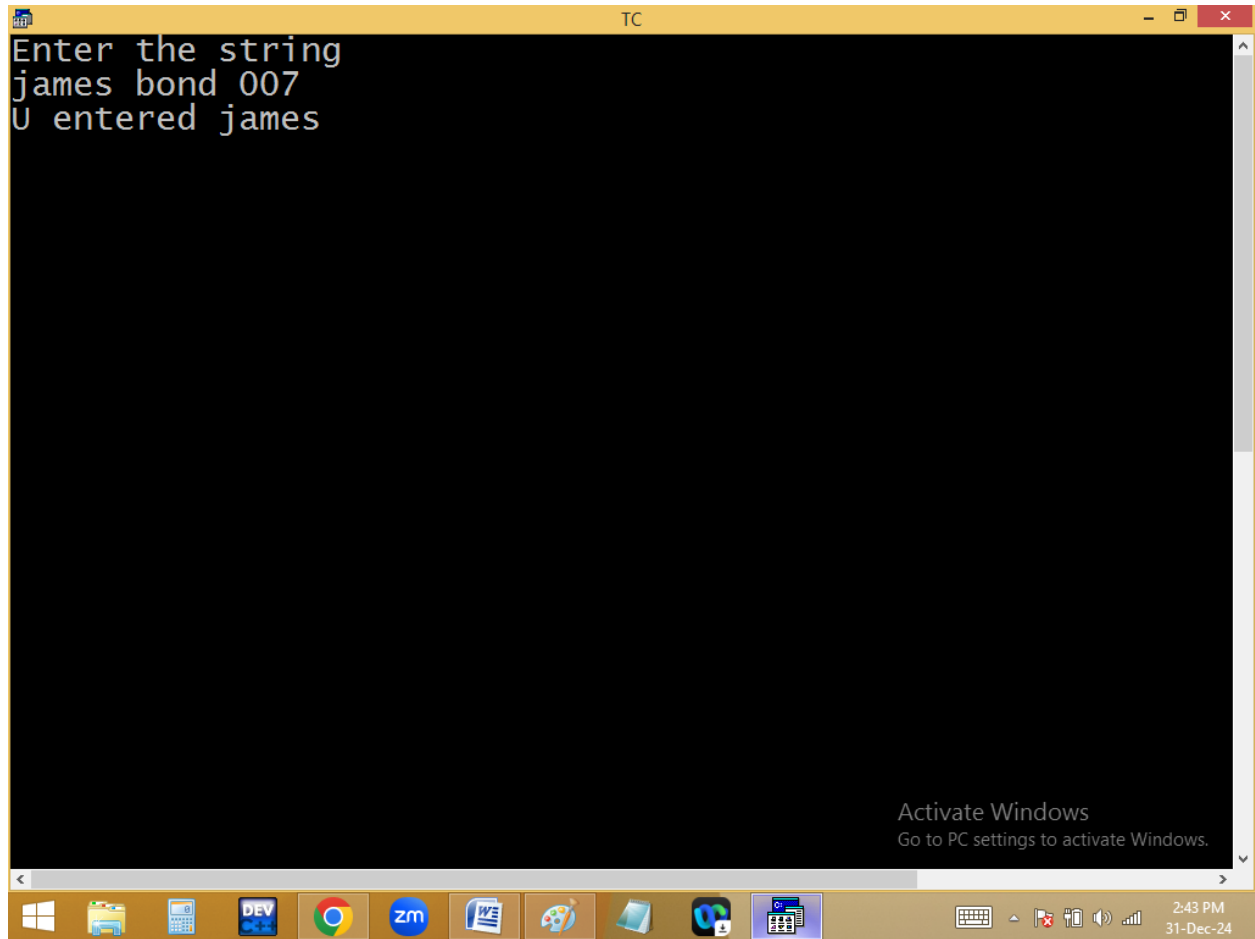

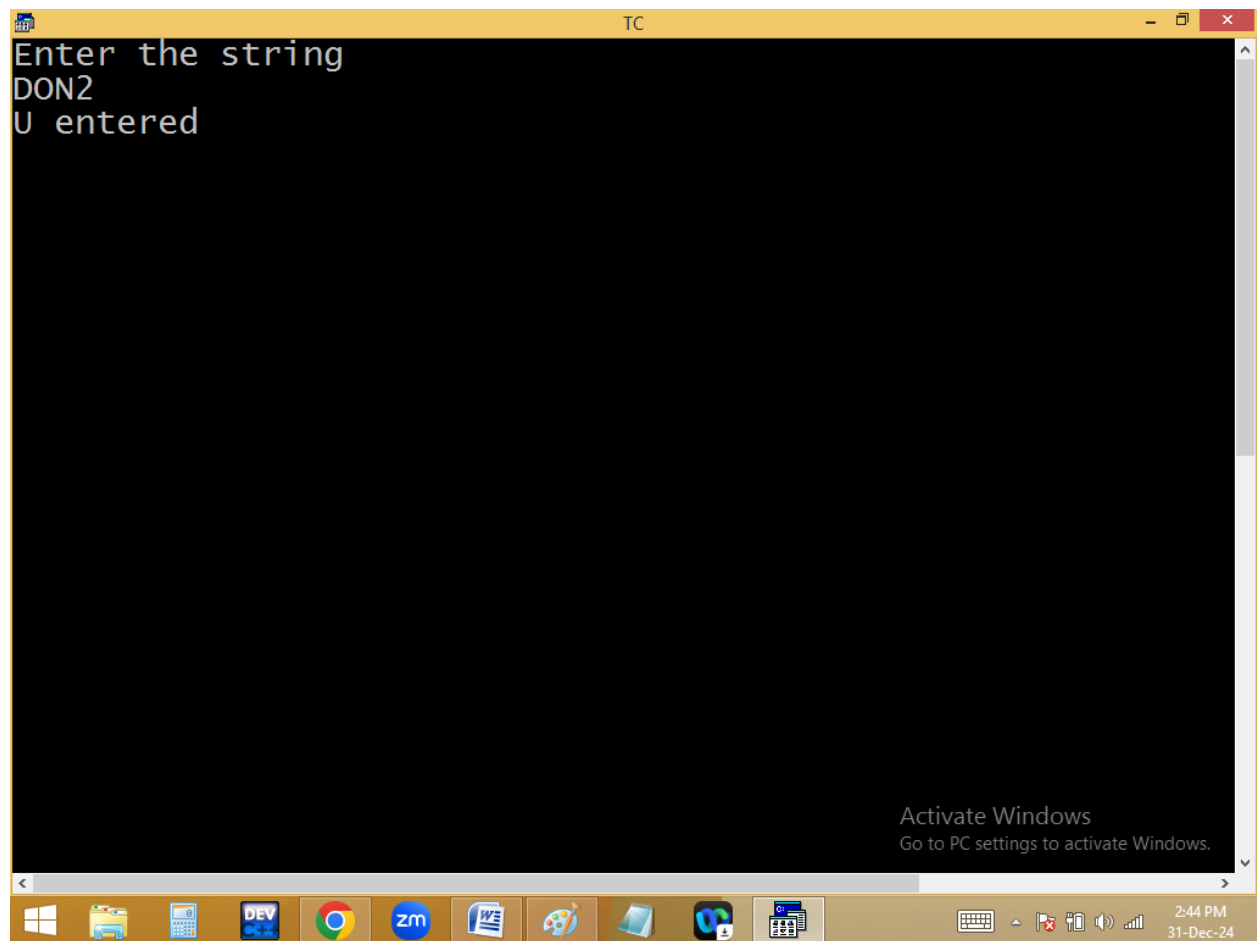

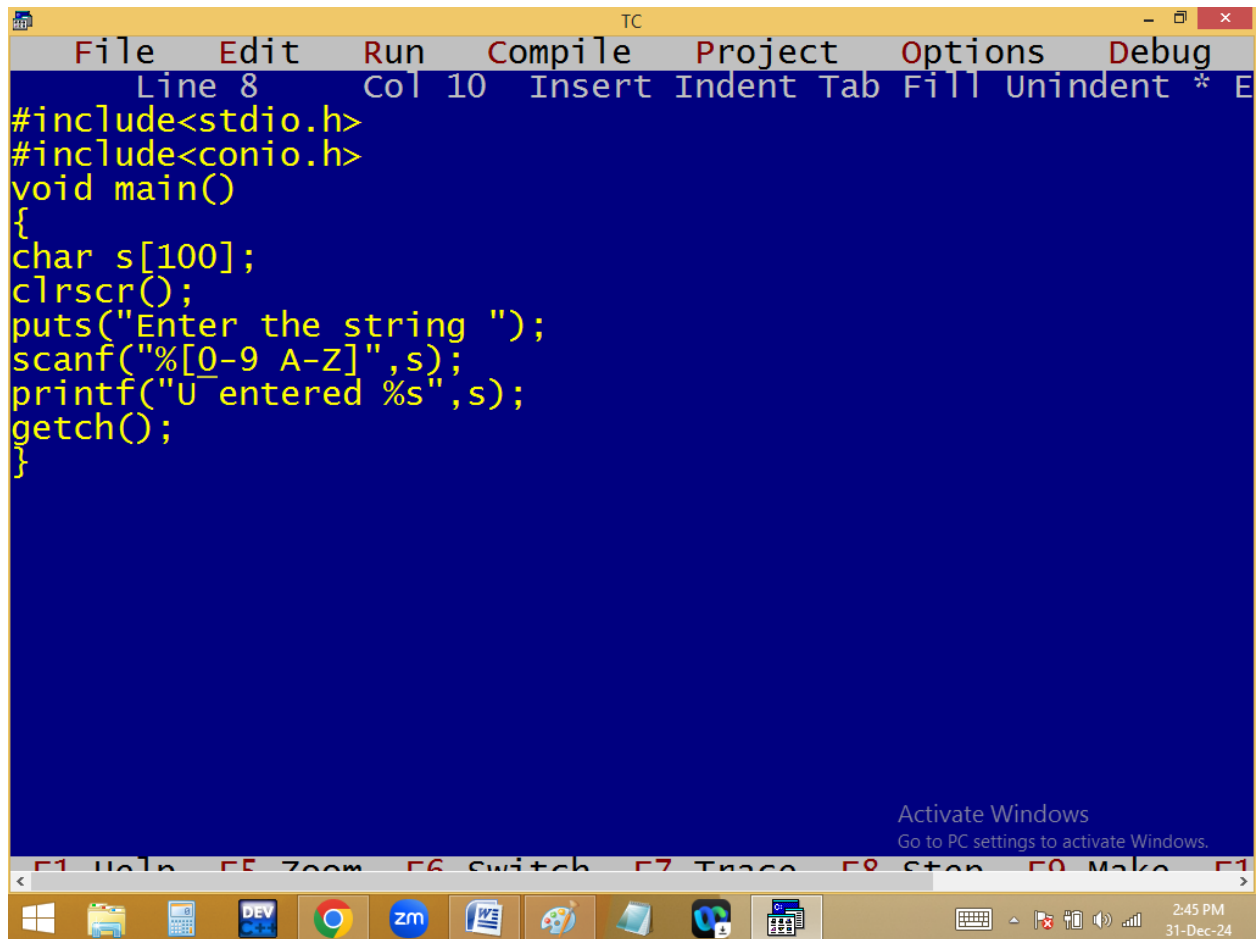



```
TC
File Edit Run Compile Project Options Debug
Line 8 Col 10 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100];
clrscr();
puts("Enter the string ");
scanf("%[0-9 A-Z]",s);
printf("U entered %s",s);
getch();
}
```


Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

Windows taskbar icons: File Explorer, Calculator, DEV C++, Google Chrome, Zoom, Microsoft Word, Paint, VS Code, Task View, System tray (Keyboard, Mouse, Network, Volume, Date/Time: 2:45 PM 31-Dec-24)

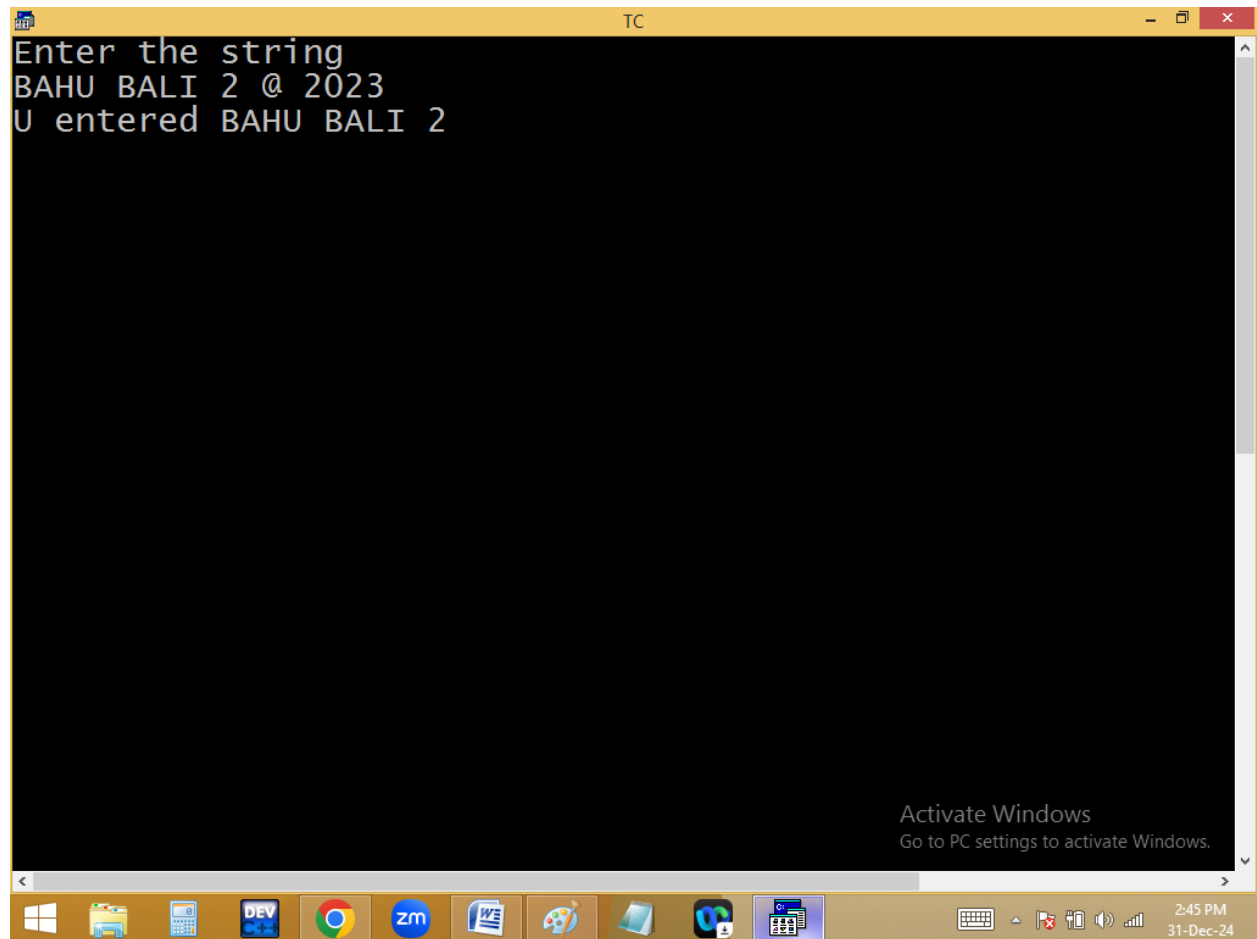

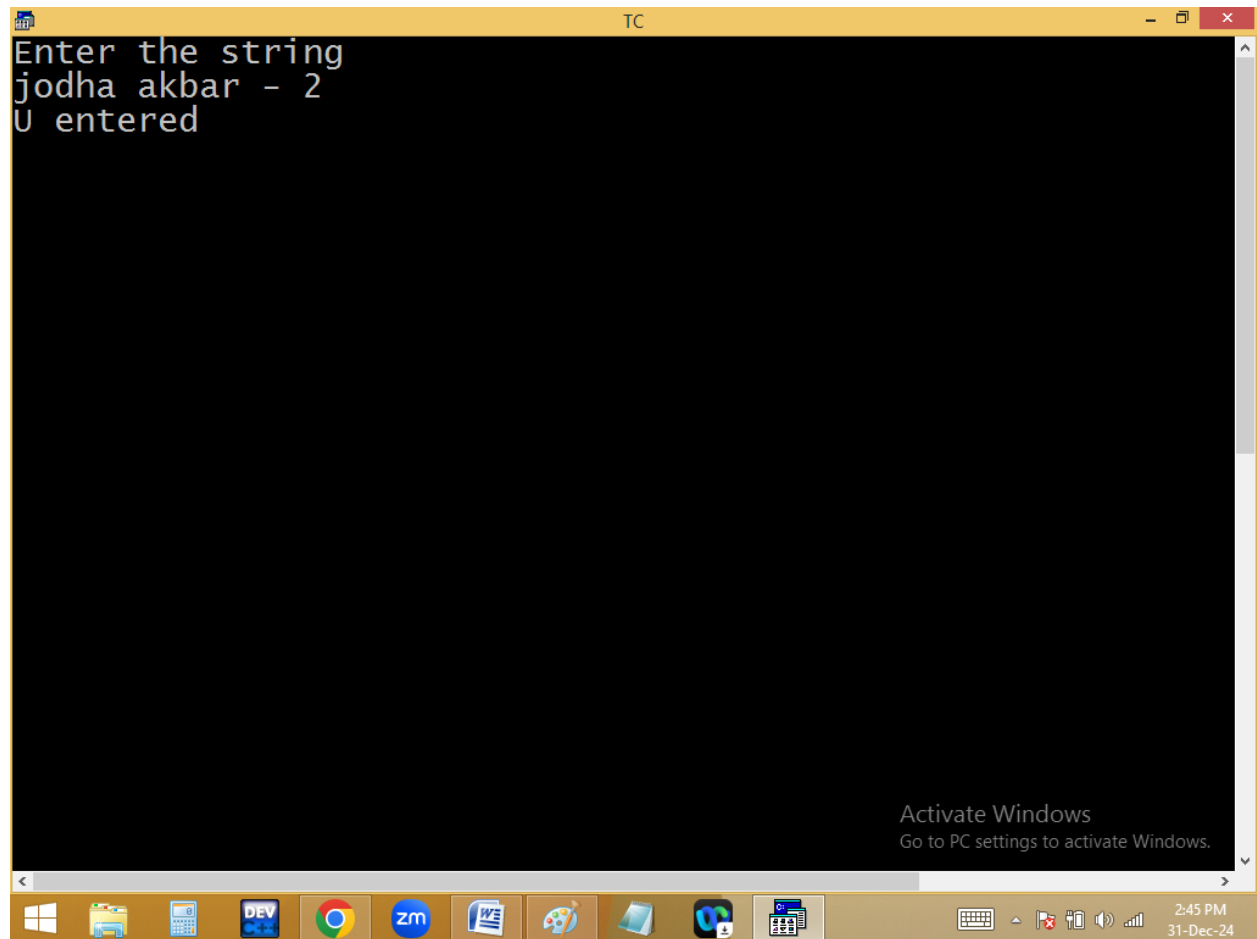


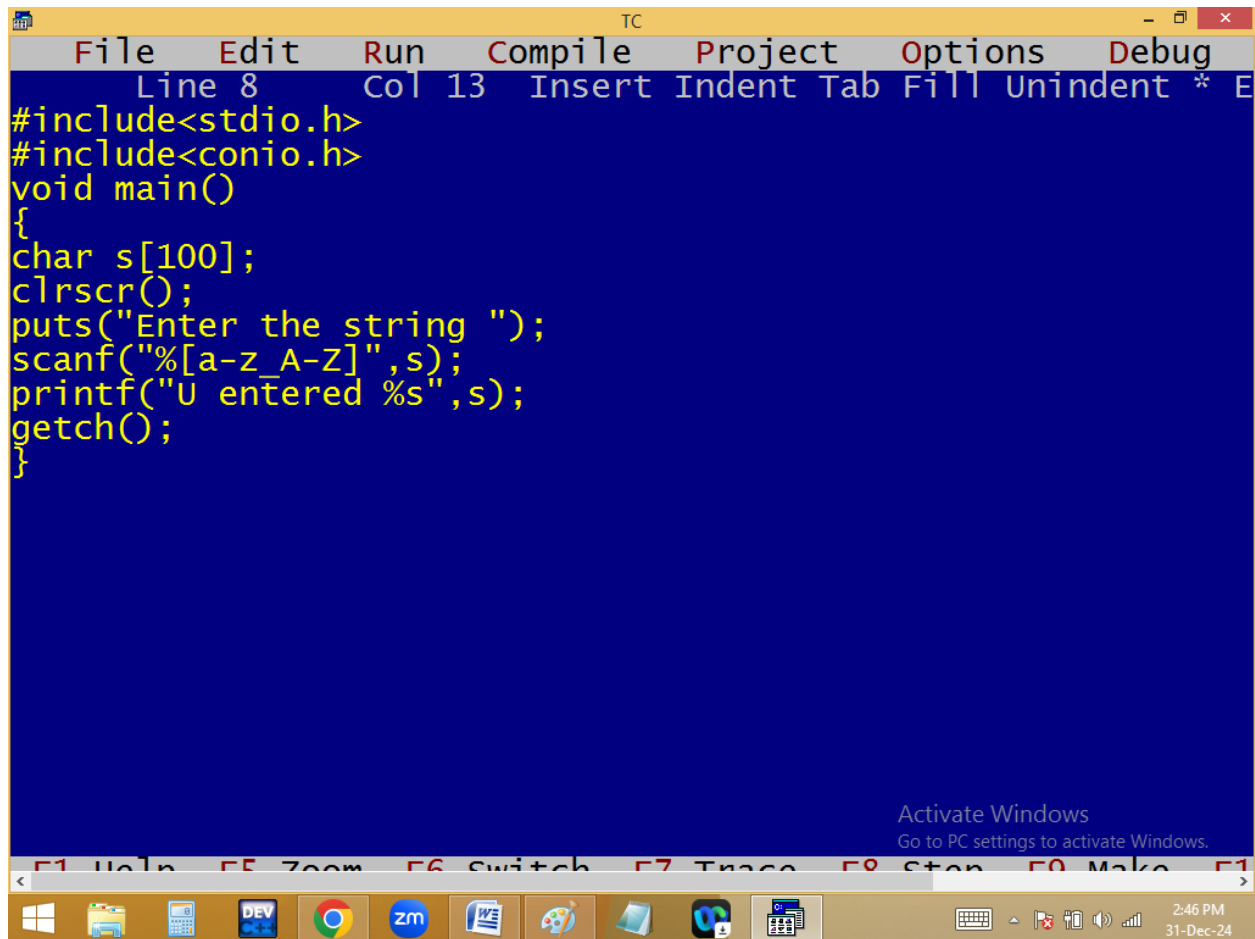


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". Below it is a menu bar with the following options: File, Edit, Run, Compile, Project, Options, and Debug. Under the "Edit" menu, a submenu is visible with the following options: Line 8, Col 13, Insert, Indent, Tab, Fill, Unindent, *, and E. The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100];
clrscr();
puts("Enter the string ");
scanf("%[a-z_A-Z]",s);
printf("U entered %s",s);
getch();
}
```

At the bottom of the window, there is a status bar with the text "Activate Windows" and "Go to PC settings to activate Windows." Below the status bar is a taskbar with several icons: Windows Start button, File Explorer, Calculator, DEV C++, Google Chrome, Zoom, Microsoft Word, a game controller icon, a folder icon, a VS Code icon, and a task view icon. The system tray on the right shows the date and time: "2:46 PM 31-Dec-24".

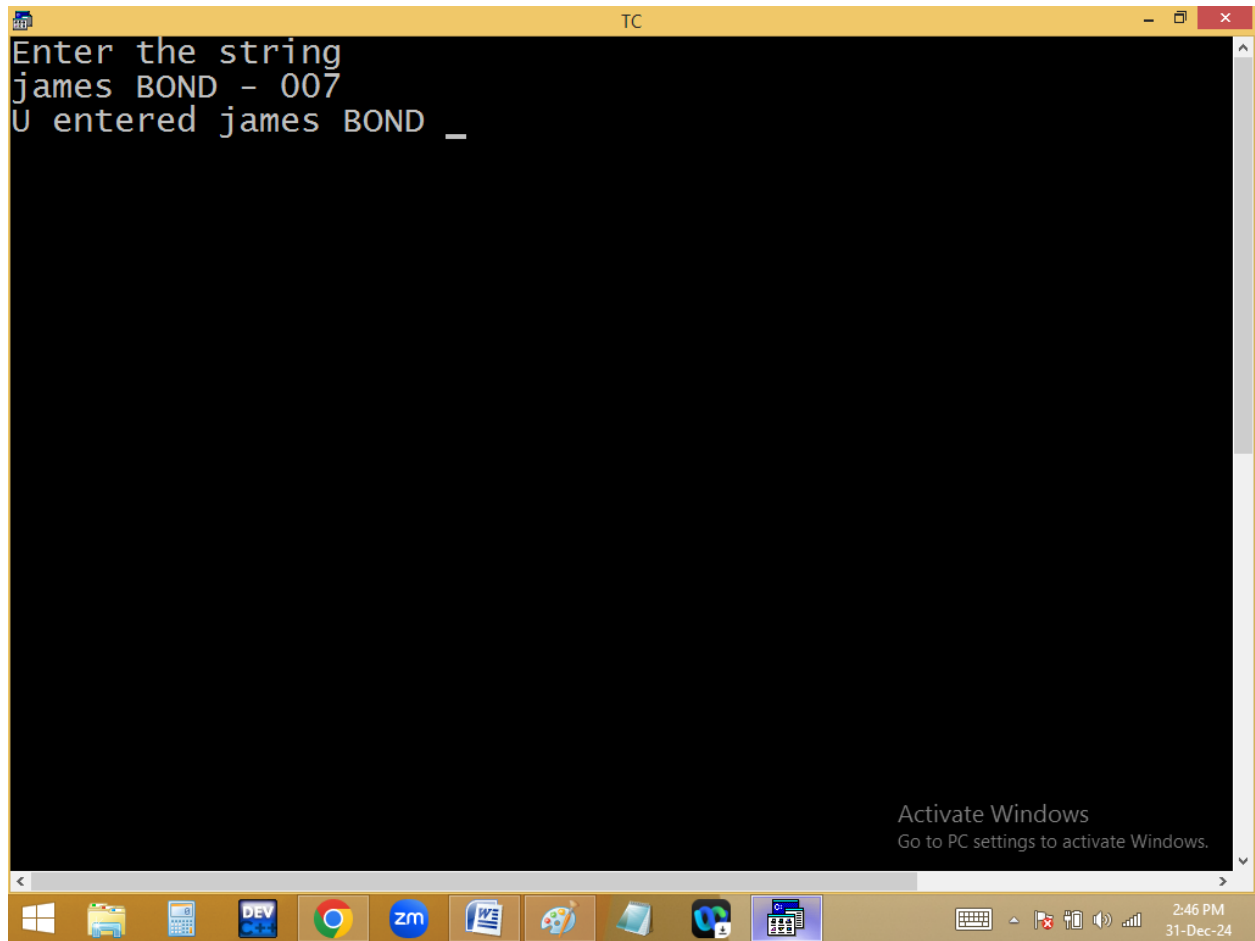

Finding string length and reverse string

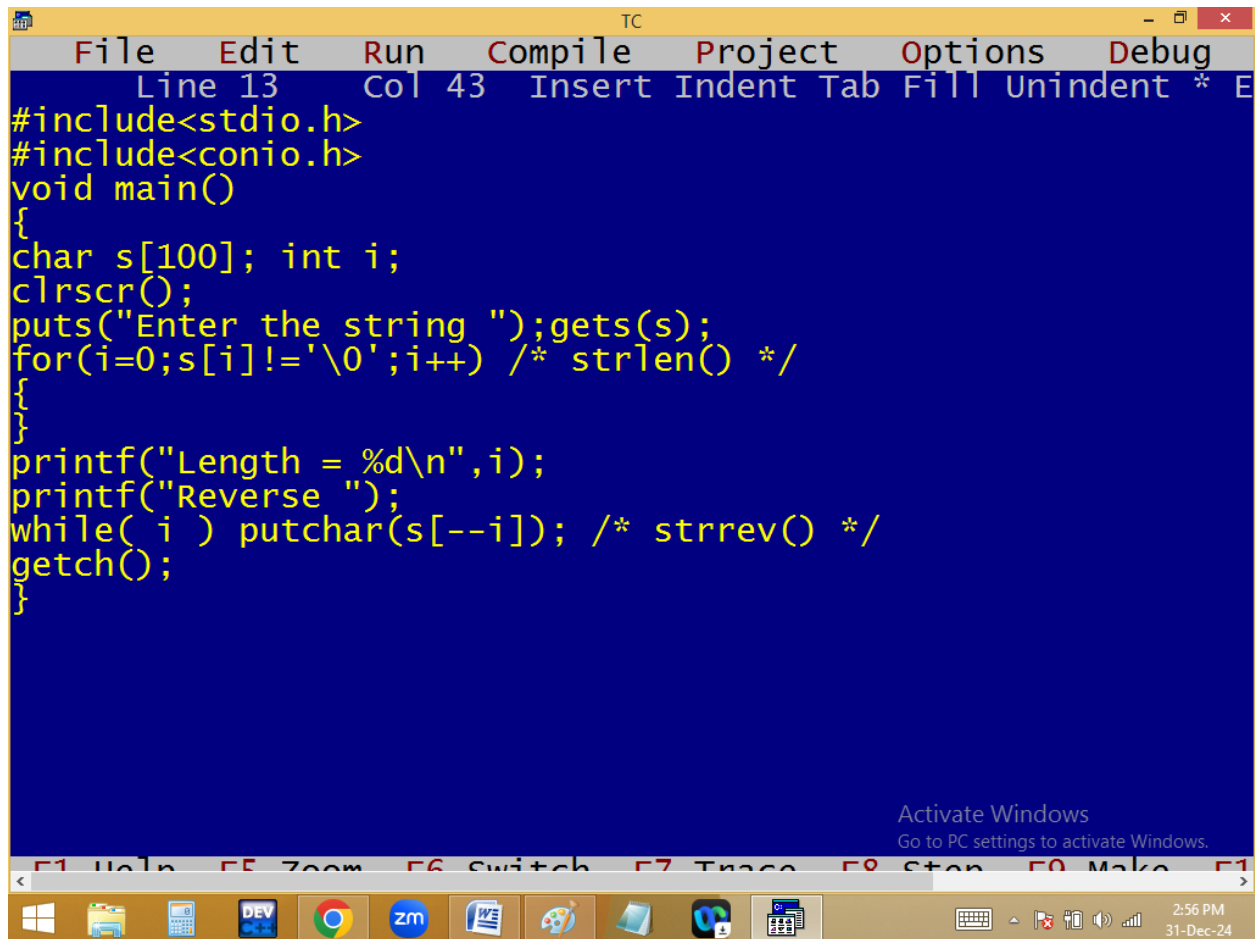



```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 43 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100]; int i;
clrscr();
puts("Enter the string ");gets(s);
for(i=0;s[i]!='\0';i++) /* strlen() */
{
}
printf("Length = %d\n",i);
printf("Reverse ");
while( i ) putchar(s[--i]); /* strrev() */
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

2:56 PM
31-Dec-24

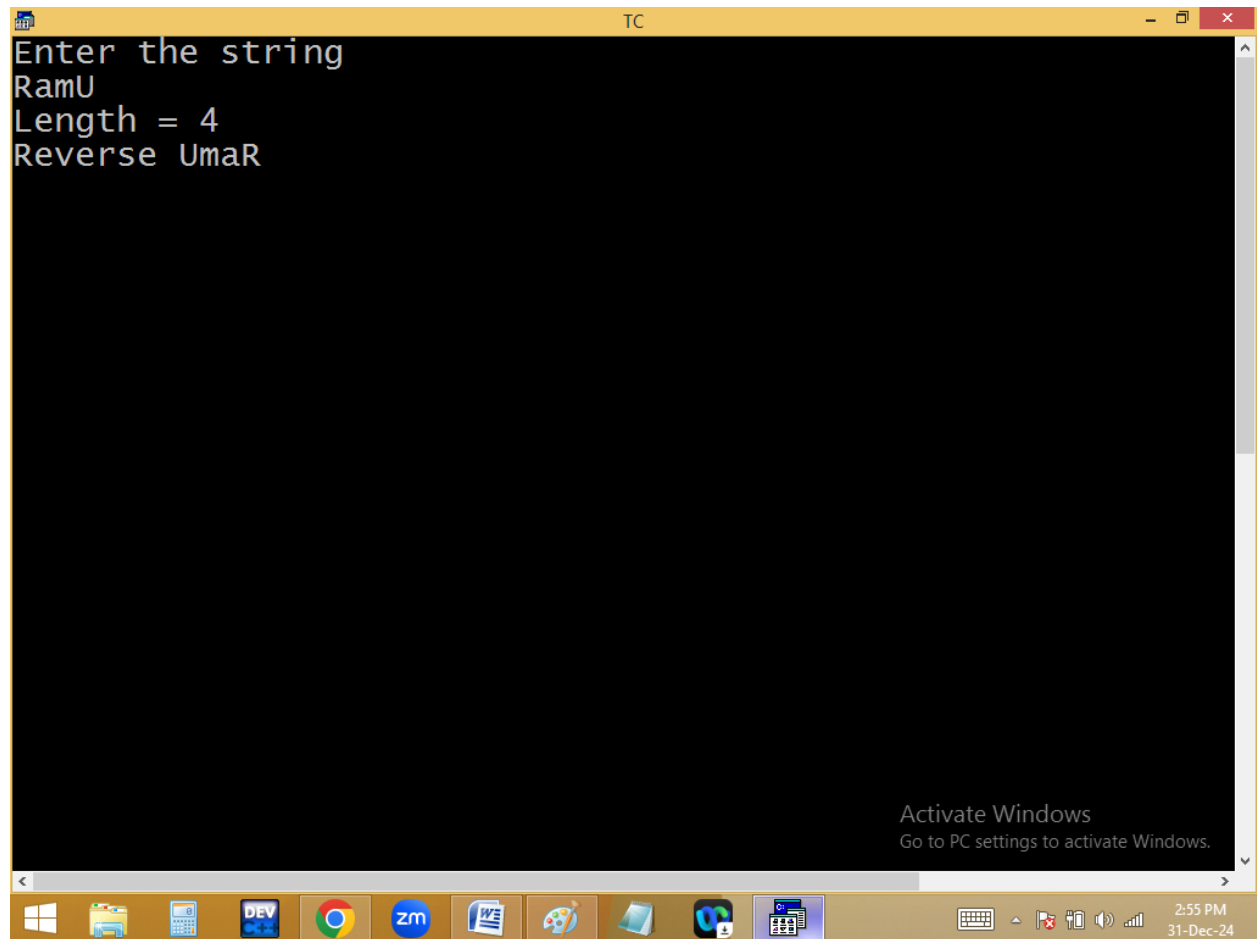

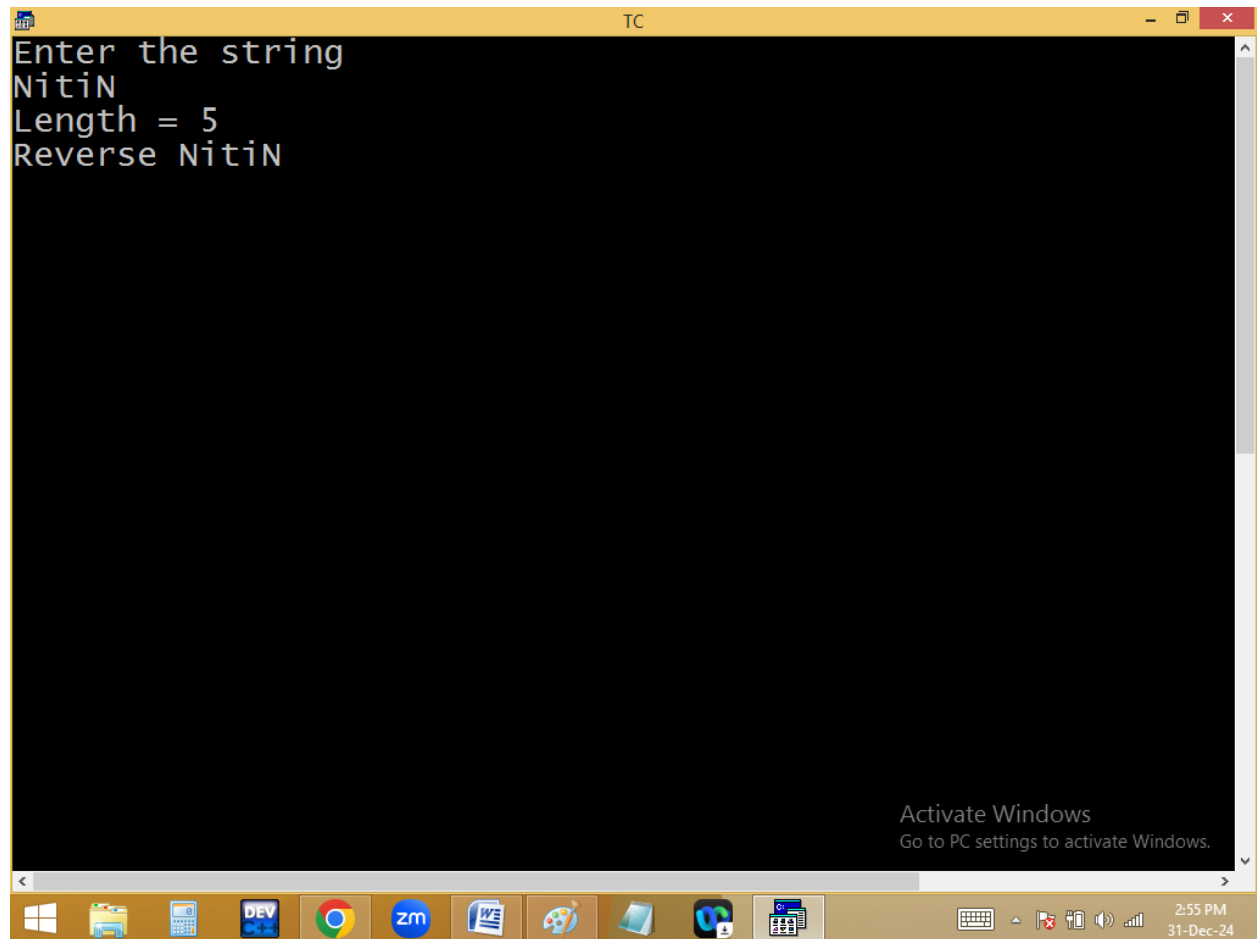


```
TC
Enter the string
rama ramya
Length = 10
Reverse aymar amar_

Activate Windows
Go to PC settings to activate Windows.
```

```
for( i=0; s[i]!='\0';i++)
{
}
p("Length=%d",i);
```


Handwritten red annotations:
A red arrow points from the condition `s[i]!='\0'` to a vertical list of indices: $\begin{matrix} i \\ 0 \\ 1 \\ 2 \\ 3 \\ 4 \end{matrix}$. Another red arrow points from the variable `i` in the `p` function call to the same list.

```
p("Reverse ");
while( i ) p( s[--i] );
```

Handwritten blue annotations:
A blue arrow points from the `while` loop to the word "Reverse". Below the `while` loop, the word "Reverse" is written vertically in blue.

s	r	a	m	u	\0
	0	1	2	3	4

Handwritten blue annotations:
A vertical list of indices: $\begin{matrix} i \\ 4 \\ 3 \\ 2 \\ 1 \\ 0 \end{matrix}$. To the right, the string "u m a r" is written in blue, with a checkmark at the end.

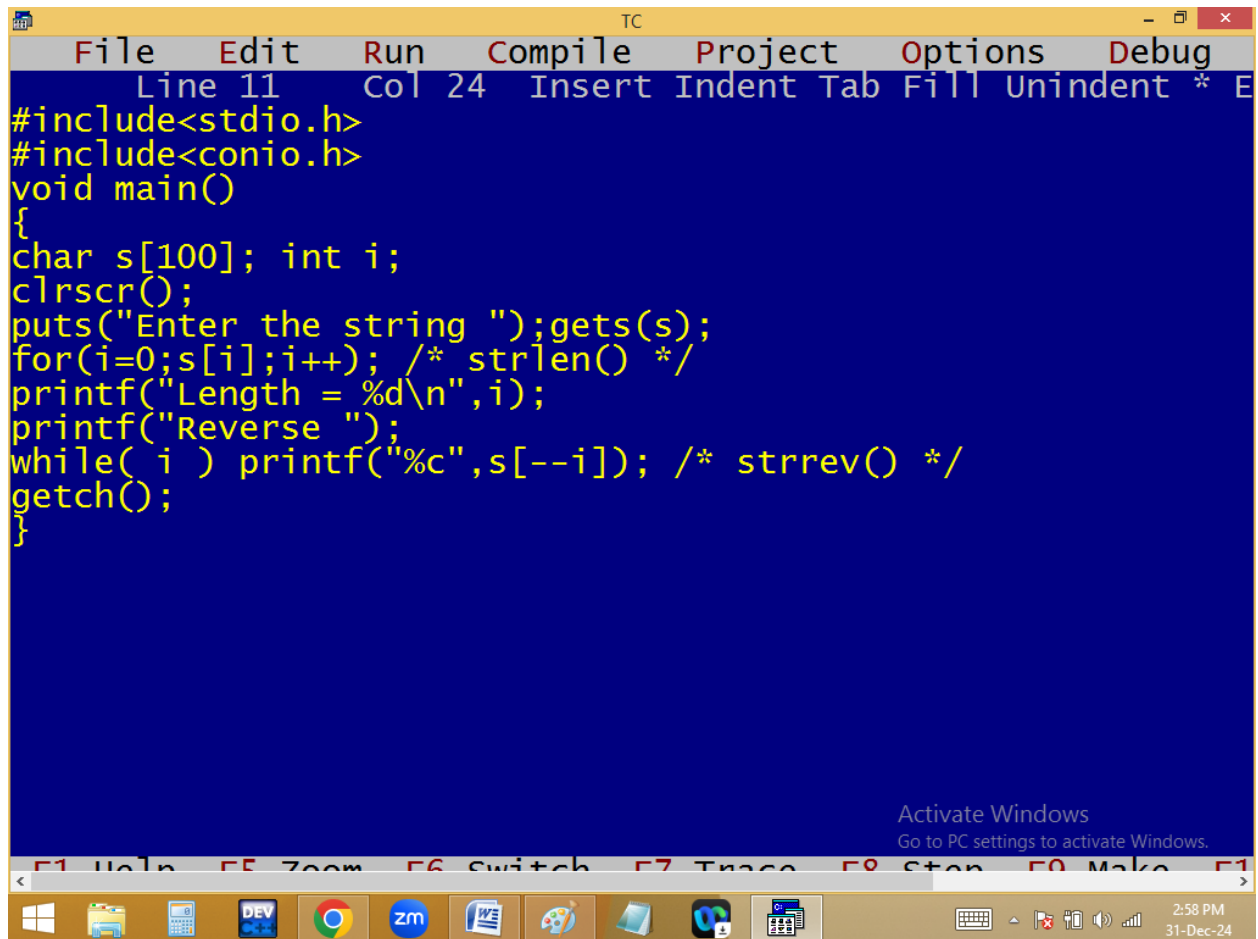


```
TC
File Edit Run Compile Project Options Debug
Line 11 Col 24 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100]; int i;
clrscr();
puts("Enter the string ");gets(s);
for(i=0;s[i];i++); /* strlen() */
printf("Length = %d\n",i);
printf("Reverse ");
while( i ) printf("%c",s[--i]); /* strrev() */
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10


2:58 PM
31-Dec-24

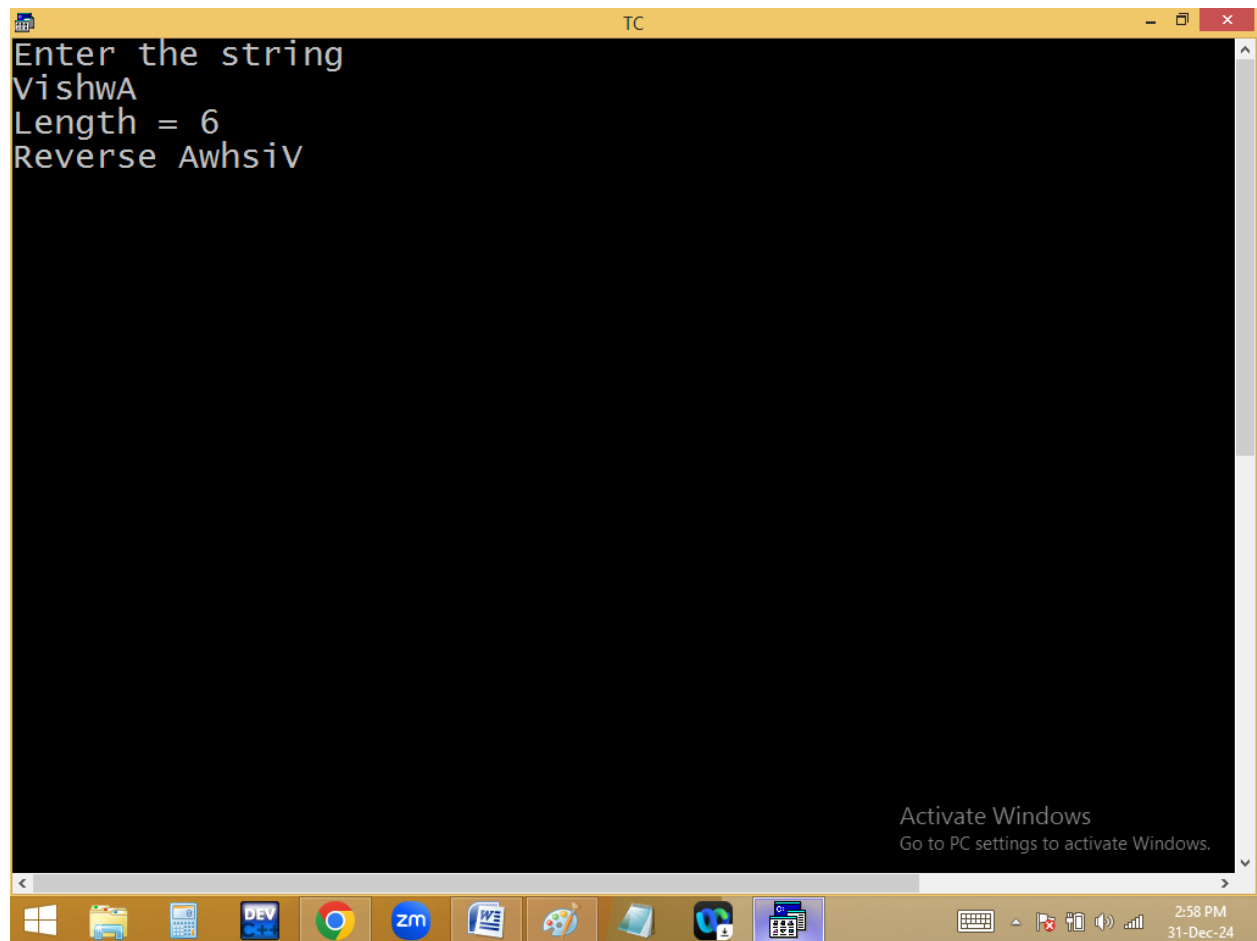

```
TC
Enter the string
VishwA
Length = 6
Reverse AwhsiV

Activate Windows
Go to PC settings to activate Windows.
```


Lower to upper / upper to lower:

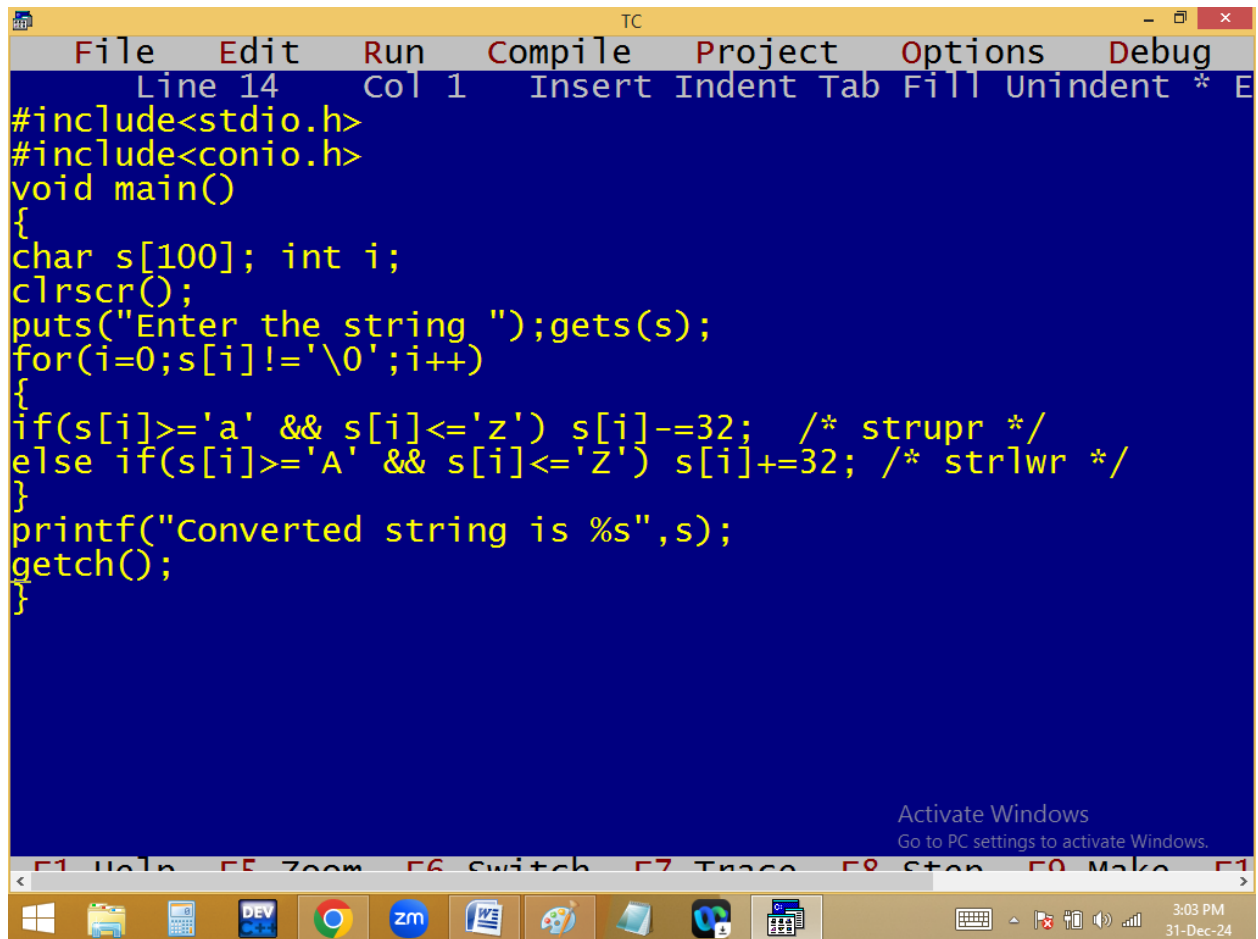

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 14", "Col 1", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code:


```
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100]; int i;
clrscr();
puts("Enter the string ");gets(s);
for(i=0;s[i]!='\0';i++)
{
if(s[i]>='a' && s[i]<='z') s[i]-=32; /*strupr */
else if(s[i]>='A' && s[i]<='Z') s[i]+=32; /*strlwr */
}
printf("Converted string is %s",s);
getch();
}
```

At the bottom of the window, there is a taskbar with various application icons including Windows Explorer, Calculator, DEV C++, Google Chrome, Zoom, Word, and others. The system tray on the right shows the time as 3:03 PM and the date as 31-Dec-24. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

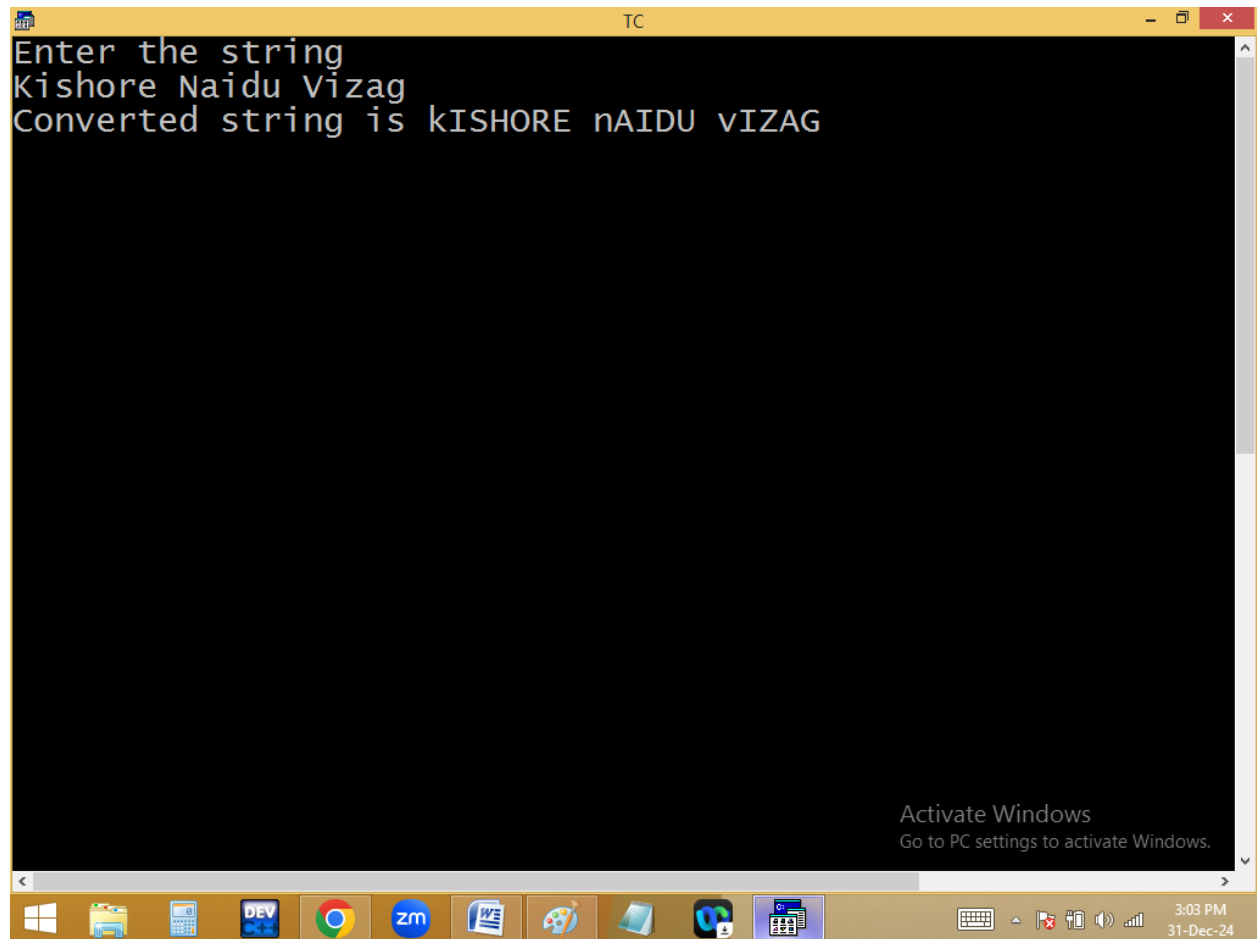

```
TC
Enter the string
James Bond - 007
Converted string is jAMES bOND - 007
```

Activate Windows
Go to PC settings to activate Windows.

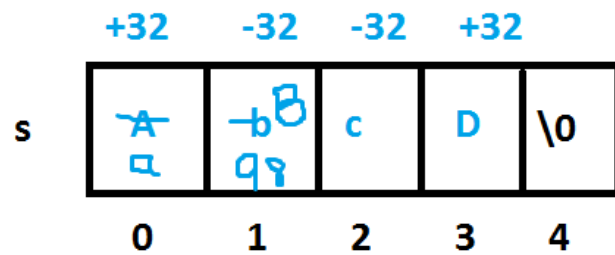

```
for( i=0; s[i]!='\0'; i++ )  
if( s[i]>=a&& s[i]<=z) s[i]-32;  
else if( s[i]>=A && s[i]<=Z) s[i]+=32 = 97
```

Finding no of vowels / consonant / digit / special char / space in given string.

```
TC
File Edit Run Compile Project Options Debug
Line 5 Col 35 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100]; int i,v,d,c,spa,spe; clrscr();
puts("Enter the string ");gets(s);
for(v=c=d=spa=spe=i=0;s[i]!='\0';i++)
{
if(s[i]>='A' && s[i]<='Z') s[i]+=32; /* strlwr */
if(s[i]>='a' && s[i]<='z')
{
if(s[i]=='a' || s[i]=='e' || s[i]=='i' || s[i]=='o' || s[i]=='u')
v++; else c++;
}
else if(s[i]>='0' && s[i]<='9')d++;
else if(s[i]==' ')spa++;
else spe++;
}
printf("Vowels=%d, Consonants=%d, Digits=%d, Spaces=%d,
Special=%d",v,c,d,spa,spe);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

3:24 PM
31-Dec-24


```

Enter the string
Bahu Bali - 2
Vowels=4, Consonants=4, Digits=1, Spaces=3, Special=1


```

Activate Windows
Go to PC settings to activate Windows.

```

for(v=c=d=spa=spe,i=0;s[i]!='\0';i++)
{
    if(s[i]>='A'&& s[i]<='Z')s[i]+=32;
    if(s[i]>='a'&& s[i]<='z')
    {
        if(s[i]=='a' || s[i]=='e' || s[i]=='o' || s[i]=='u')v++;
        else c++;
    }
    else if(s[i]>='0' && s[i]<='9')d++;
    else if(s[i]==' ')spa++;
    else spe++;
}
p( v, c, d, spa, spe );

```

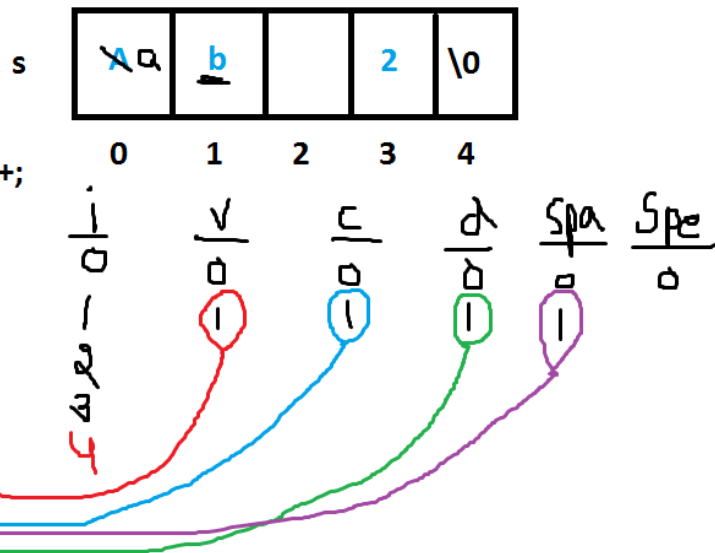


**Convert lower / upper / digits / space / special
with @ / # / \$ / * / ~**


```
TC
File Edit Run Compile Project Options Debug
Line 16 Col 1 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100]; int i; clrscr();
puts("Enter the string "); gets(s);
for(i=0; s[i]!='\0'; i++)
{
if(s[i]>='A' && s[i]<='Z') s[i]='#';
else if(s[i]>='a' && s[i]<='z') s[i]='@';
else if(s[i]>='0' && s[i]<='9') s[i]='$';
else if(s[i]==' ') s[i]='*';
else s[i]='~';
}
printf("Converted string is %s", s);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

3:28 PM
31-Dec-24

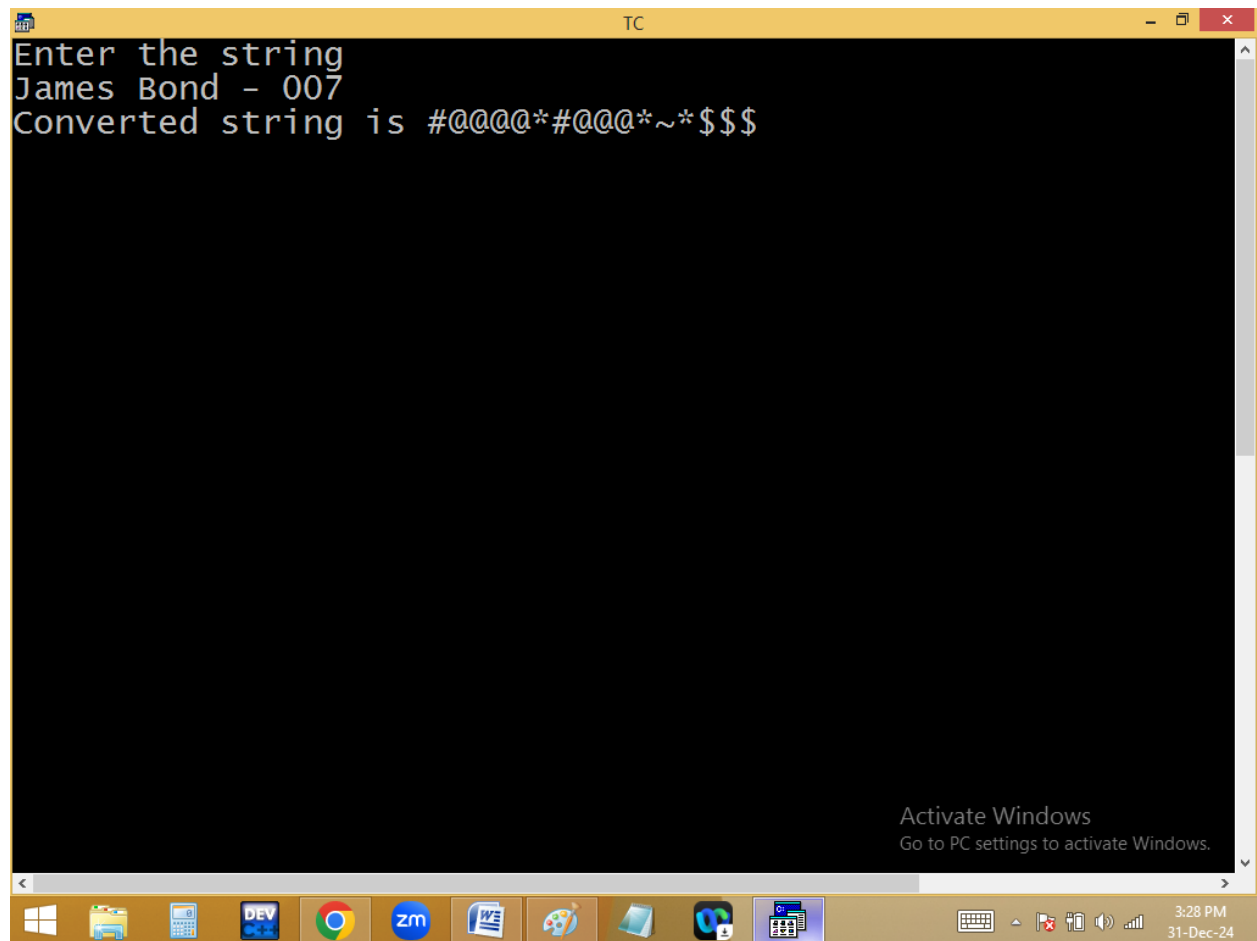

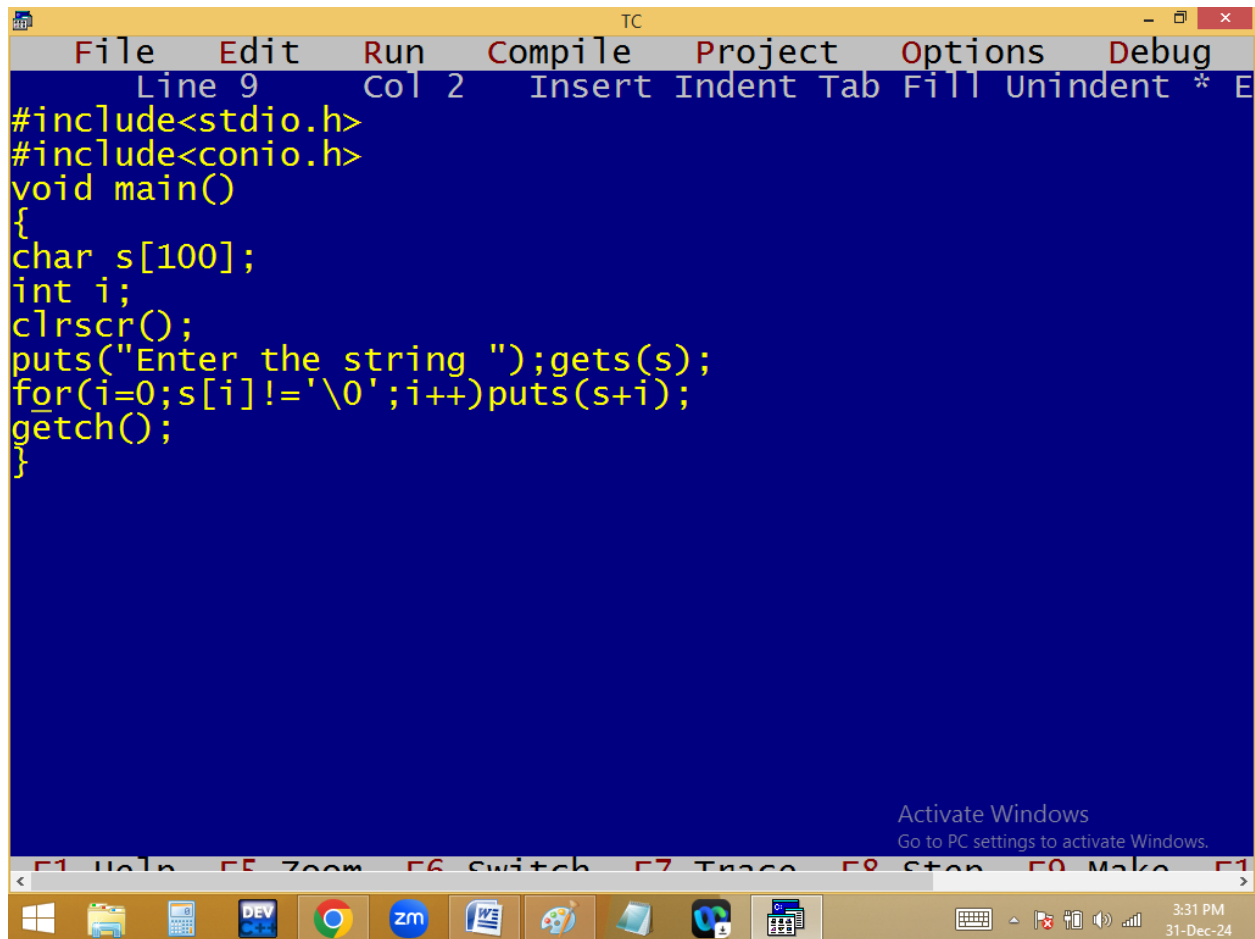


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 9", "Col 2", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100];
int i;
clrscr();
puts("Enter the string ");gets(s);
for(i=0;s[i]!='\0';i++)puts(s+i);
getch();
}
```

At the bottom of the window, there is a taskbar with icons for Windows, File Explorer, Calculator, DEV C++, Google Chrome, Zoom, Word, Paint, and a folder icon. The system tray on the right shows the time as 3:31 PM and the date as 31-Dec-24. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.


```
Enter the string
Bharathi
Bharathi
harathi
arathi
rathi
athi
thi
hi
i
_
```

Activate Windows
Go to PC settings to activate Windows.

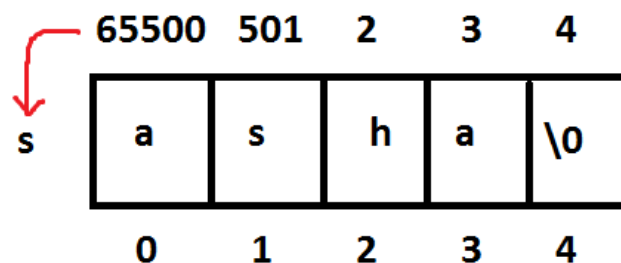

```
for( i=0; s[i]!='\0';i++)puts(s+i);
```


$65500 + 0 * 1 \Rightarrow 65500$ to $\backslash 0 \Rightarrow$ **asha**
 $65500 + 1 * 1 \Rightarrow 65501$ to $\backslash 0 \Rightarrow$ **sha**
 $65500 + 2 * 1 \Rightarrow 65502$ to $\backslash 0 \Rightarrow$ **ha**
 $65500 + 3 * 1 \Rightarrow 65503$ to $\backslash 0 \Rightarrow$ **a**
 $65500 + 4 * 1 \Rightarrow 65504 = '\backslash 0' \neq '\backslash 0' \Rightarrow$ **false**

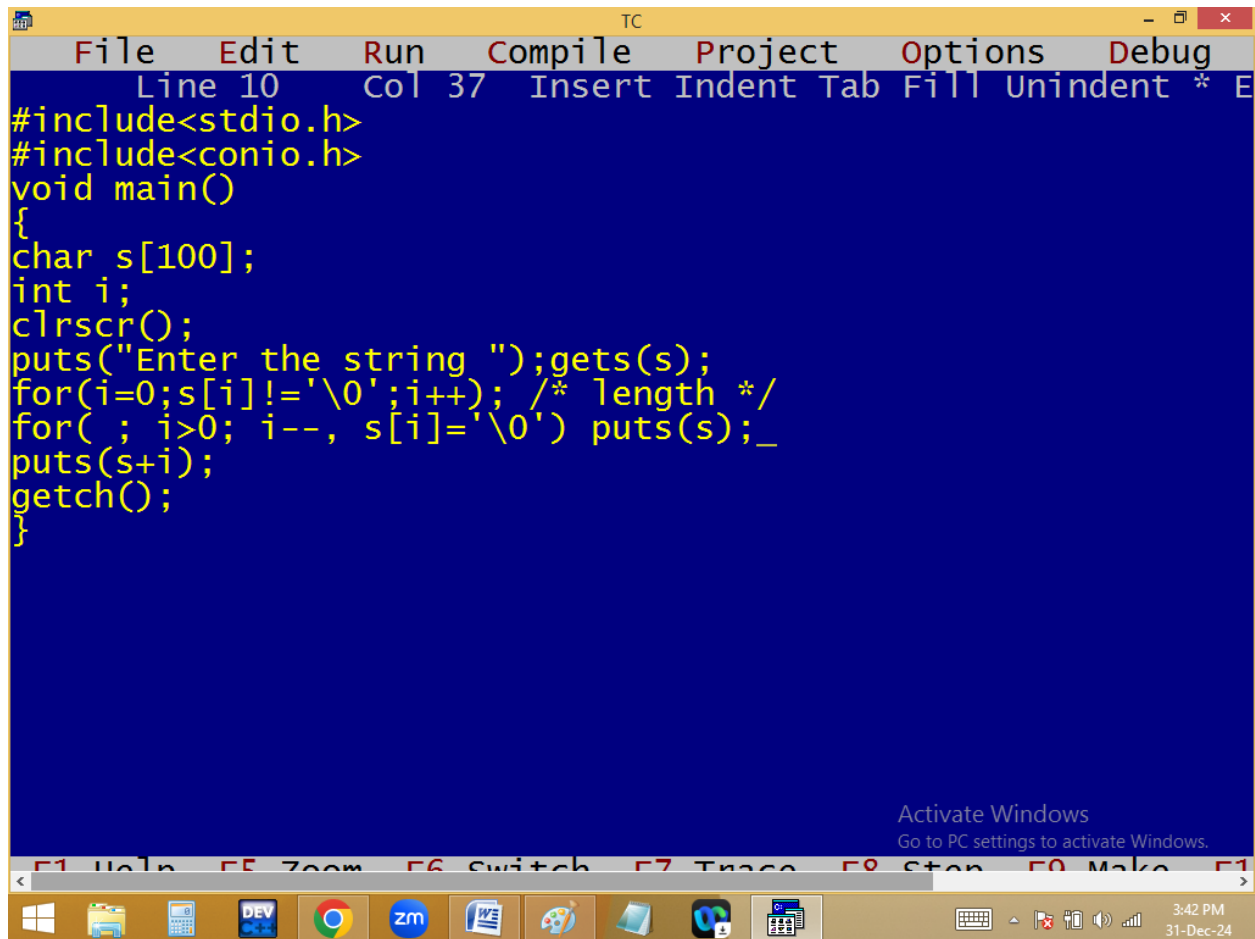


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status line indicates "Line 10 Col 37" and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and a list of asterisks followed by "E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100];
int i;
clrscr();
puts("Enter the string ");gets(s);
for(i=0;s[i]!='\0';i++); /* length */
for( ; i>0; i--, s[i]='\0') puts(s);_
puts(s+i);
getch();
}
```

At the bottom of the window, there is a taskbar with various application icons including Windows Explorer, Calculator, DEV C++, Google Chrome, Zoom, Word, and others. On the right side of the taskbar, the system clock shows "3:42 PM" and the date "31-Dec-24". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window, with the text "Go to PC settings to activate Windows."

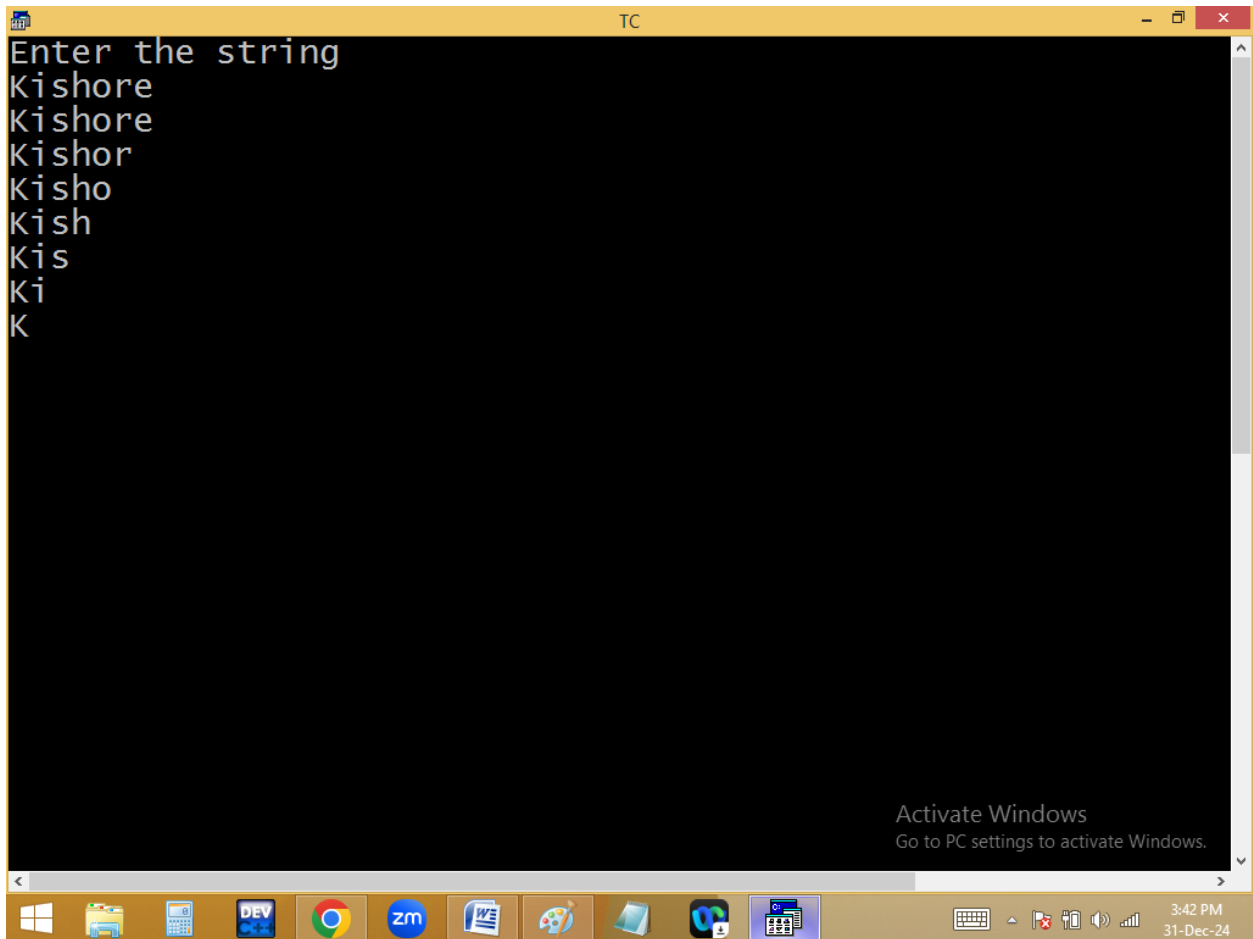


```
for( i=0; s[i]!='\0';i++); len=4
```

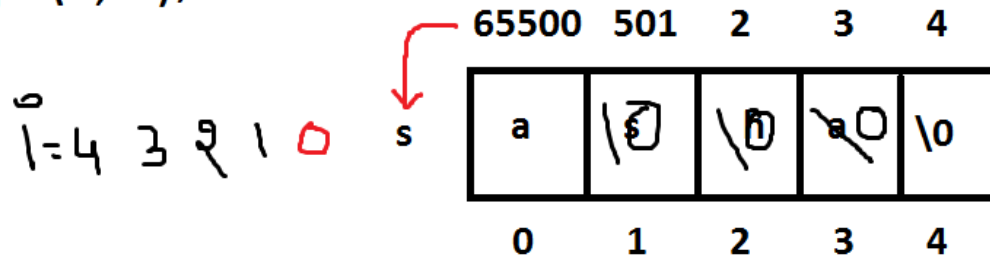

```
for( ; i>0 ; i--, s[i]='\0') puts(s);
```

↓

65500 to \0 ==> asha
 65500 to \0 ==> ash
 65500 to \0 ==> as
 65500 to \0 ==> a

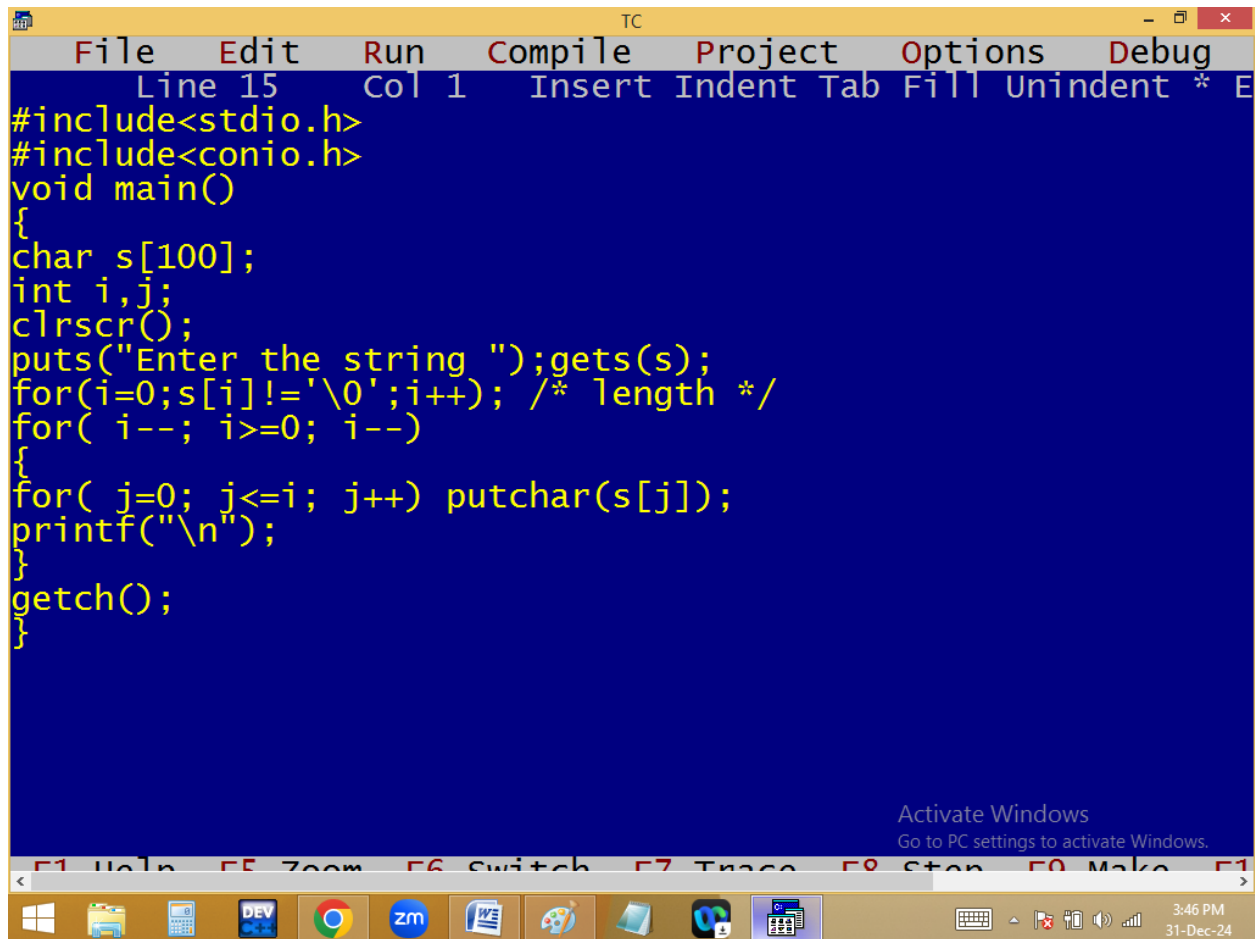


```
TC
File Edit Run Compile Project Options Debug
Line 15 Col 1 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100];
int i,j;
clrscr();
puts("Enter the string ");gets(s);
for(i=0;s[i]!='\0';i++); /* length */
for( i--; i>=0; i--)
{
for( j=0; j<=i; j++) putchar(s[j]);
printf("\n");
}
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

Windows taskbar icons: File Explorer, Calculator, DEV C++, Google Chrome, Zoom, Word, Paint, VS Code, Task Manager.

System tray: 3:46 PM, 31-Dec-24.

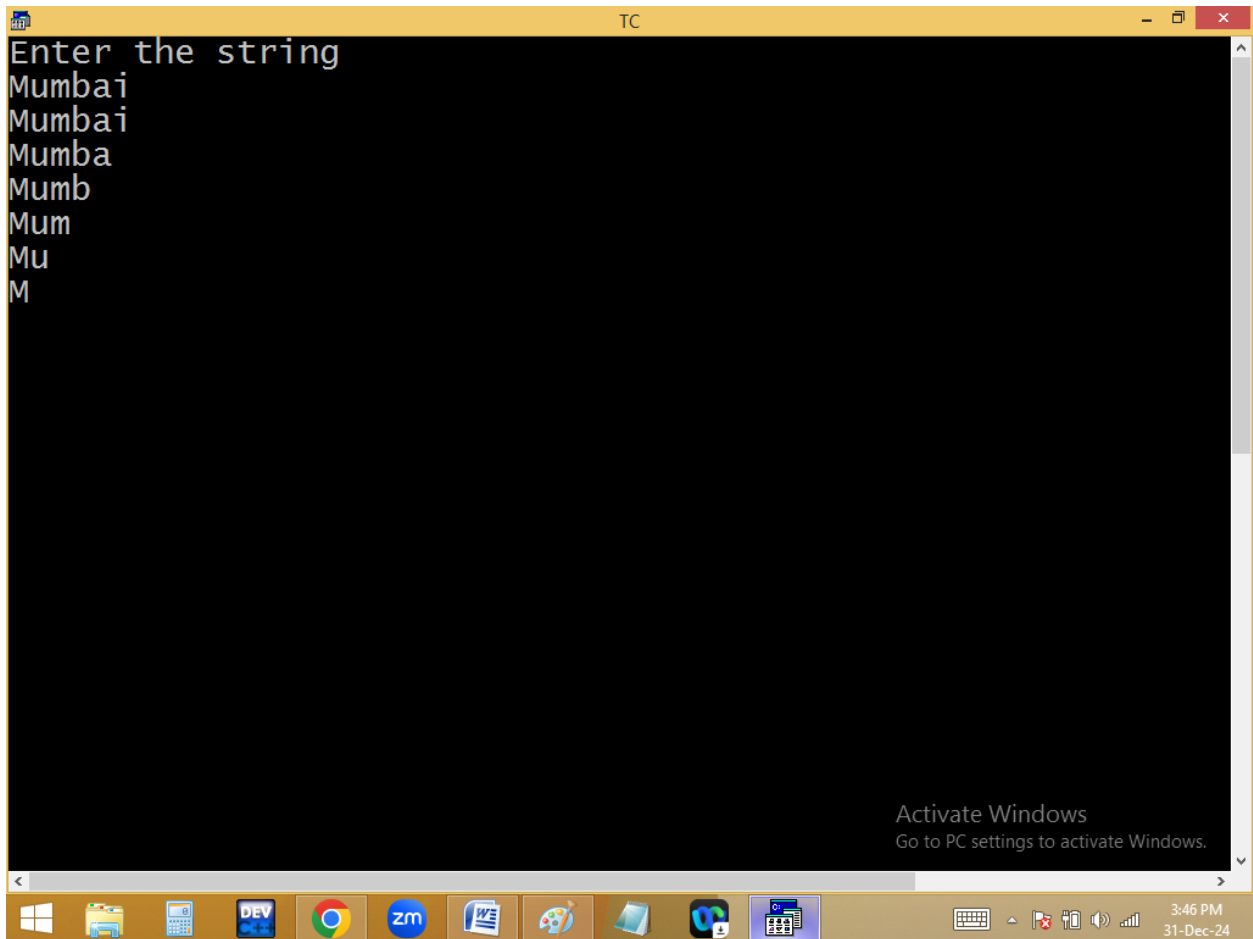


```
for( i=0; s[i]!='\0';i++); len=4
```

```

    i-- ✓
for( ; i ; i-- )
{
    for( j=0; j<=i;j++) p( s[j] );
    p("\n");
}

```

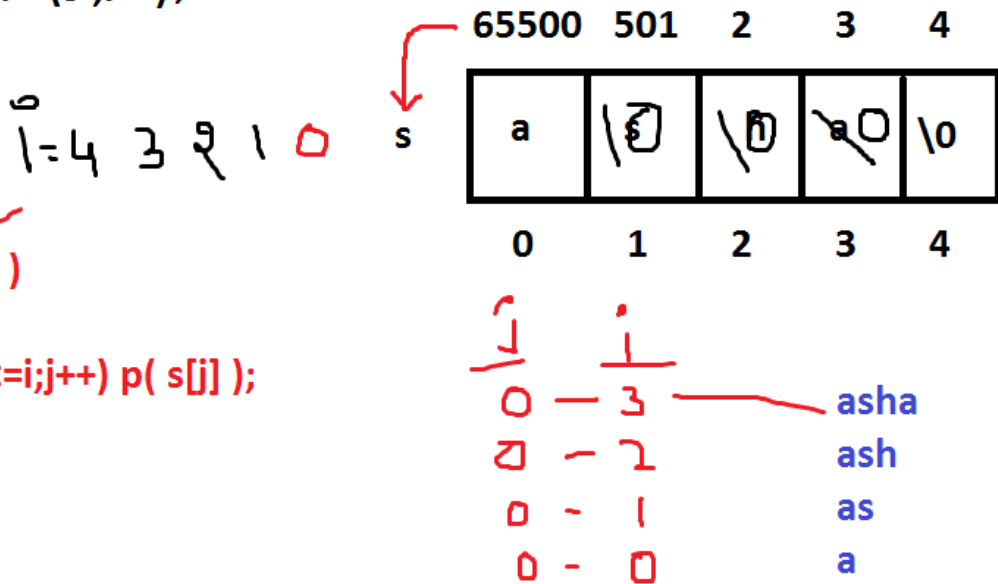

Home work 1:

Kabhi Kushi Kabhi Ghum ==> K K K G <== Abbreviation

Ranam Raudram Rudhiram ==> R R R

United Kingdom ==> U K

2.

I Miss You Jaanu ==> 4 words

