


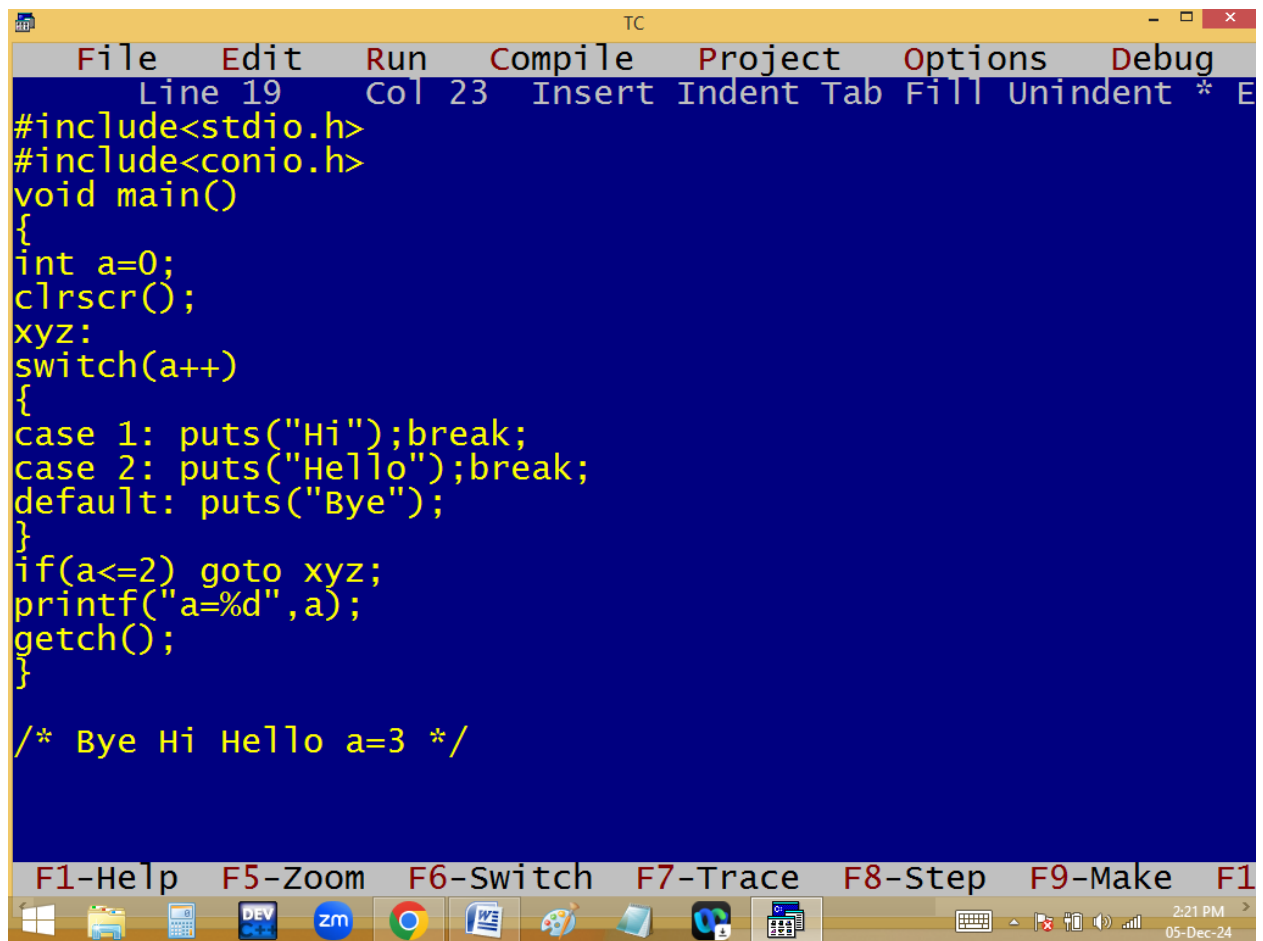


The image shows a screenshot of the Turbo C++ (TC) integrated development environment. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 19", "Col 23", and lists editing options: "Insert", "Indent", "Tab", "Fill", "Unindent", and "E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0;
clrscr();
xyz:
switch(a++)
{
case 1: puts("Hi");break;
case 2: puts("Hello");break;
default: puts("Bye");
}
if(a<=2) goto xyz;
printf("a=%d",a);
getch();
}

/* Bye Hi Hello a=3 */
```

The bottom of the window features a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". Below the toolbar is the Windows taskbar, which includes icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and other applications. The system clock in the bottom right corner shows "2:21 PM" and "05-Dec-24".

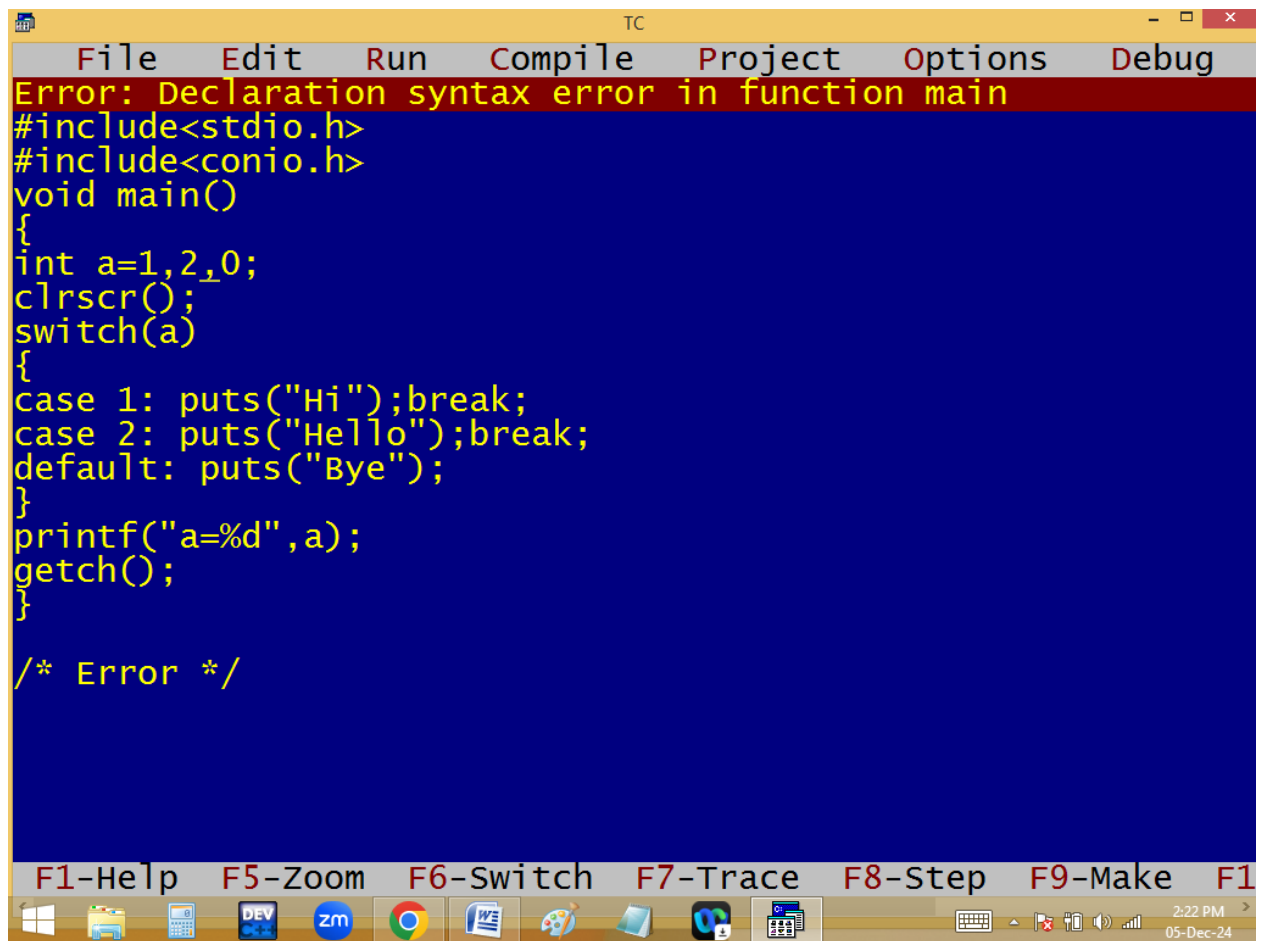


The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error banner at the top of the code area states "Error: Declaration syntax error in function main". The code being edited is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1,2,0;
clrscr();
switch(a)
{
case 1: puts("Hi");break;
case 2: puts("Hello");break;
default: puts("Bye");
}
printf("a=%d",a);
getch();
}

/* Error */
```

Below the code area, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar at the bottom shows various application icons and the system clock indicating 2:22 PM on 05-Dec-24.

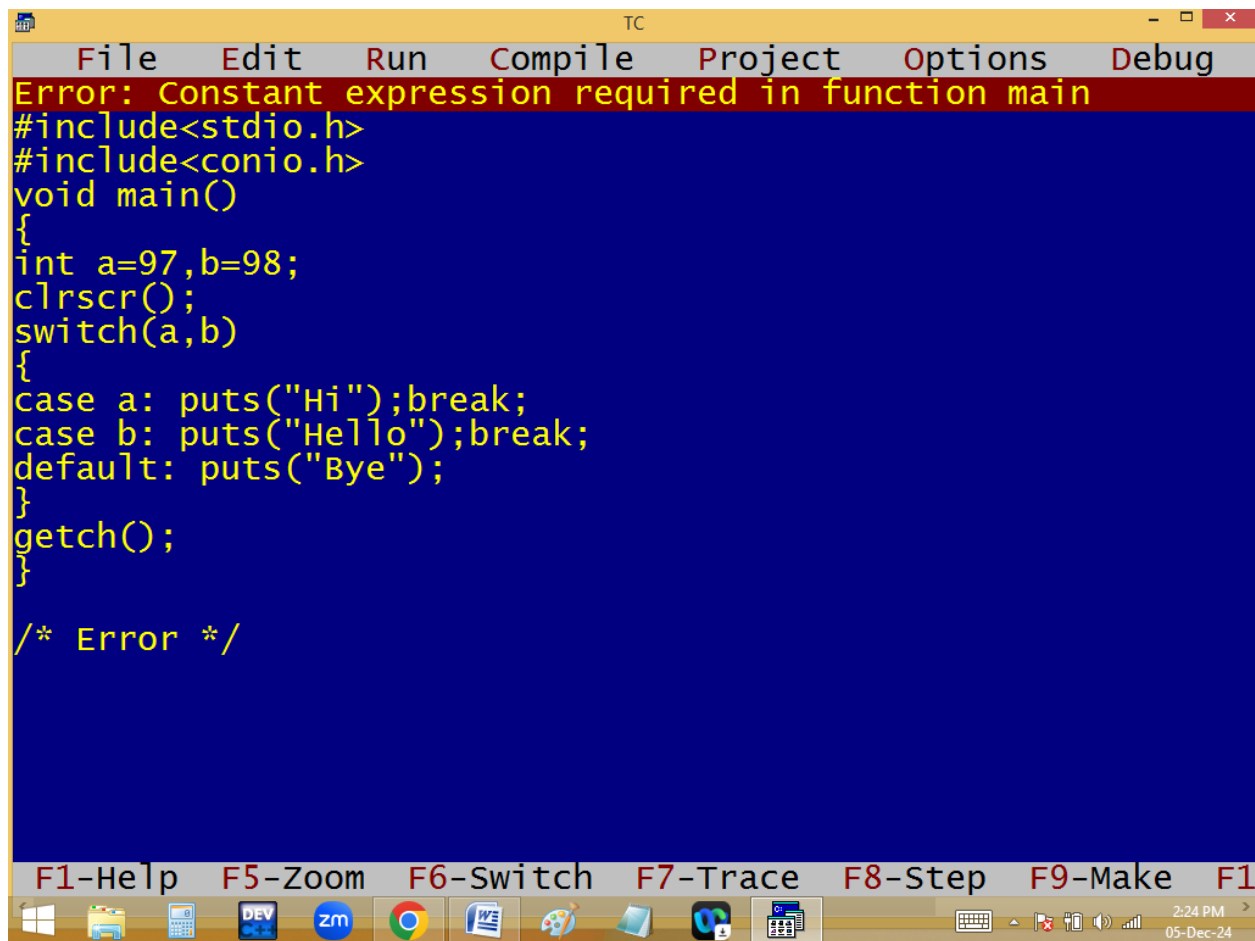


The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top of the editor area states: "Error: Constant expression required in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=97,b=98;
clrscr();
switch(a,b)
{
case a: puts("Hi");break;
case b: puts("Hello");break;
default: puts("Bye");
}
getch();
}

/* Error */
```


Below the code editor, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar at the bottom shows various application icons, including the Start button, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and VS Code. The system clock in the bottom right corner displays "2:24 PM" and "05-Dec-24".

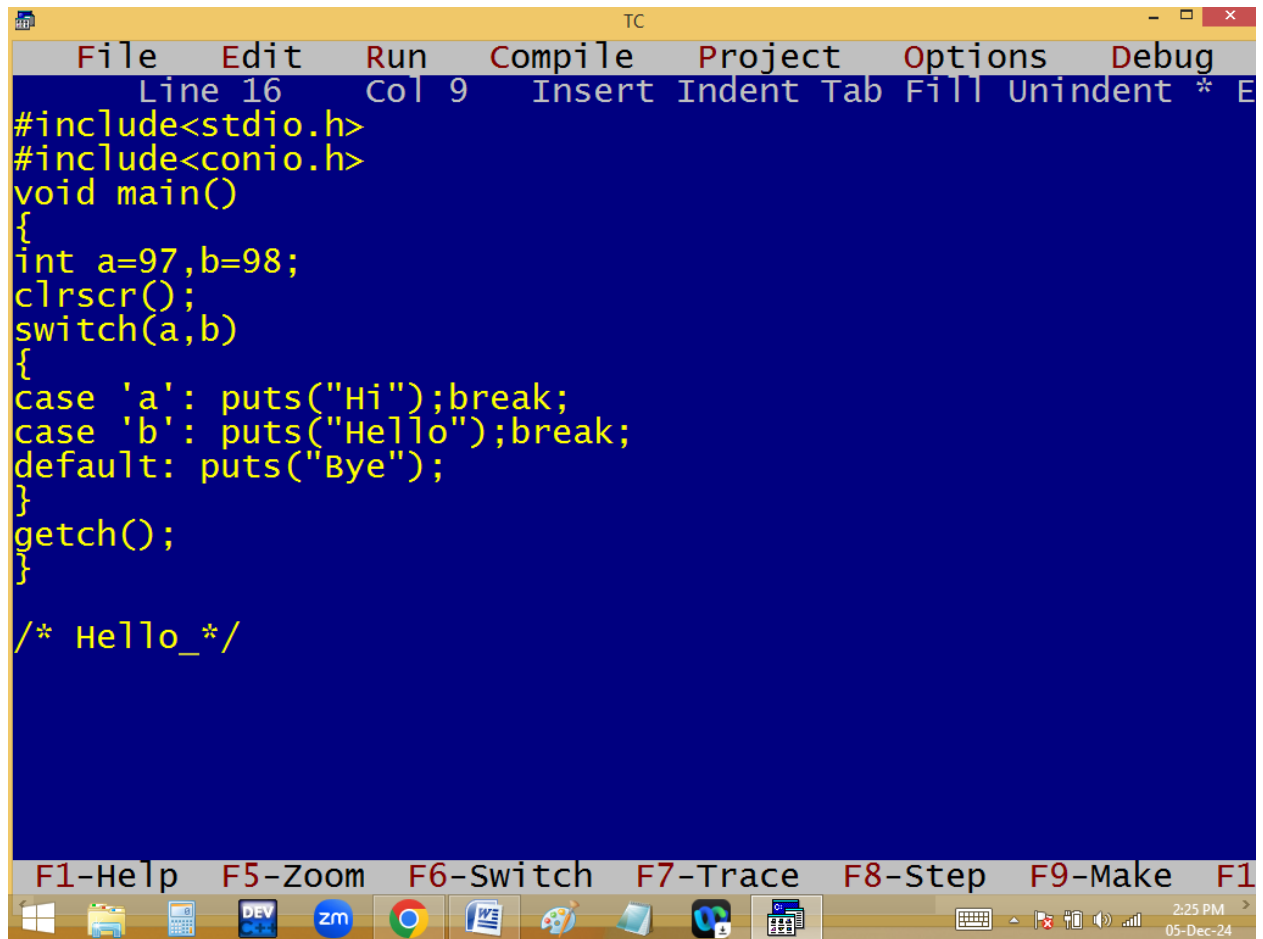

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 16", "Col 9", and "Insert Indent Tab Fill Unindent * E". The code is written in yellow text on a blue background. It includes headers for `stdio.h` and `conio.h`, defines a `main` function, declares two integers `a` and `b` with values 97 and 98, calls `clrscr()` to clear the screen, and uses a `switch` statement to print "Hi" for 'a', "Hello" for 'b', and "Bye" for the default case. It also includes a `getch()` call and a multi-line comment `/* Hello_*/`. The bottom status bar shows function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar at the bottom displays various application icons and the system clock showing 2:25 PM on 05-Dec-24.

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=97,b=98;
clrscr();
switch(a,b)
{
case 'a': puts("Hi");break;
case 'b': puts("Hello");break;
default: puts("Bye");
}
getch();
}

/* Hello_*/
```

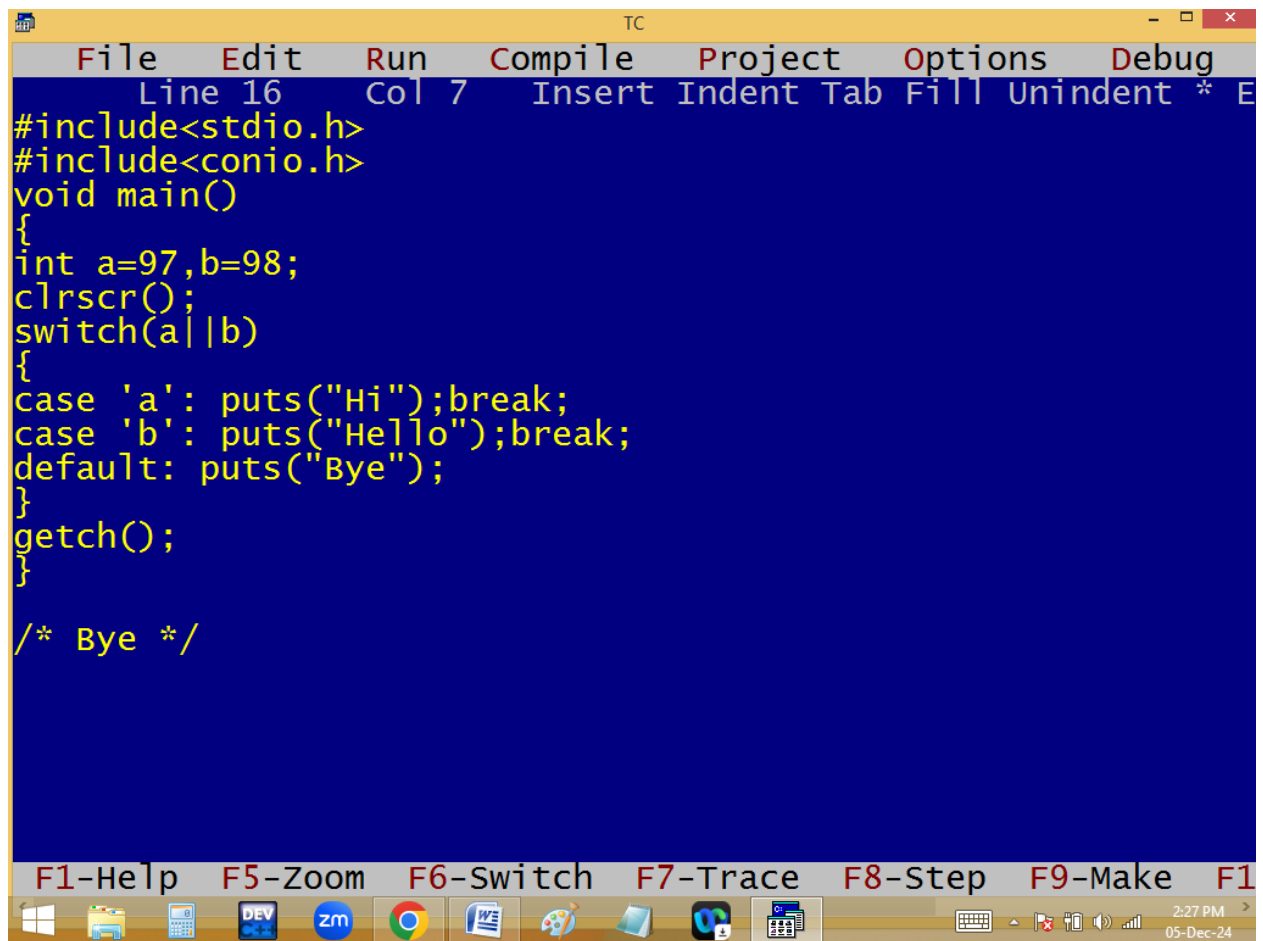

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 16", "Col 7", and "Insert Indent Tab Fill Unindent * E". The code is written in yellow text on a dark blue background. It includes headers for `stdio.h` and `conio.h`, defines a `main` function, declares two integers `a` and `b` with values 97 and 98, clears the screen with `clrscr()`, and uses a `switch` statement to print "Hi" for 'a', "Hello" for 'b', and "Bye" for the default case. It also includes `getch()` and a comment `/* Bye */`. The bottom status bar shows function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar at the bottom shows icons for various applications and the system clock displaying "2:27 PM" and "05-Dec-24".

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=97,b=98;
clrscr();
switch(a||b)
{
case 'a': puts("Hi");break;
case 'b': puts("Hello");break;
default: puts("Bye");
}
getch();
}

/* Bye */
```

TC

File Edit Run Compile Project Options Debug


Error: Duplicate case in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=97,b=98;
clrscr();
switch(a||b)
{
case 'a' || 'b': puts("Hi");break;
case 'b' || 'a': puts("Hello");break;
default: puts("Bye");
}
getch();
}

/* Error */
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

2:28 PM 05-Dec-24

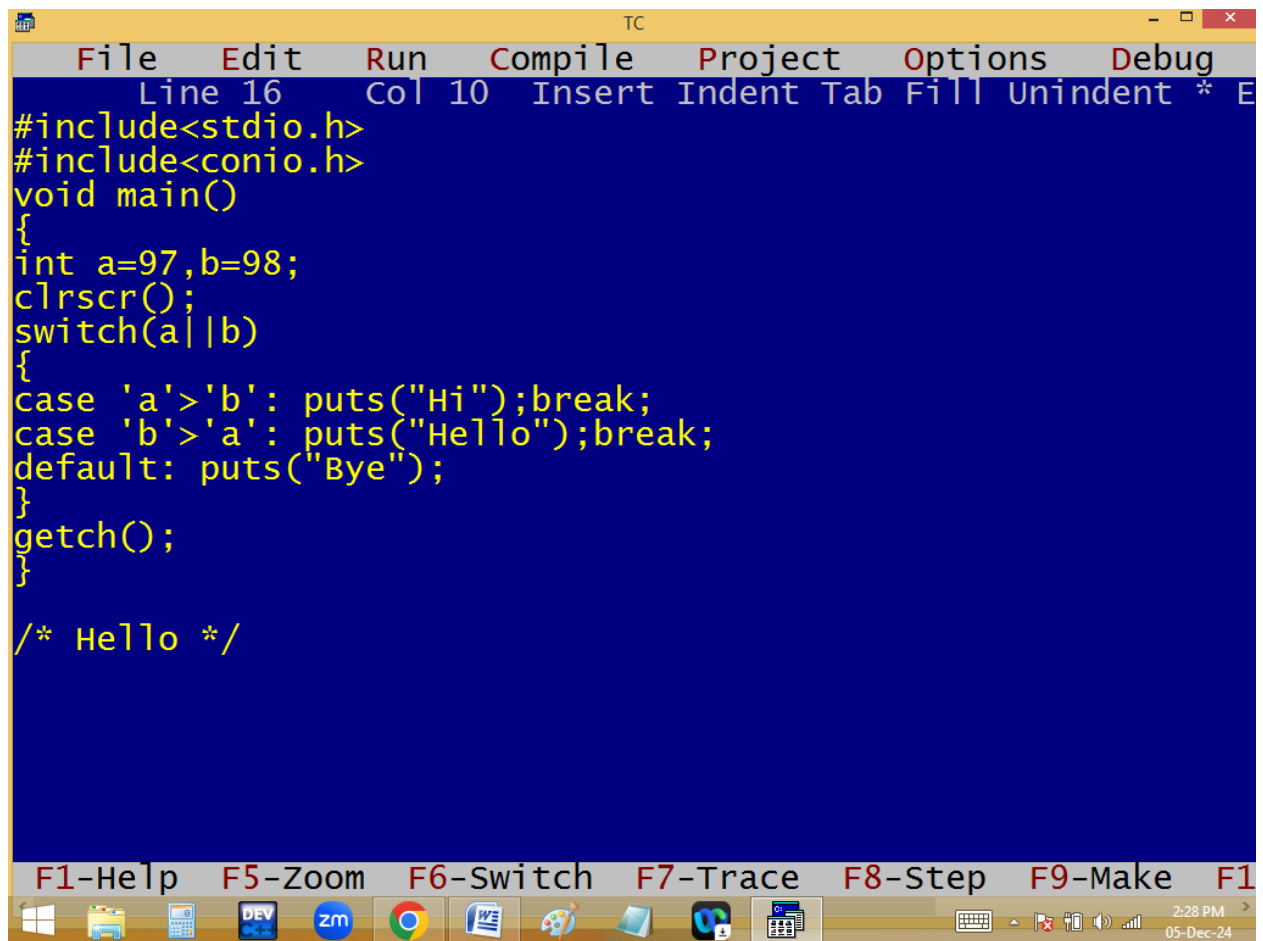


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 16", "Col 10", and "Insert Indent Tab Fill Unindent * E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=97,b=98;
clrscr();
switch(a||b)
{
case 'a'>'b': puts("Hi");break;
case 'b'>'a': puts("Hello");break;
default: puts("Bye");
}
getch();
}

/* Hello */
```


Below the code editor, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the bottom, showing icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and the Turbo C++ application. The system clock in the bottom right corner displays "2:28 PM" and "05-Dec-24".

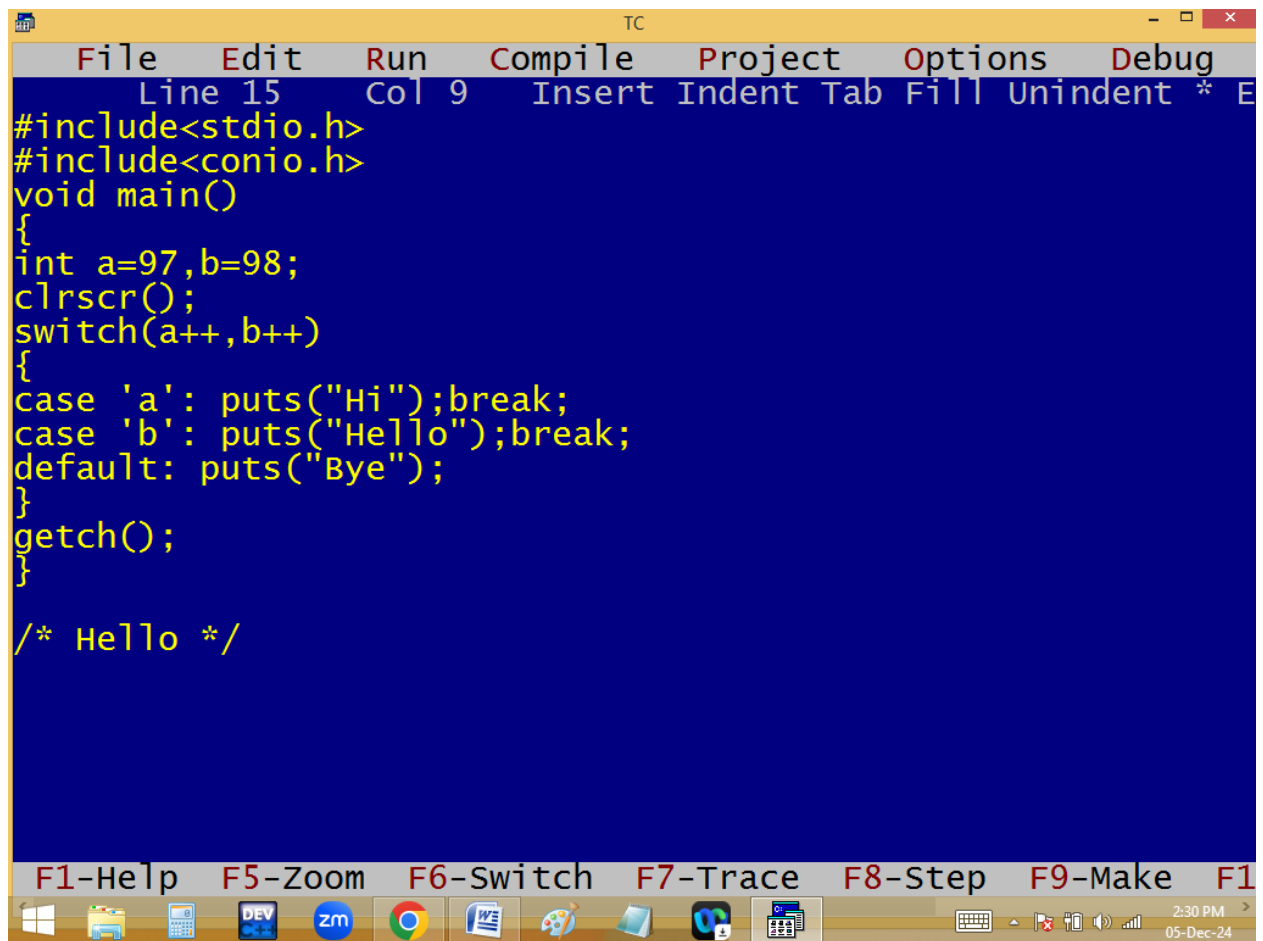

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 15", "Col 9", and "Insert Indent Tab Fill Unindent * E". The code is written in yellow text on a blue background. It includes headers for `stdio.h` and `conio.h`, defines a `main` function, declares two integer variables `a` and `b` with values 97 and 98, calls `clrscr()`, and uses a `switch` statement to print "Hi" for 'a', "Hello" for 'b', and "Bye" for the default case. It also includes a `getch()` call and a multi-line comment `/* Hello */`. The bottom status bar shows function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar at the bottom displays various application icons and the system clock showing 2:30 PM on 05-Dec-24.

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=97,b=98;
clrscr();
switch(a++,b++)
{
case 'a': puts("Hi");break;
case 'b': puts("Hello");break;
default: puts("Bye");
}
getch();
}

/* Hello */
```

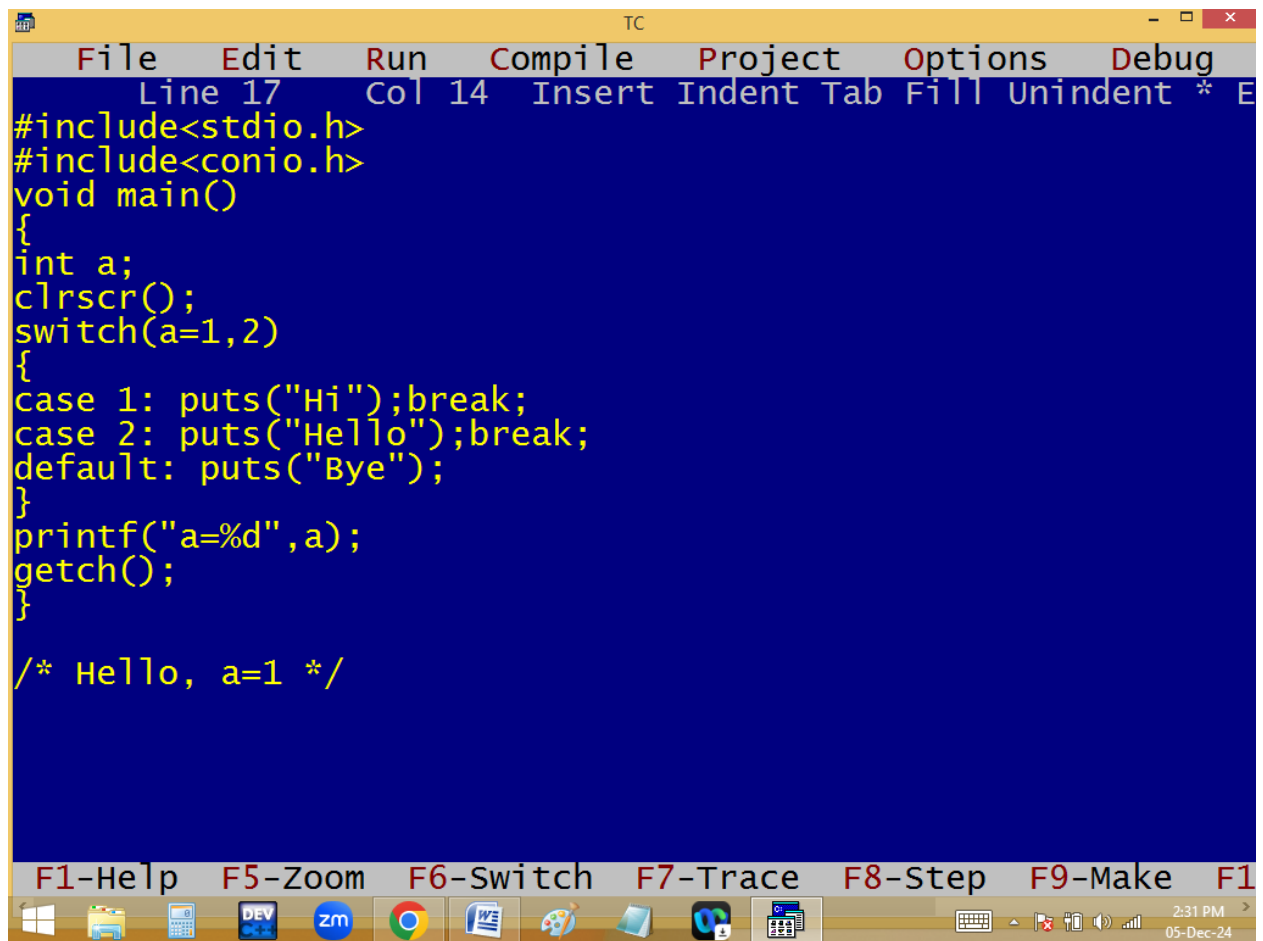
```
TC
File Edit Run Compile Project Options Debug
Line 17 Col 14 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a;
clrscr();
switch(a=1,2)
{
case 1: puts("Hi");break;
case 2: puts("Hello");break;
default: puts("Bye");
}
printf("a=%d",a);
getch();
}

/* Hello, a=1 */

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit
```

2:31 PM
05-Dec-24


switch (a = 1 , 2)



```
TC
File Edit Run Compile Project Options Debug
Line 17 Col 12 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a;
clrscr();
switch(a = printf("") && printf("Thank You"))
{
case 1: puts("Hi");break;
case 2: puts("Hello");break;
default: puts("Bye");
}
printf("a=%d",a);
getch();
}

/* Bye, a=0 */

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit
2:33 PM
05-Dec-24
```

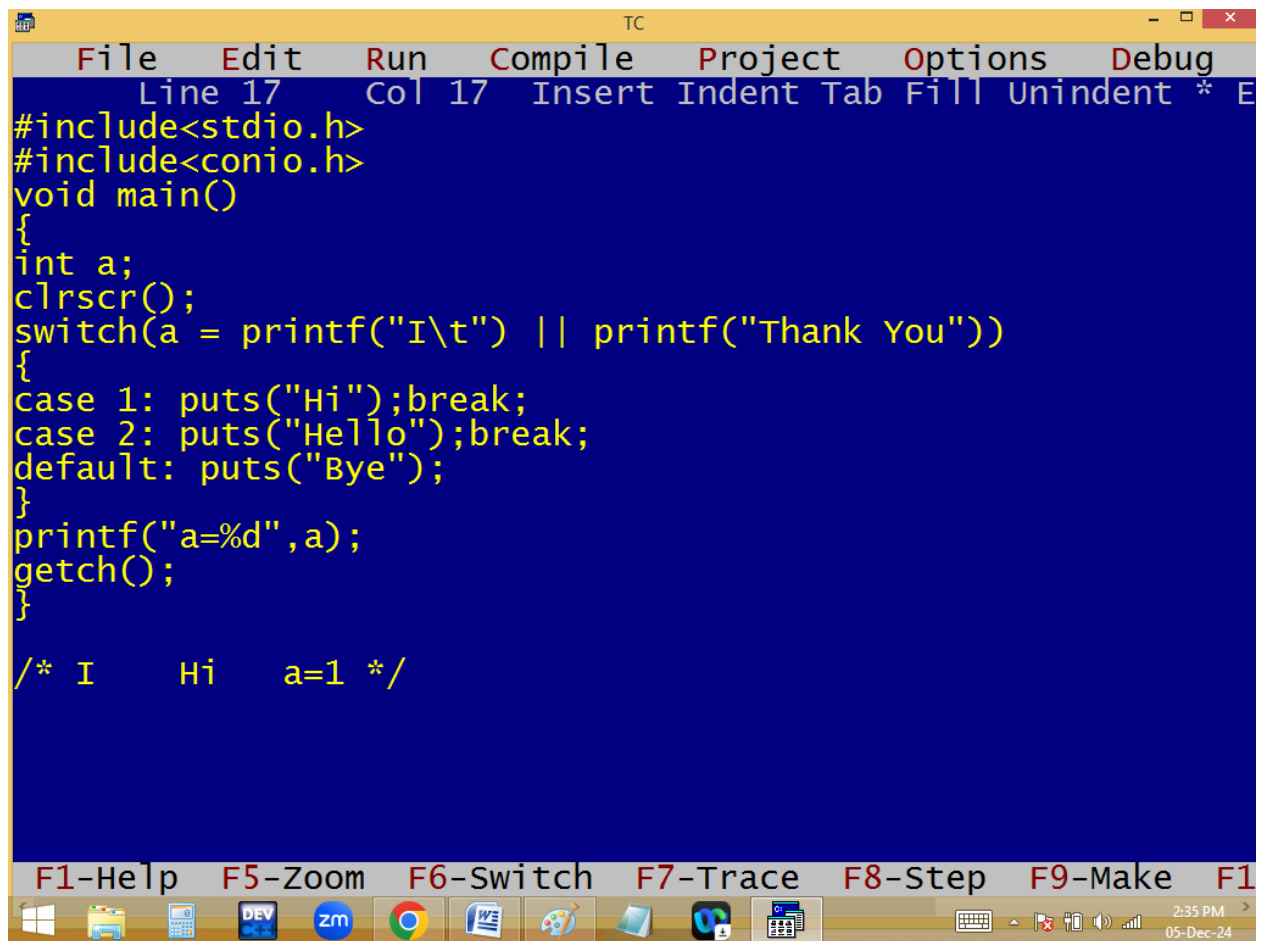

```
TC
File Edit Run Compile Project Options Debug
Line 17 Col 17 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a;
clrscr();
switch(a = printf("I\t") || printf("Thank You"))
{
case 1: puts("Hi");break;
case 2: puts("Hello");break;
default: puts("Bye");
}
printf("a=%d",a);
getch();
}


/* I      Hi      a=1 */

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run
2:35 PM
05-Dec-24
```

```
TC
File Edit Run Compile Project Options Debug
Line 18 Col 26 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a;
clrscr();
switch(a = printf("I\t") , printf("Am\t"))
{
case 1: puts("Indian");break;
case 2: puts("Bharathiyudu");break;
case 3: puts("Hindustani");break;
default: puts("Human Being");
}
printf("a=%d",a);
getch();
}

/* I Am Hindustani a=2_*/

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit
```

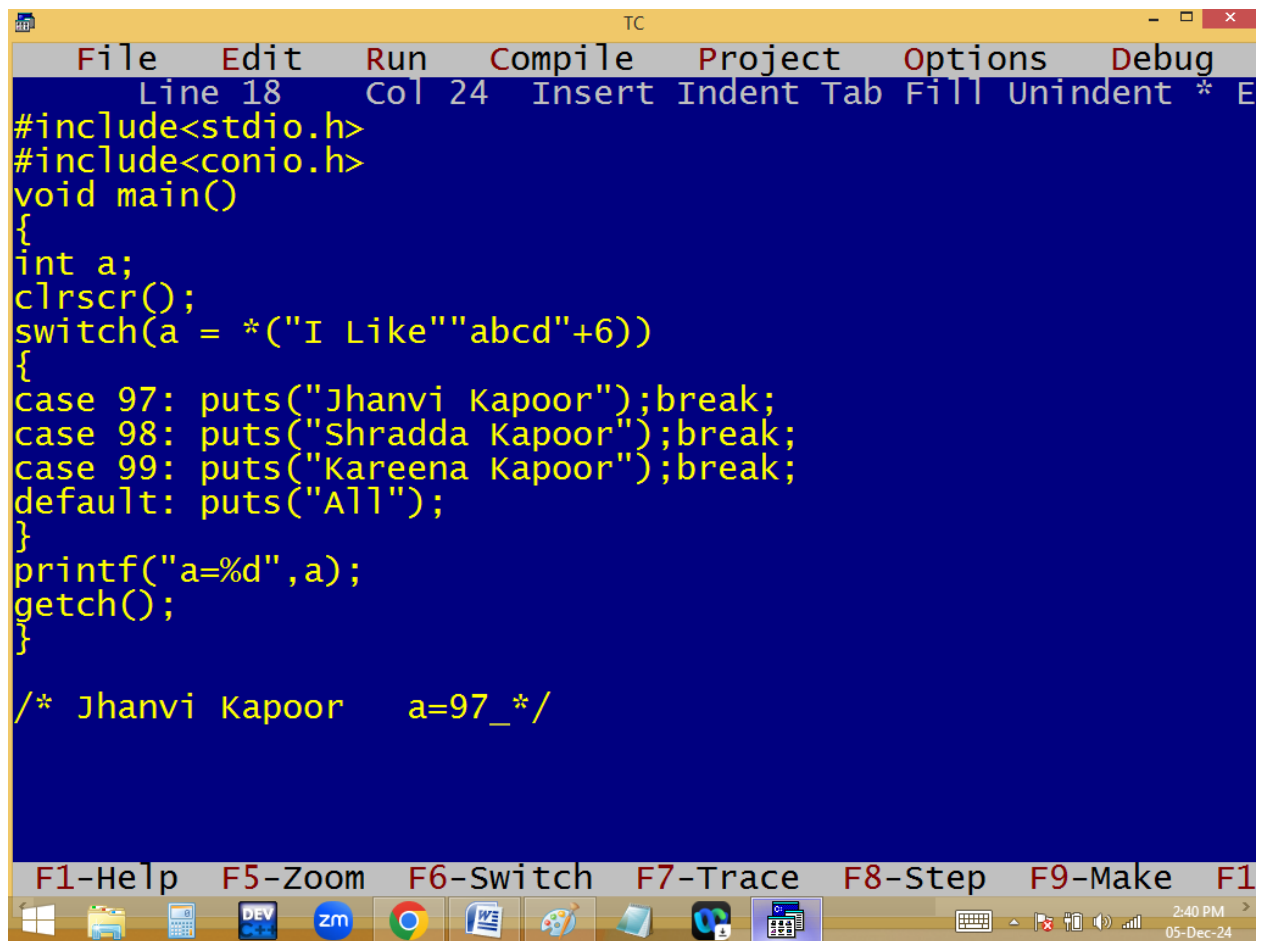

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 18", "Col 24", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and "* E". The code is written in yellow text on a dark blue background. It includes headers for `stdio.h` and `conio.h`, and defines a `main` function. Inside `main`, it declares an integer `a`, calls `clrscr()`, and uses a `switch` statement to print names based on the value of `a`. The `switch` statement has three cases: 97 for "Jhanvi Kapoor", 98 for "Shradda Kapoor", and 99 for "Kareena Kapoor". A default case prints "All". After the `switch` block, it prints the value of `a` using `printf` and then calls `getch()`. At the bottom of the code, there is a comment: `/* Jhanvi Kapoor a=97_*/`. The bottom status bar shows function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar at the very bottom shows various application icons and the system clock indicating 2:40 PM on 05-Dec-24.


```
File Edit Run Compile Project Options Debug
Line 18 Col 24 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a;
clrscr();
switch(a = *("I Like""abcd"+6))
{
case 97: puts("Jhanvi Kapoor");break;
case 98: puts("Shradda Kapoor");break;
case 99: puts("Kareena Kapoor");break;
default: puts("All");
}
printf("a=%d",a);
getch();
}

/* Jhanvi Kapoor a=97_*/

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run
2:40 PM
05-Dec-24
```

"**B**harathi"+1 = harathi


* $(\text{"I Like"abcd} + 6) \Rightarrow \text{abcd}$
 ↓
 470
 value at 470 $\Rightarrow$ a $\Rightarrow$ 97

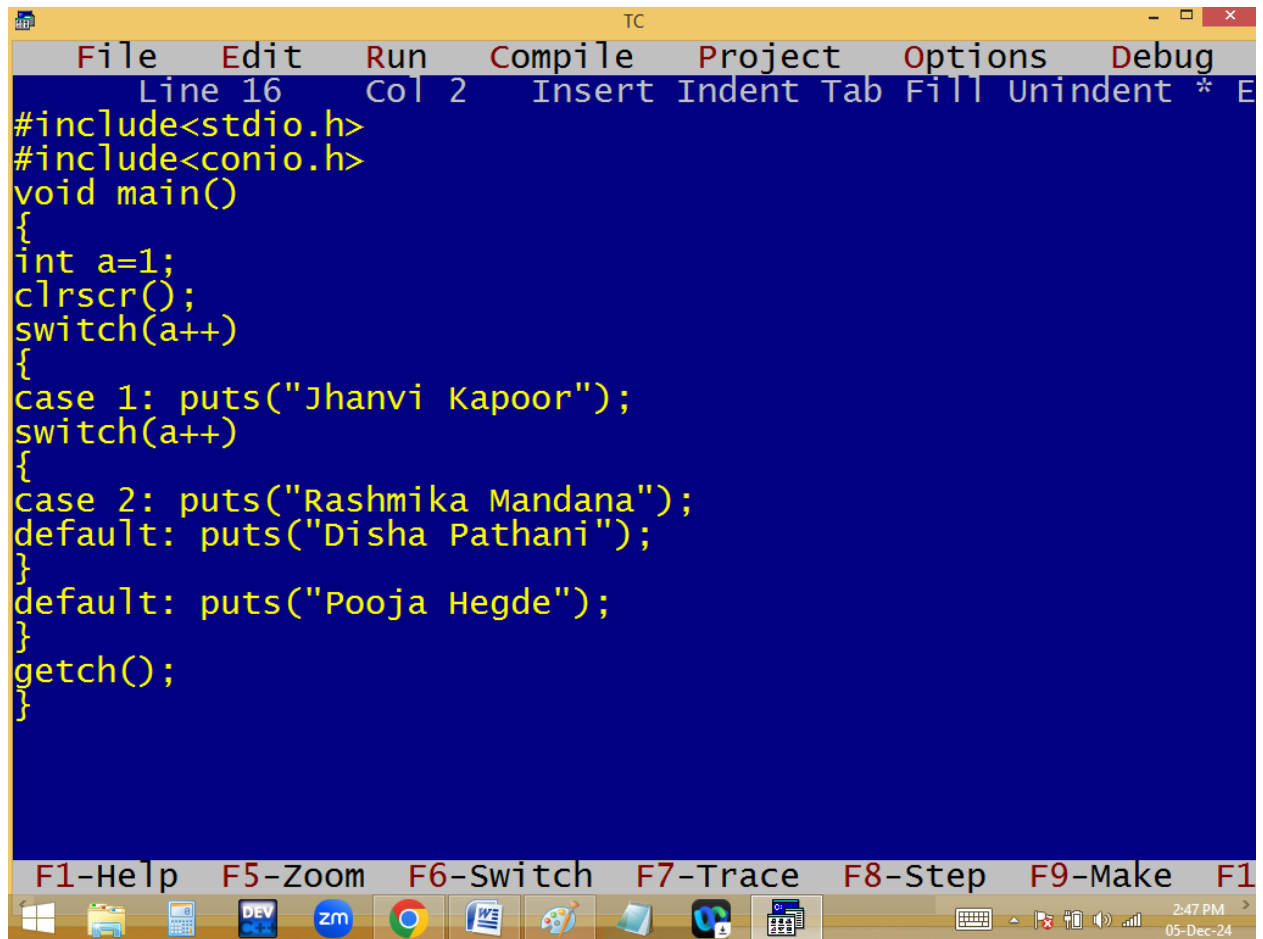


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 16", "Col 2", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and "* E". The code editor has a blue background and contains the following C program:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1;
clrscr();
switch(a++)
{
case 1: puts("Jhanvi Kapoor");
switch(a++)
{
case 2: puts("Rashmika Mandana");
default: puts("Disha Pathani");
}
default: puts("Pooja Hegde");
}
getch();
}
```

The bottom status bar shows function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar at the bottom includes icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and other applications. The system clock shows "2:47 PM" and "05-Dec-24".

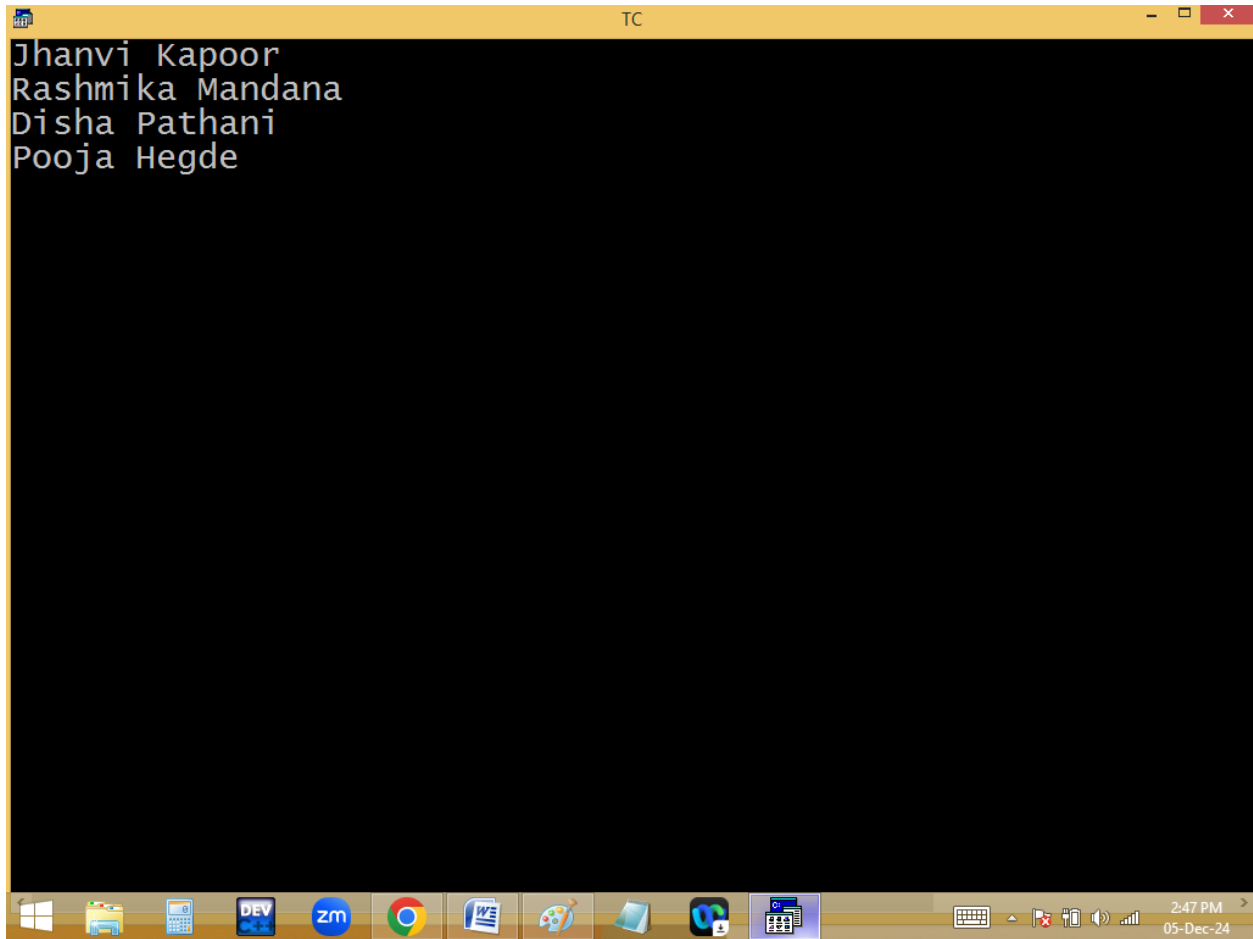


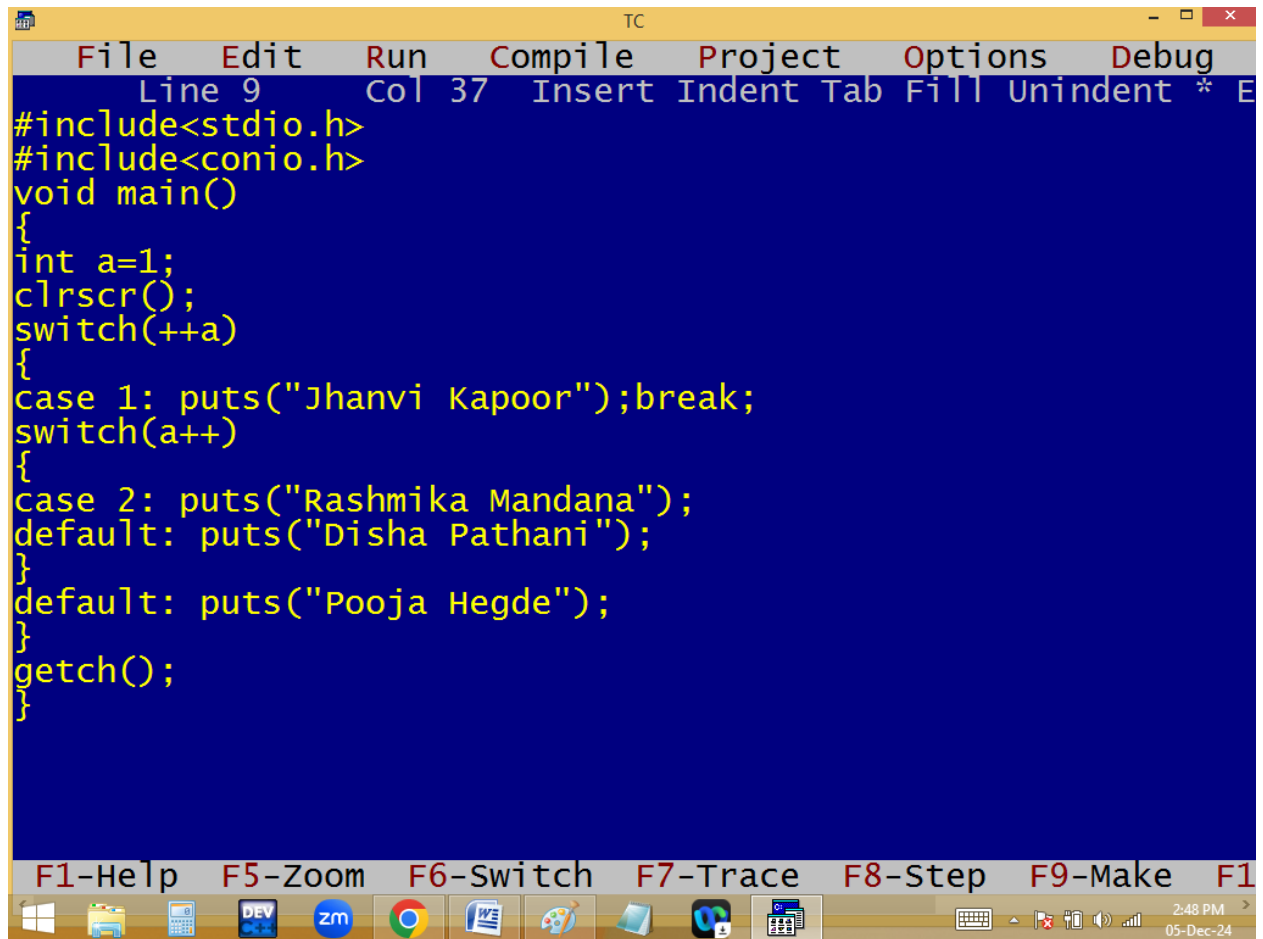

```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 37 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1;
clrscr();
switch(++a)
{
case 1: puts("Jhanvi Kapoor");break;
switch(a++)
{
case 2: puts("Rashmika Mandana");
default: puts("Disha Pathani");
}
default: puts("Pooja Hegde");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run


2:48 PM 05-Dec-24

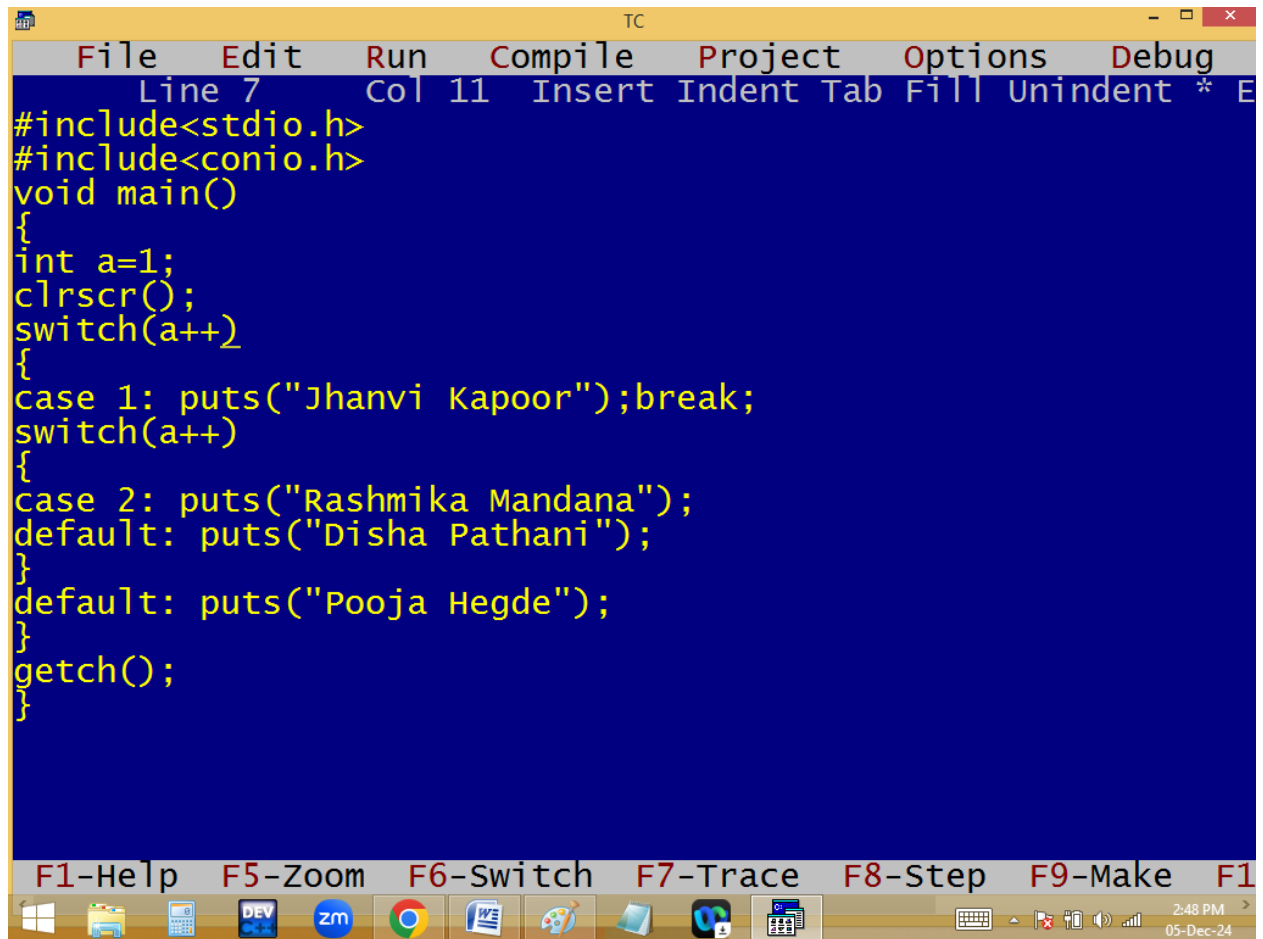


```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 11 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1;
clrscr();
switch(a++)
{
case 1: puts("Jhanvi Kapoor");break;
switch(a++)
{
case 2: puts("Rashmika Mandana");
default: puts("Disha Pathani");
}
default: puts("Pooja Hegde");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

2:48 PM
05-Dec-24

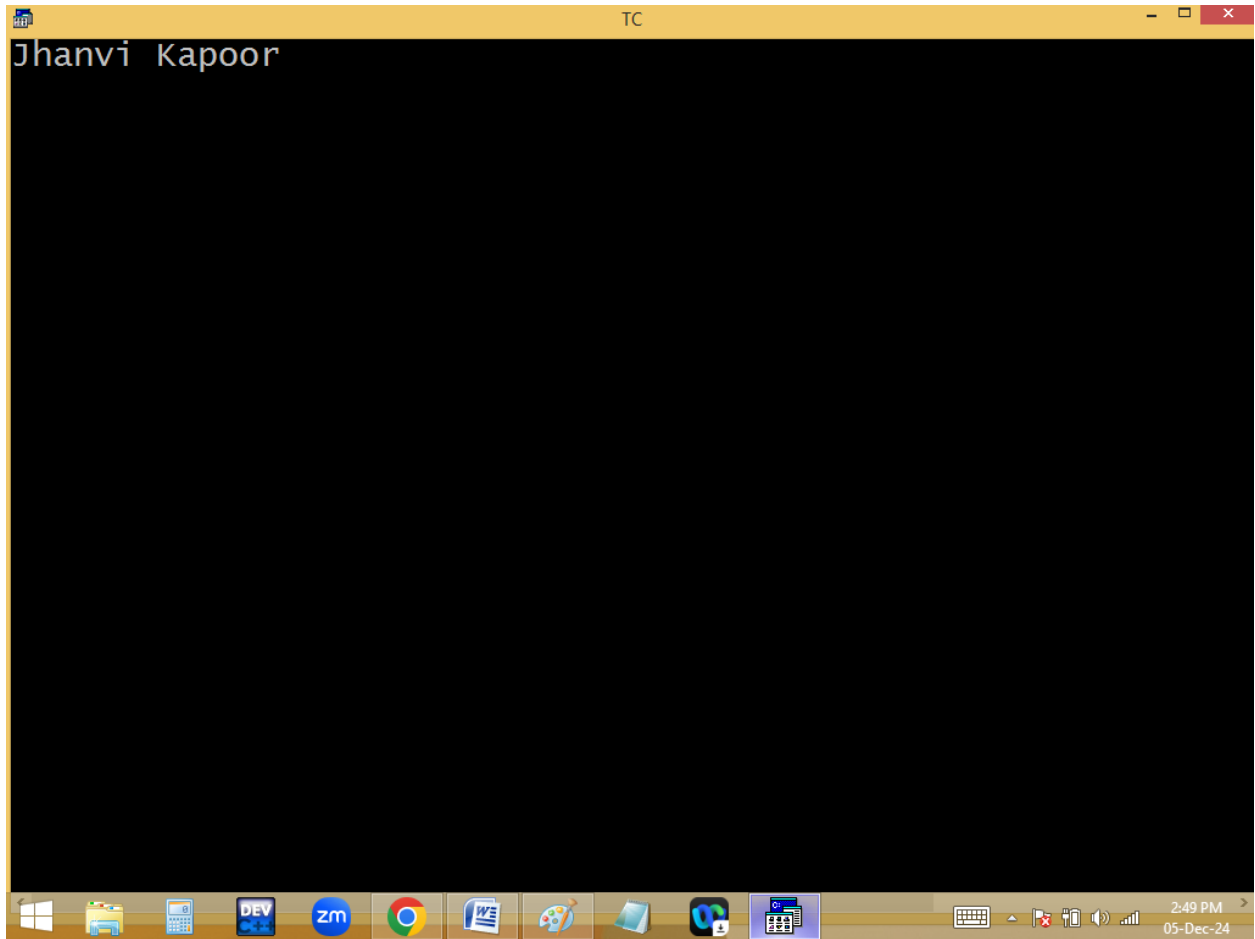


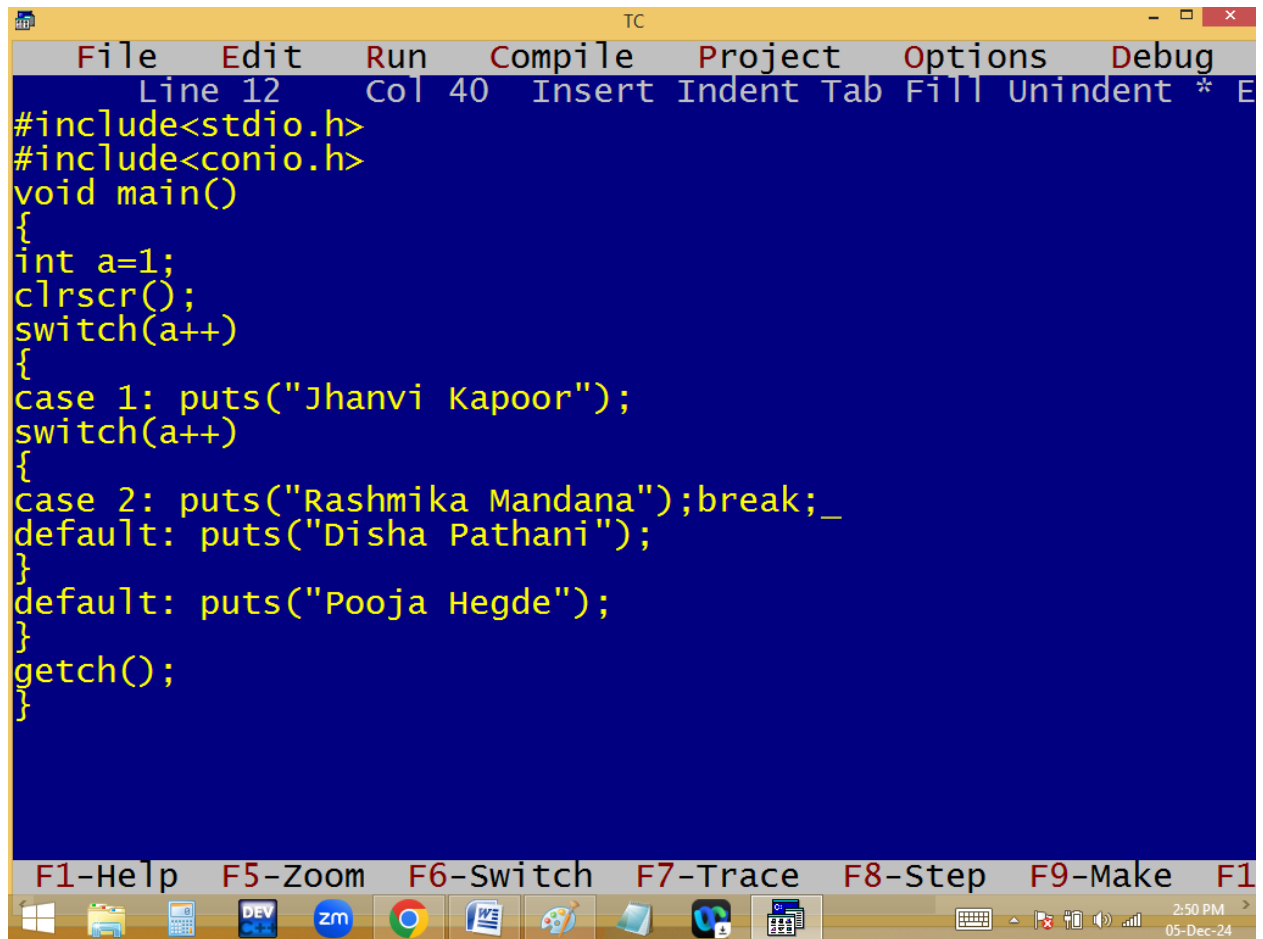


```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 40 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1;
clrscr();
switch(a++)
{
case 1: puts("Jhanvi Kapoor");
switch(a++)
{
case 2: puts("Rashmika Mandana");break;_
default: puts("Disha Pathani");
}
default: puts("Pooja Hegde");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

2:50 PM 05-Dec-24

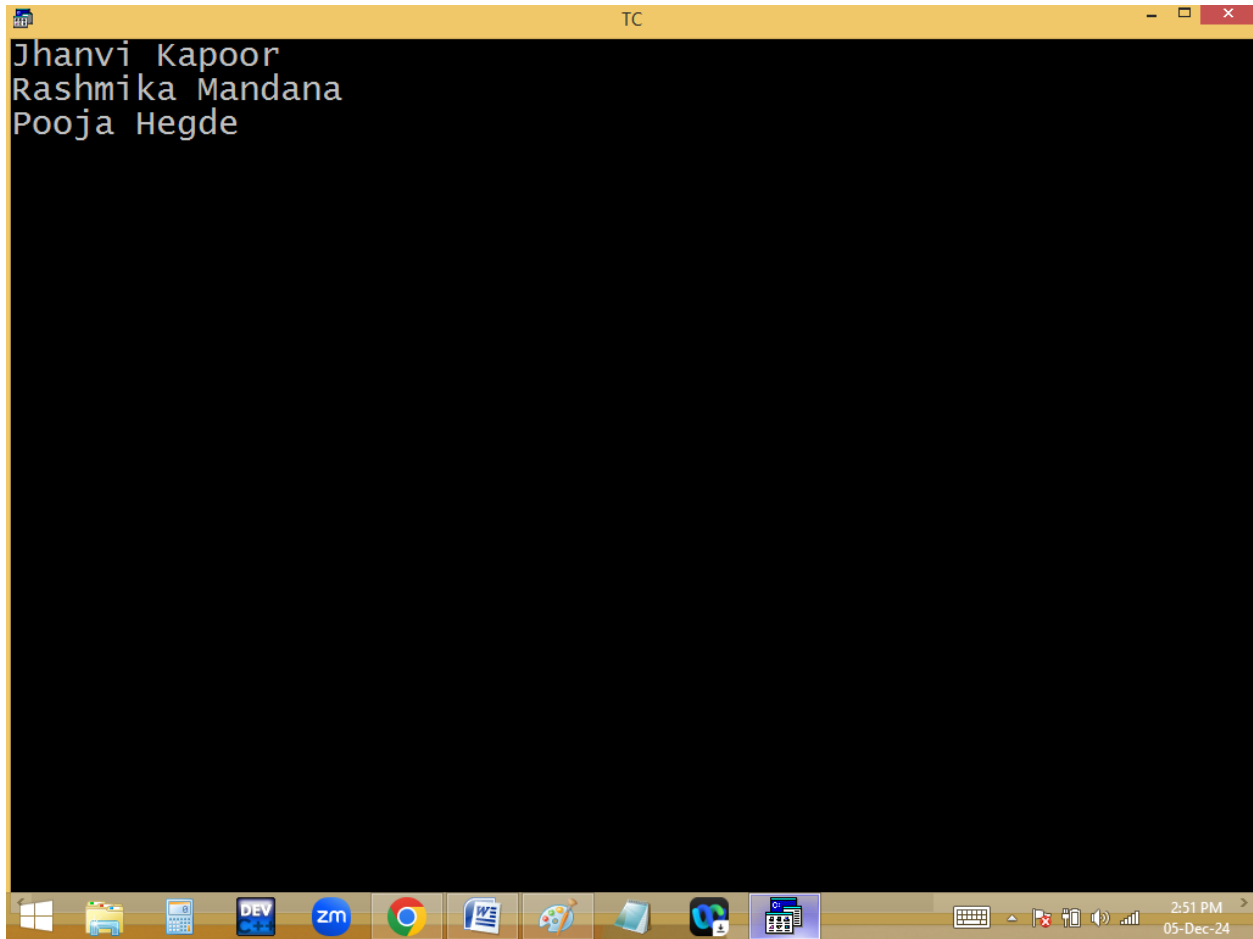


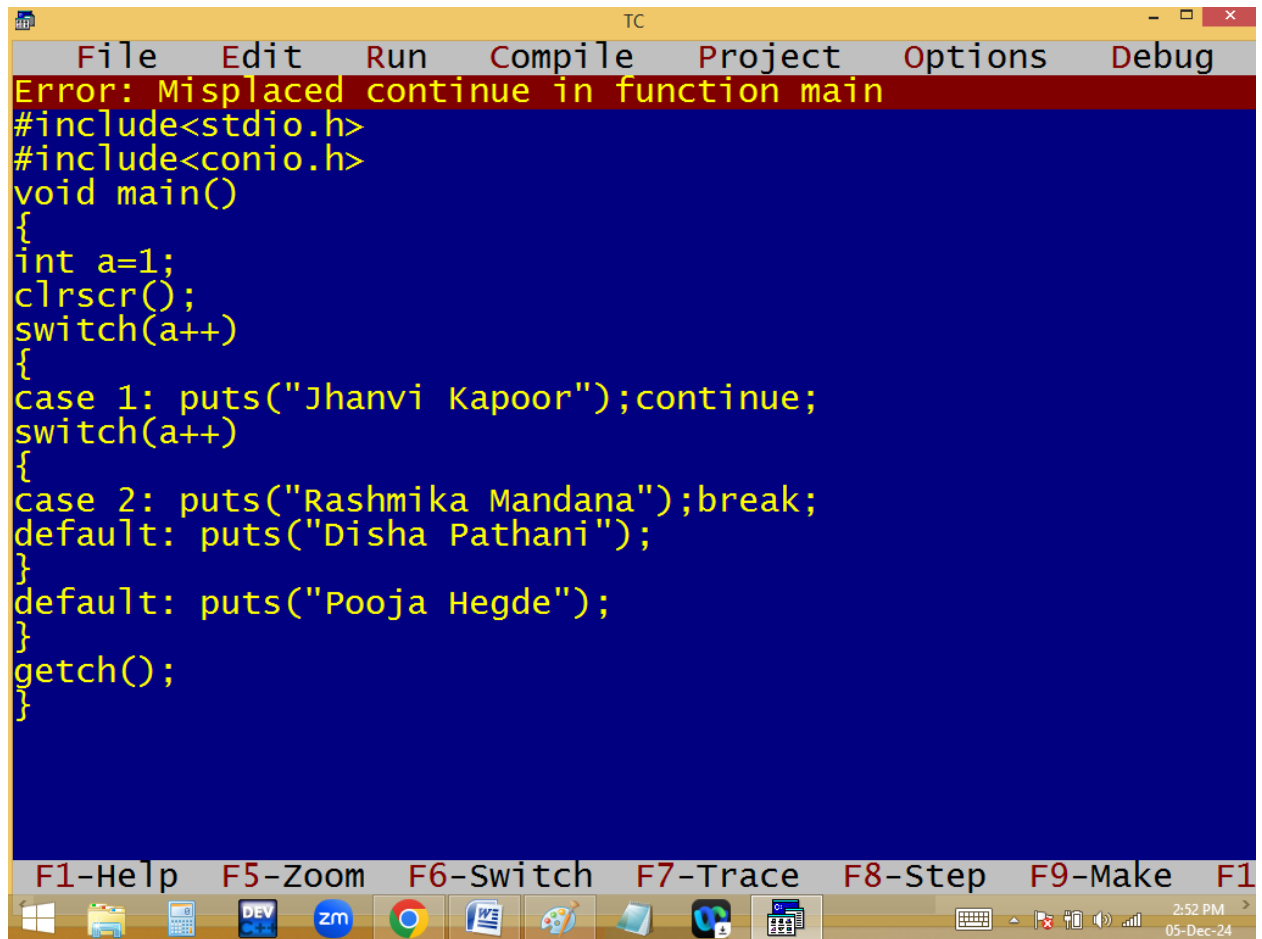

The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error banner at the top of the code editor displays the message: "Error: Misplaced continue in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1;
clrscr();
switch(a++)
{
case 1: puts("Jhanvi Kapoor");continue;
switch(a++)
{
case 2: puts("Rashmika Mandana");break;
default: puts("Disha Pathani");
}
default: puts("Pooja Hegde");
}
getch();
}
```

Below the code editor, a toolbar contains function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar at the bottom shows the Start button, taskbar icons for File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and VS Code, along with system tray icons for keyboard, volume, and network. The system clock indicates the time is 2:52 PM on 05-Dec-24.

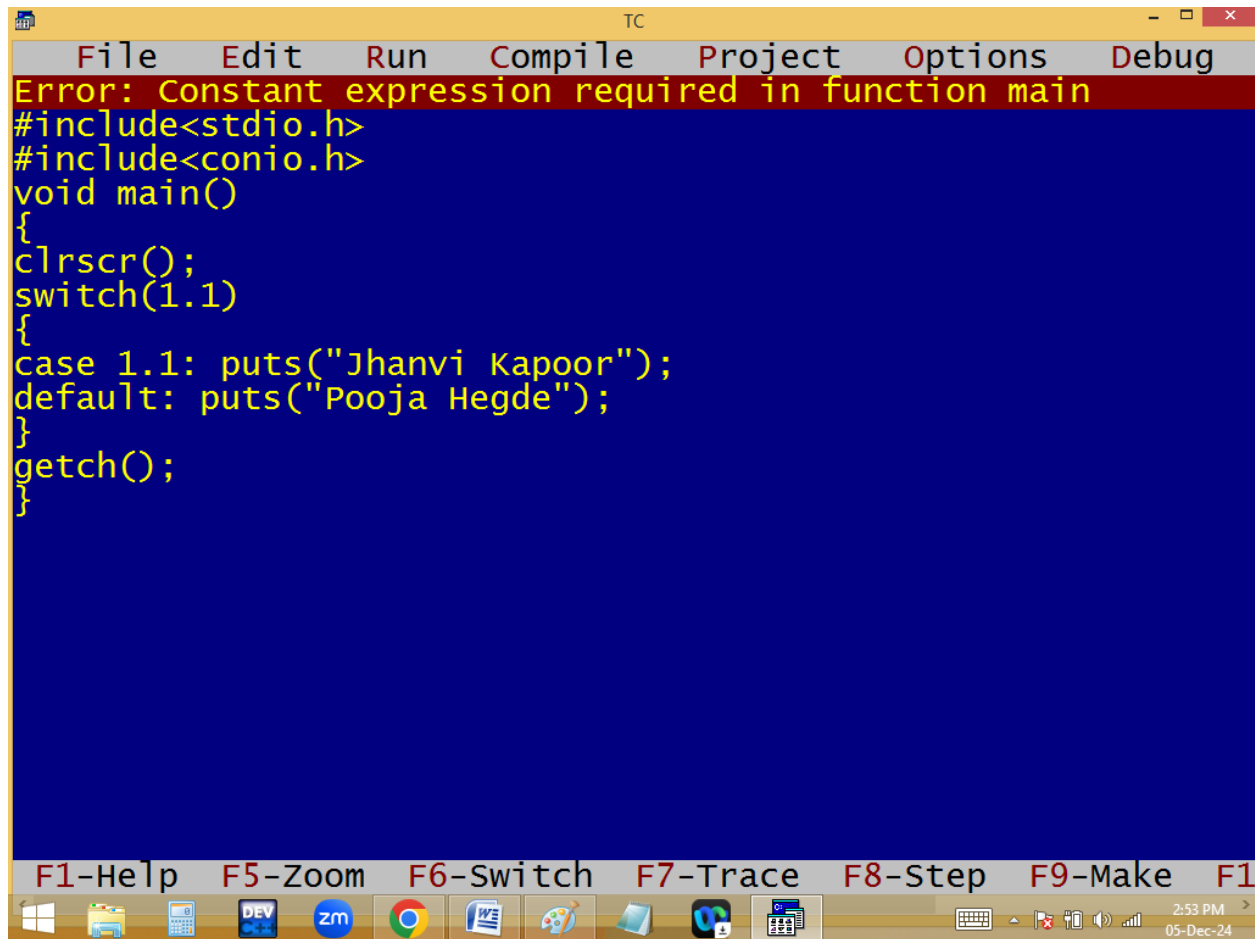


The screenshot shows the Turbo C++ (TC) IDE interface. The title bar reads 'TC'. The menu bar includes 'File', 'Edit', 'Run', 'Compile', 'Project', 'Options', and 'Debug'. A red error message banner at the top states: 'Error: Constant expression required in function main'. The code editor has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(1.1)
{
case 1.1: puts("Jhanvi Kapoor");
default: puts("Pooja Hegde");
}
getch();
}
```

Below the code editor, there is a toolbar with function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar at the bottom shows various application icons and the system clock indicating 2:53 PM on 05-Dec-24.


Finding even/odd using switch:

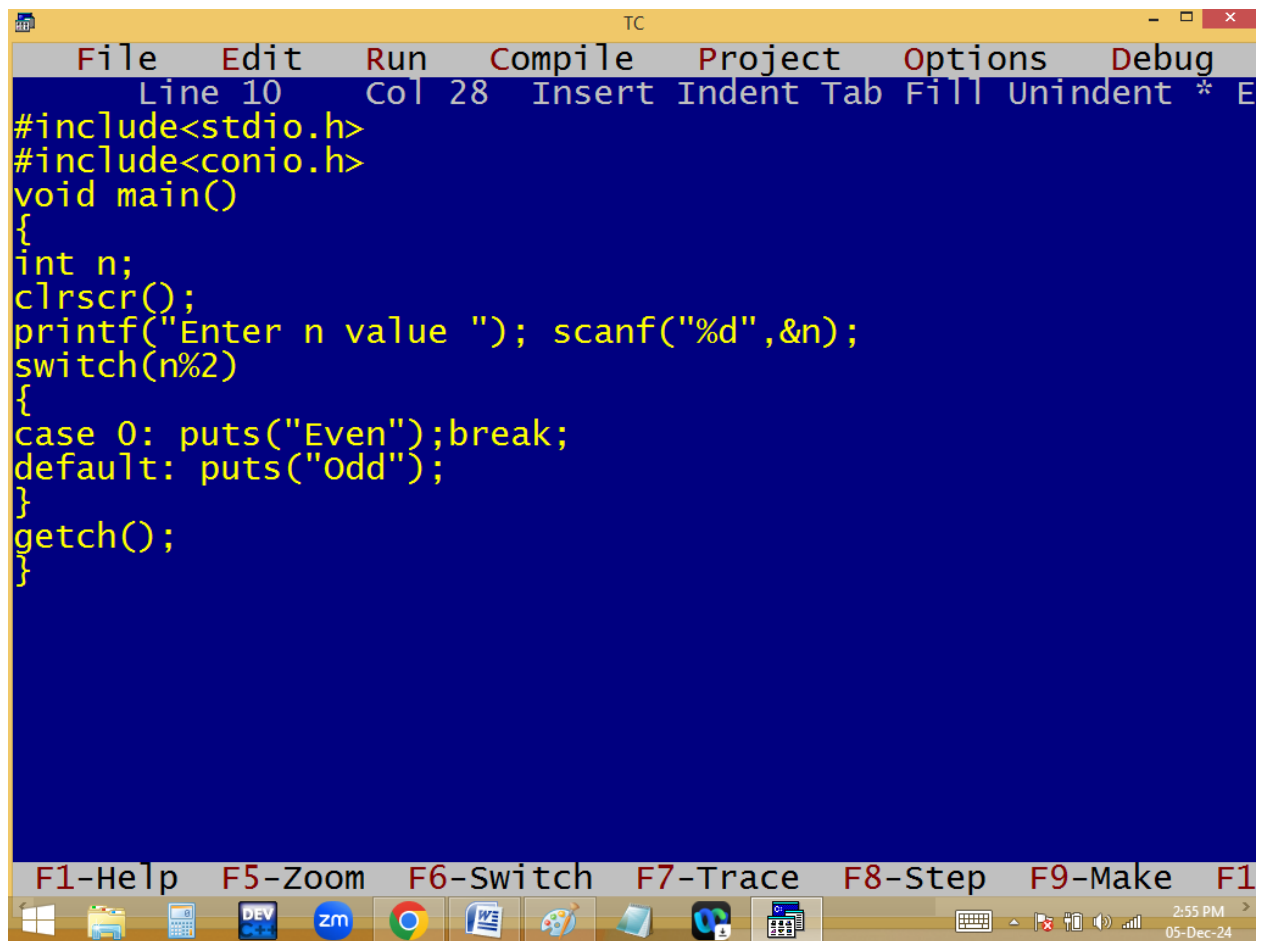


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 10", "Col 28", and "Insert" mode. The main editing area has a blue background and contains the following C code:


```
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter n value "); scanf("%d",&n);
switch(n%2)
{
case 0: puts("Even");break;
default: puts("odd");
}
getch();
}
```

Below the code editor, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the bottom, showing icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and other applications. The system clock in the bottom right corner shows "2:55 PM" and "05-Dec-24".

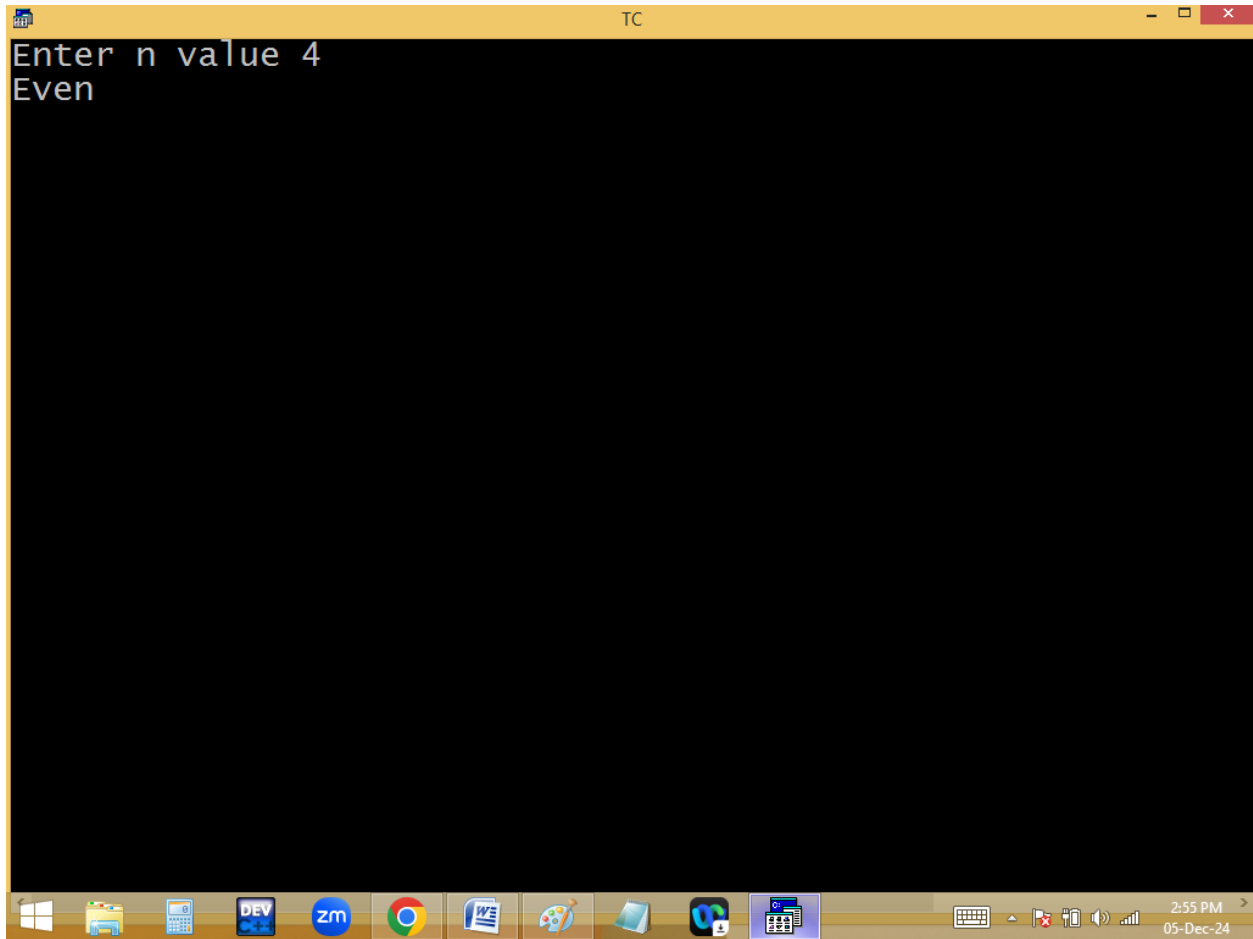

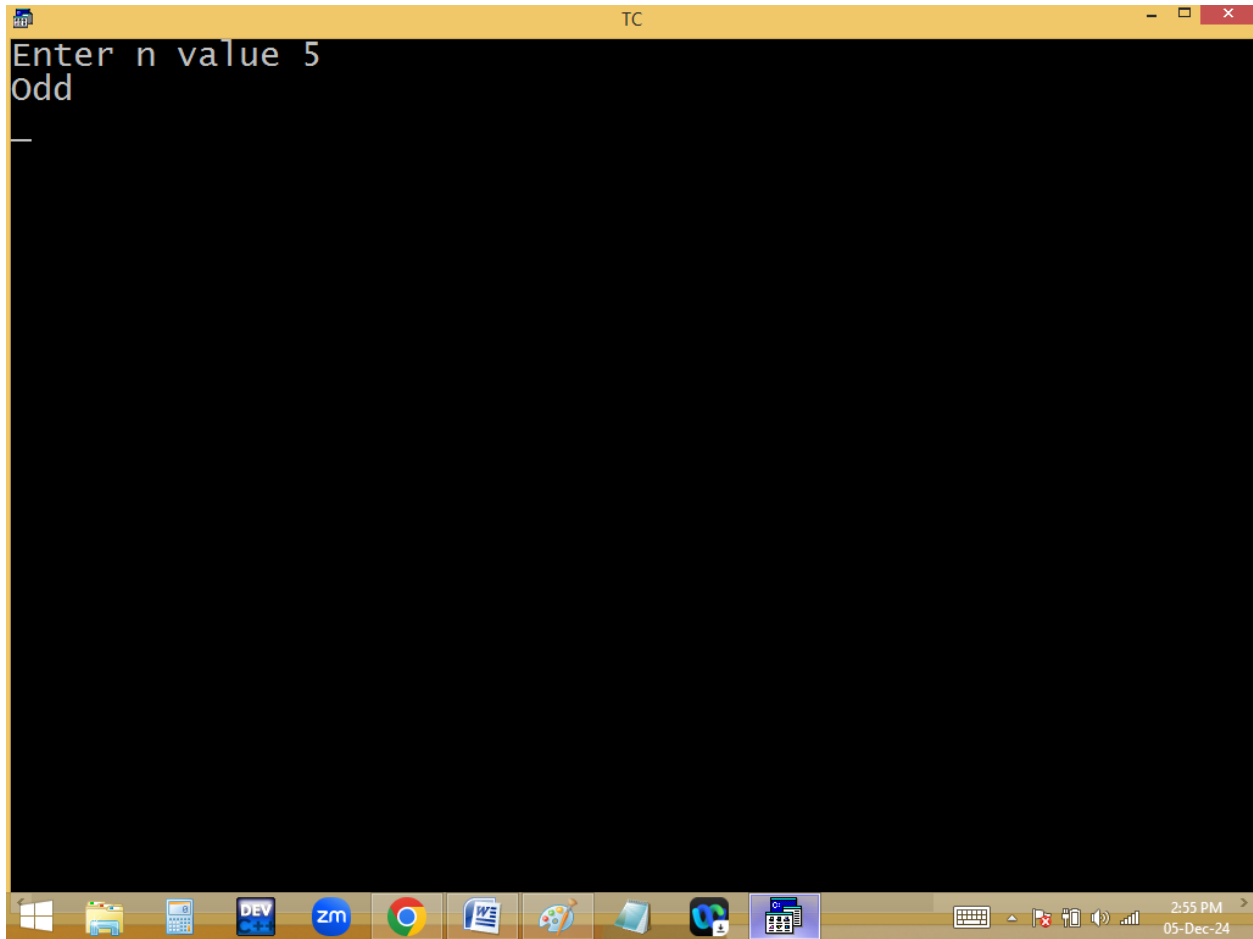


Finding weekday name:

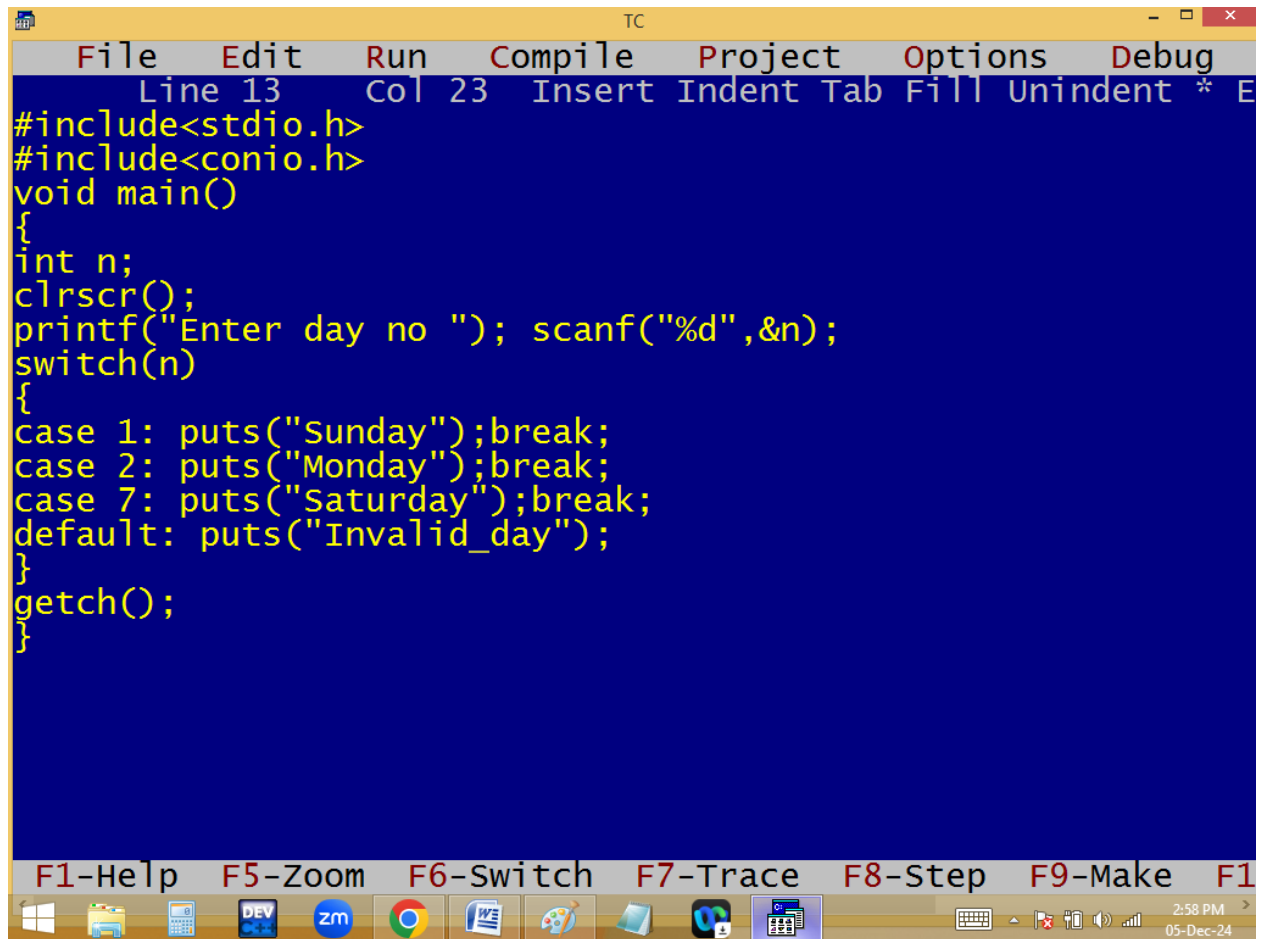



The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 13", "Col 23", and various editing options like "Insert", "Indent", "Tab", "Fill", "Unindent", and "E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter day no "); scanf("%d",&n);
switch(n)
{
case 1: puts("Sunday");break;
case 2: puts("Monday");break;
case 7: puts("Saturday");break;
default: puts("Invalid_day");
}
getch();
}
```

At the bottom of the window, there is a toolbar with icons for various functions and a row of function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Exit". The Windows taskbar is visible at the very bottom, showing icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and other applications. The system clock in the bottom right corner indicates the time is 2:58 PM on 05-Dec-24.

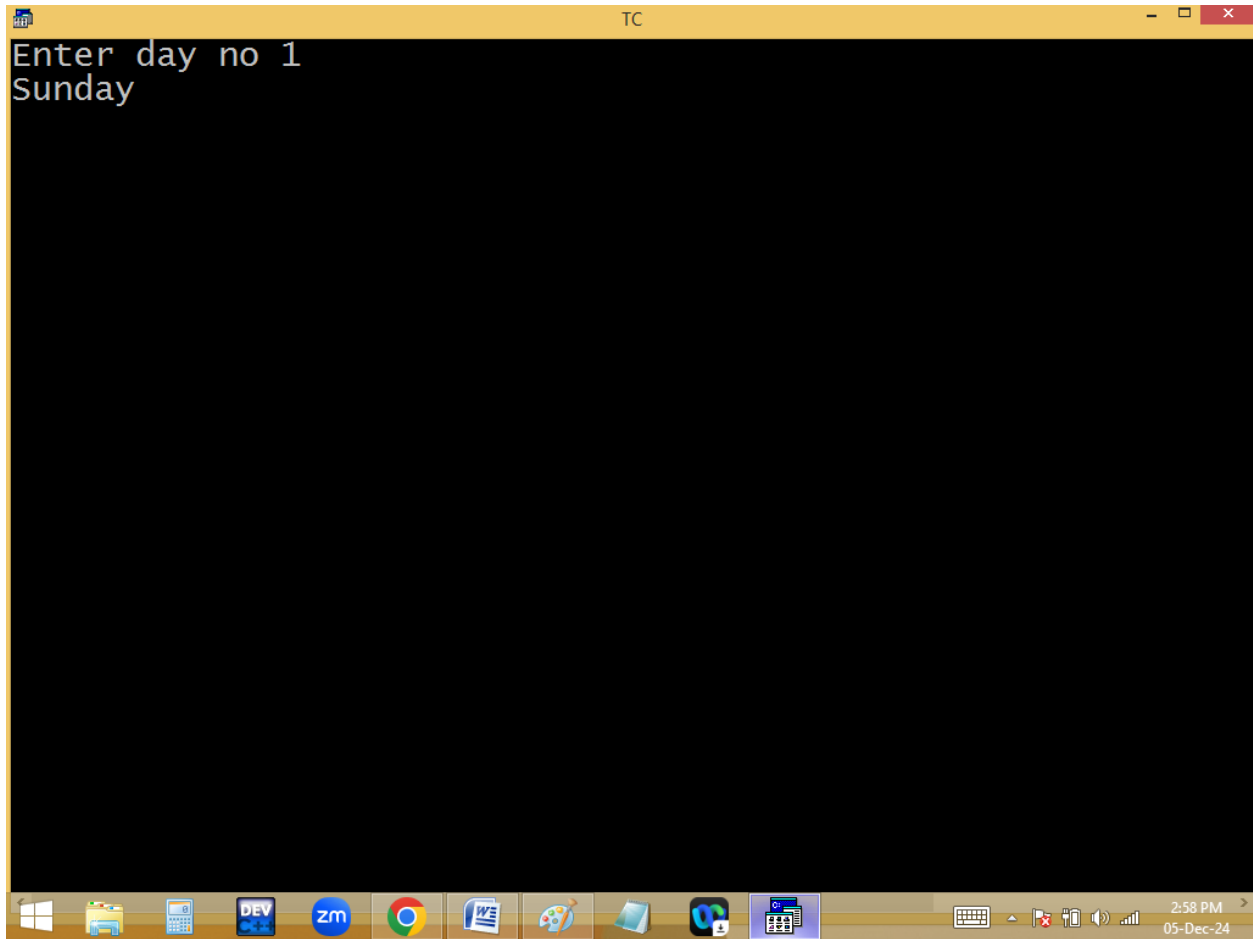

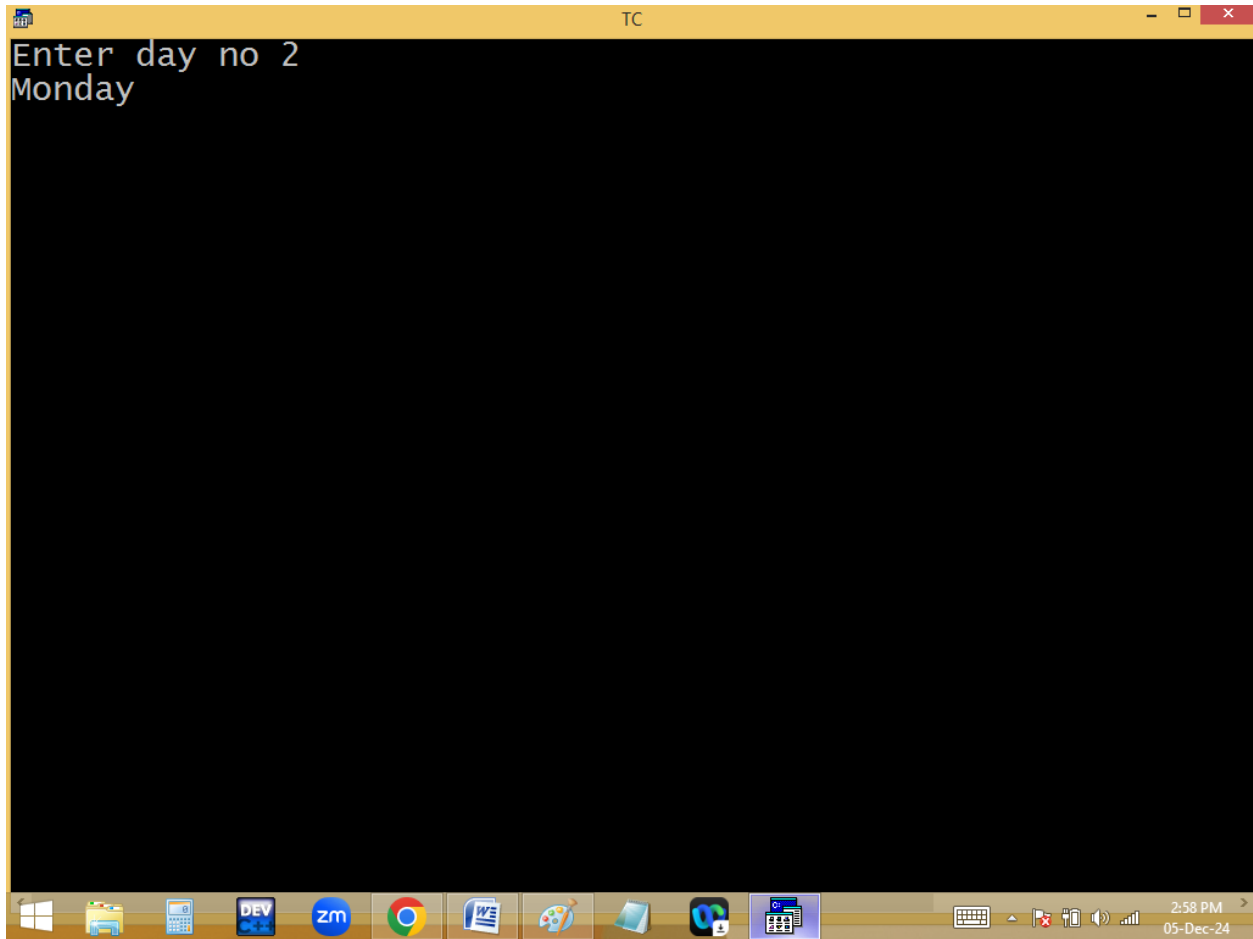

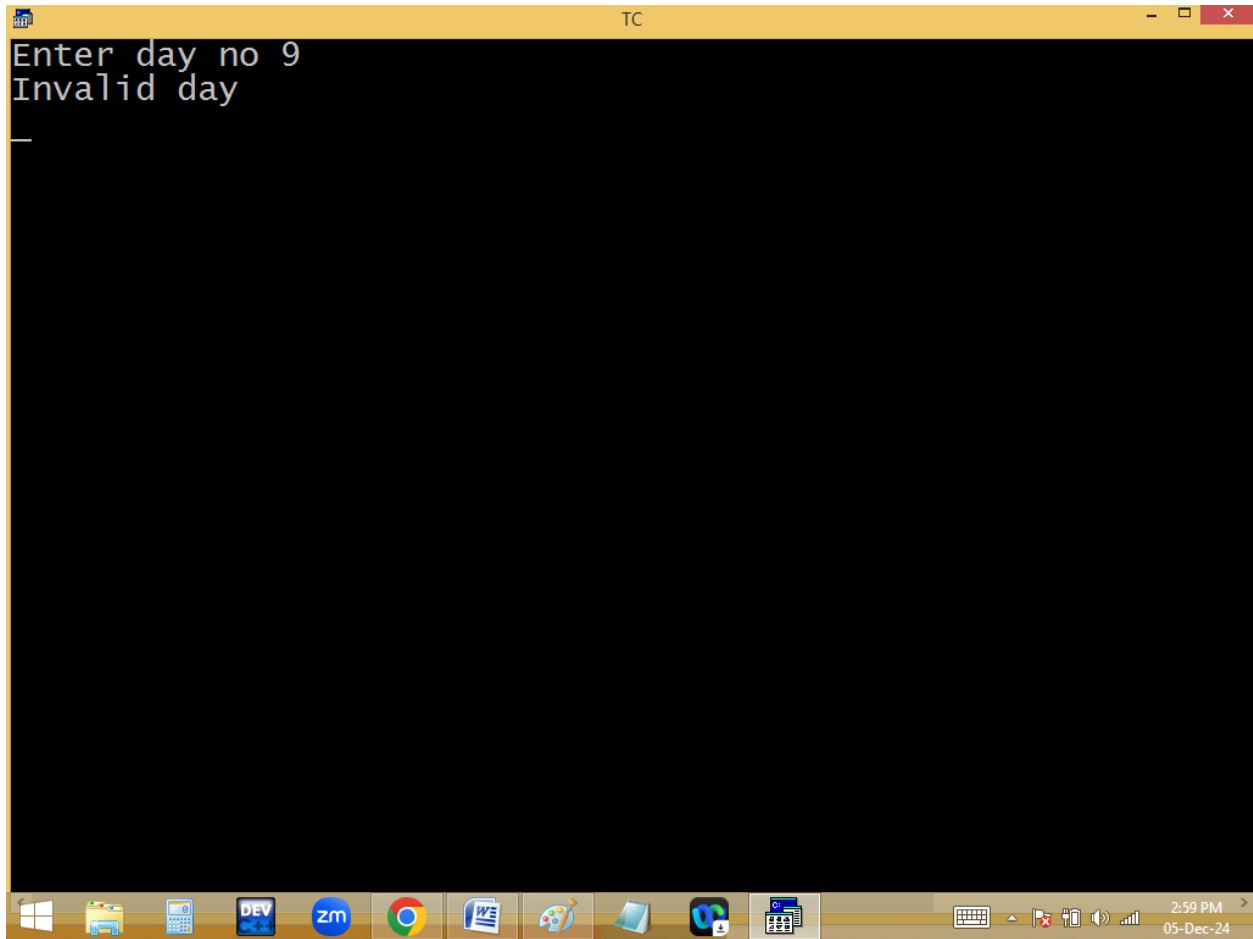



Finding vowel / consonant using switch:


```
TC
File Edit Run Compile Project Options Debug
Line 18 Col 30 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char ch;
clrscr();
printf("Enter a character "); scanf("%c",&ch);
if(ch>='A'&&ch<='Z')ch+=32;
if(ch>='a'&&ch<='z')
{
switch(ch)
{
case 'a':case 'e': case 'i': case 'o': case 'u':
puts("Vowel");break;
default: puts("Consonant");
}
}
else puts("Not an alphabet");_
getch();
}
```


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run


3:12 PM 05-Dec-24

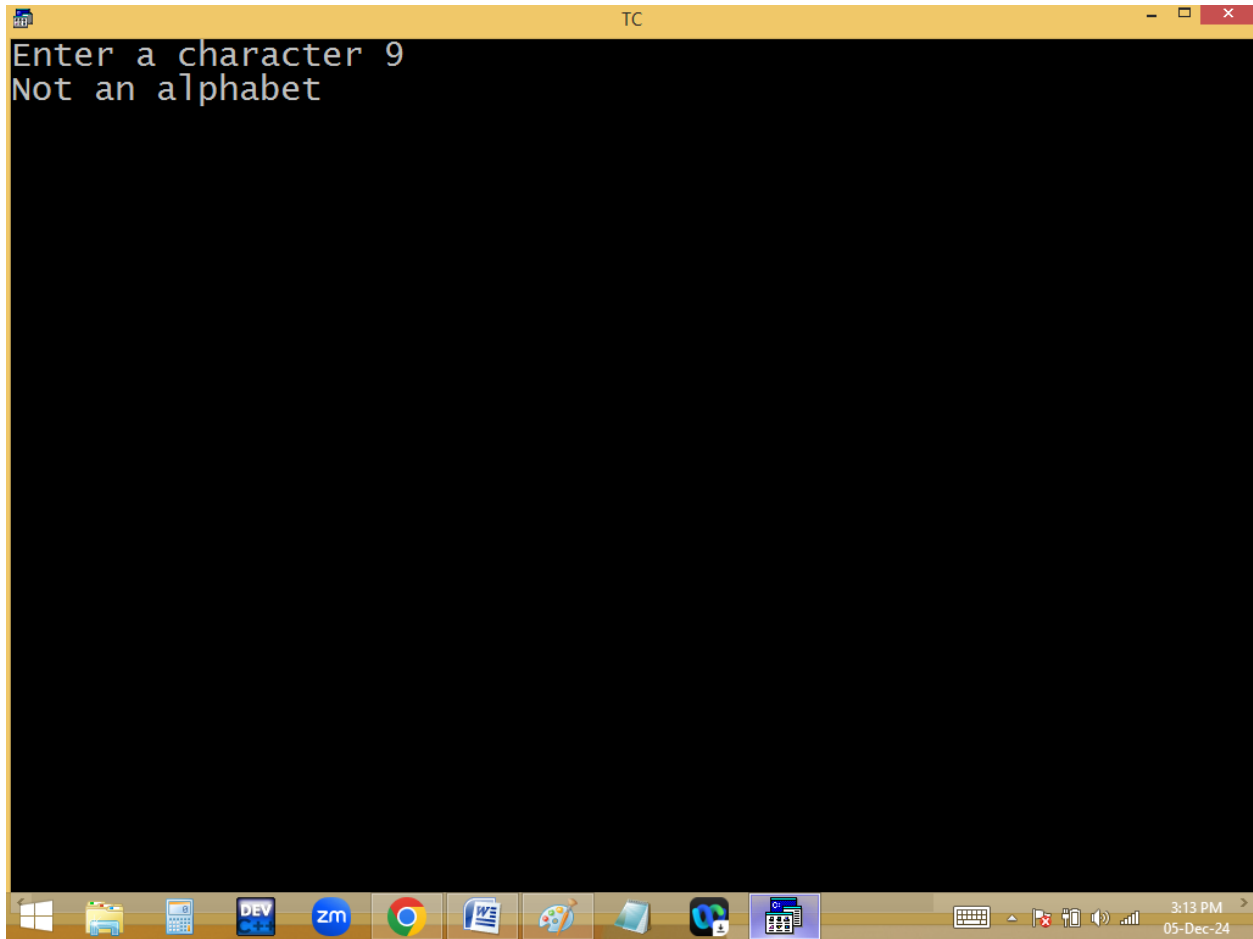

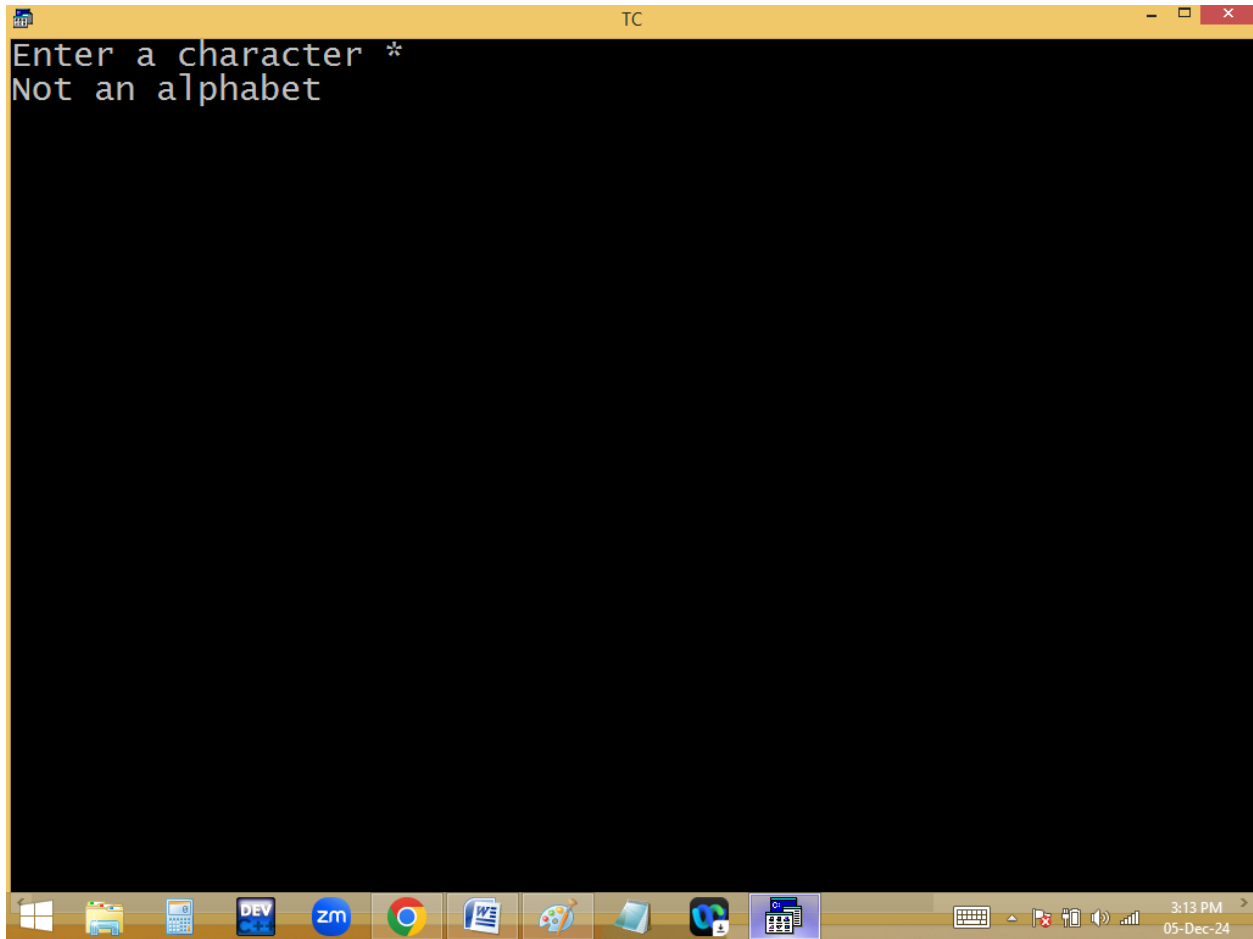

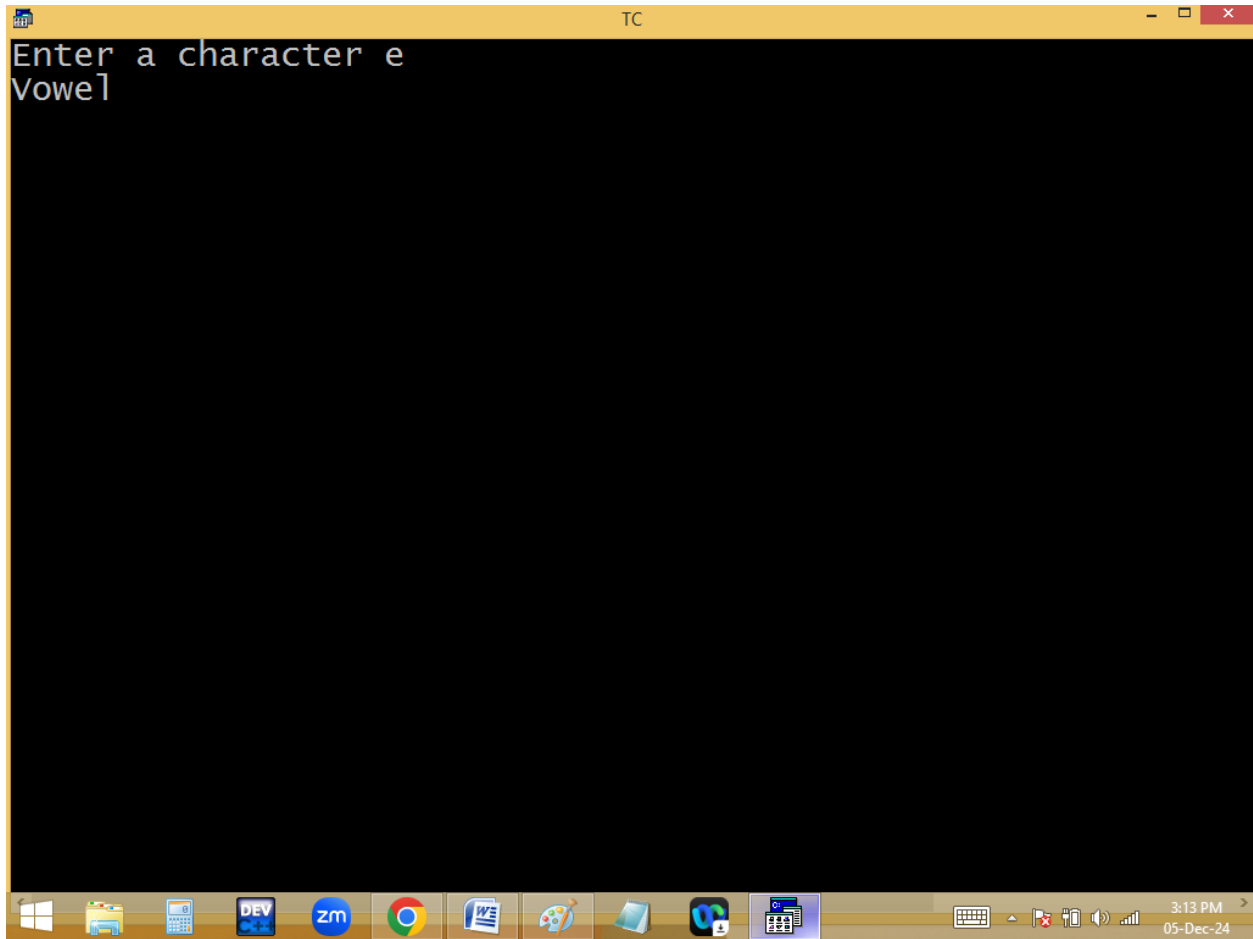

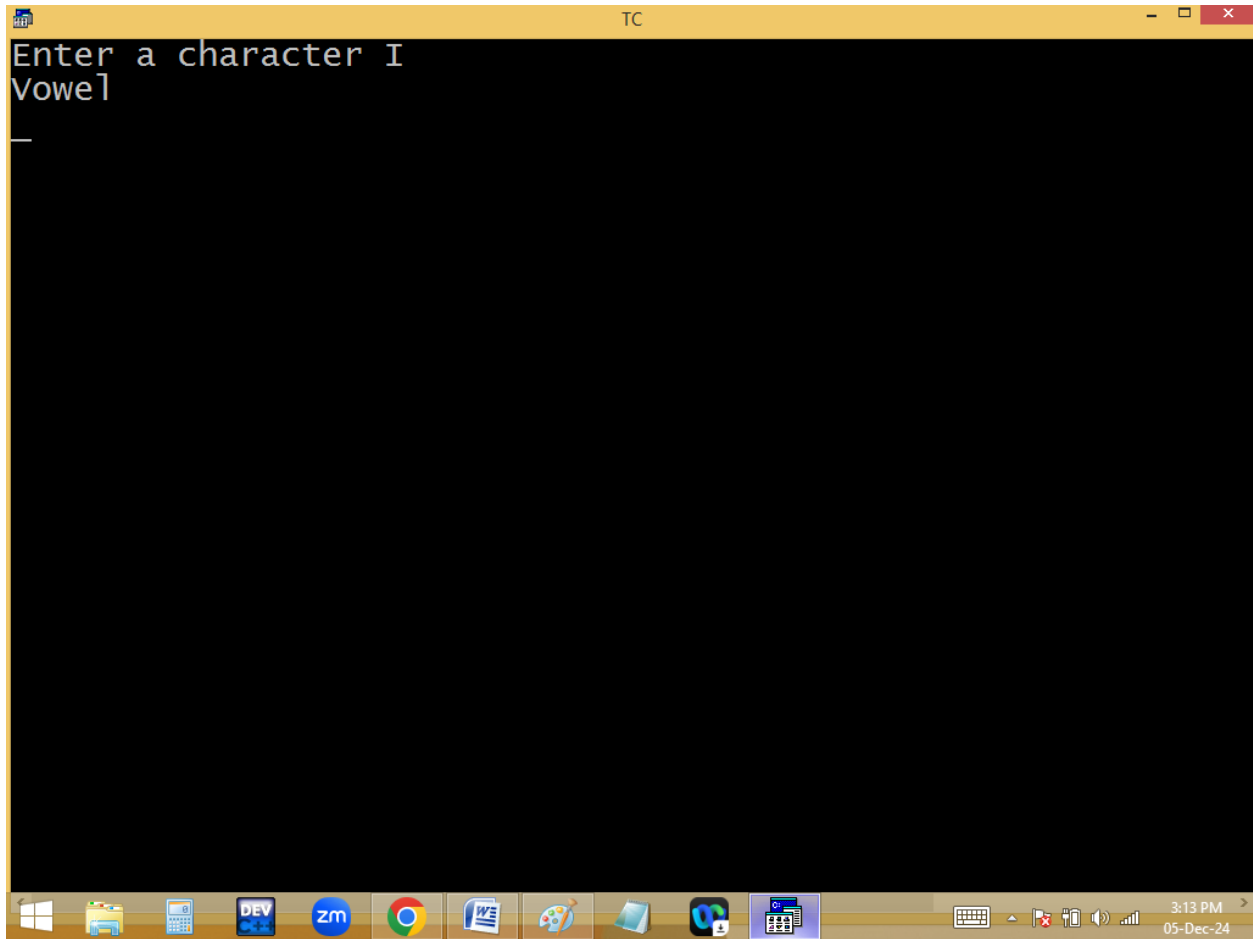


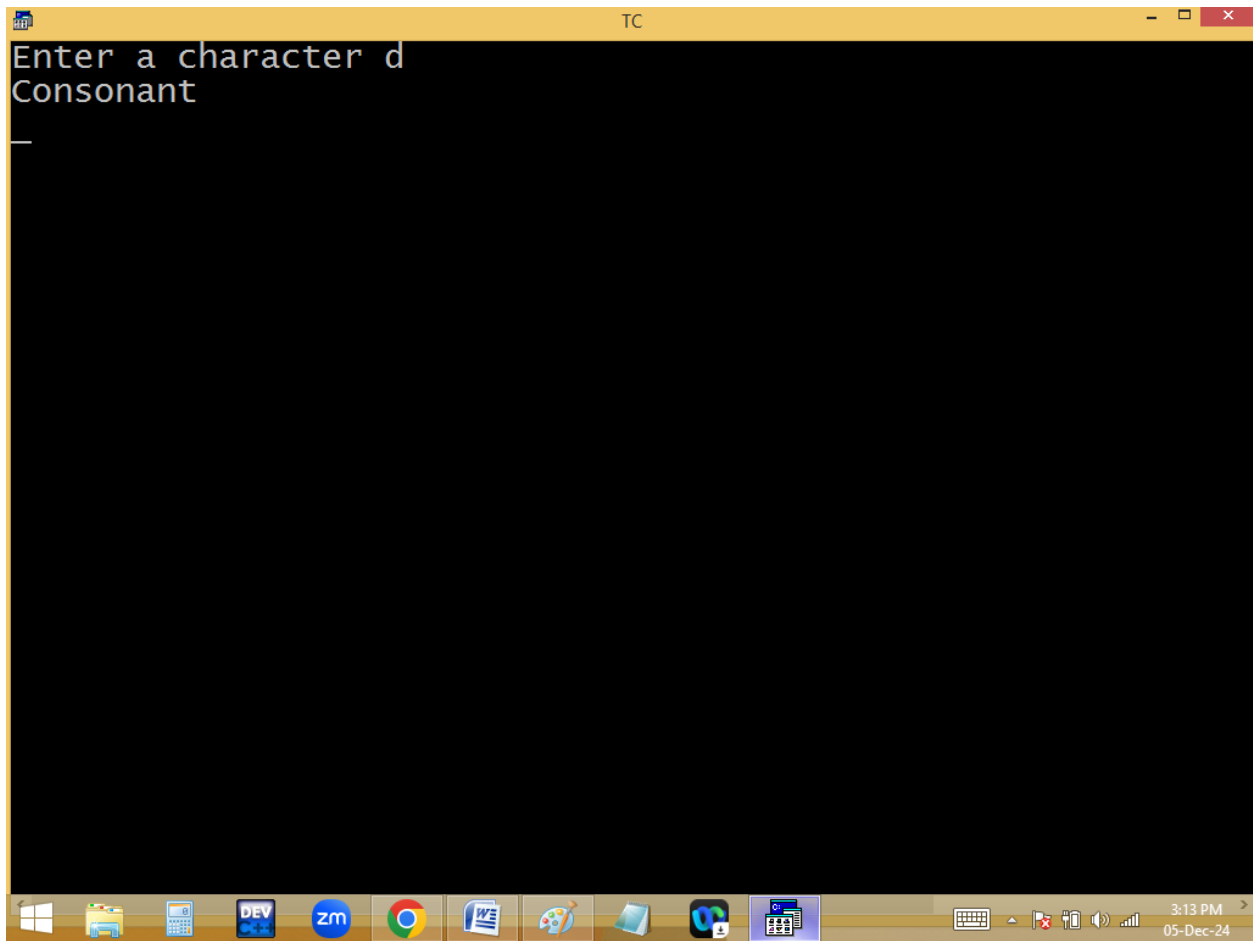



```
TC
File Edit Run Compile Project Options Debug
Line 19 Col 27 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char ch;
clrscr();
printf("Enter a character "); scanf("%c",&ch);
if(ch>='A'&&ch<='Z')ch+=32;
if(ch>='a'&&ch<='z')
{
switch(ch)
{
case 'a':case 'e': case 'i': case 'o': case 'u':
puts("Vowel");break;
default: puts("Consonant");
}
}
else if(ch>='0' && ch<='9')puts("It is a digit");
else puts("Special char");
getch();
}
```


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

3:14 PM 05-Dec-24

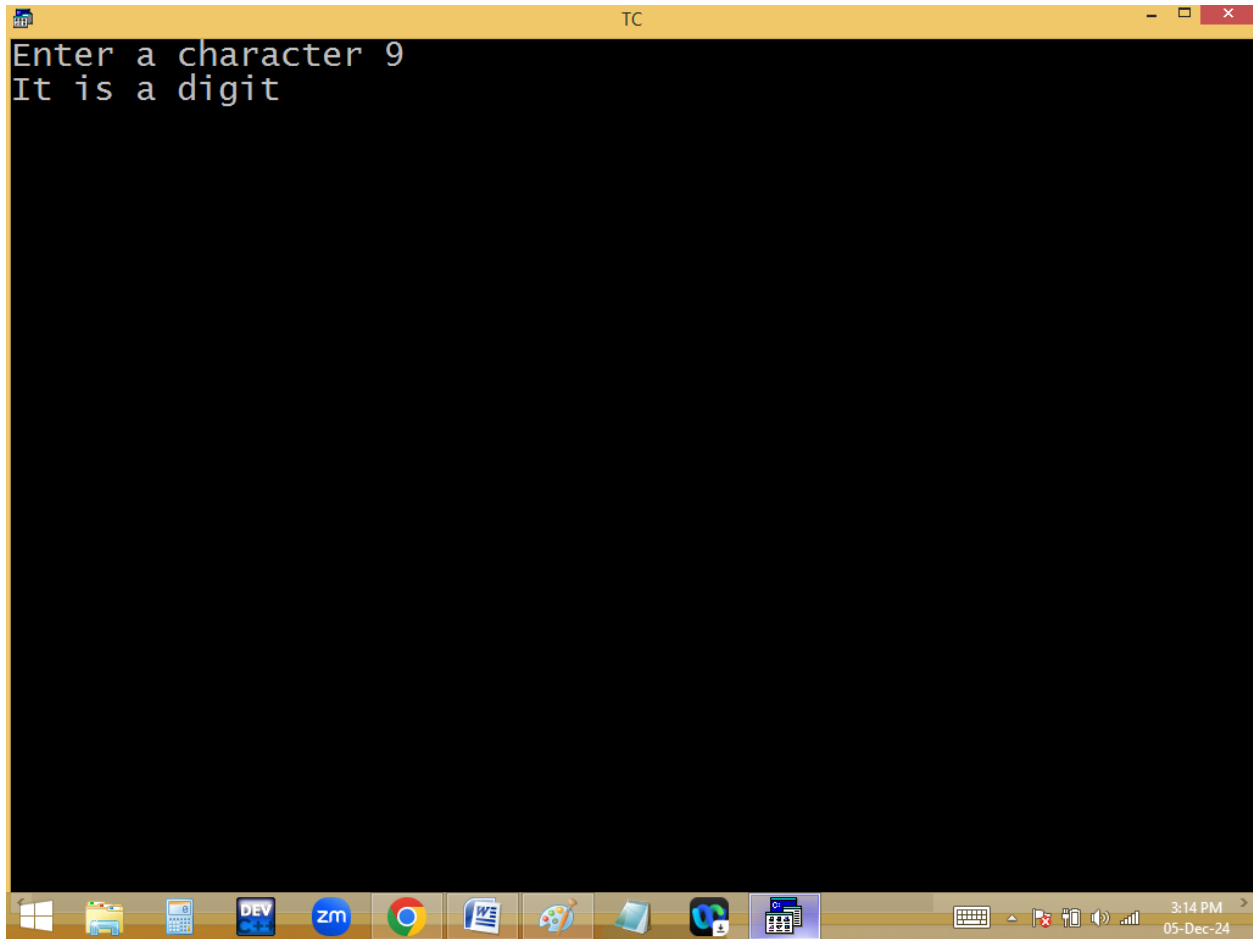

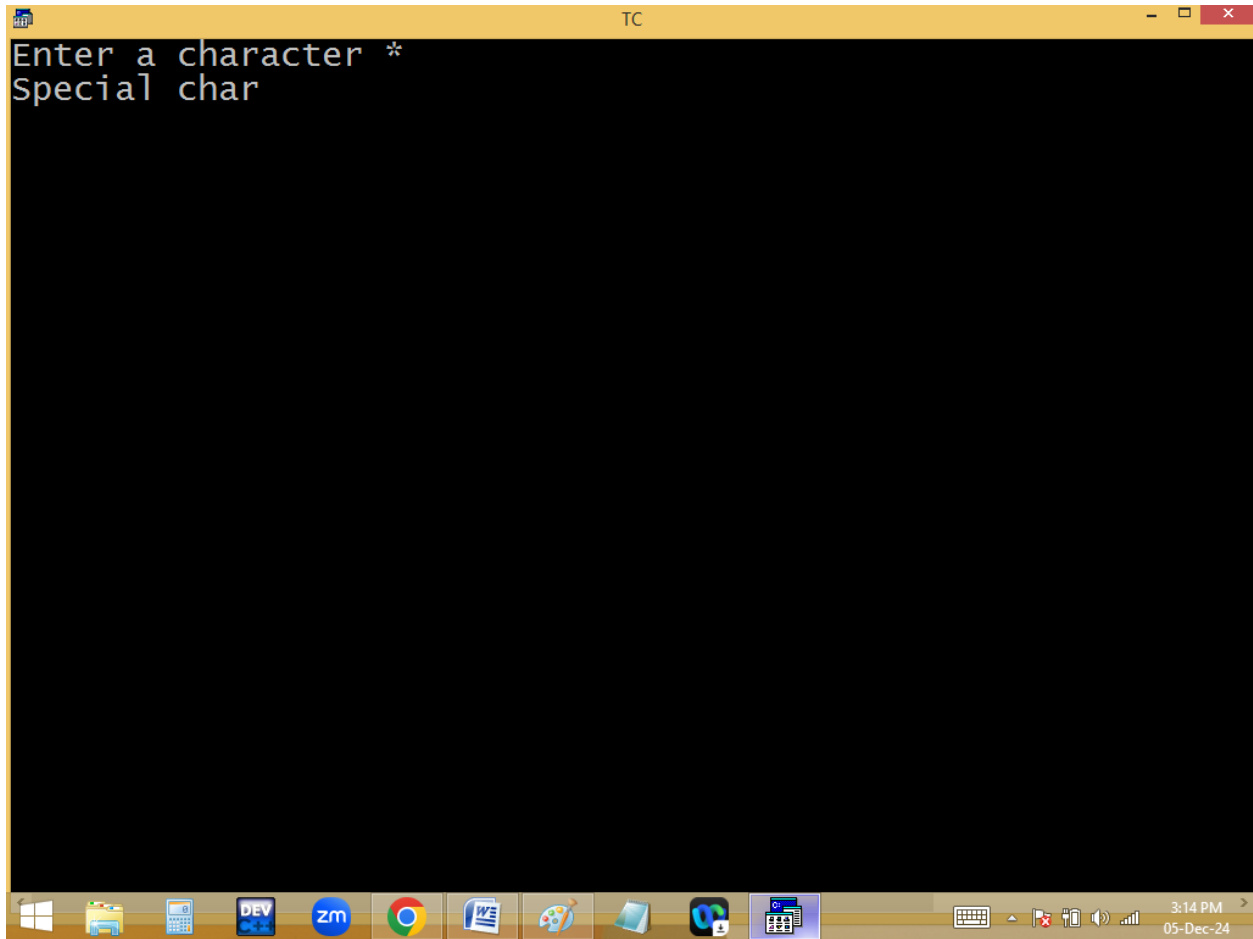

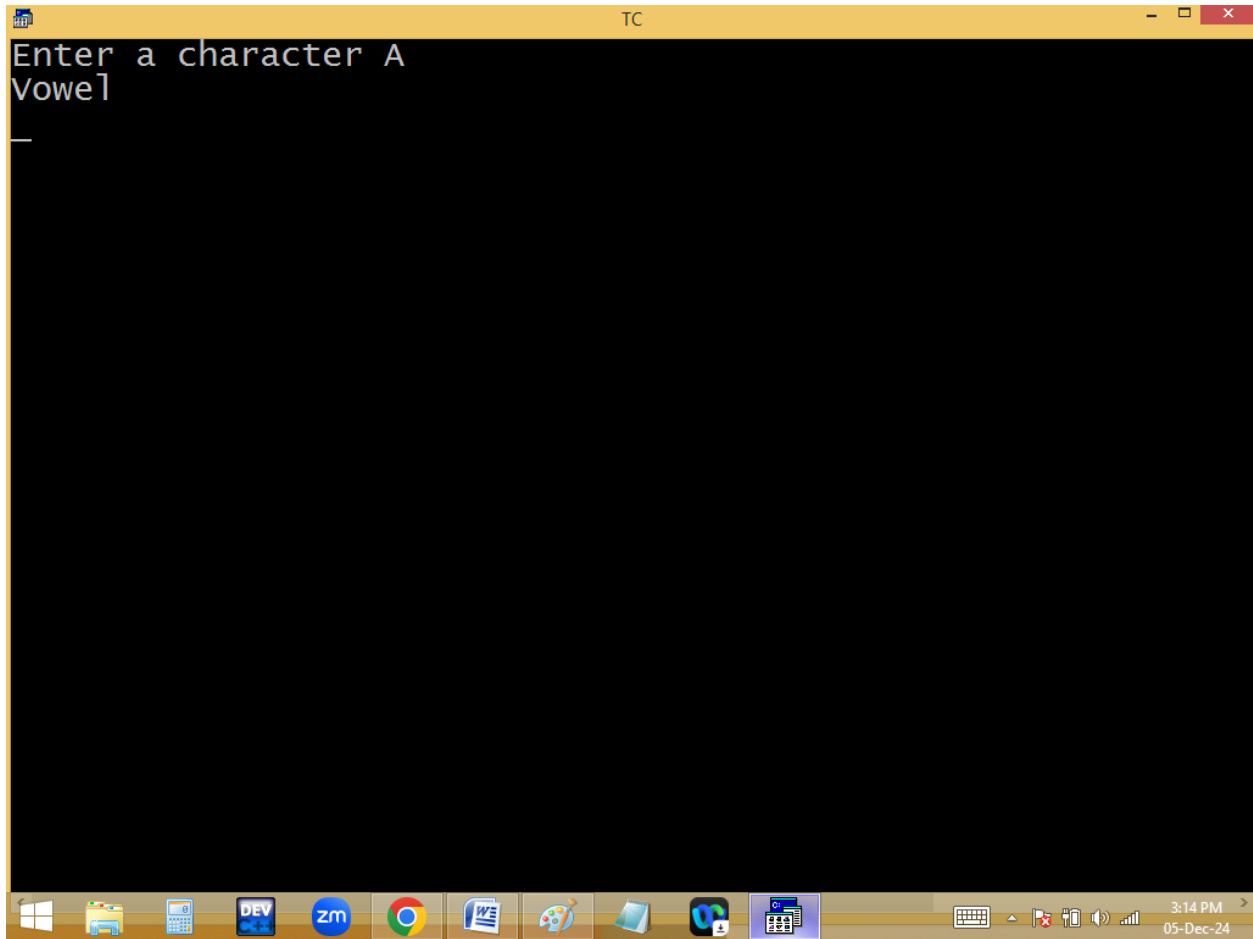


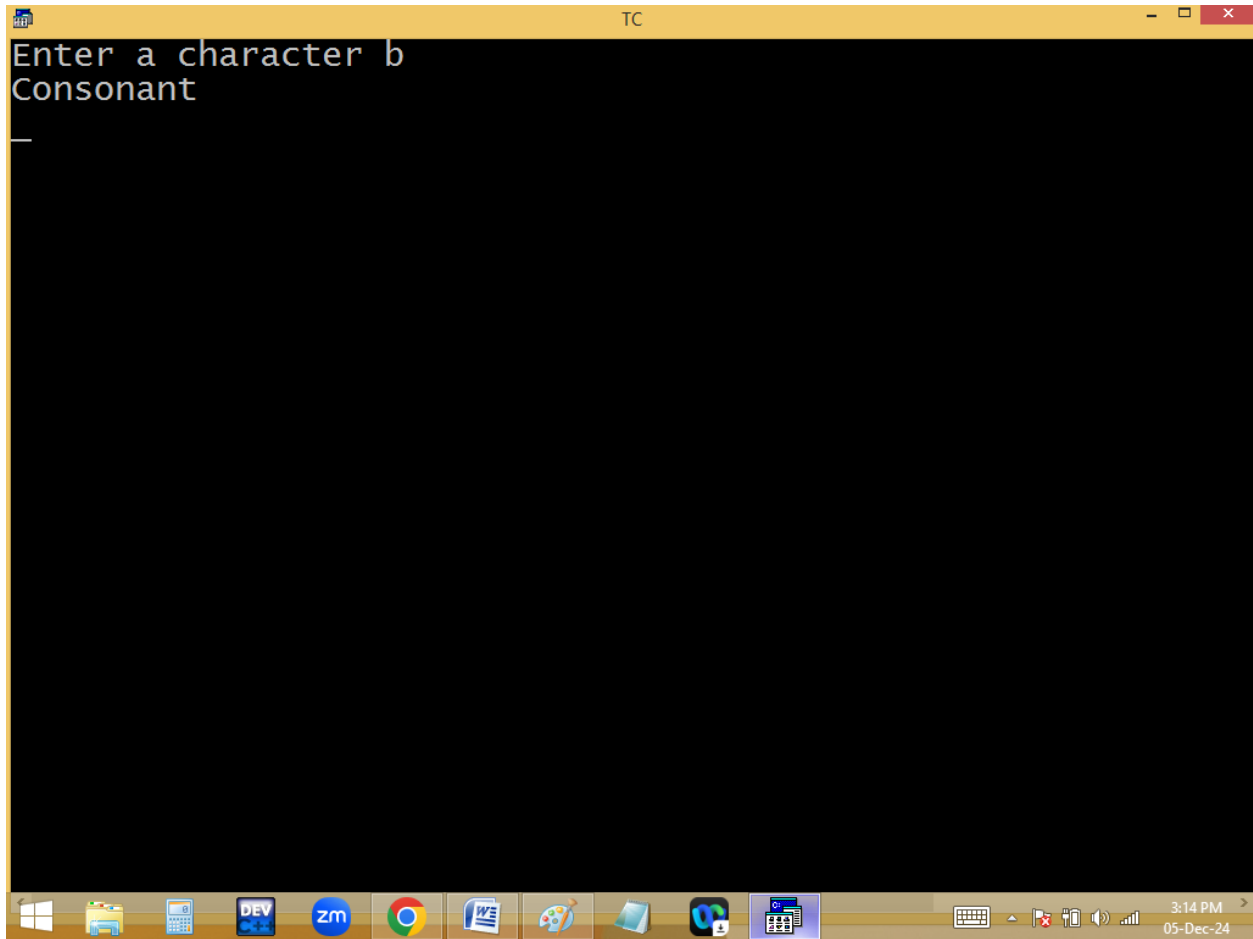



```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 10 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char ch;
clrscr();
printf("Enter a character "); scanf("%c",&ch);
if(ch>='A'&&ch<='Z')ch+=32;
if(ch>='a'&&ch<='z')
{
switch(ch=='a' || ch=='e' || ch=='i' || ch=='o' || ch=='u')
{
case 1: puts("Vowel");break;
default: puts("Consonant");
}
}
else if(ch>='0' && ch<='9')puts("It is a digit");
else puts("Special char");
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run


3:16 PM 05-Dec-24

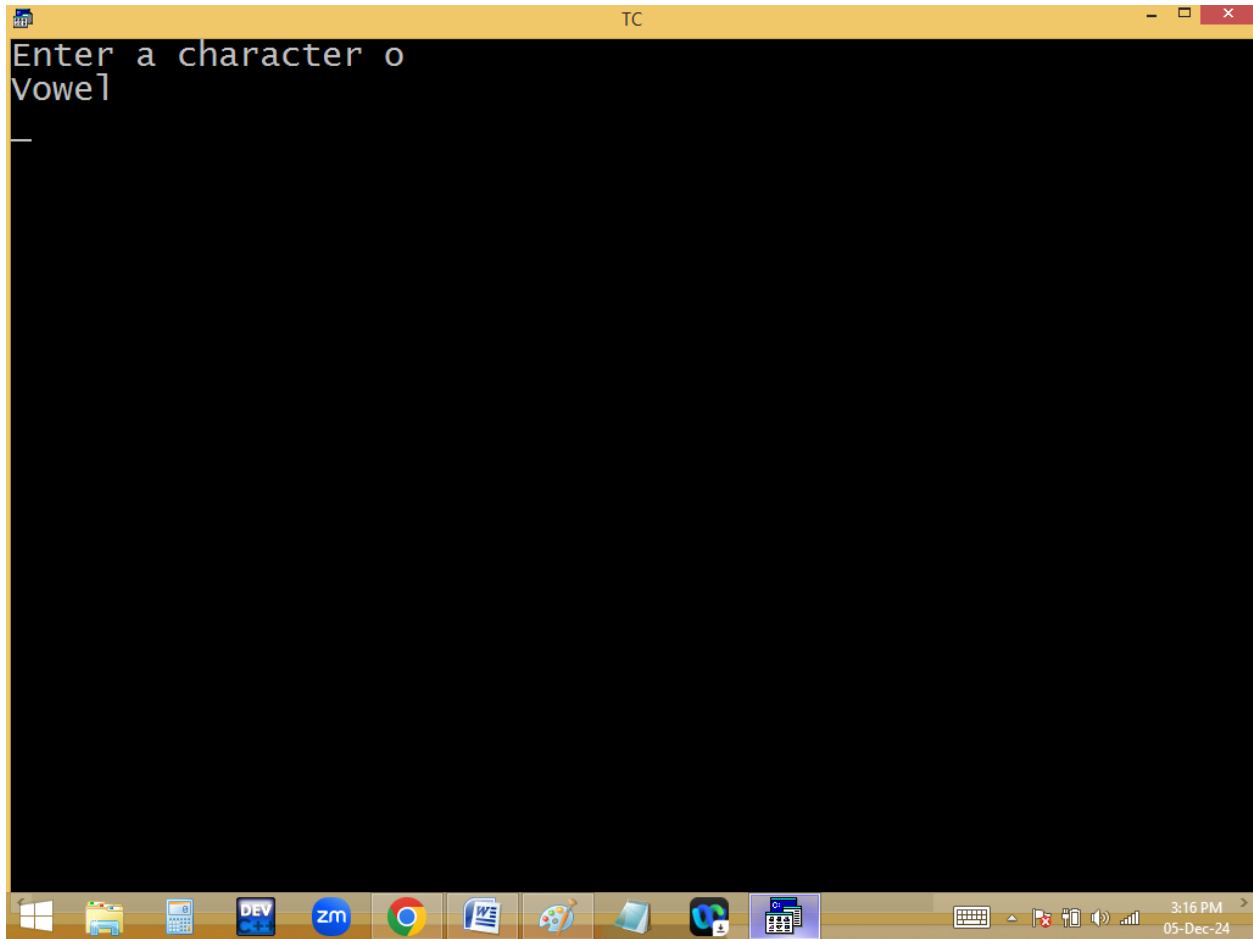

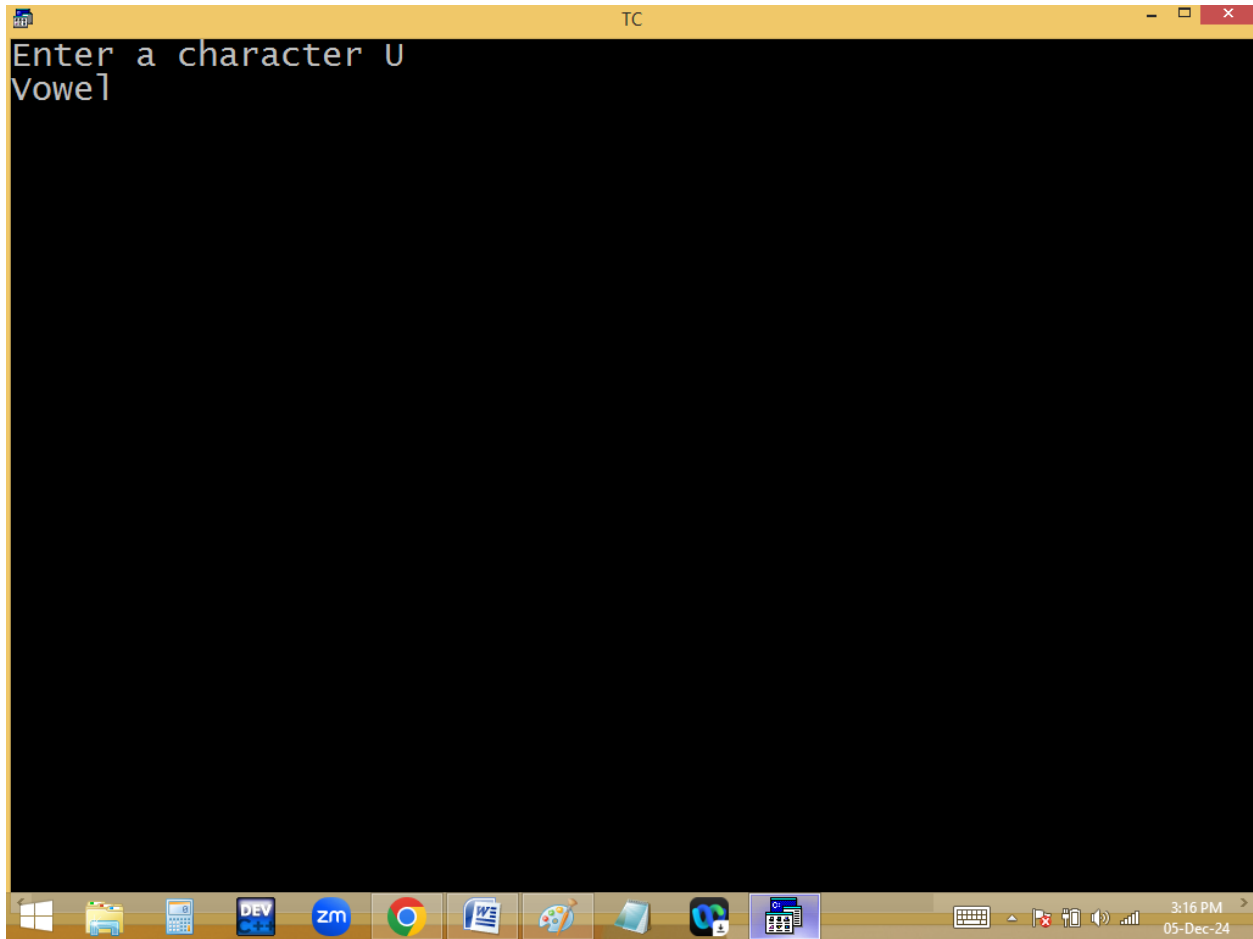

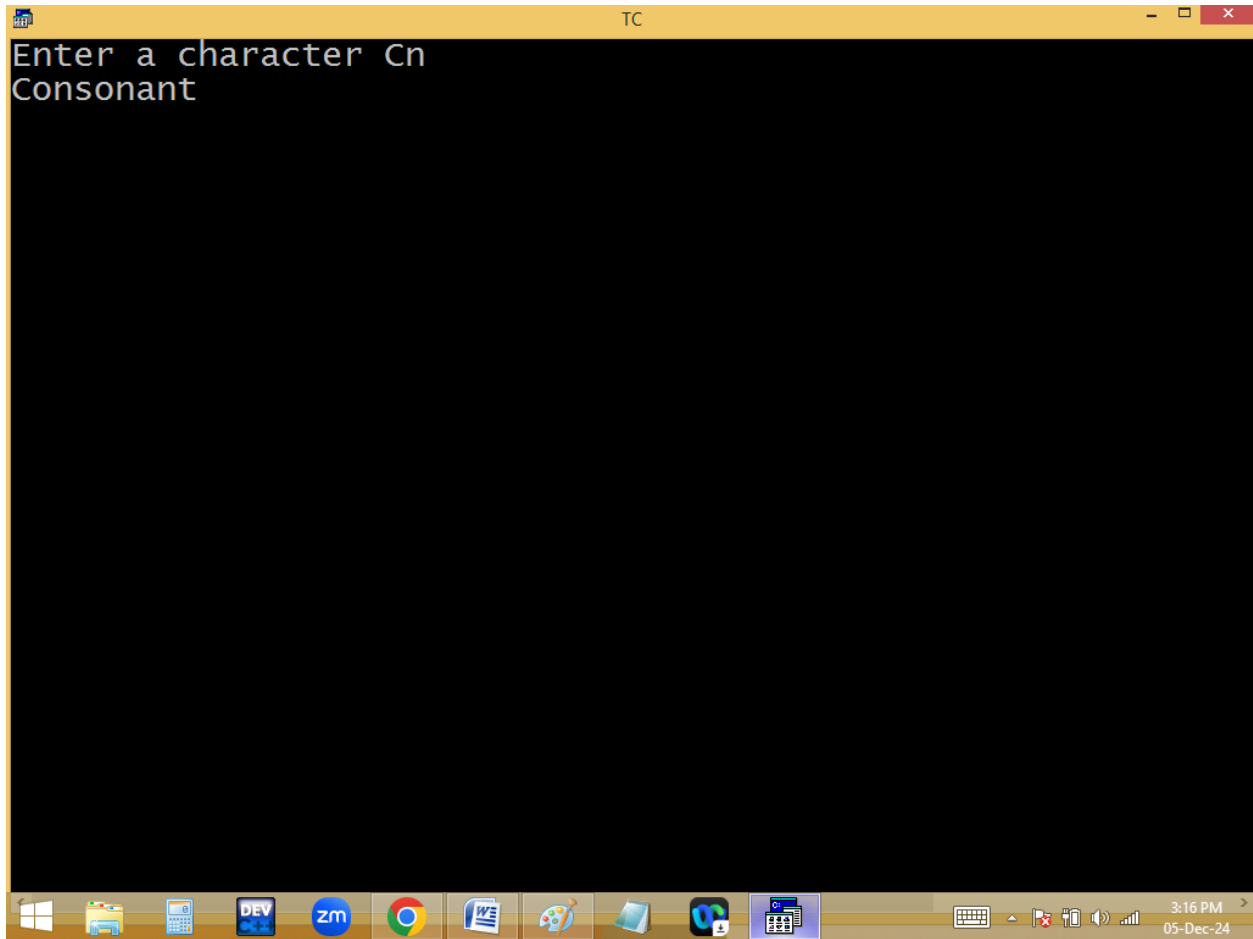


With predefined functions:

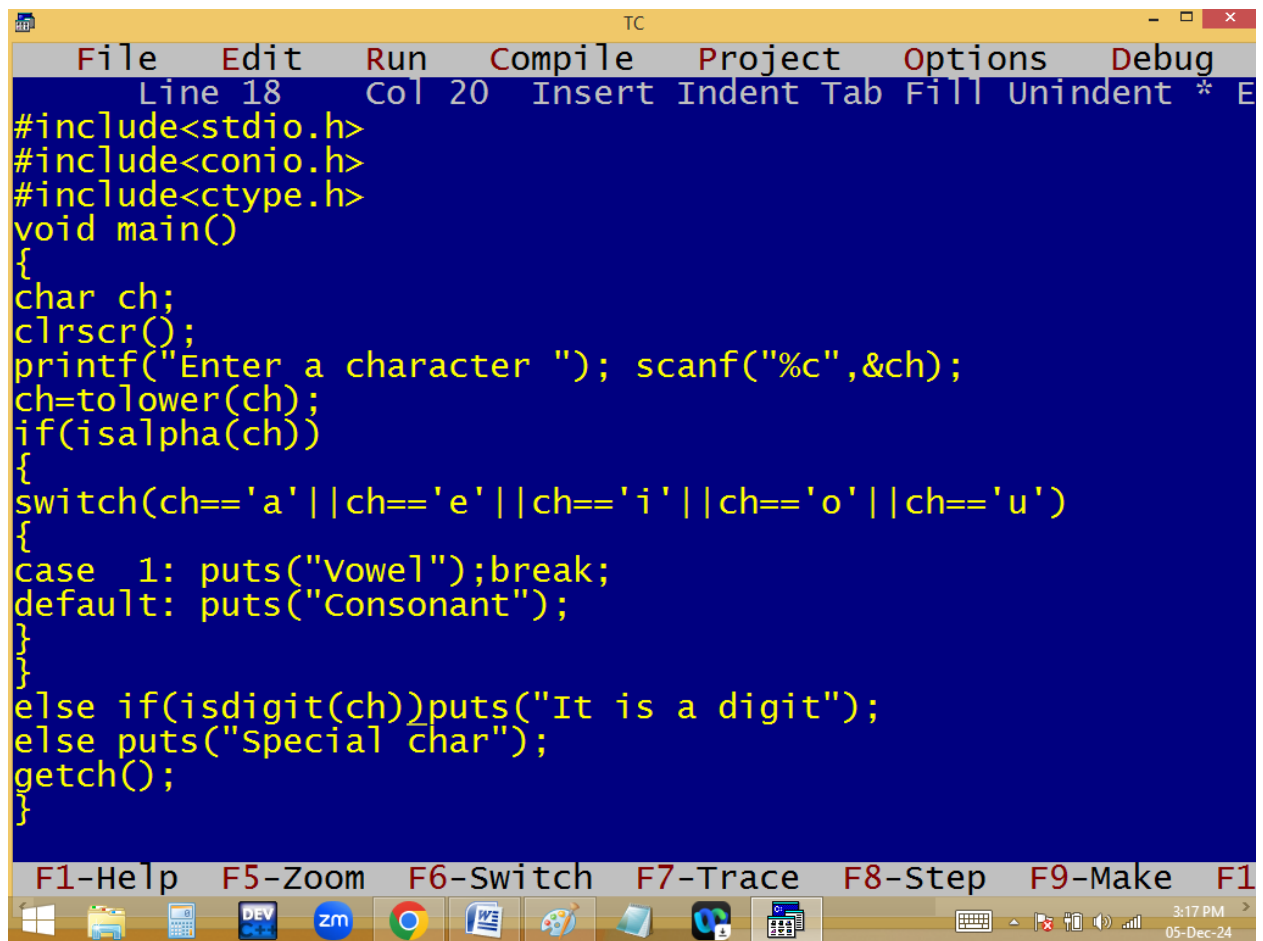



The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 18", "Col 20", and "Insert Indent Tab Fill Unindent * E". The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
#include<ctype.h>
void main()
{
char ch;
clrscr();
printf("Enter a character "); scanf("%c",&ch);
ch=tolower(ch);
if(isalpha(ch))
{
switch(ch=='a' || ch=='e' || ch=='i' || ch=='o' || ch=='u')
{
case 1: puts("Vowel");break;
default: puts("Consonant");
}
}
else if(isdigit(ch))puts("It is a digit");
else puts("Special char");
getch();
}
```

At the bottom of the IDE, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the very bottom, showing icons for the Start menu, File Explorer, Calculator, DEV C++, ZOOM, Google Chrome, Word, Paint, and the Turbo C++ application. The system clock in the bottom right corner shows "3:17 PM" and "05-Dec-24".

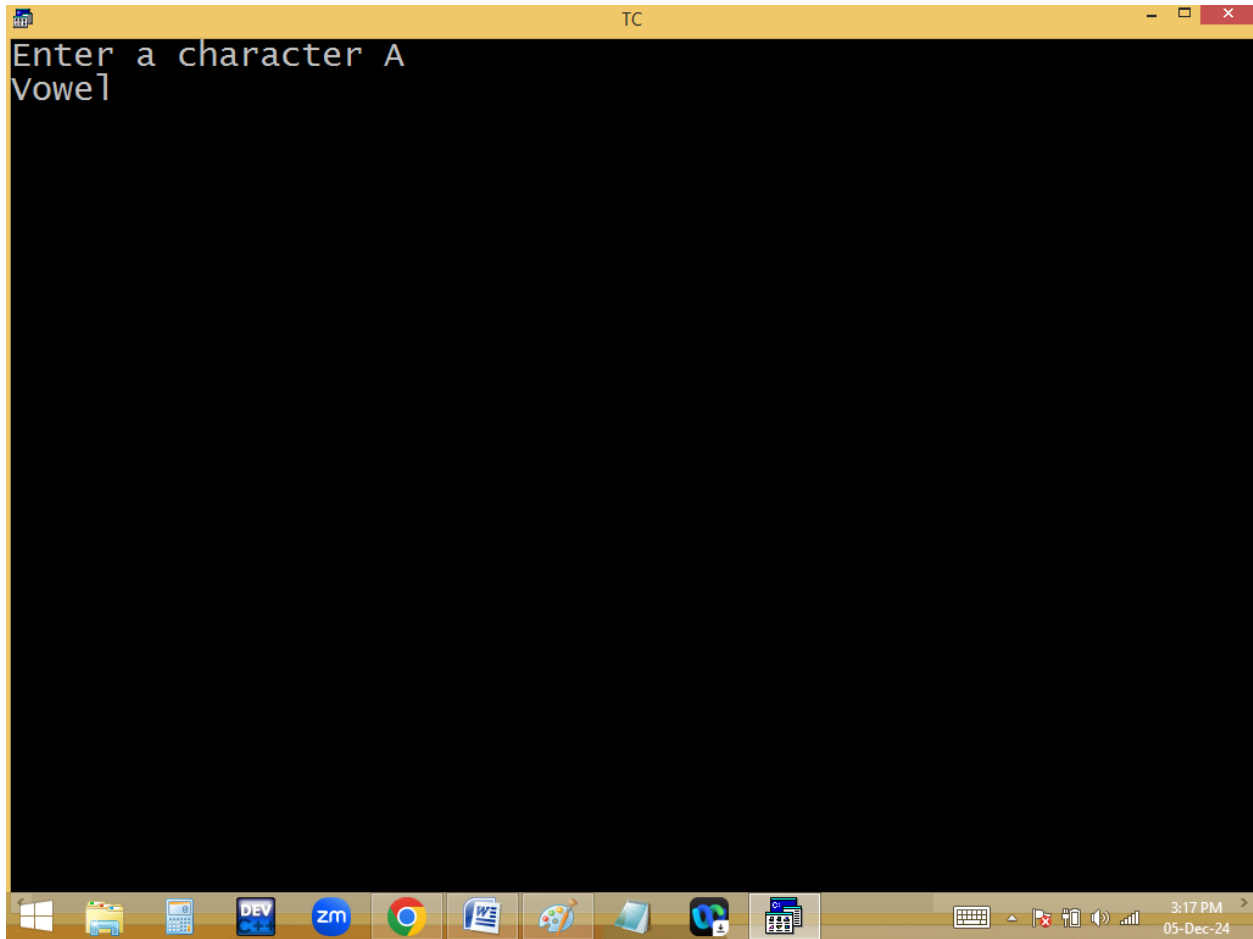

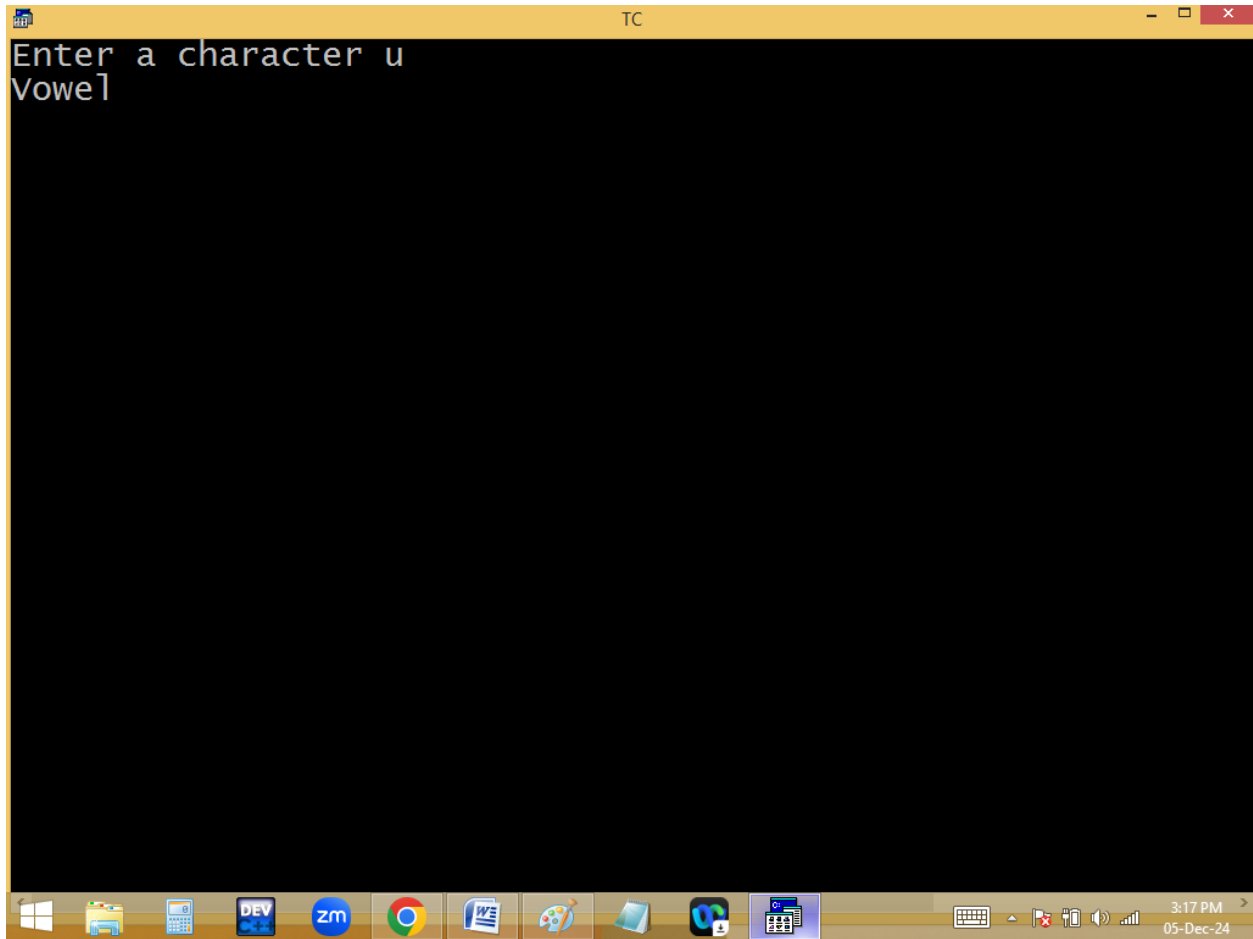

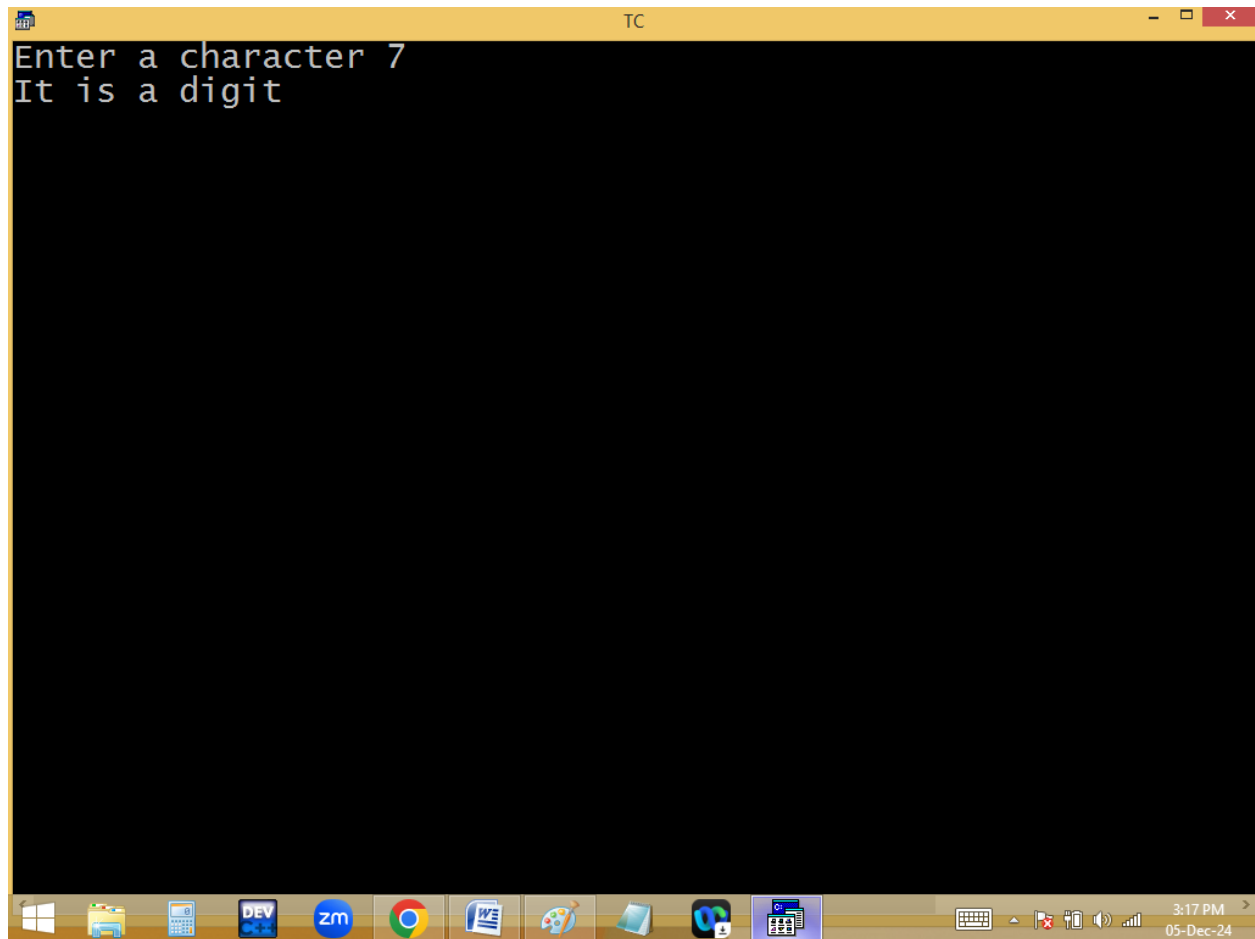

HOTEL BILLING SOFTWARE:

HOTEL SAI BALAJI

AMEERPET - HYD

M E N U

1. Tea - 10/-
 2. Coffee / Milk / Horlicks / Lemon Tea / Water Bottle - 20/-
 3. Idly / bonda / punugu / poha / upma / plain dosa - 30/-
 4. Masala / Karam / Onion / Pesara / Upma dosa / wada / poori - 40/-
 5. Sambar wada / Veg biryani / paneer dosa - 50/-
 6. Bill
 7. Cancel
 8. Close
-

Enter Ur Option [2]

Enter Quantity 1

Ur bill amount=20

```
#include<stdio.h>
```

```
#include<conio.h>
```

```
void main()
```

```
{
```

```
float qty,amt=0; int op;
```

```
abc:
```

```
clrscr();
```

```
puts("-----");
```


```
puts("\t\t\t HOTEL SAI KRISH ");
```


```
puts("\t\t\t AMEERPET - HYD-15");  
puts("-----");  
puts("\t\t\t M E N U");  
puts("-----");  
puts("1. Tea - 10/-");  
puts("2. Coffee/Milk/Boost/Lemon Tea/Water bottle -  
20/-");  
puts("3. Idly/poha/bonda/upma/Plain dosa - 30/-");  
puts("4. Poori/Onion/Masal dosa/Sambar idly/wada -  
40/-");  
puts("5. Veg Biryani / Panner dosa / Sambar wada - 50/-  
");  
puts("6. Bill");  
puts("7. Cancel");  
puts("8. Close");  
puts("-----");  
printf("\t\t\t Enter Ur option[ ]\b\b");scanf("%d",&op);  
if(op>=1 && op<=5)
```

```
{  
printf("\t\t Enter Quantity "); scanf("%f",&qty);  
}  
  
switch(op)  
{  
case 1: amt+=qty*10;break;  
case 2: amt+=qty*20;break;  
case 3: amt+=qty*30;break;  
case 4: amt+=qty*40;break;  
case 5: amt+=qty*50;break;  
case 6: printf("Ur bill %.2f",amt);amt=0;getch();break;  
case 7: printf("Ur order  
cancelled",amt=0);getch();break;  
case 8: return;  
default:printf("Invalid Item");  
}  
  
goto abc;
```

}

```
TC
-----
HOTEL SAI KRISH
AMEERPET - HYD-15
-----
M E N U
-----
1. Tea - 10/-
2. Coffee/Milk/Boost/Lemon Tea/Water bottle - 20/-
3. Idly/poha/bonda/upma/Plain dosa - 30/-
4. Poori/Onion/Masal dosa/Sambar idly/wada - 40/-
5. Veg Biryani / Panner dosa / Sambar wada - 50/-
6. Bill
7. Cancel
8. Close
-----
Enter Ur option[8]
-----
Page: 53 of 53 Words: 141
120%
3:50 PM
05-Dec-24
```

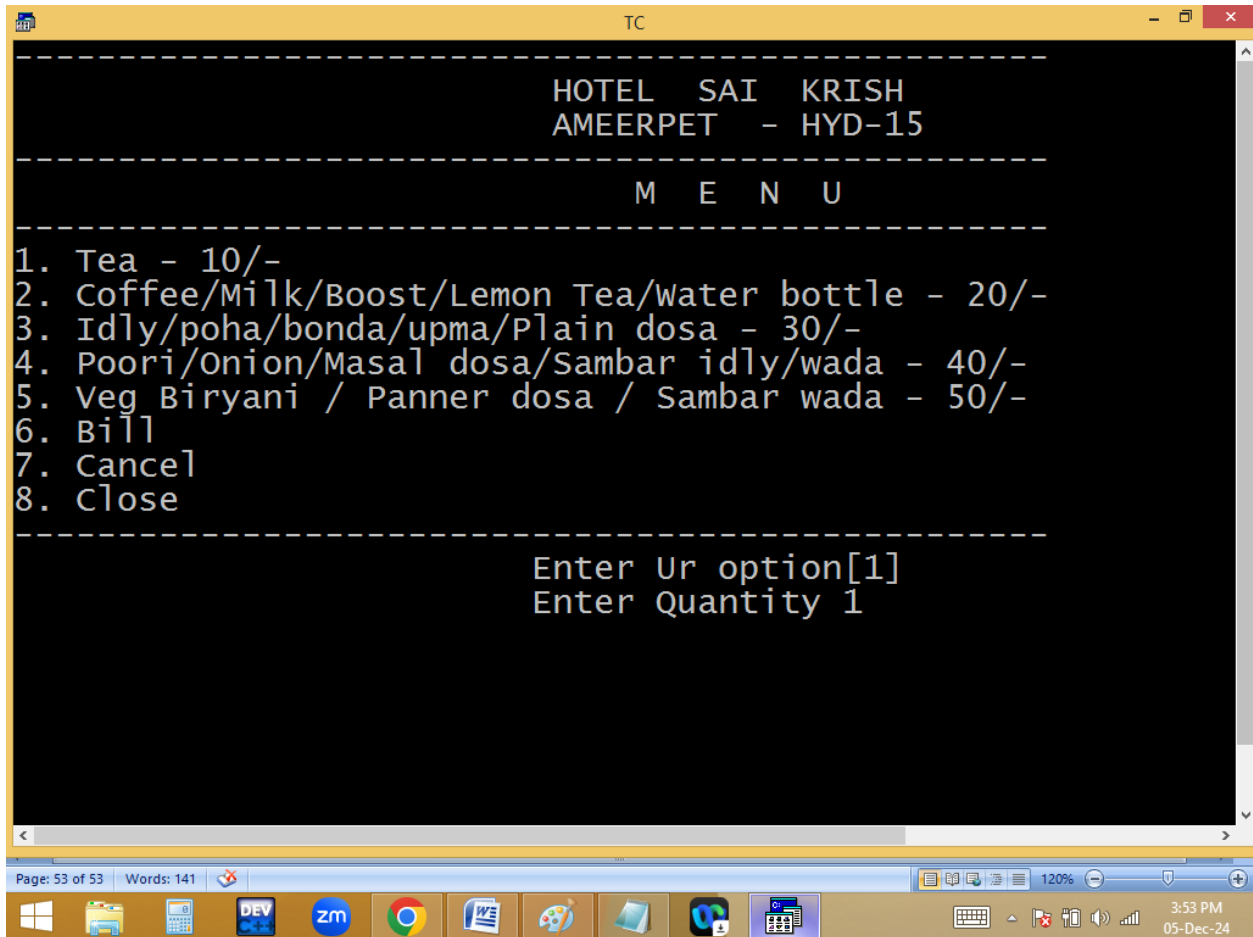

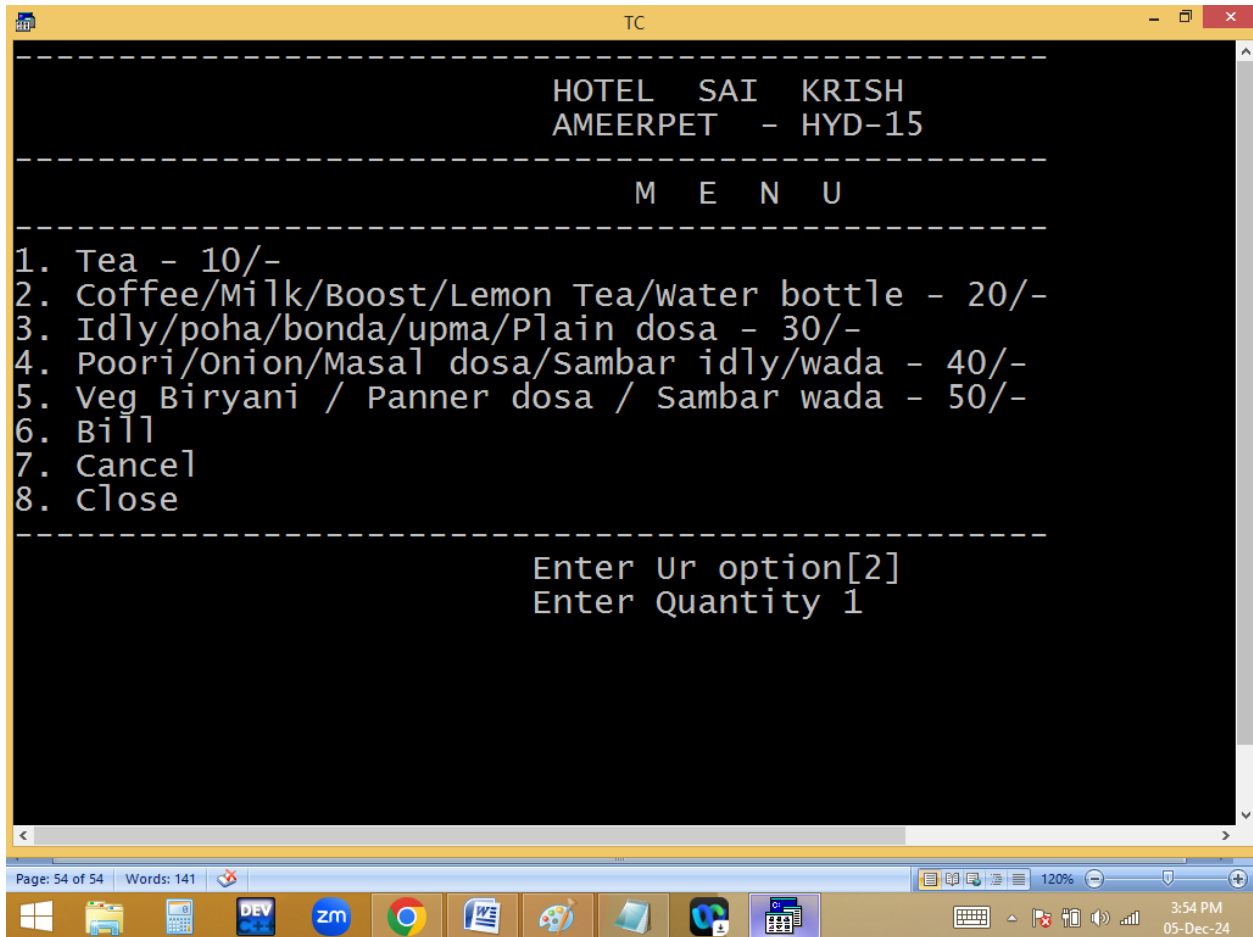

```
TC
-----
HOTEL SAI KRISH
AMEERPET - HYD-15
-----
M E N U
-----
1. Tea - 10/-
2. Coffee/Milk/Boost/Lemon Tea/Water bottle - 20/-
3. Idly/poha/bonda/upma/Plain dosa - 30/-
4. Poori/Onion/Masal dosa/Sambar idly/wada - 40/-
5. Veg Biryani / Panner dosa / Sambar wada - 50/-
6. Bill
7. Cancel
8. Close
-----
Enter Ur option[6]
Ur bill 30.00
```