


```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 23 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%D + %d = %d\n",1,2,3);
printf("%d + %D = %d\n",1,2,3);
printf("%d + %d = %D\n",1,2,3);
printf("%d %% %d = %d\n",5,2,5%2);
printf("%d % %d = %d\n",5,2,5%2);
printf("%i + %i = %i\n",5,2,5+2);
printf("%id + %id = %id\n",5,2,5+2);
printf("%Id + %Id = %Id\n",5,2,5+2);
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

11:25 AM 25-Nov-24

```
TC
%D + %d = %d
1 + %D = %d
1 + 2 = %D
5 % 2 = 1
5 % %d = %d
5 + 2 = 7
5d + 2d = 7d
%Id + %Id = %Id
```

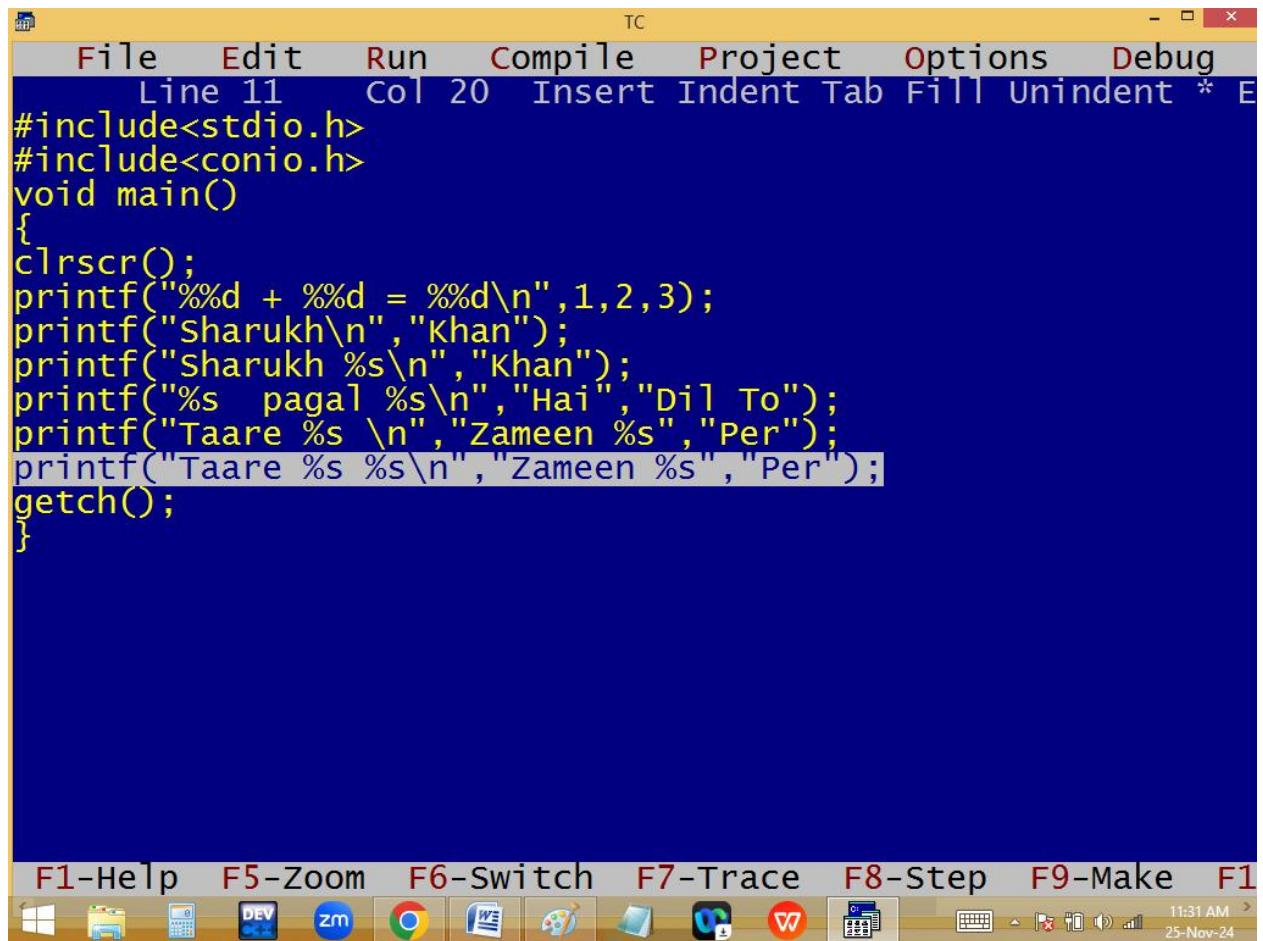

```
TC
File Edit Run Compile Project Options Debug
Line 11 Col 20 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%d + %d = %d\n",1,2,3);
printf("Sharukh\n","Khan");
printf("Sharukh %s\n","Khan");
printf("%s pagal %s\n","Hai","Dil To");
printf("Taare %s \n","Zameen %s","Per");
printf("Taare %s %s\n","Zameen %s","Per");
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

11:31 AM 25-Nov-24

```
TC
%d + %d = %d
Sharukh
Sharukh Khan
Hai pagal Dil To
Taare Zameen %s
Taare Zameen %s Per
```



```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 43 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%d\n",printf("Kahona Pyar Hai\t"));
printf("%d\n",printf("Kahona Pyar Hai\0"));
printf("%d\n",sizeof("Kahona Pyar Hai\0"));
printf("Dilse-%d\n",printf("Pathaan-%d\n",
printf("Kahona Pyar Hai\n"))));
printf("Don-%d\n",printf("Khan-%d\r",printf("Dilwale143\n")));
printf("Secunderabad-Biryani\rHyderabad");_
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

11:47 AM
25-Nov-24

```
TC
Kahona Pyar Hai 16
Kahona Pyar Hai15
17
Kahona Pyar Hai
Pathaan-16
Dilse-11
Dilwale143
Don-811
Hyderabad-Biryani
```

`p("Kahona Pyar Hai\n");`

16

`p("Pathaan-%d\n");`

16

||

`p("Dilse-%d\n");`

11

`p("Dilwale143\n");`

||

`p("Khan-%d\r");`


11

`p("Don-%d\n");`

8




~~Secunderabad-Biryani\r~~
Hyderabad

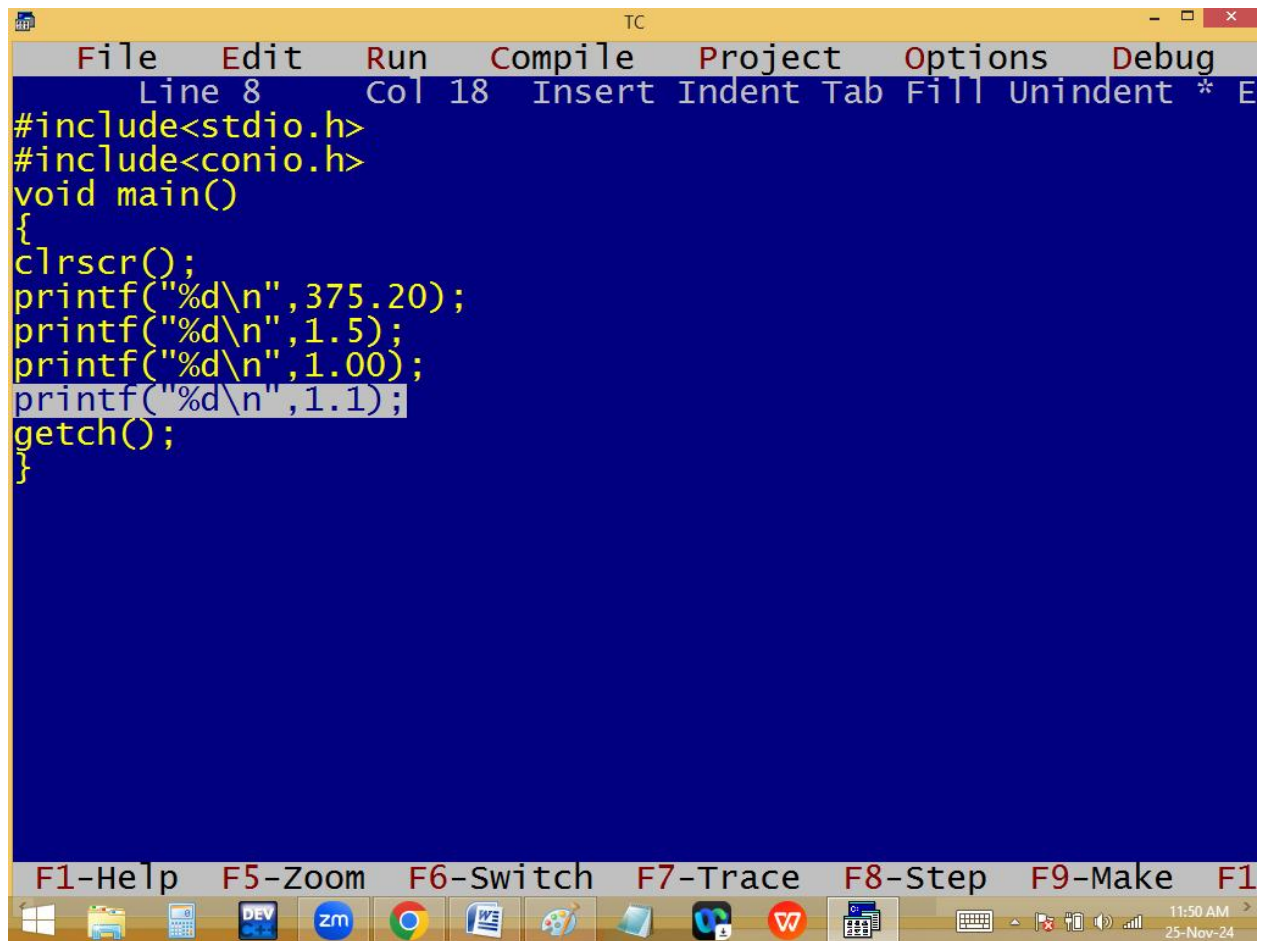


The image shows a screenshot of the Turbo C++ (TC) integrated development environment. The main window has a dark blue background with yellow text for the code. The menu bar at the top includes File, Edit, Run, Compile, Project, Options, and Debug. Below the menu bar, a status bar shows 'Line 8 Col 18' and various editing options like Insert, Indent, Tab, Fill, Unindent, and *. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%d\n",375.20);
printf("%d\n",1.5);
printf("%d\n",1.00);
printf("%d\n",1.1);
getch();
}
```

The line `printf("%d\n",1.1);` is currently selected. At the bottom of the window, there is a toolbar with function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. Below the toolbar is the Windows taskbar, which includes icons for the Start menu, File Explorer, Calculator, DEV C++, Zm, Google Chrome, Notepad, Paint, and several other applications. The system clock in the bottom right corner indicates the time is 11:50 AM on 25-Nov-24.

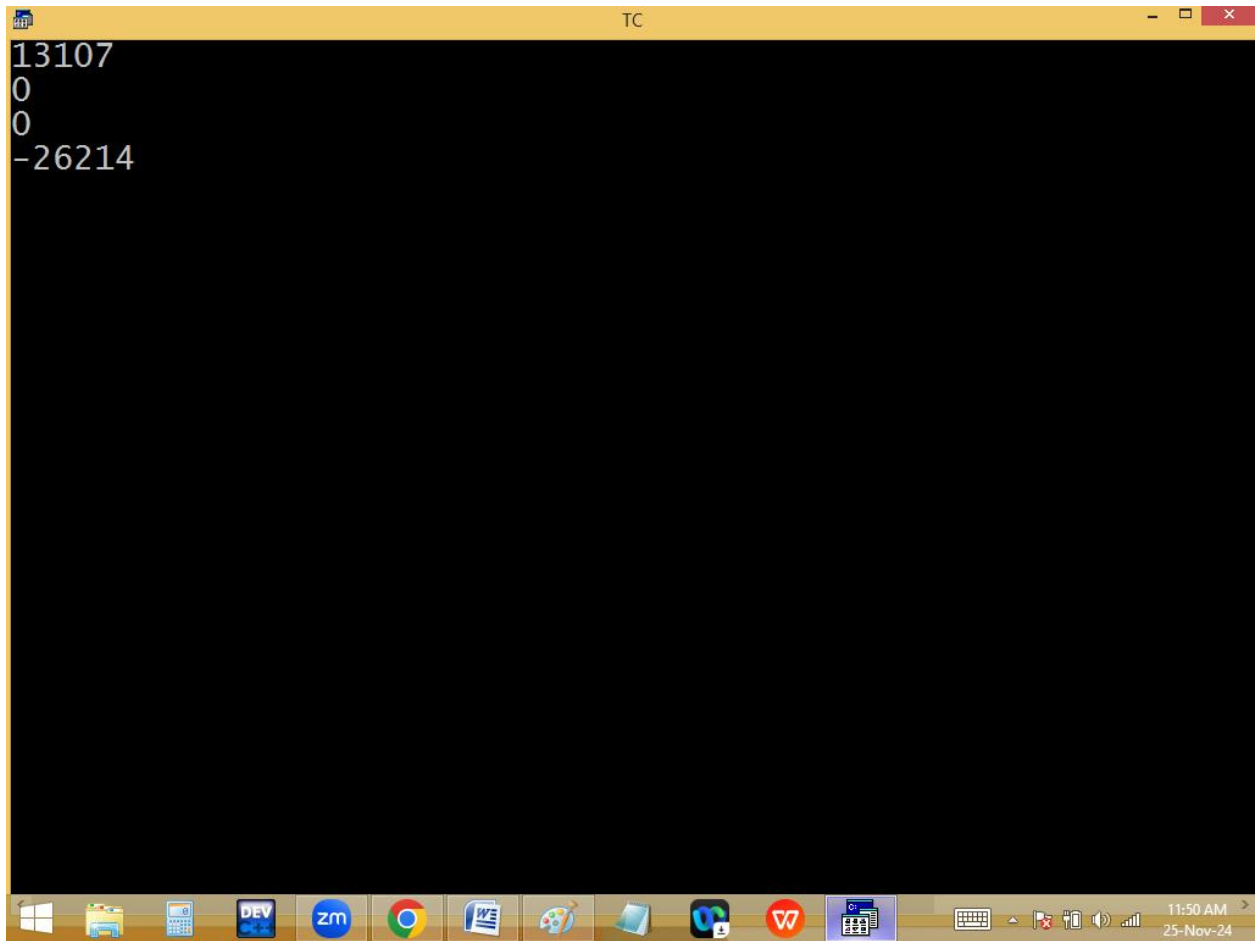


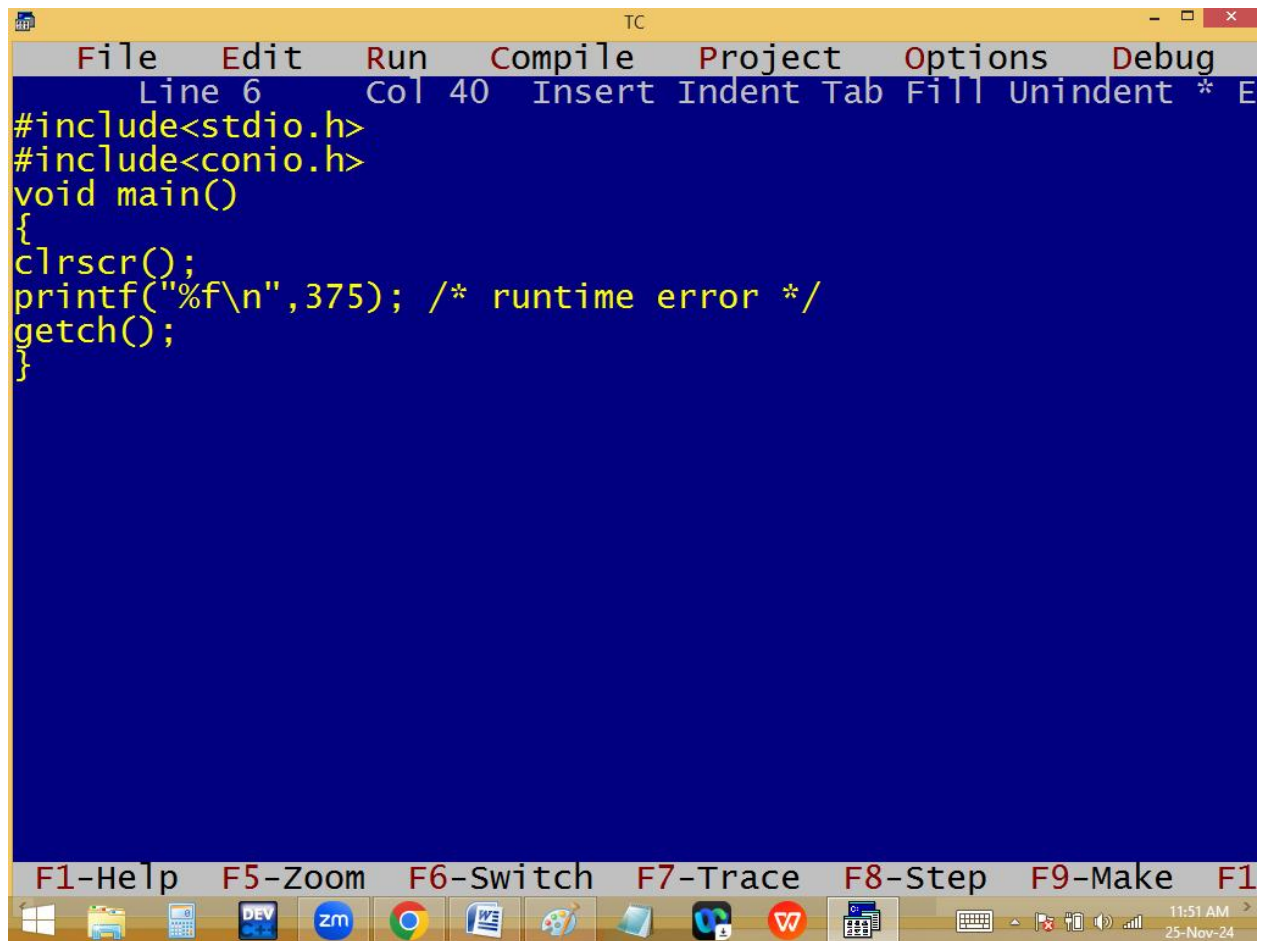

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status line indicates "Line 6 Col 40" and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and a partially visible "E". The main editing area has a dark blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%f\n",375); /* runtime error */
getch();
}
```


At the bottom of the window, a toolbar contains function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and a partially visible "F1". The Windows taskbar is visible at the very bottom, showing icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, and other applications. The system clock in the bottom right corner shows "11:51 AM" and "25-Nov-24".

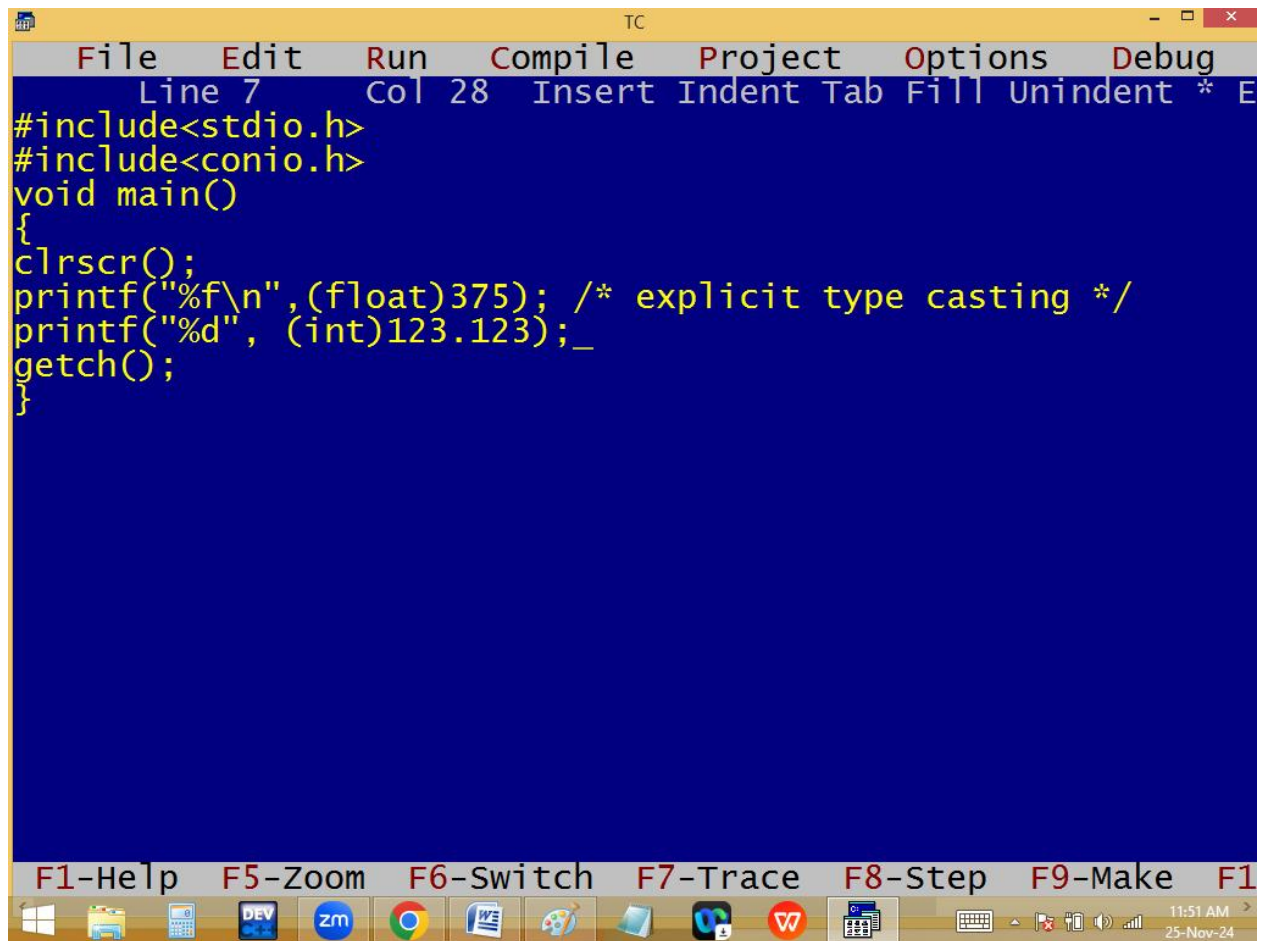

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 7", "Col 28", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and a help icon. The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%f\n", (float)375); /* explicit type casting */
printf("%d", (int)123.123);_
getch();
}
```


At the bottom of the window, there is a toolbar with icons for various functions. Above the toolbar, a row of function key shortcuts is displayed: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the very bottom, showing icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, and other applications. The system clock in the bottom right corner indicates the time is 11:51 AM on 25-Nov-24.

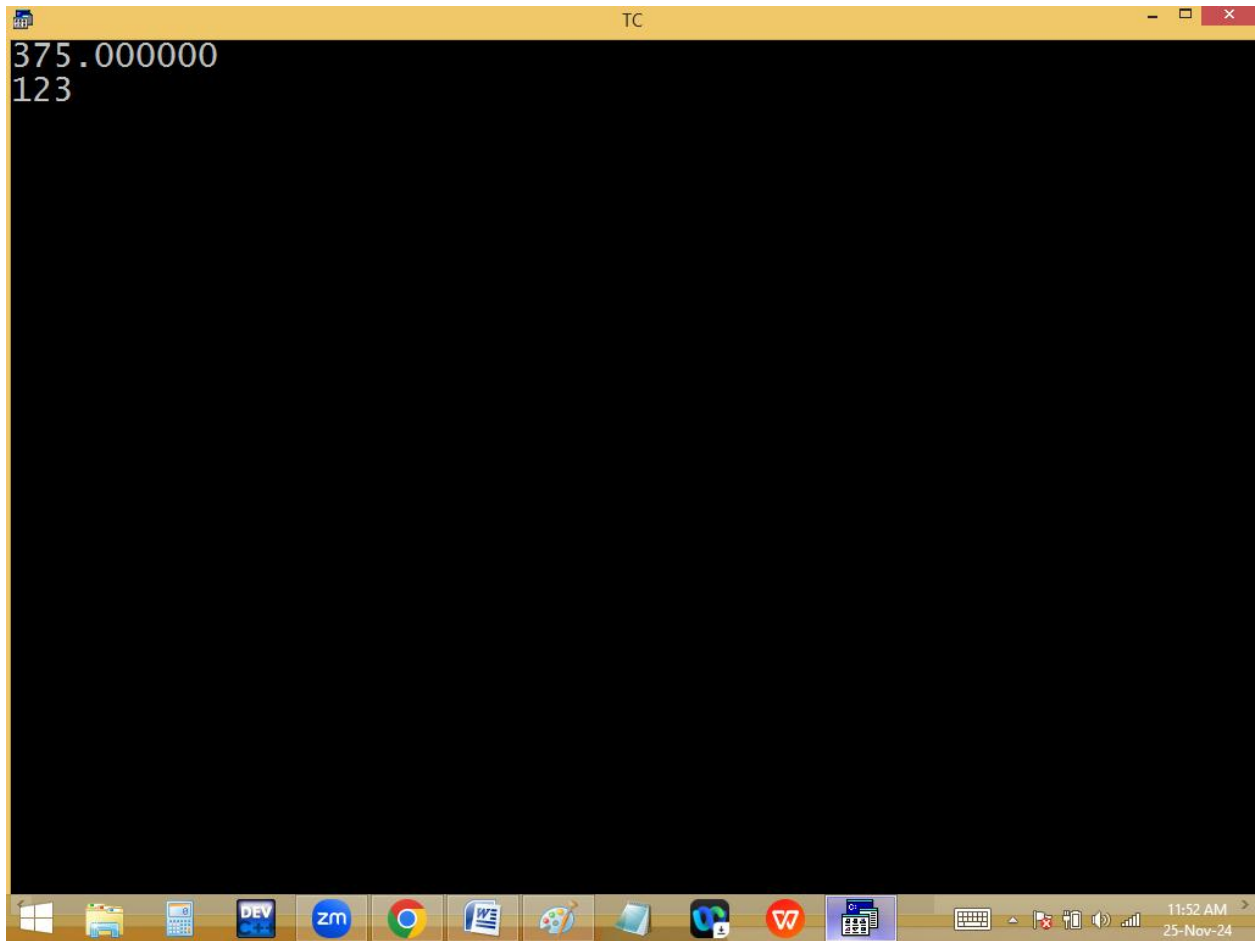


```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 14 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a=74;
clrscr();
printf("%4d\n",a); /* - - 7 4 */
printf("%-4d\n",a); /* 7 4 - - */
printf("%1d\n",496);
printf("%*d\n",5,a);
printf("%-*d\n",5,a);
printf("%*d\n",-5,a);
printf("%$d\n",5,a);
printf("%.5d",a);
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

12:00 PM 25-Nov-24

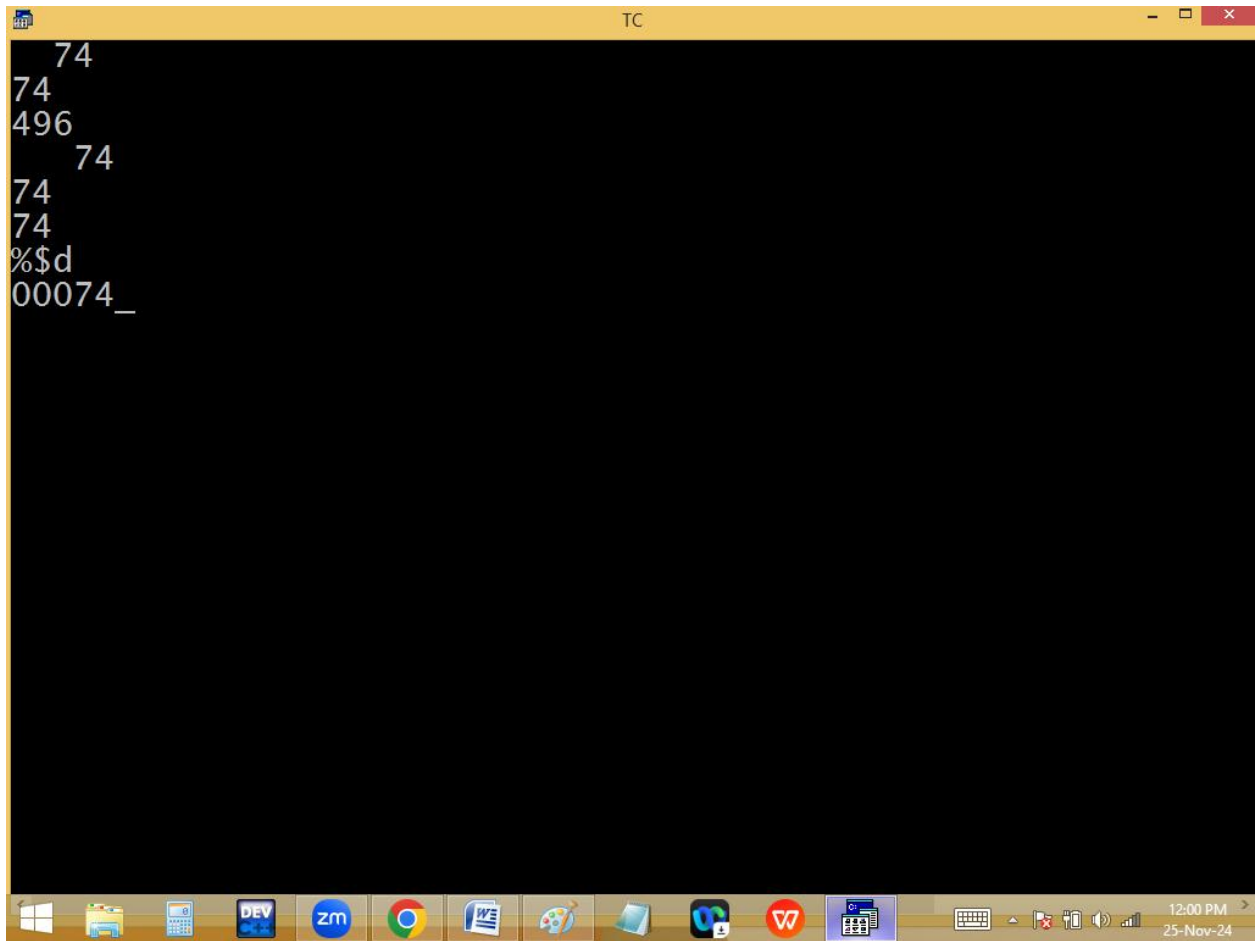


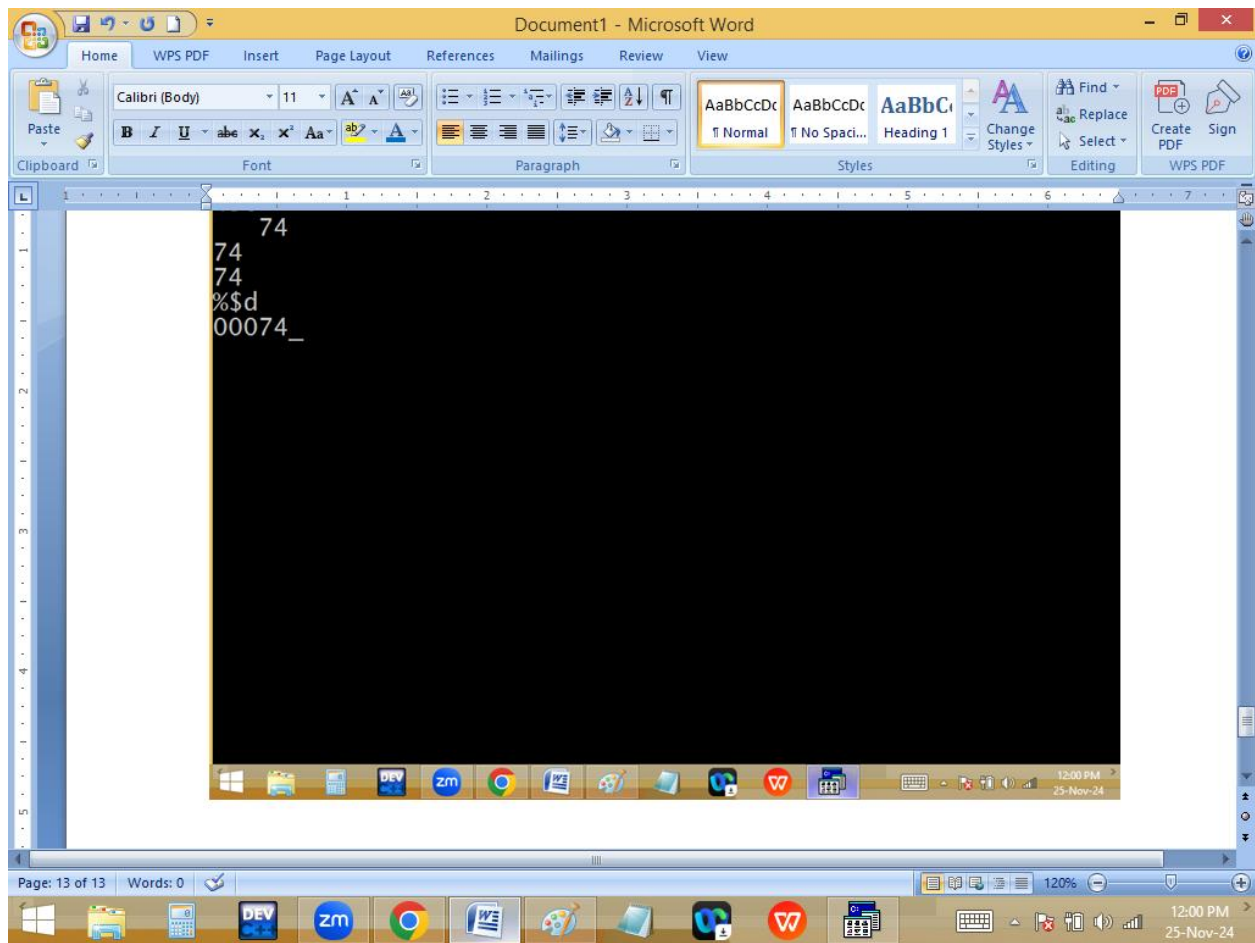


```
TC
File Edit Run Compile Project Options Debug
Line 1 Col 13 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{
float a=1.2;clrscr();
printf("%f\n",a);
printf("%.0f\n",a);
printf("%.1f\n",a);
printf("%.2f\n",a);
printf("%.10f\n",1.5);
printf("%.10.2f\n",1.5); /* - - - - - 1.50 */
printf("%.10.2f\n",1.5);
printf("%.2f\n",1.5555);
printf("%.2f\n",1.4444);
printf("%.2f\n",1.9999);
printf("%.2f\n",1.9944);
printf("%.2f\n",floor(1.9999));
printf("%.2f\n",ceil(1.1));
printf("%.0f\n", (4.5555));
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

12:12 PM 25-Nov-24

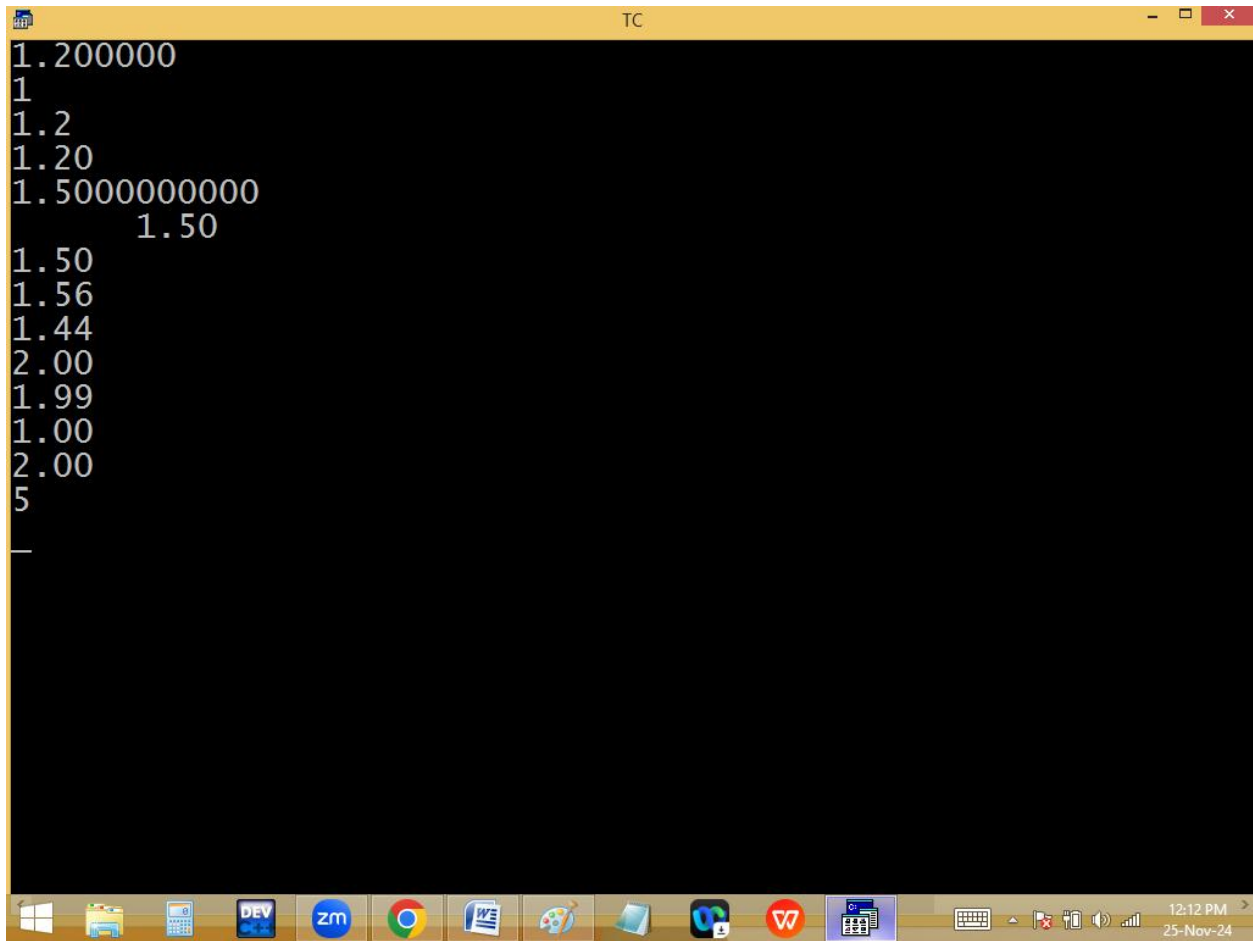

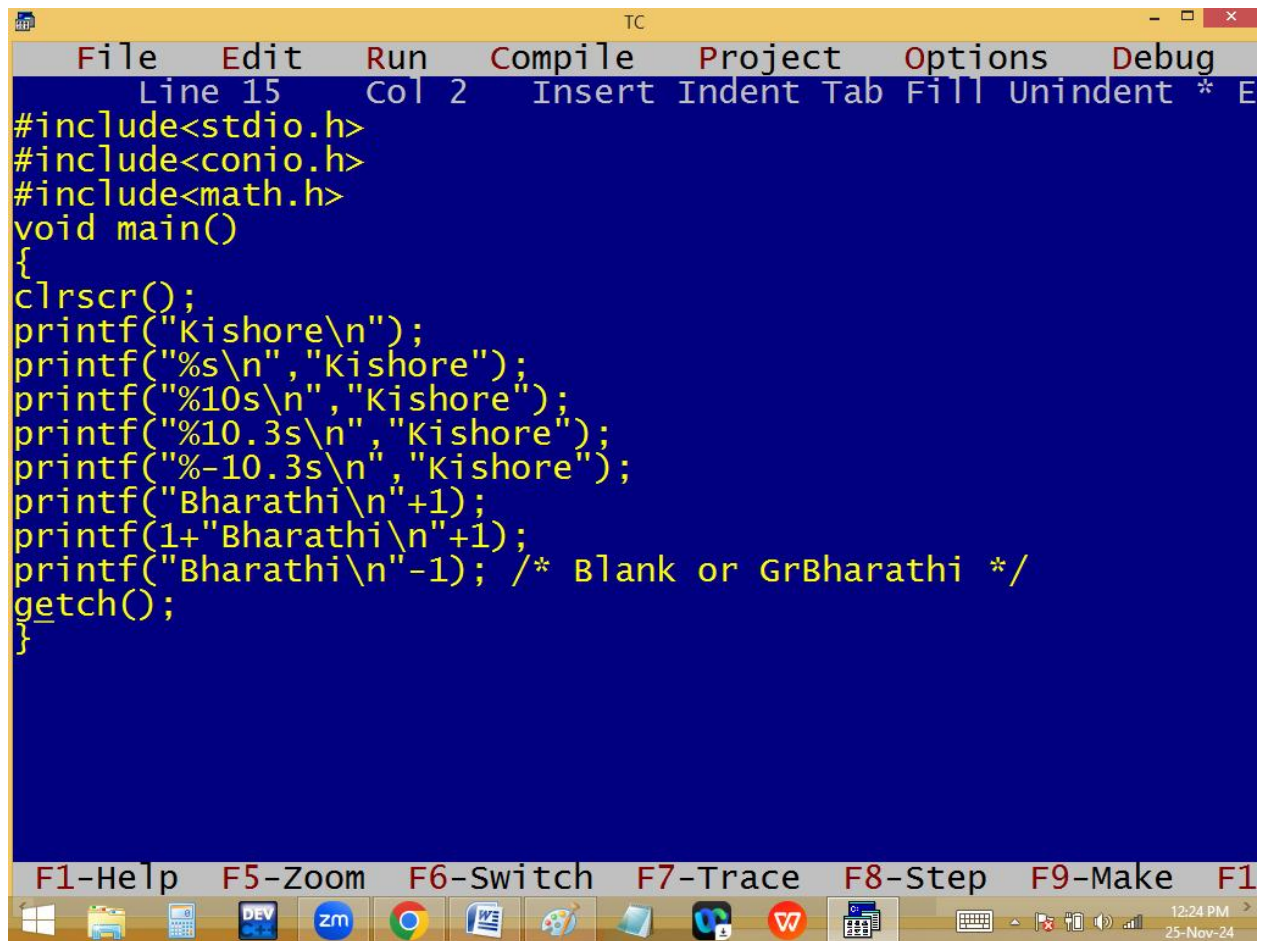

```
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{
clrscr();
printf("Kishore\n");
printf("%s\n", "Kishore");
printf("%10s\n", "Kishore");
printf("%10.3s\n", "Kishore");
printf("%-10.3s\n", "Kishore");
printf("Bharathi\n"+1);
printf(1+"Bharathi\n"+1);
printf("Bharathi\n"-1); /* Blank or GrBharathi */
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

12:24 PM
25-Nov-24


```
TC
Kishore
Kishore
  Kishore
    Kis
Kis
harathi
arathi
Bharathi
```

Base addr + 1 = 427+1=428



427 428 9 10 11


B h a r a t h i \0 +1

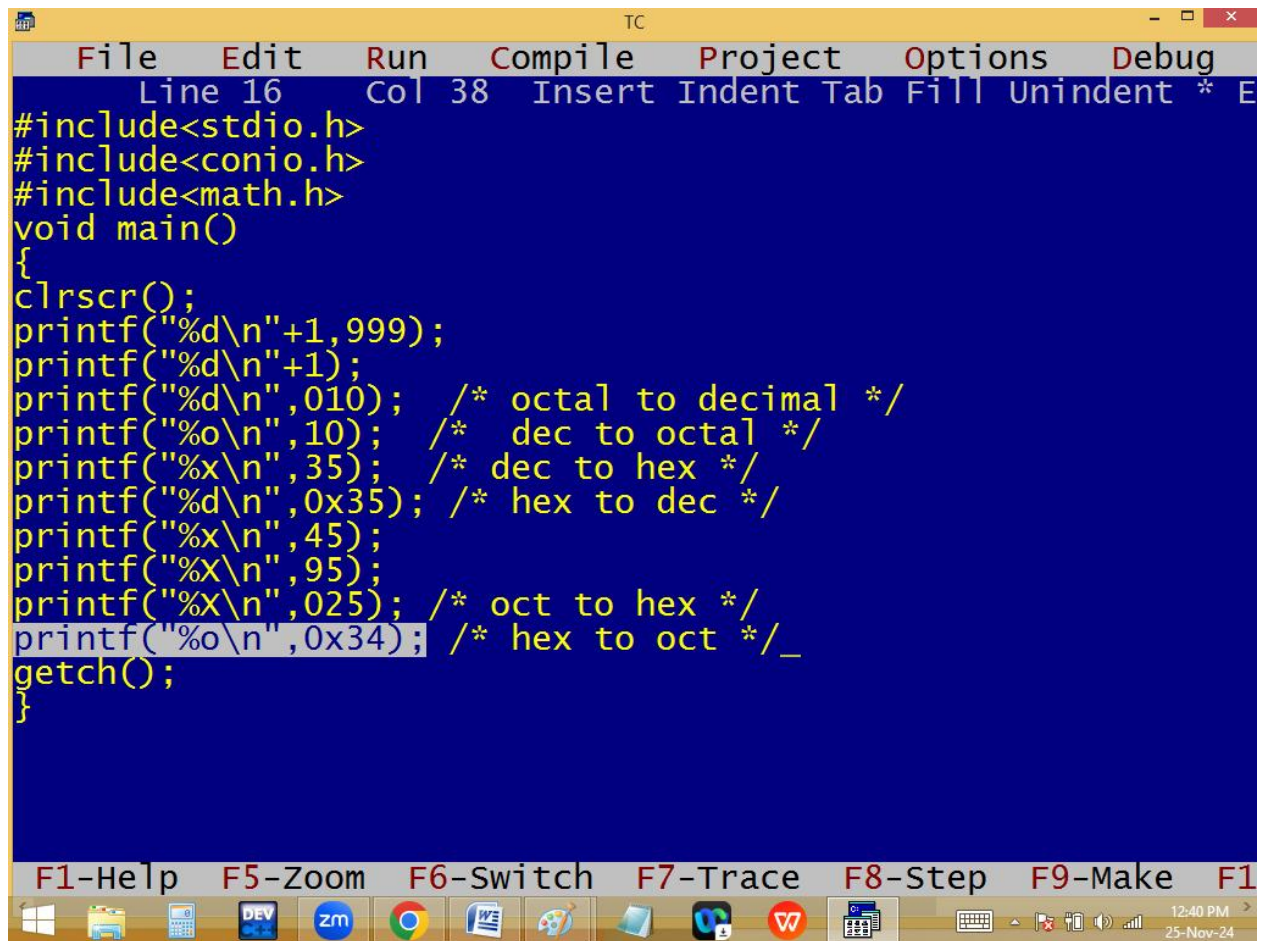

```
TC
File Edit Run Compile Project Options Debug
Line 16 Col 38 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{
clrscr();
printf("%d\\n"+1,999);
printf("%d\\n"+1);
printf("%d\\n",010); /* octal to decimal */
printf("%o\\n",10); /* dec to octal */
printf("%x\\n",35); /* dec to hex */
printf("%d\\n",0x35); /* hex to dec */
printf("%x\\n",45);
printf("%X\\n",95);
printf("%X\\n",025); /* oct to hex */
printf("%o\\n",0x34); /* hex to oct */
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

12:40 PM 25-Nov-24

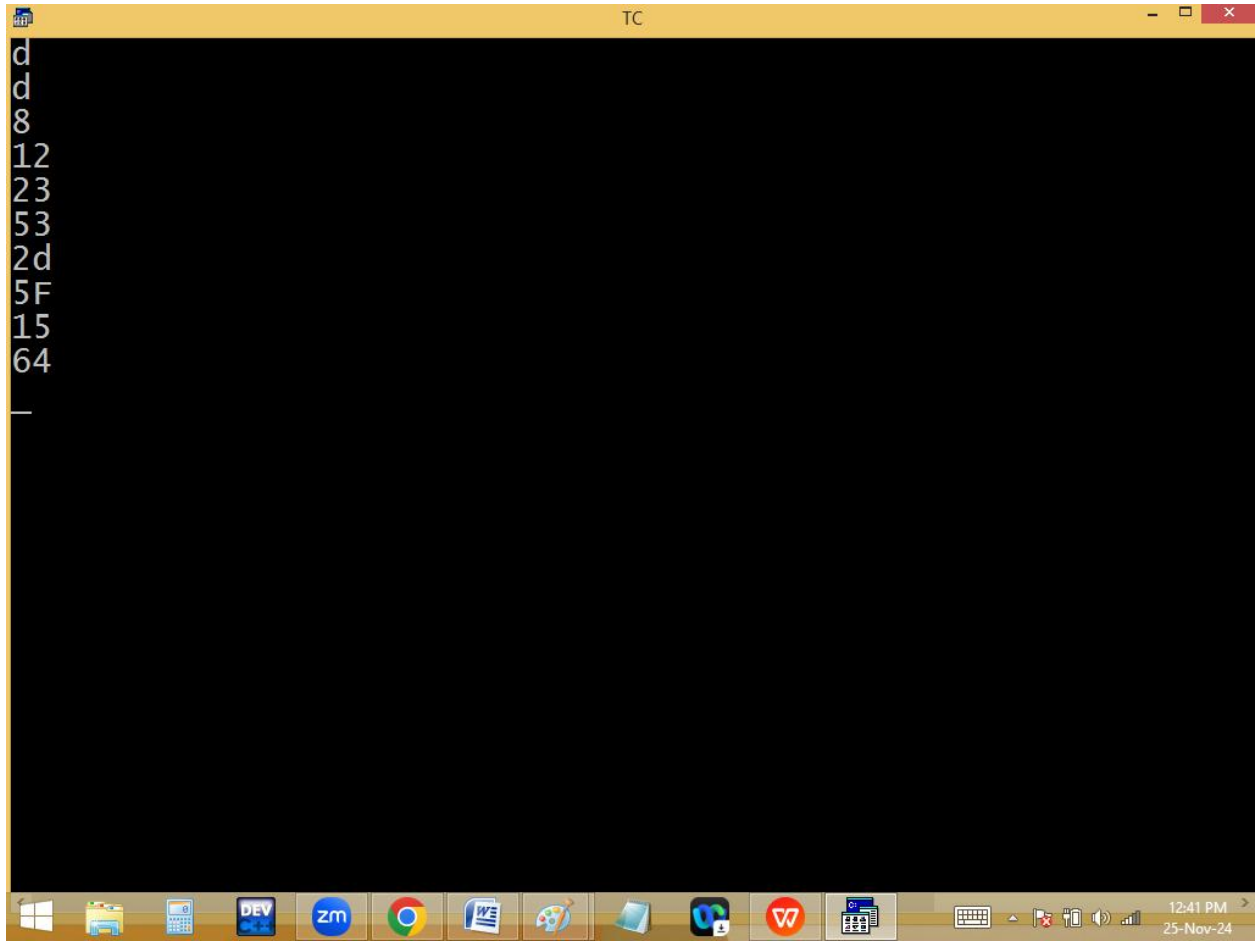

oct to dec

$$\begin{array}{r}
 010 \\
 \swarrow \quad \searrow \\
 8^1 \times 1 + 8^0 \times 0 \\
 \hline
 8 + 0 = 8
 \end{array}$$

dec to oct

$$\begin{array}{r}
 8 \overline{) 10} \\
 \underline{1-2} \checkmark
 \end{array}$$

dec to hexa

$$\begin{array}{r}
 16 \overline{) 35} \\
 \underline{2-3} \checkmark
 \end{array}$$

hex to dec

$$\begin{array}{r}
 0 \times 3^5 \\
 \swarrow \quad \searrow \\
 16^1 \times 3 + 16^0 \times 5 \\
 \hline
 48 + 5 = 53
 \end{array}$$

$$\begin{array}{r}
 16 \overline{) 45} \\
 \underline{2-13}
 \end{array}$$

$$\begin{array}{r}
 16 \overline{) 45} \\
 \underline{5-15}
 \end{array}$$

0-9, 10-a, 11-b, 12-c, 13-d, 14-e, 15-f

oct to dec

$$\begin{array}{r}
 025 \\
 \swarrow \quad \searrow \\
 8^1 \times 2 + 8^0 \times 5 \\
 \hline
 16 + 5 = 21
 \end{array}$$

dec to hexa

$$\begin{array}{r}
 16 \overline{) 21} \\
 \underline{1-5}
 \end{array}$$

hex to dec

0x34

$$\begin{array}{r} \overset{1}{16} \times 3 \quad \overset{0}{16} \times 4 \\ \hline 48 + 4 = 52 \end{array}$$

dec to oct

$$\begin{array}{r} 8 \overline{) 52} \\ 6 - 4 \checkmark \end{array}$$