



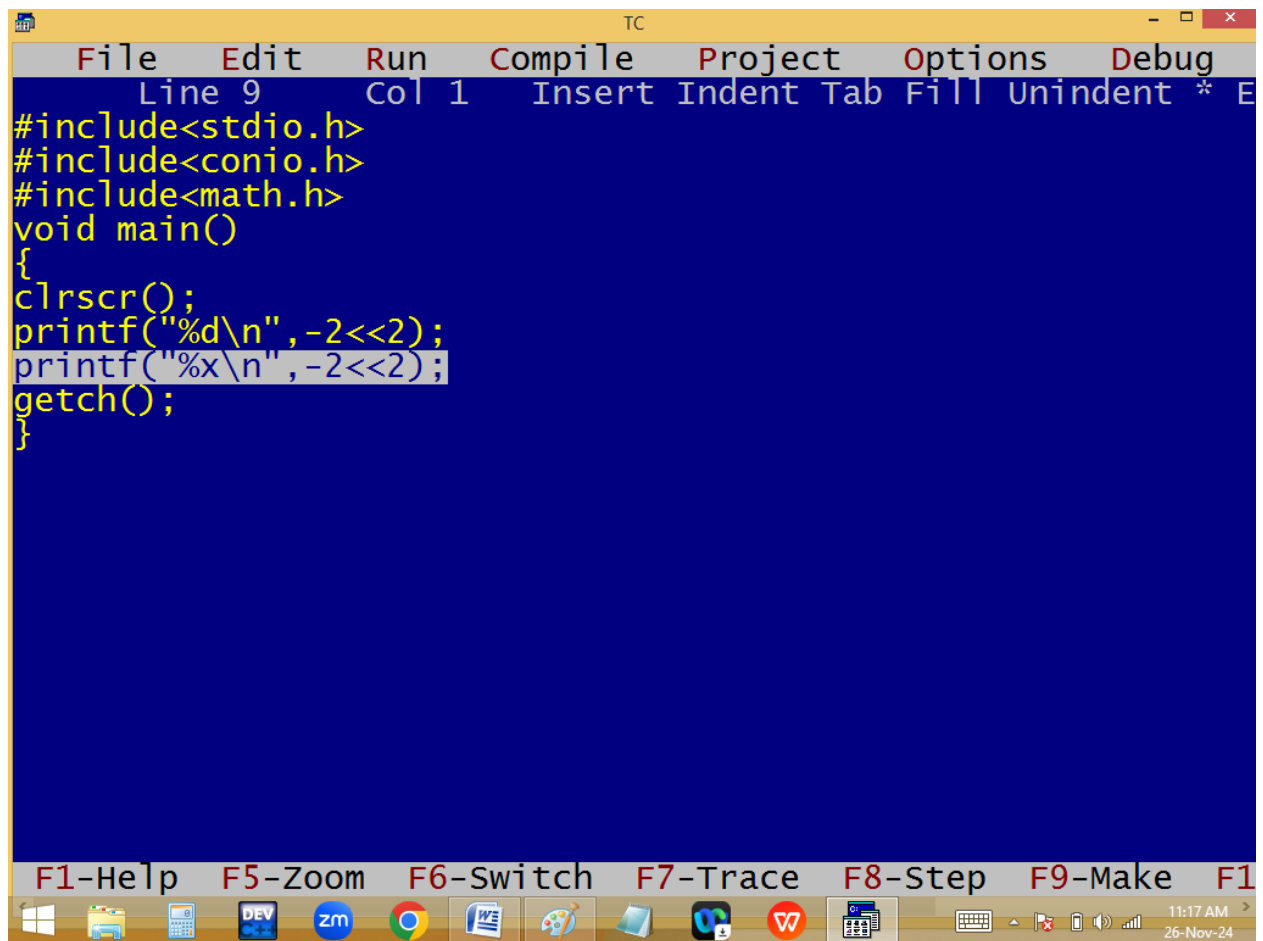

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 9 Col 1" and lists keyboard shortcuts: Insert, Indent, Tab, Fill, Unindent, *, and E. The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{
clrscr();
printf("%d\n",-2<<2);
printf("%x\n",-2<<2);
getch();
}
```

The bottom of the window features a toolbar with function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar at the very bottom shows various application icons, including File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, and others. The system clock in the bottom right corner displays "11:17 AM" and "26-Nov-24".

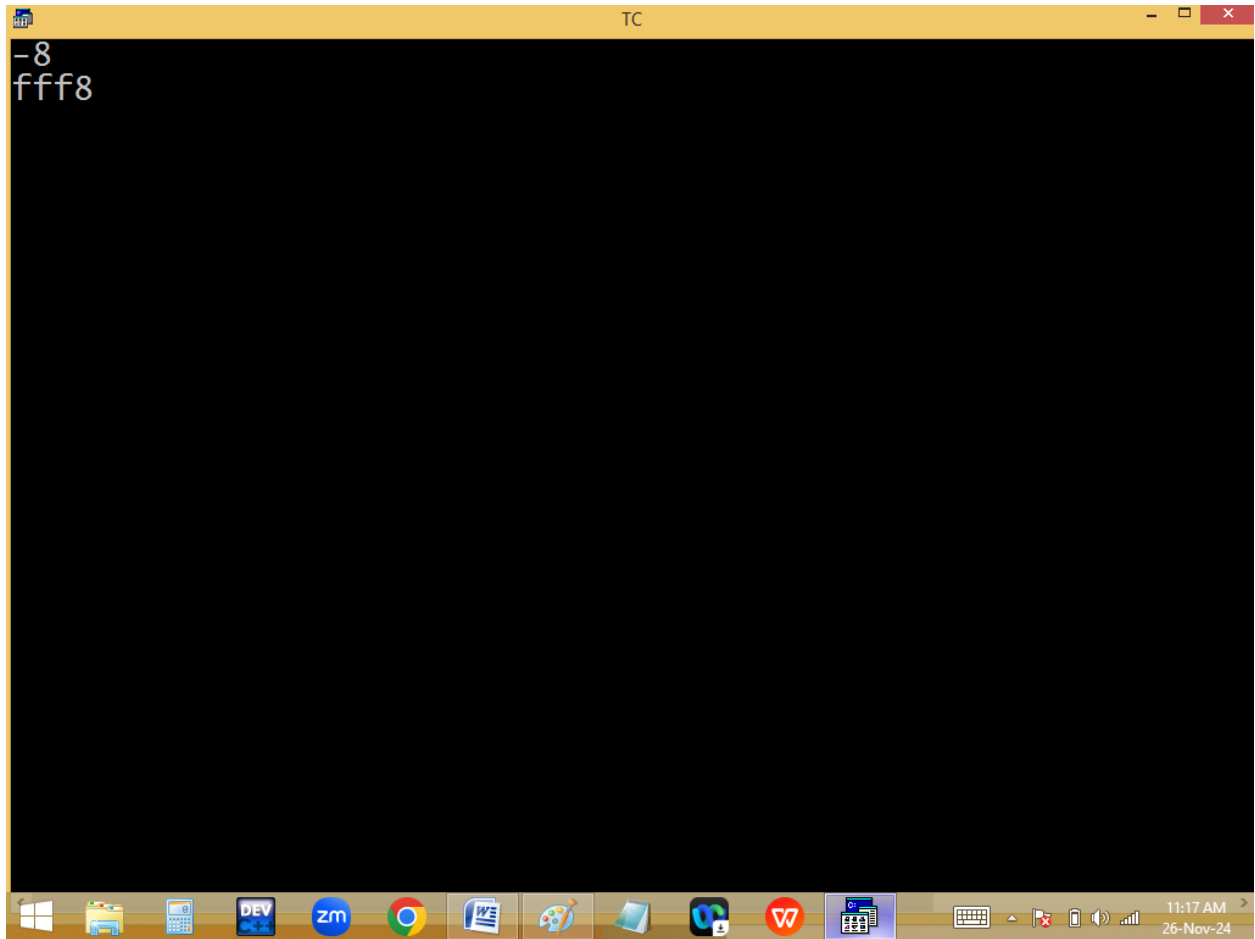

$$2 \ll 2 = 8$$

$$8 = 0000\ 0000\ 0000\ 1000$$

$$1's \sim 1111\ 1111\ 1111\ 0111$$

$$2's \sim 0000\ 0000\ 0000\ 0001$$

$$\begin{array}{r}
 \begin{array}{cccc}
 1111 & 1111 & 1111 & 1000 \\
 \hline
 \end{array} \\
 \begin{array}{cccc}
 & & \swarrow & \searrow \\
 & & 2^3 & 2^3 \\
 & & \sim & \\
 & & 1 & 1 \\
 & & \uparrow & \downarrow \\
 & & 8 & 2 \\
 \hline
 \end{array} \\
 \begin{array}{cccc}
 15 & 15 & 8+4+2+1 & 8 \\
 \hline
 \end{array} \\
 \begin{array}{cccc}
 f & f & f & 8 \\
 \hline
 \end{array}
 \end{array}$$

$$\begin{array}{r}
 2 \overline{) 8} \\
 2 \overline{) 4} - 0 \\
 2 \overline{) 2} - 0 \\
 1 - 0
 \end{array}$$

Variables:

Variable is a container is used to store the values in our programs.

Variable is a named memory [bytes] location where we can store and manipulate [modify] the values.


All the variables are stored in **primary memory** [**RAM**] only, which is temporary. Due to this once function / program execution is completed, automatically these variables deleted from memory.

Variables are case sensitive. i.e. lower and upper are different.

Eg:

Int a=10;

Int A=20;

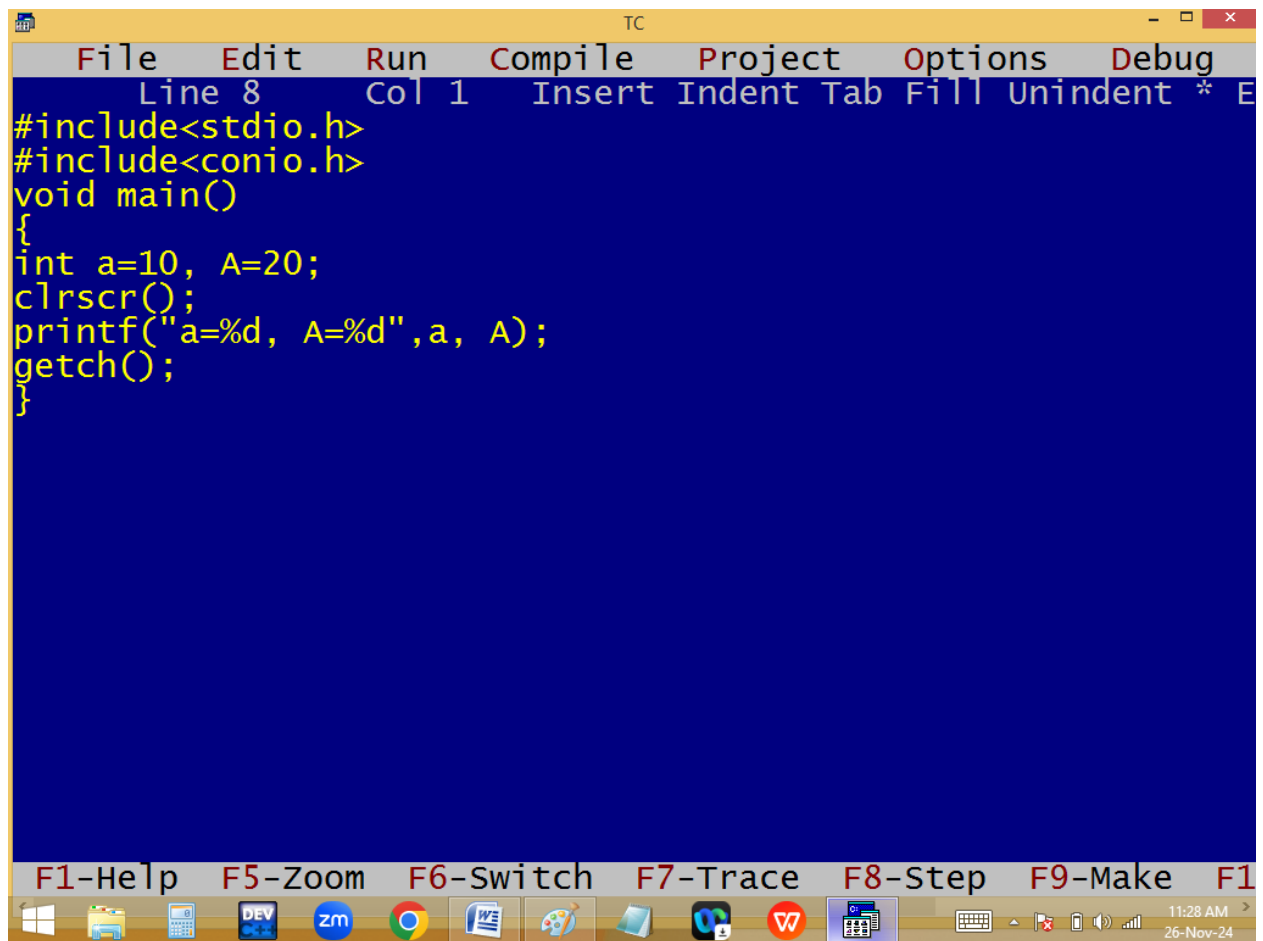

```
TC
File Edit Run Compile Project Options Debug
Line 8 Col 1 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a=10, A=20;
clrscr();
printf("a=%d, A=%d",a, A);
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

11:28 AM
26-Nov-24



every variables is having 2 stages.

1. Variable declaration / declared
Eg: `int a;`
2. Variable initialization / defined
`a=23;`


in C compiler the variables should be declared at the first line only. In C++ we can declare anywhere.

Syntax:

Datatype variable[=**value**], variable[=**value**],.....;

Eg:


```
int rollno=1234, children=2;
```

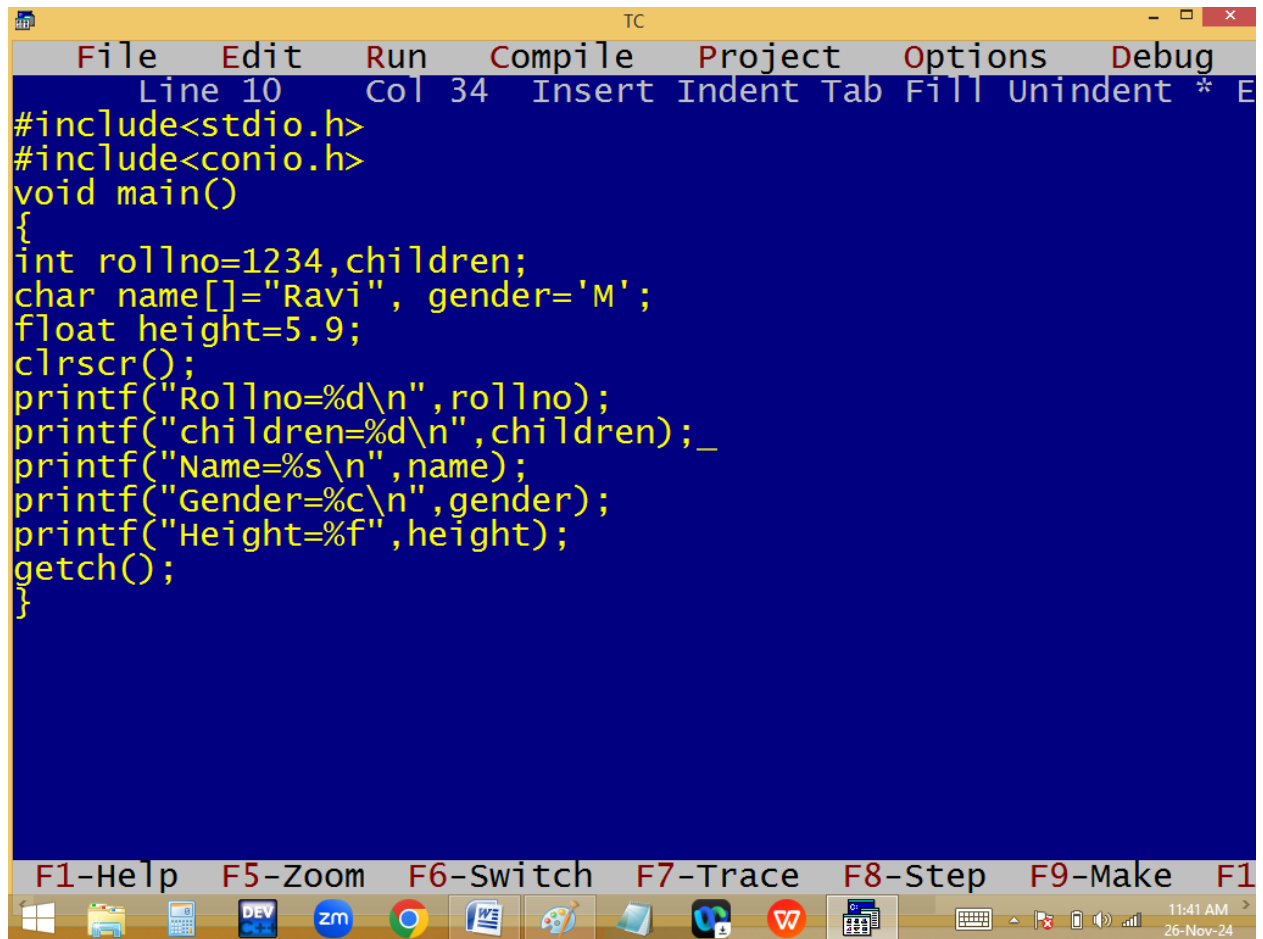

```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 34 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int rollno=1234,children;
char name[]="Ravi", gender='M';
float height=5.9;
clrscr();
printf("Rollno=%d\n",rollno);
printf("children=%d\n",children);_
printf("Name=%s\n",name);
printf("Gender=%c\n",gender);
printf("Height=%f",height);
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

11:41 AM 26-Nov-24

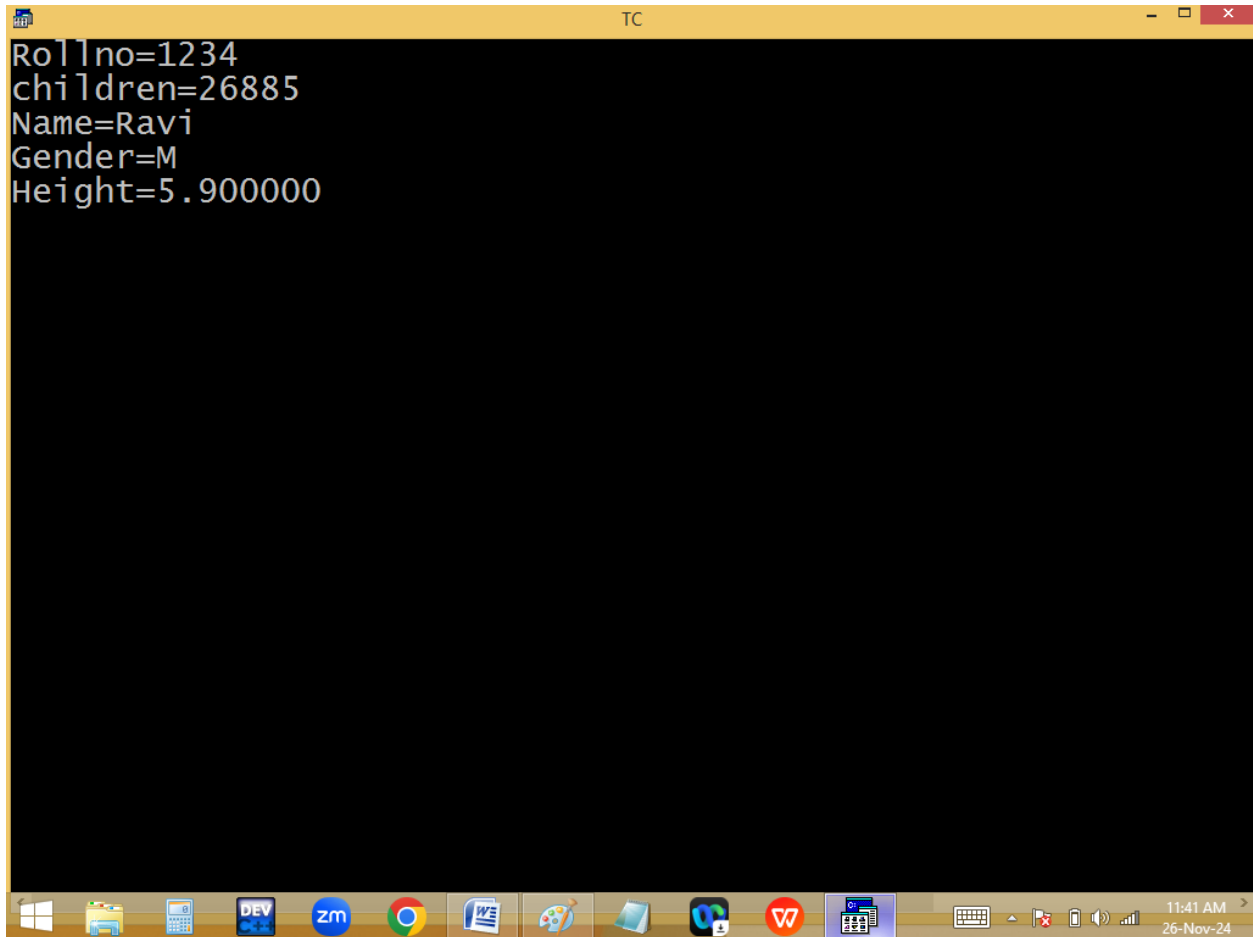

A screenshot of a Windows desktop environment. A terminal window titled 'TC' is open, displaying the following text: Rollno=1234, children=26885, Name=Ravi, Gender=M, Height=5.900000. The desktop background is black. The taskbar at the bottom shows various application icons including Windows Explorer, Calculator, DEV, zm, Chrome, Word, and others. The system tray on the right shows the time as 11:41 AM and the date as 26-Nov-24.

```
Rollno=1234
children=26885
Name=Ravi
Gender=M
Height=5.900000
```

Memory allocation for variables:

4 bits - 1 nibble

2 nibbles / 8 bits - 1 byte

1024 bytes - 1kb


1024kb - 1mb

1024mb - 1gb


1024gb - 1 tb

RAM STACK

64kb - 65536 bytes
 $64 * 1024 = 65536$

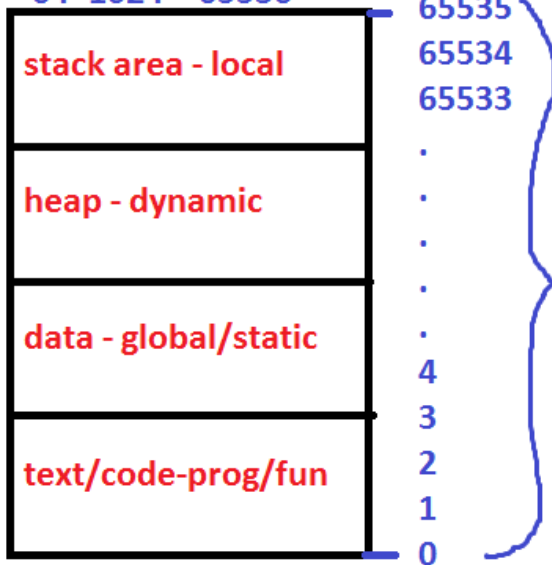


Byte address - +Ve- Unsigned int - %u

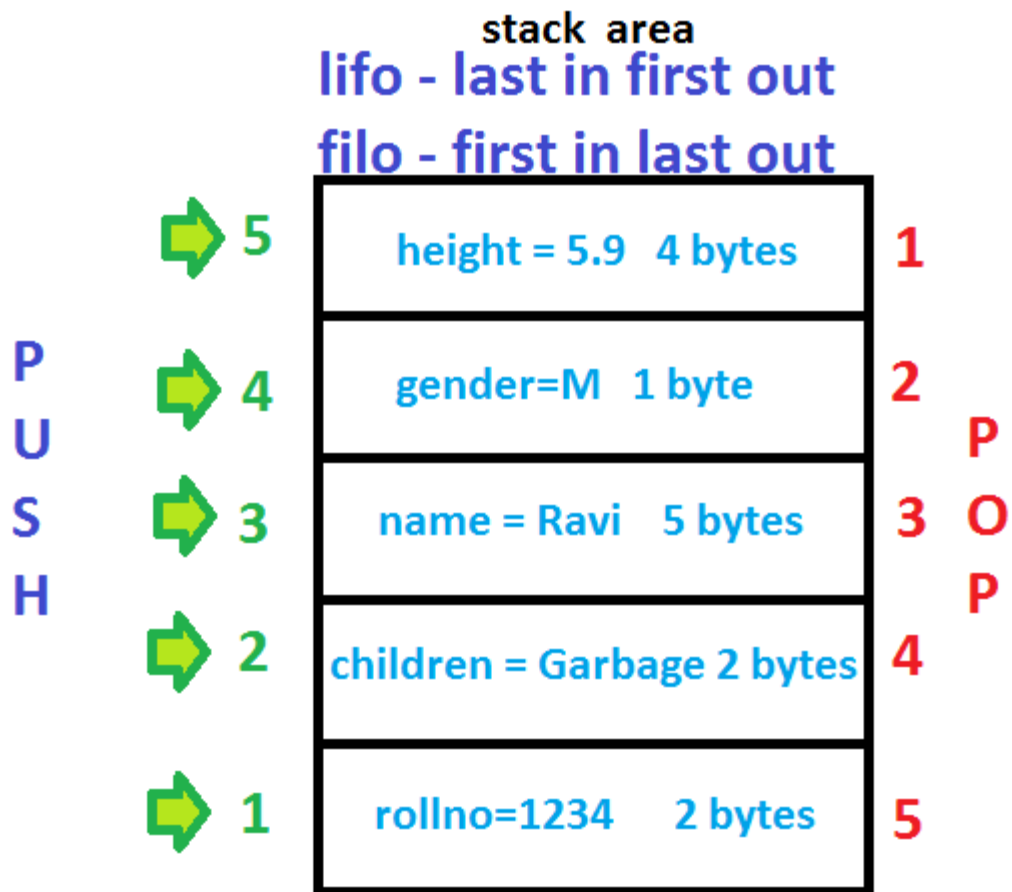

Finding area of a square:


Area = side * side;

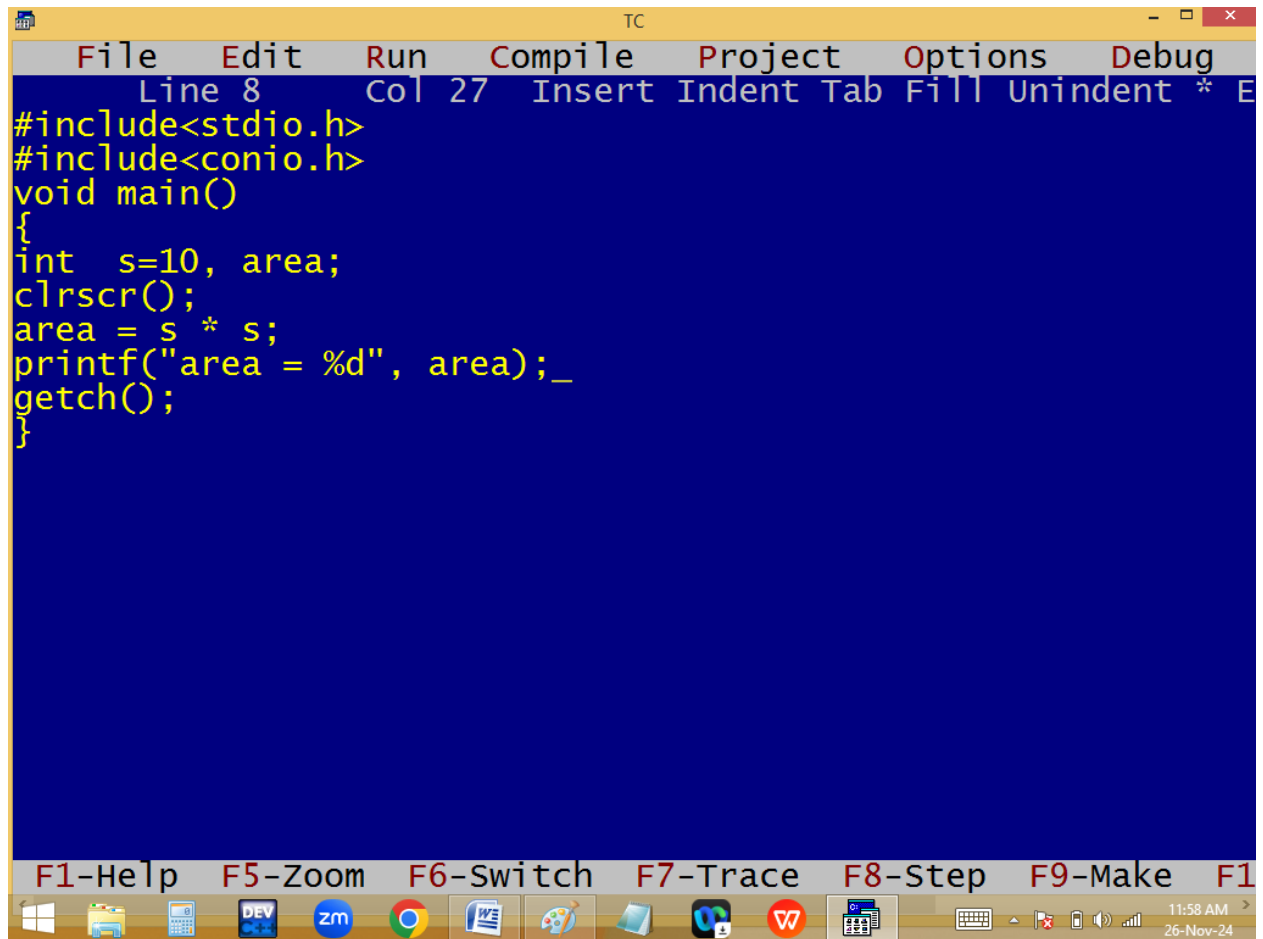


The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 8", "Col 27", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and "* E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int s=10, area;
clrscr();
area = s * s;
printf("area = %d", area);_
getch();
}
```

At the bottom of the window, there is a toolbar with icons for various functions. Below the toolbar, a row of function key shortcuts is displayed: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Exit". The Windows taskbar is visible at the very bottom, showing several open applications and the system clock indicating 11:58 AM on 26-Nov-24.

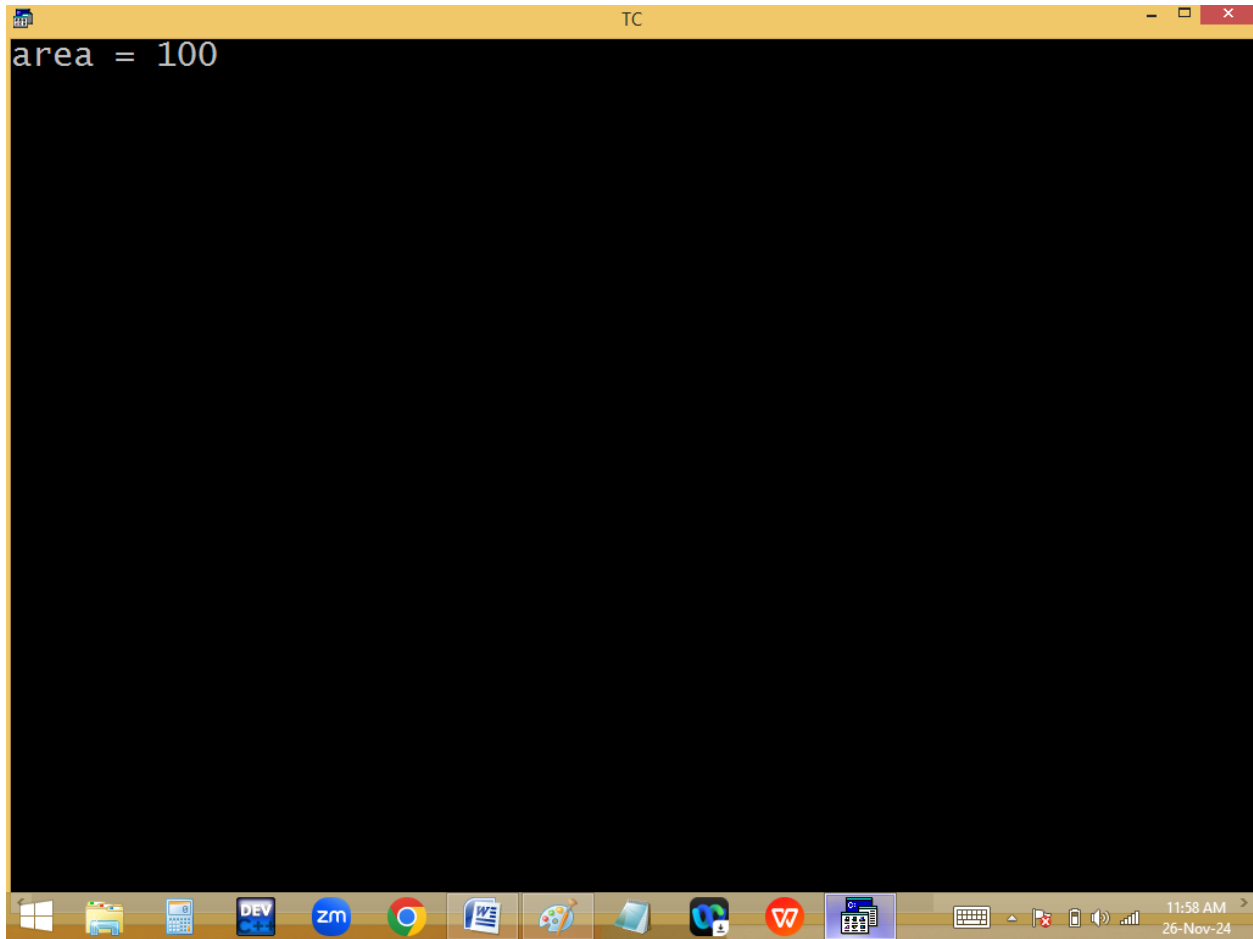


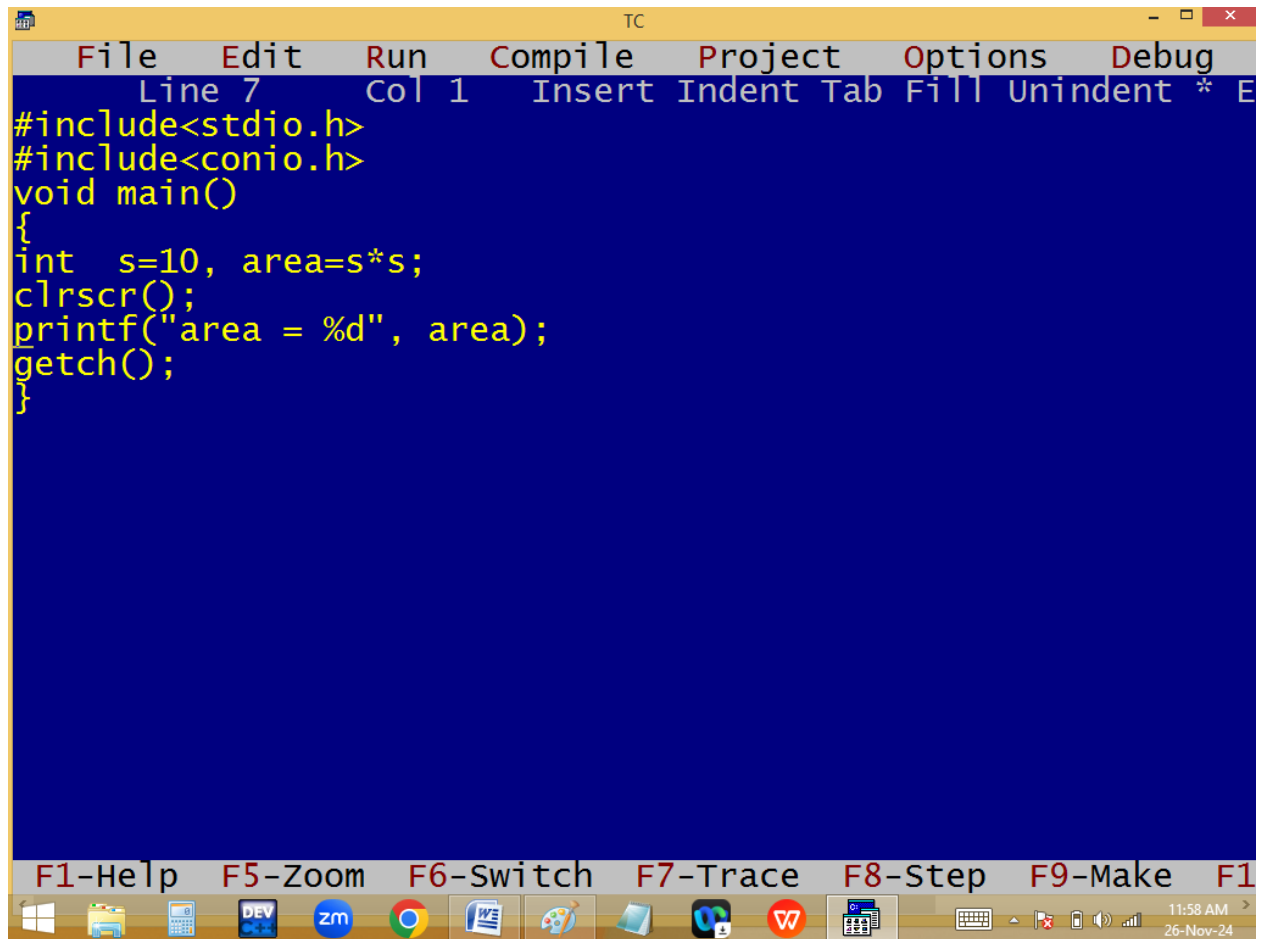


The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 7", "Col 1", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and a cursor icon. The main editing area has a dark blue background and contains the following C code in yellow text:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int  s=10, area=s*s;
clrscr();
printf("area = %d", area);
getch();
}
```

At the bottom of the window, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". Below the toolbar is a Windows taskbar with various application icons, including the Start button, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, and others. The system clock in the bottom right corner displays "11:58 AM" and "26-Nov-24".

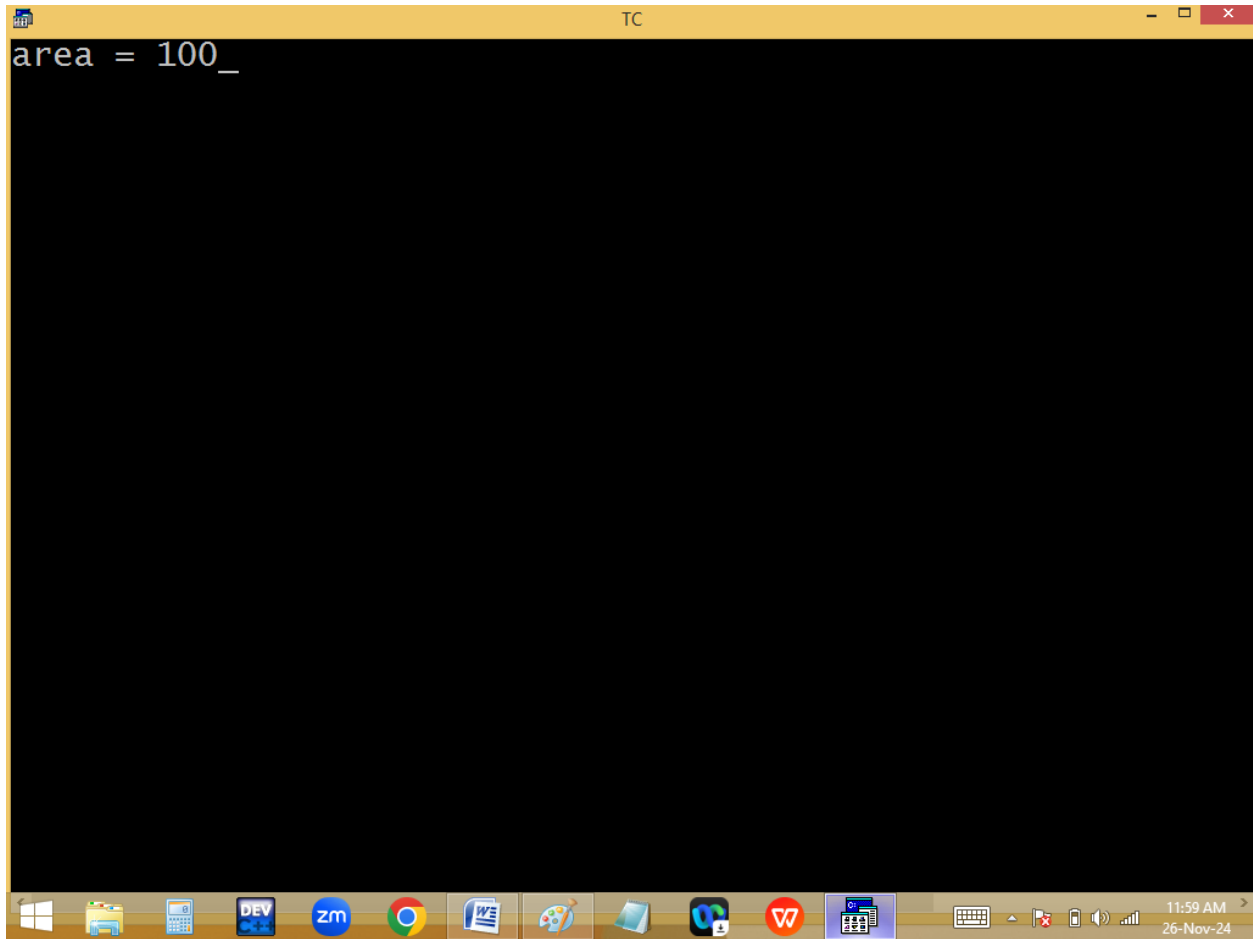


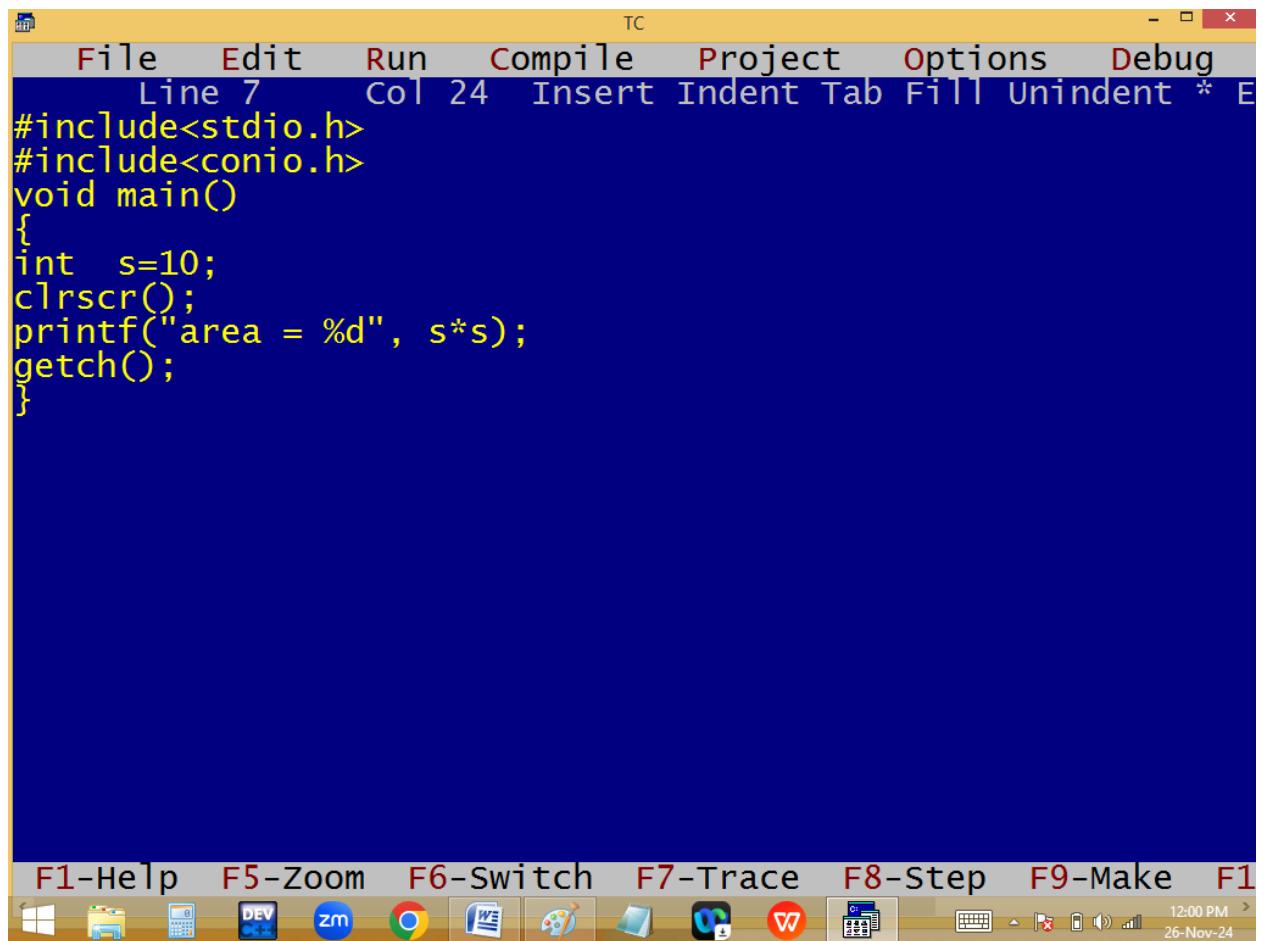

The image shows a screenshot of the Turbo C++ (TC) Integrated Development Environment (IDE). The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 7", "Col 24", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and a cursor icon. The main editing area has a dark blue background and contains the following C code:


```
#include<stdio.h>
#include<conio.h>
void main()
{
int s=10;
clrscr();
printf("area = %d", s*s);
getch();
}
```

At the bottom of the IDE window, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". Below the IDE window is the Windows taskbar, which includes icons for the Start button, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, Paint, and several other applications. The system tray on the right shows the time as "12:00 PM" and the date as "26-Nov-24".

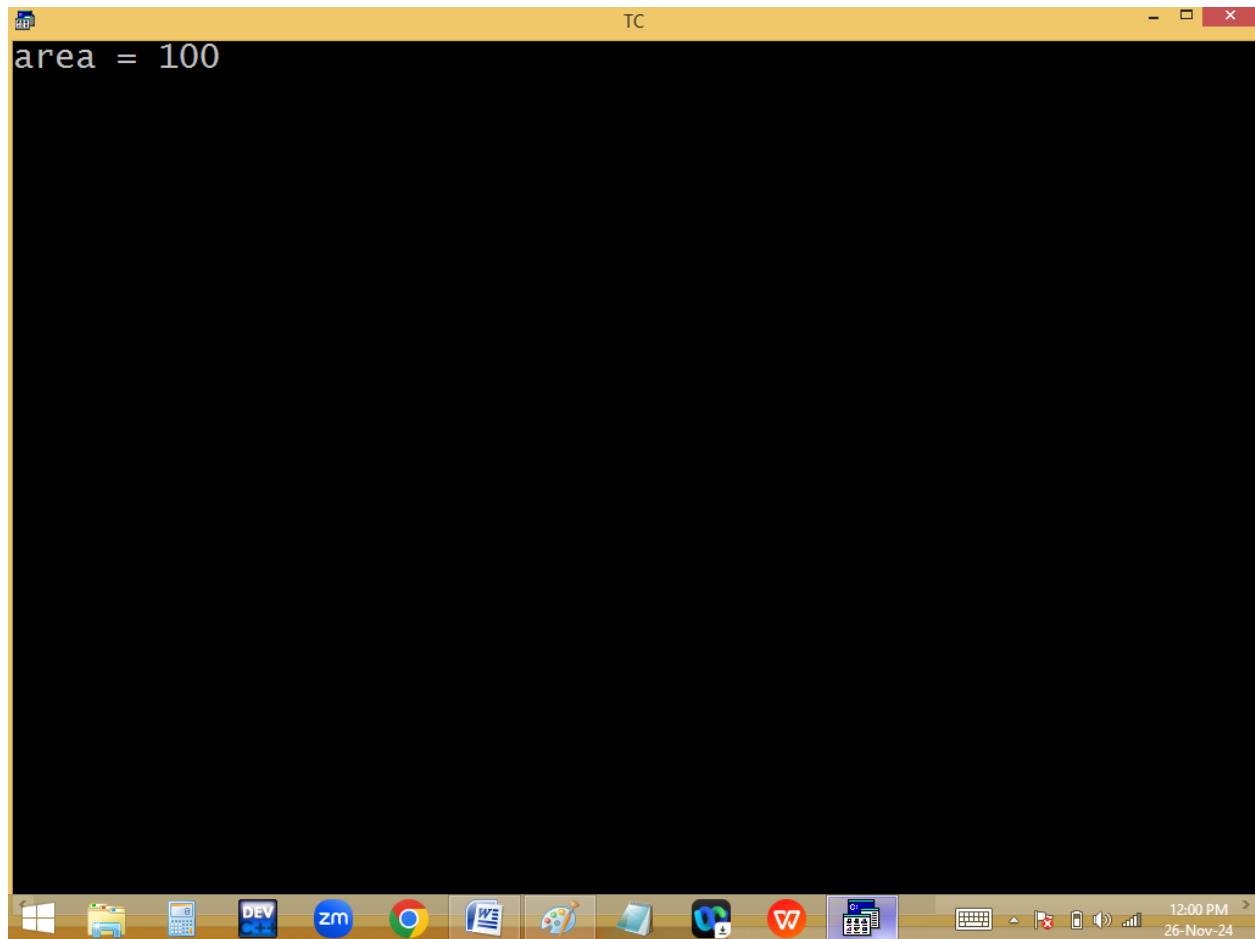

Finding area or a triangle.


$$\text{Area} = 0.5 * b * h;$$

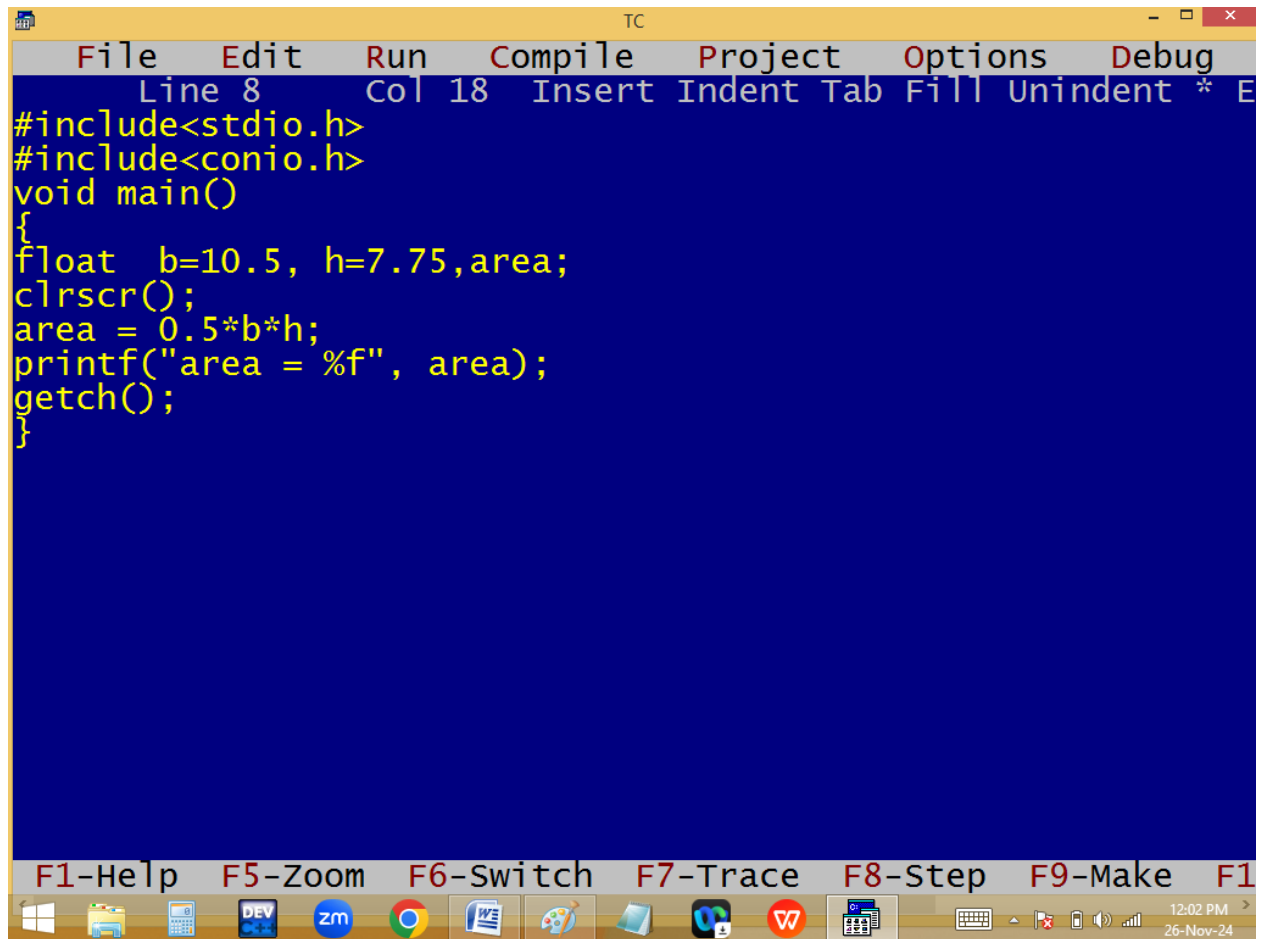


The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 8", "Col 18", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and a cursor icon. The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
float  b=10.5, h=7.75,area;
clrscr();
area = 0.5*b*h;
printf("area = %f", area);
getch();
}
```

At the bottom of the window, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". Below the toolbar is a Windows taskbar with various application icons, including the Start button, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, and a game controller icon. The system clock in the bottom right corner displays "12:02 PM" and "26-Nov-24".

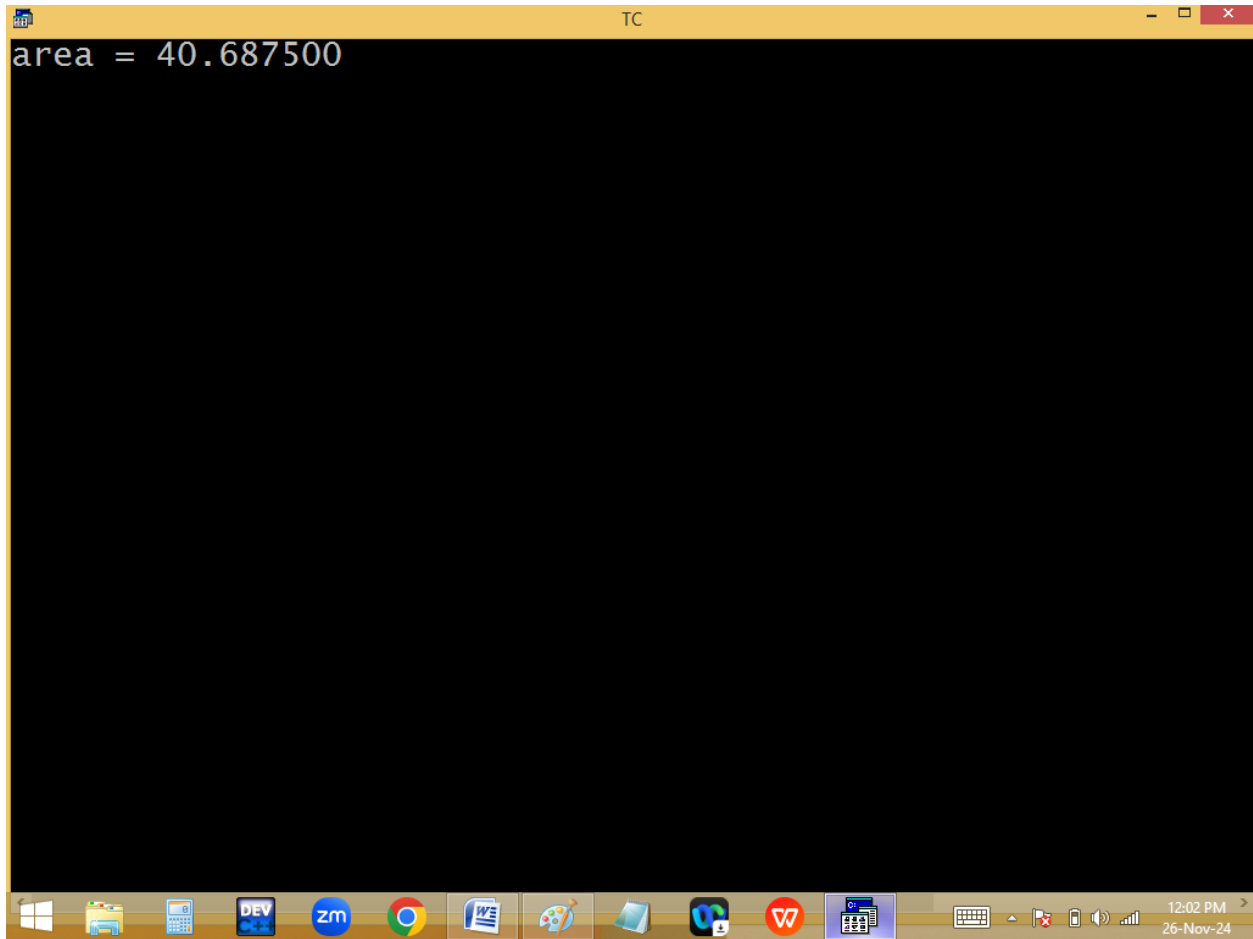


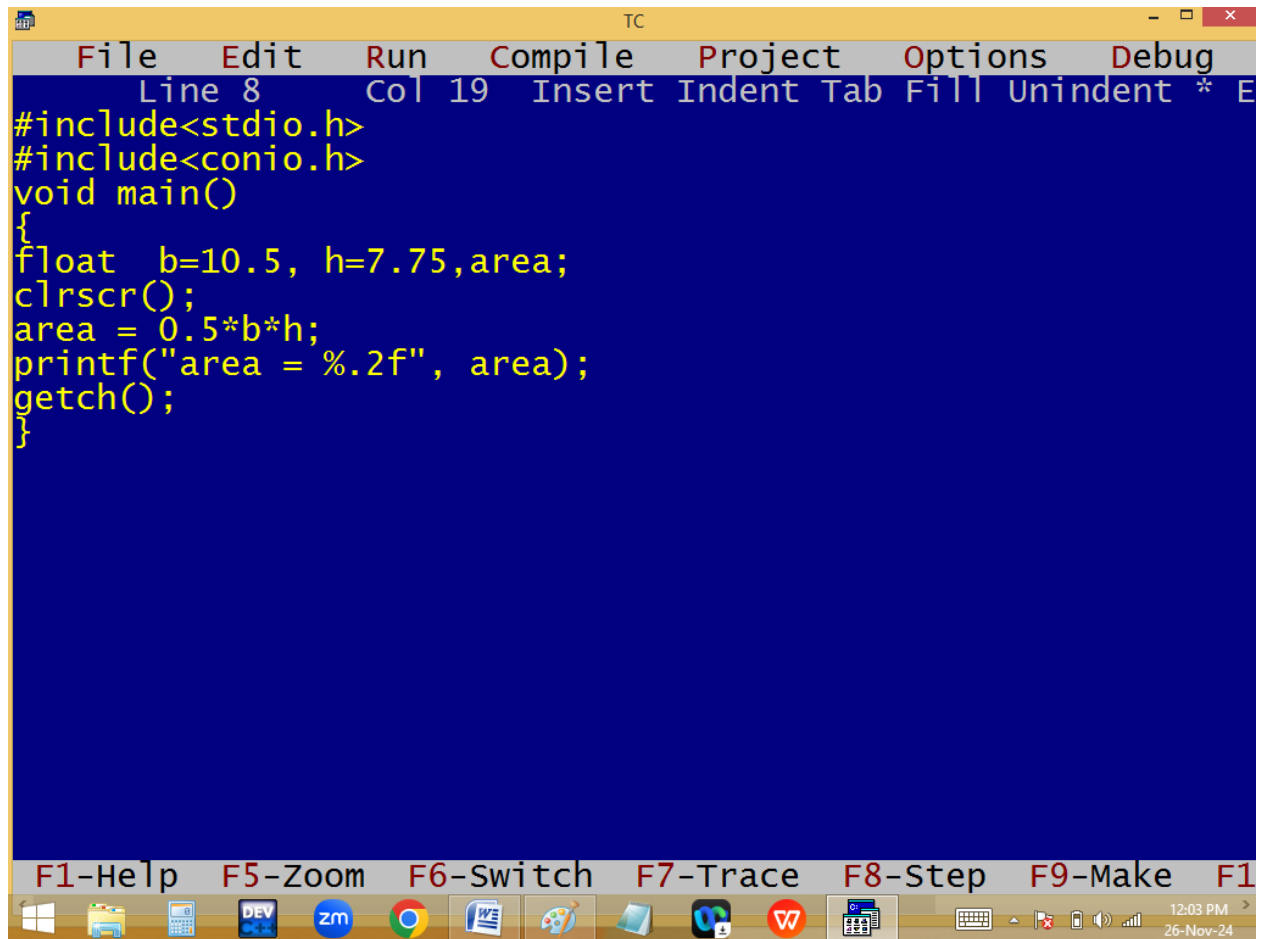

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 8", "Col 19", and various editing options like "Insert", "Indent", "Tab", "Fill", "Unindent", and "E". The main editing area has a dark blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
float  b=10.5, h=7.75,area;
clrscr();
area = 0.5*b*h;
printf("area = %.2f", area);
getch();
}
```

At the bottom of the window, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the very bottom, showing icons for various applications and the system clock indicating "12:03 PM" on "26-Nov-24".

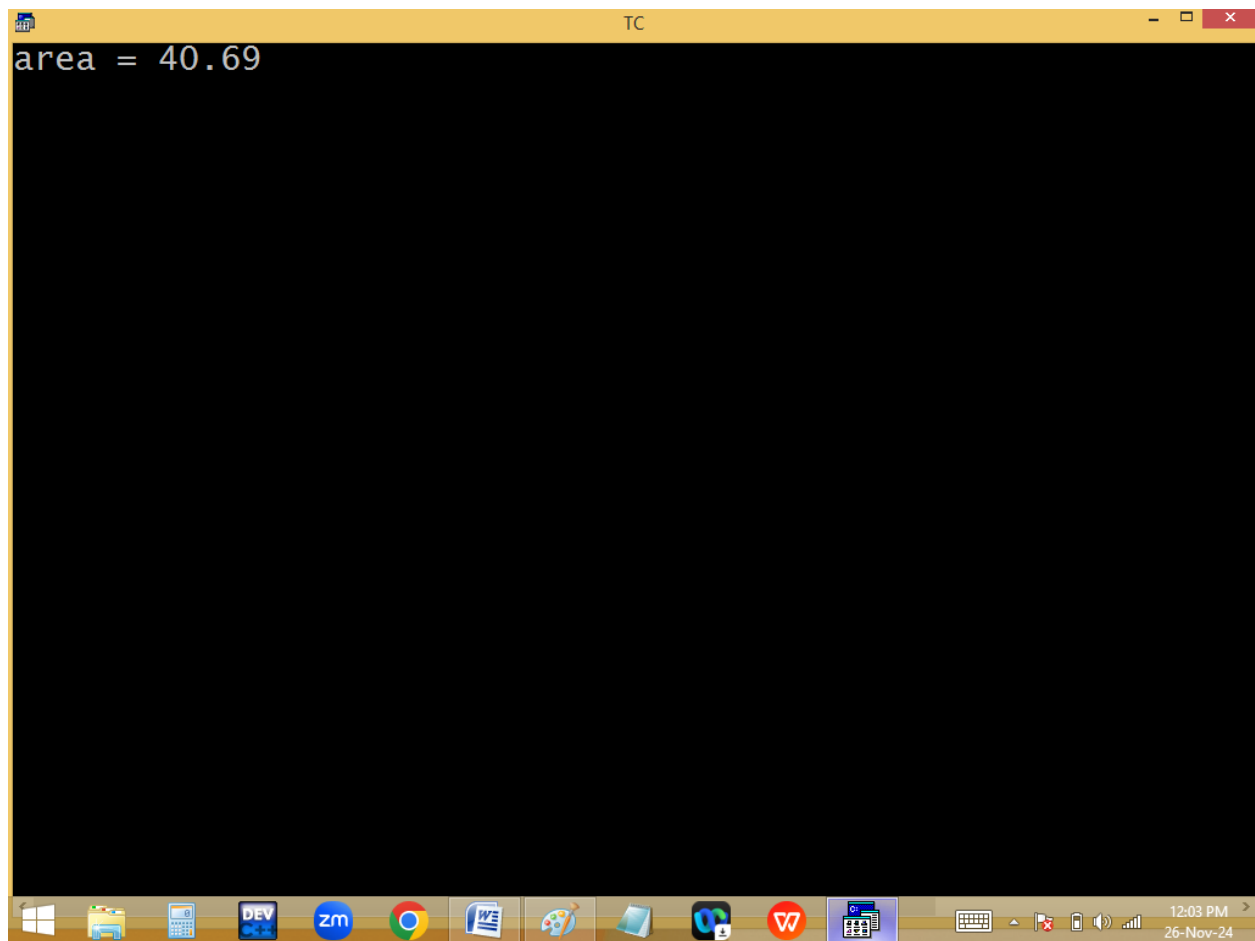

Finding cube value:


Cube = $n * n * n$;

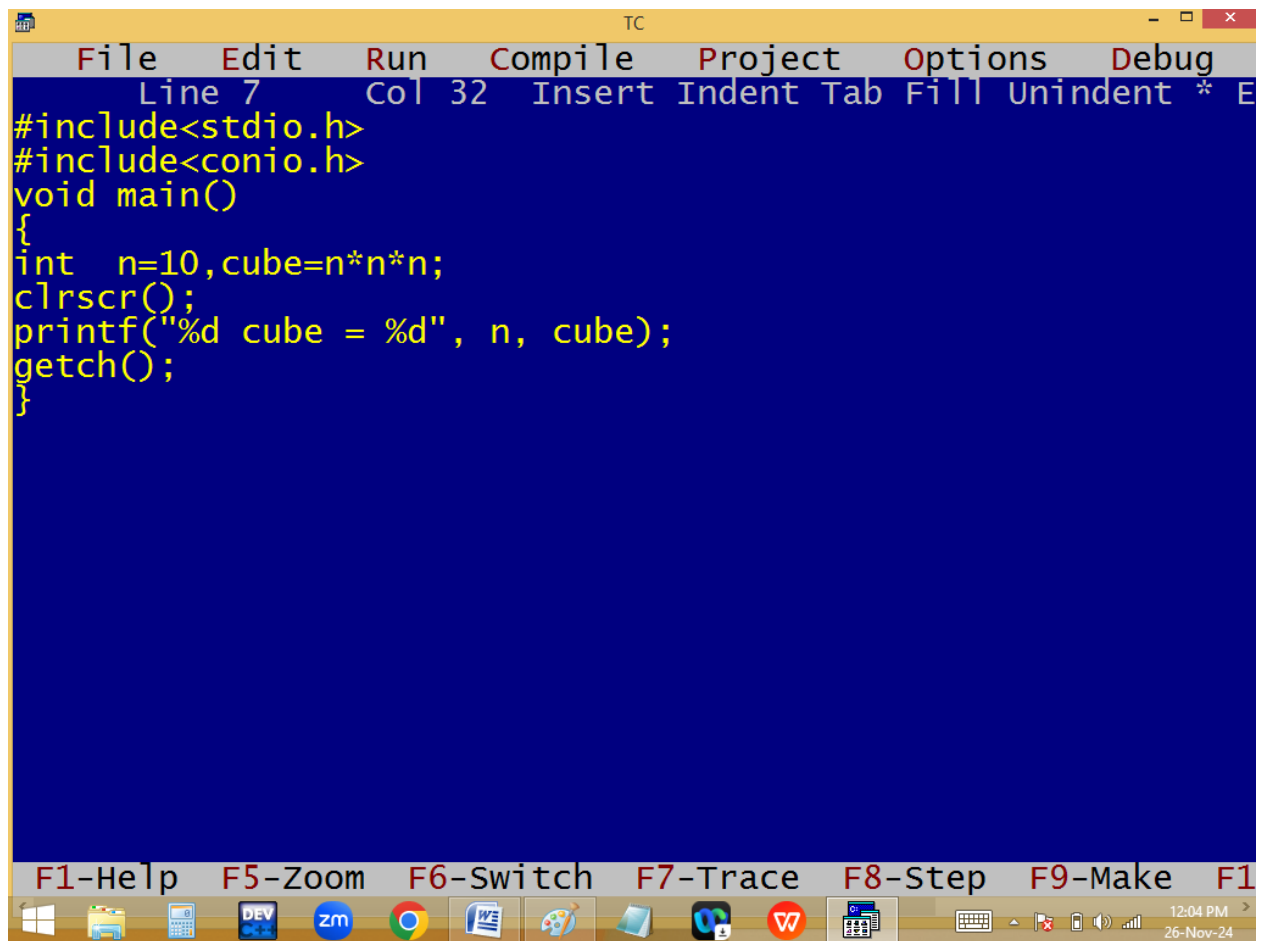


The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 7", "Col 32", and various editing options like "Insert", "Indent", "Tab", "Fill", "Unindent", and "E". The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int  n=10,cube=n*n*n;
clrscr();
printf("%d cube = %d", n, cube);
getch();
}
```

At the bottom of the window, there is a toolbar with icons for various functions and a row of function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the very bottom, showing several application icons and the system clock indicating "12:04 PM" on "26-Nov-24".

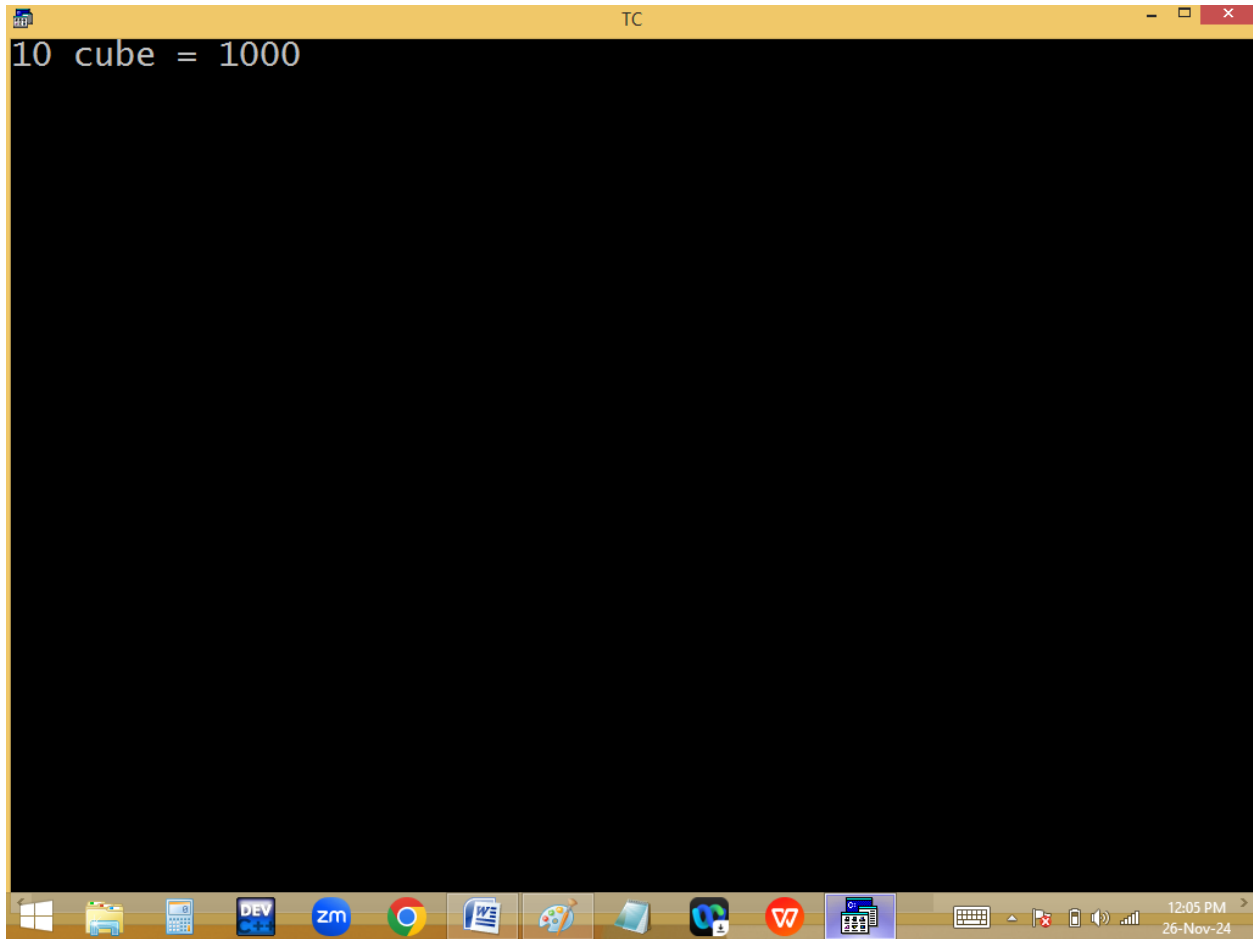


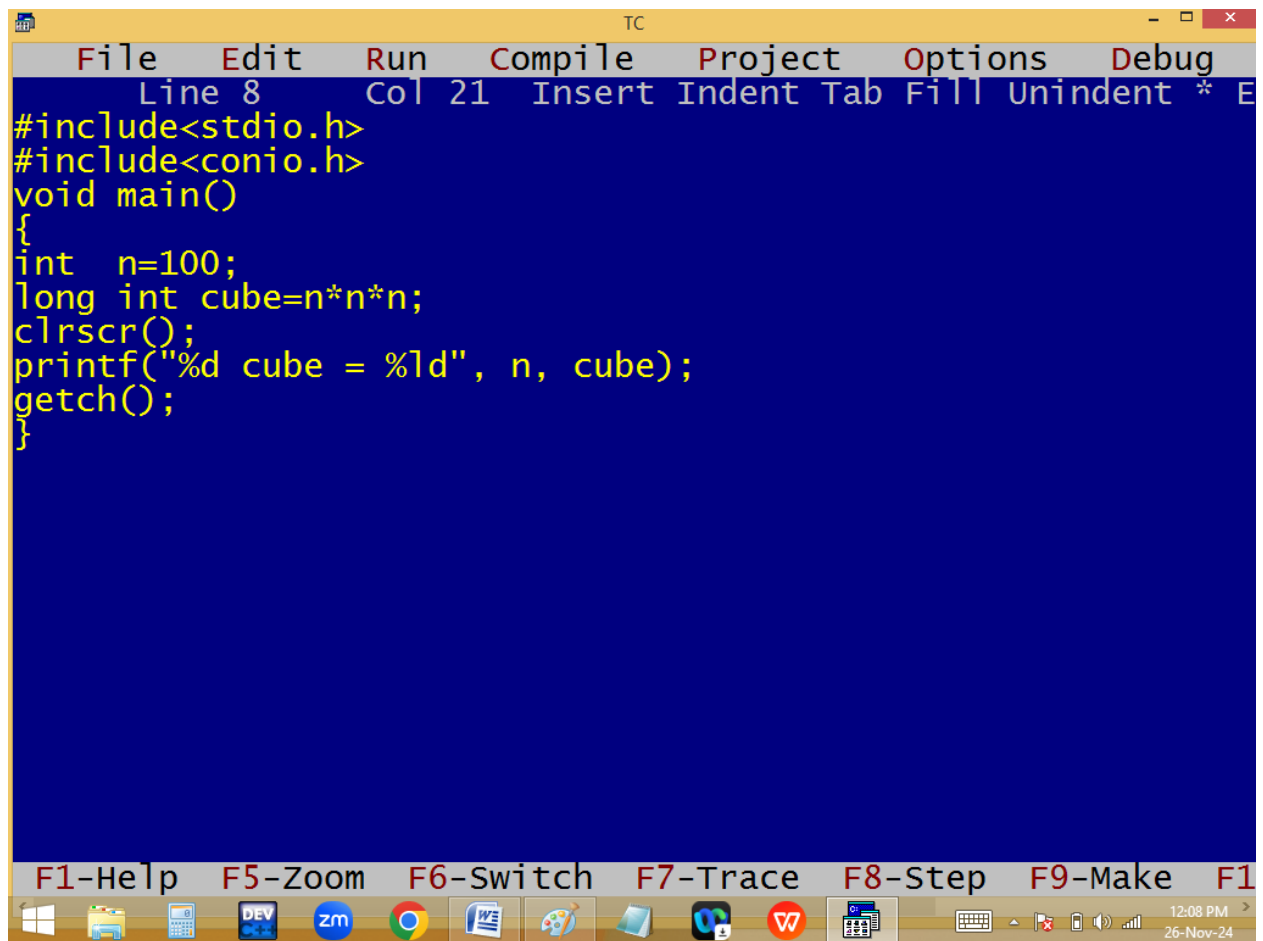


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 8", "Col 21", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and "* E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int  n=100;
long int cube=n*n*n;
clrscr();
printf("%d cube = %ld", n, cube);
getch();
}
```

Below the code editor, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the bottom, showing icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, and a game controller. The system clock in the bottom right corner shows "12:08 PM" and "26-Nov-24".

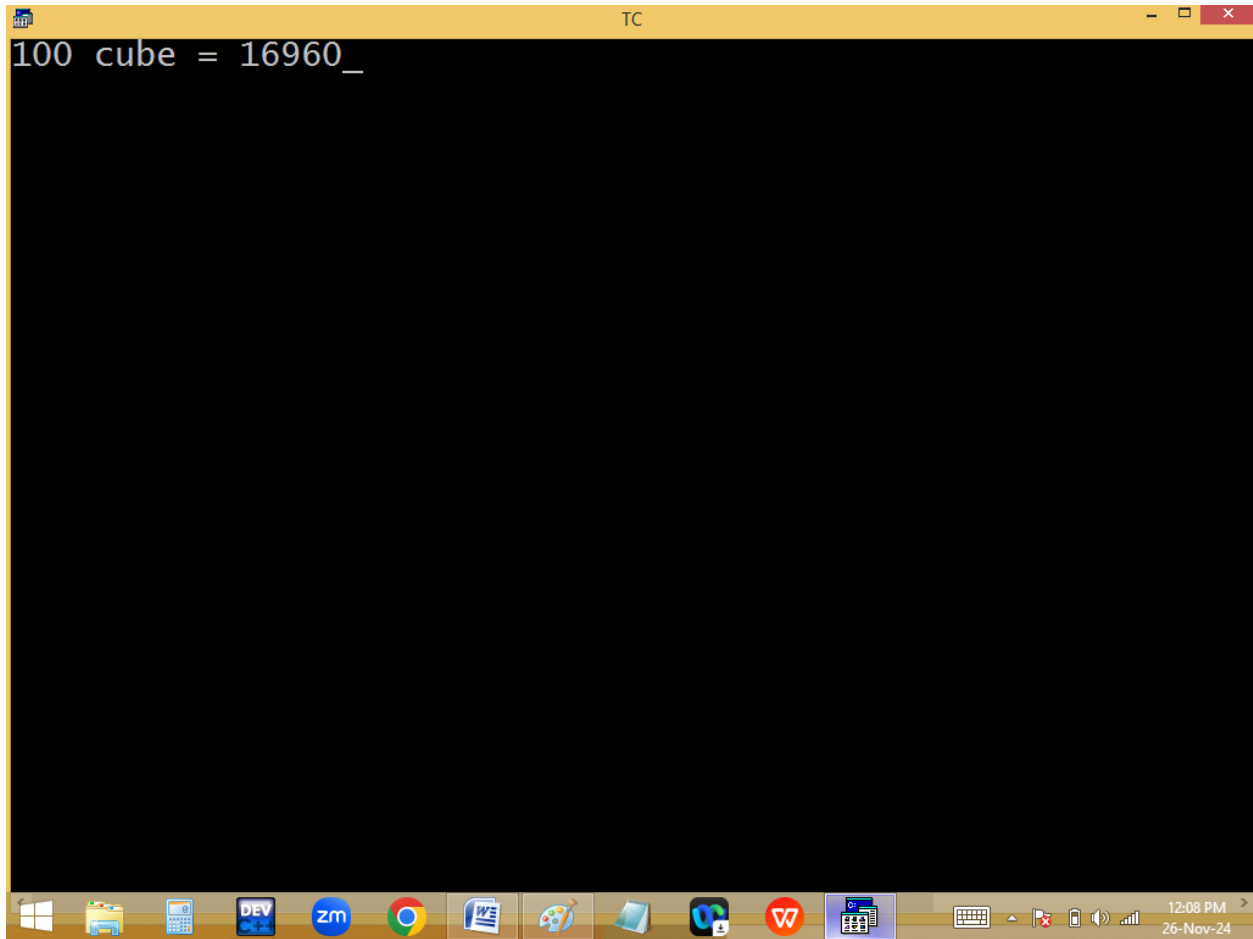


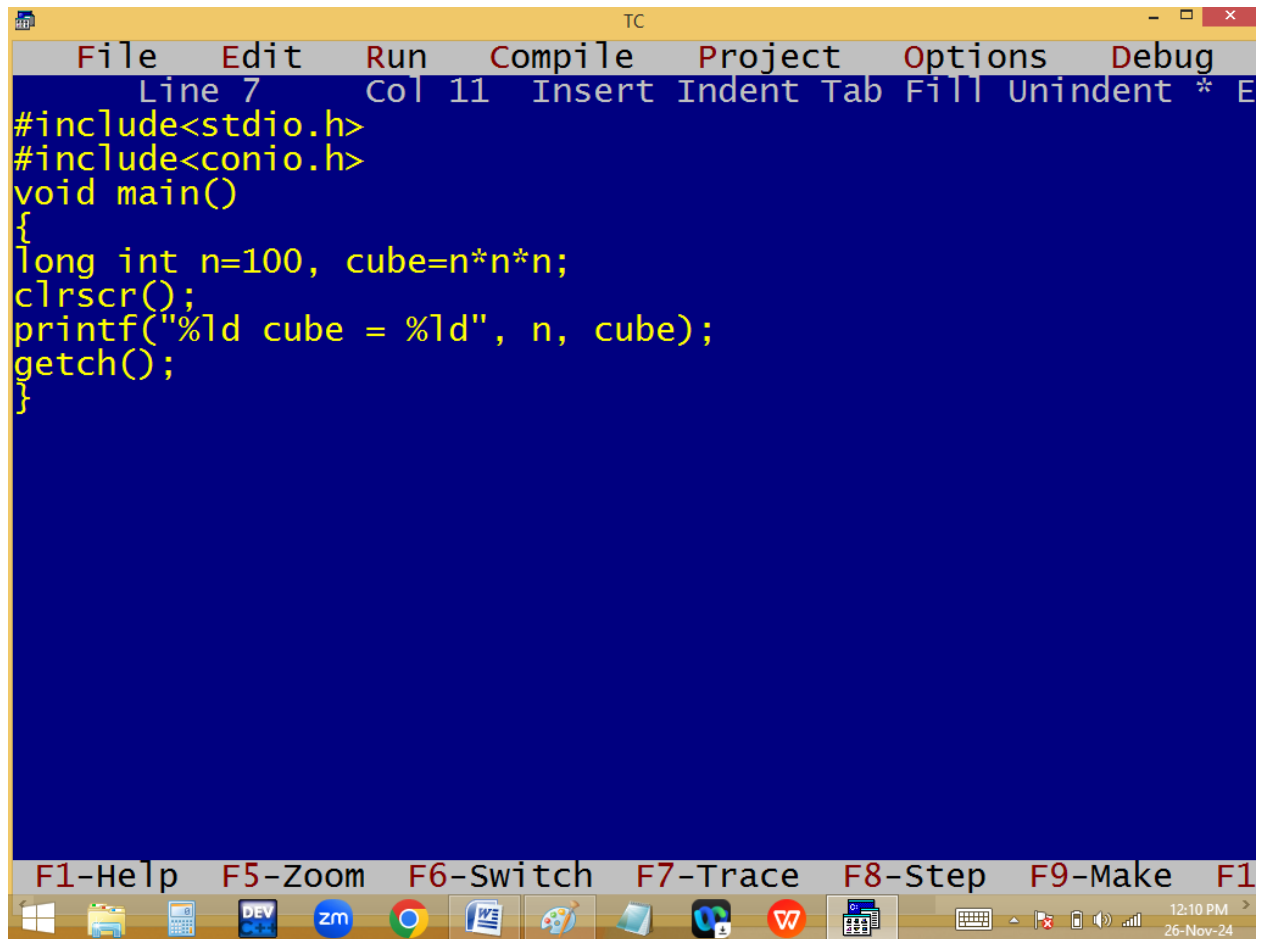


The image shows a screenshot of the Turbo C++ (TC) integrated development environment. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 7", "Col 11", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and a cursor icon. The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
long int n=100, cube=n*n*n;
clrscr();
printf("%ld cube = %ld", n, cube);
getch();
}
```

At the bottom of the window, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". Below the toolbar is the Windows taskbar, which includes icons for the Start button, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, and a game controller. The system tray on the right shows the time "12:10 PM" and the date "26-Nov-24".

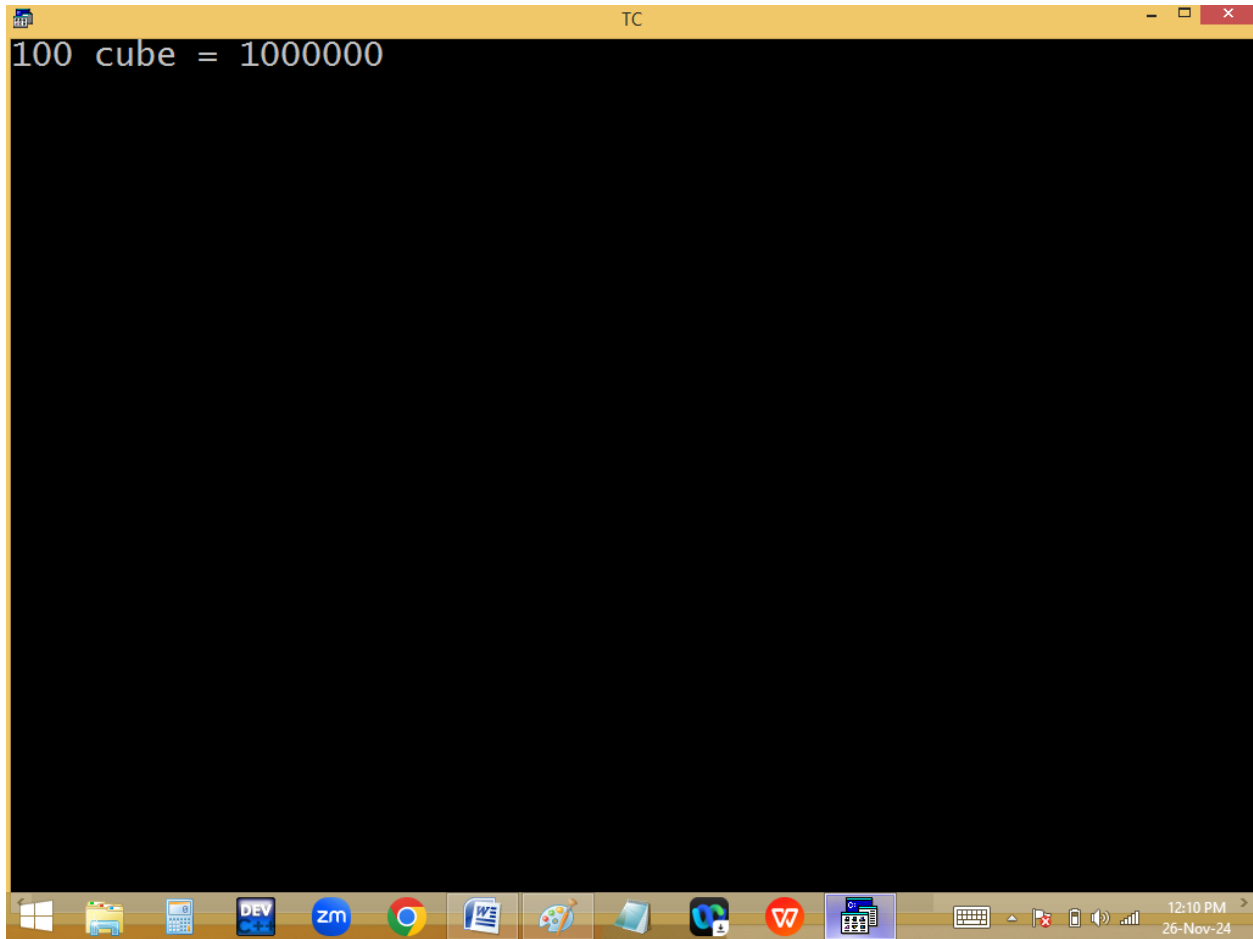


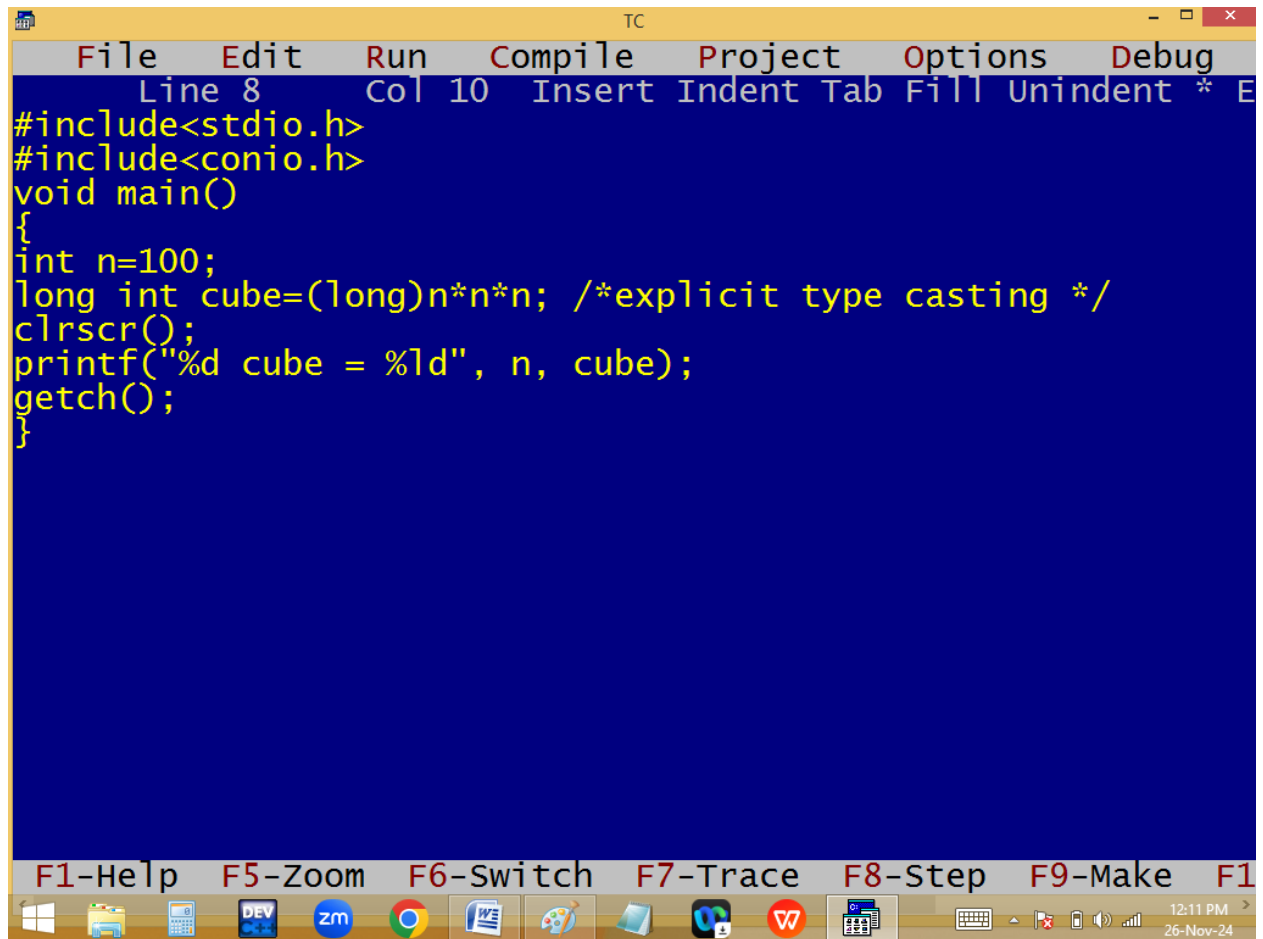


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 8", "Col 10", and "Insert Indent Tab Fill Unindent * E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int n=100;
long int cube=(long)n*n*n; /*explicit type casting */
clrscr();
printf("%d cube = %ld", n, cube);
getch();
}
```

At the bottom of the IDE, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". Below the toolbar is the Windows taskbar, which includes icons for the Start button, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Notepad, Paint, and several other applications. The system tray on the right shows the time "12:11 PM" and the date "26-Nov-24".

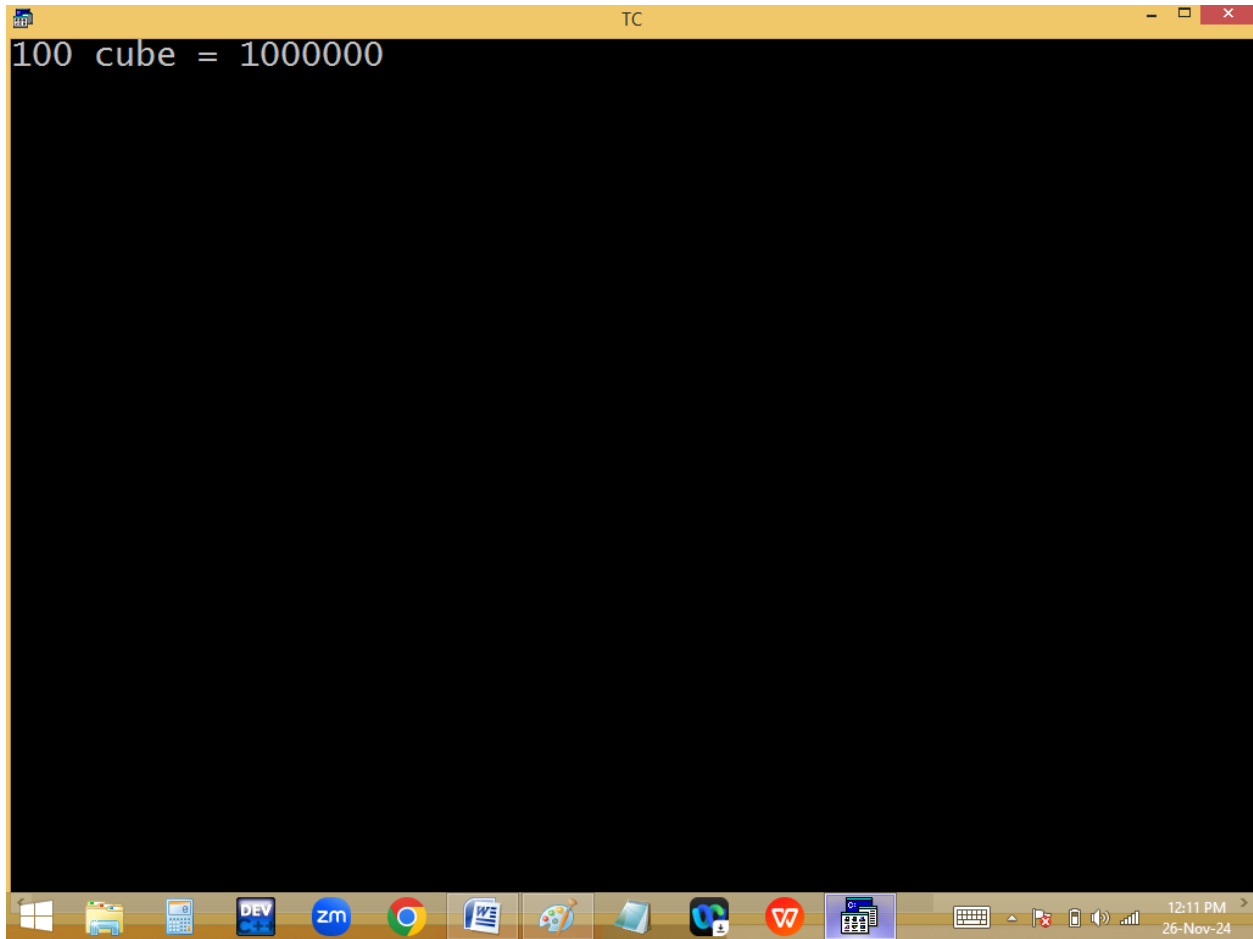


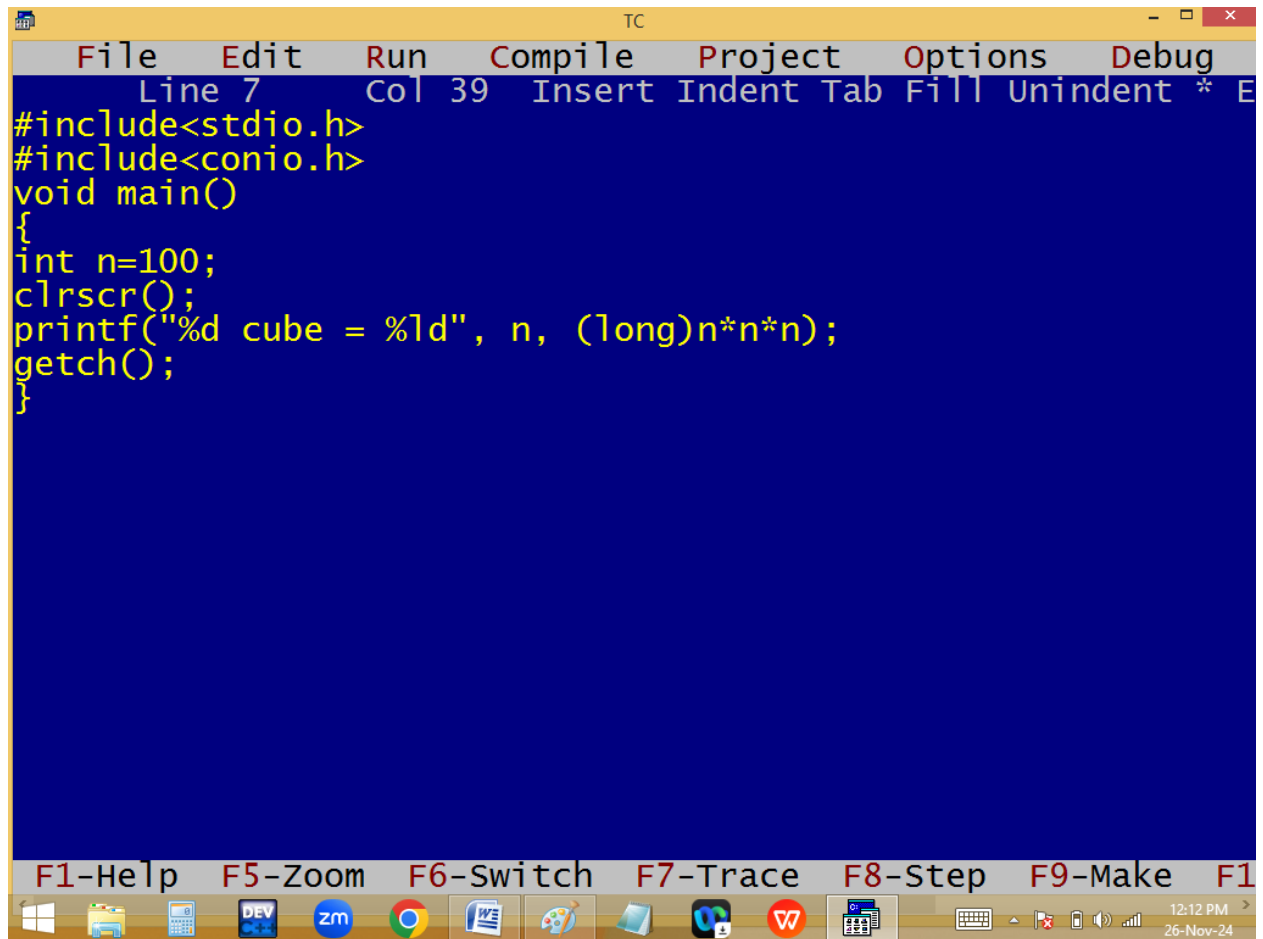

The image shows a screenshot of the Turbo C++ (TC) integrated development environment. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 7", "Col 39", and lists editing options: "Insert", "Indent", "Tab", "Fill", "Unindent", and a "Format" icon. The main editing area has a blue background and contains the following C code:


```
#include<stdio.h>
#include<conio.h>
void main()
{
int n=100;
clrscr();
printf("%d cube = %ld", n, (long)n*n*n);
getch();
}
```

Below the code editor, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the bottom, showing icons for the Start menu, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, and a game controller. The system clock in the bottom right corner shows "12:12 PM" and "26-Nov-24".

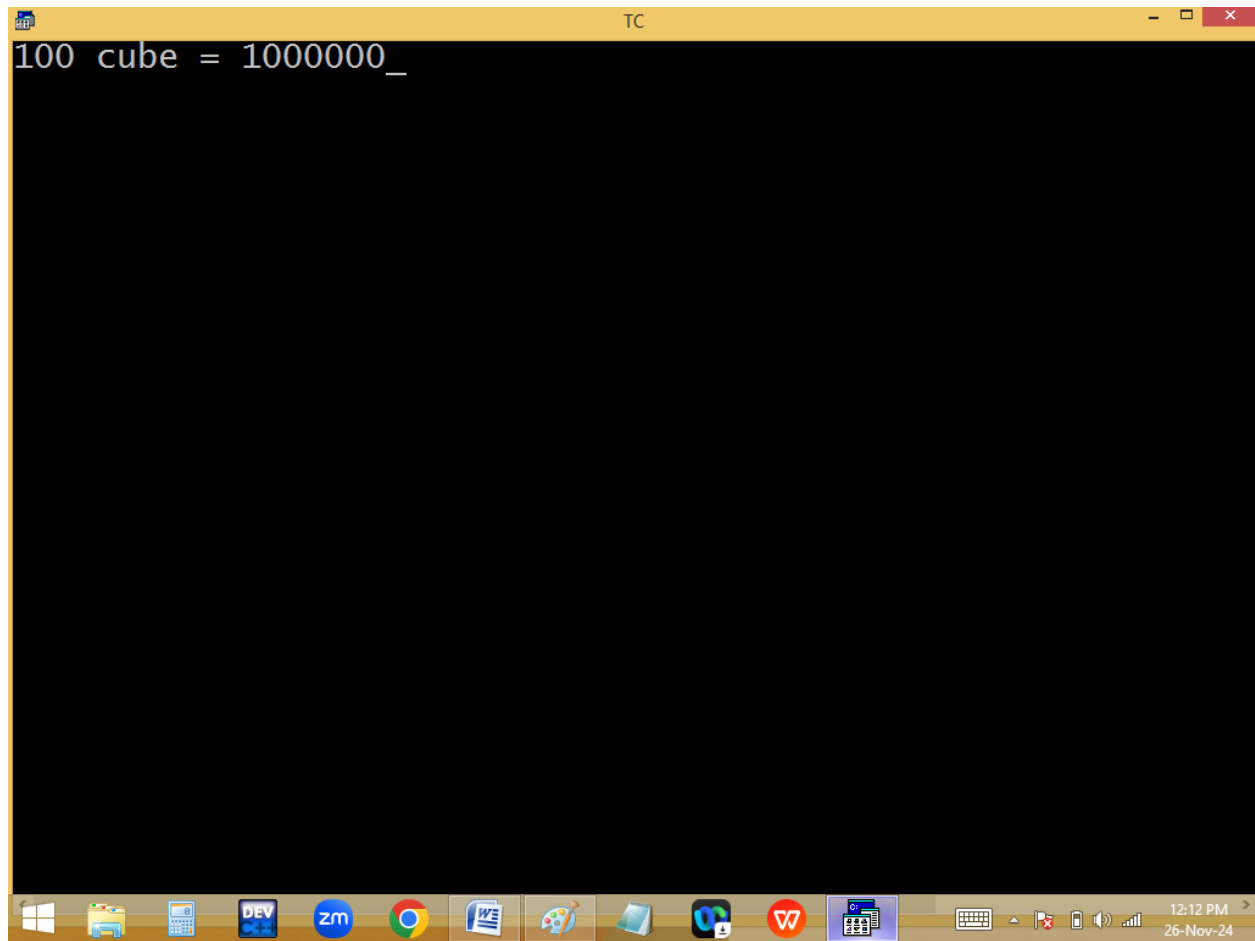

Finding power value:


$$2^5 = 32$$

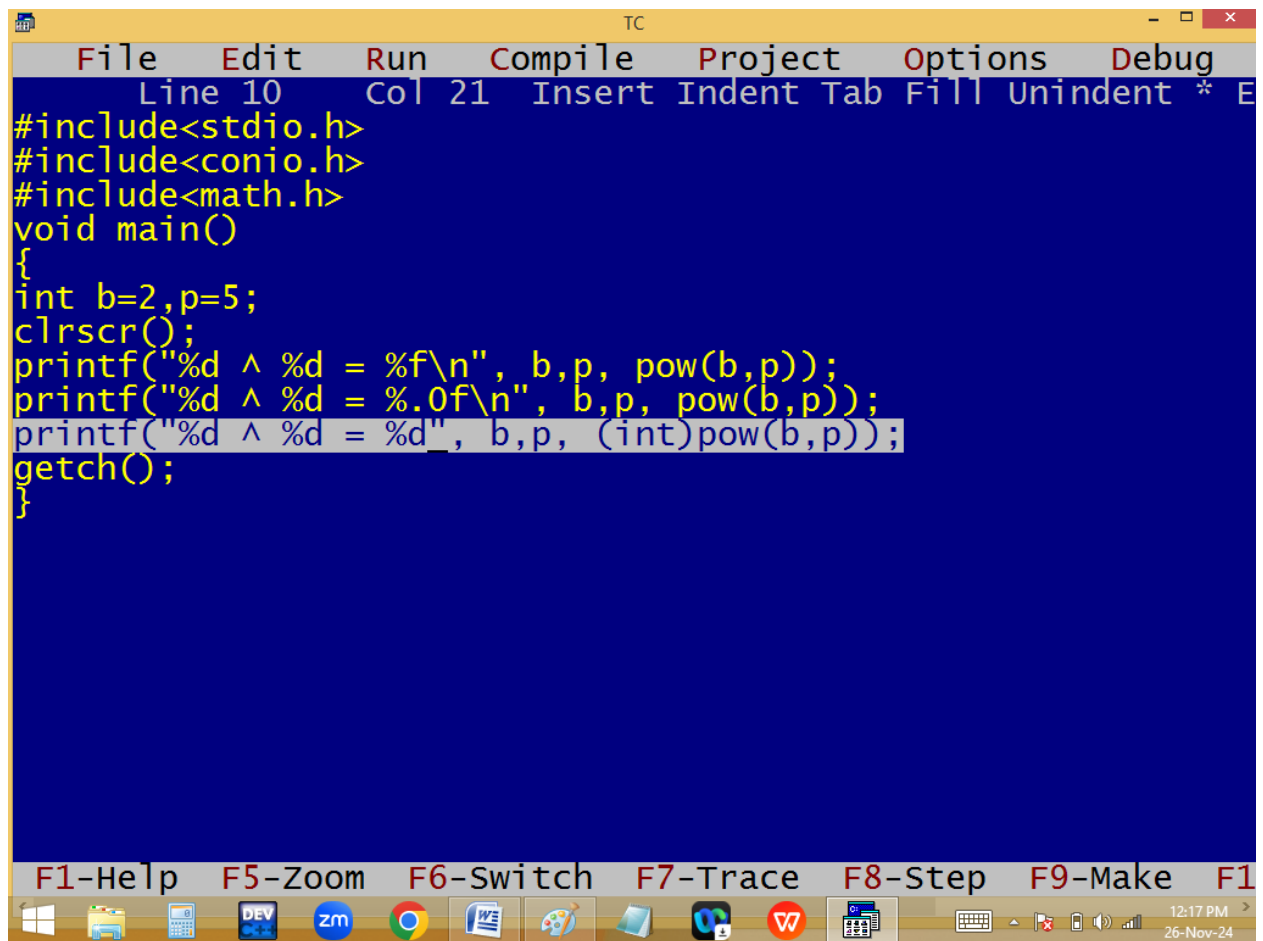

```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 21 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{
int b=2,p=5;
clrscr();
printf("%d ^ %d = %f\n", b,p, pow(b,p));
printf("%d ^ %d = %.0f\n", b,p, pow(b,p));
printf("%d ^ %d = %d", b,p, (int)pow(b,p));
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

12:17 PM 26-Nov-24

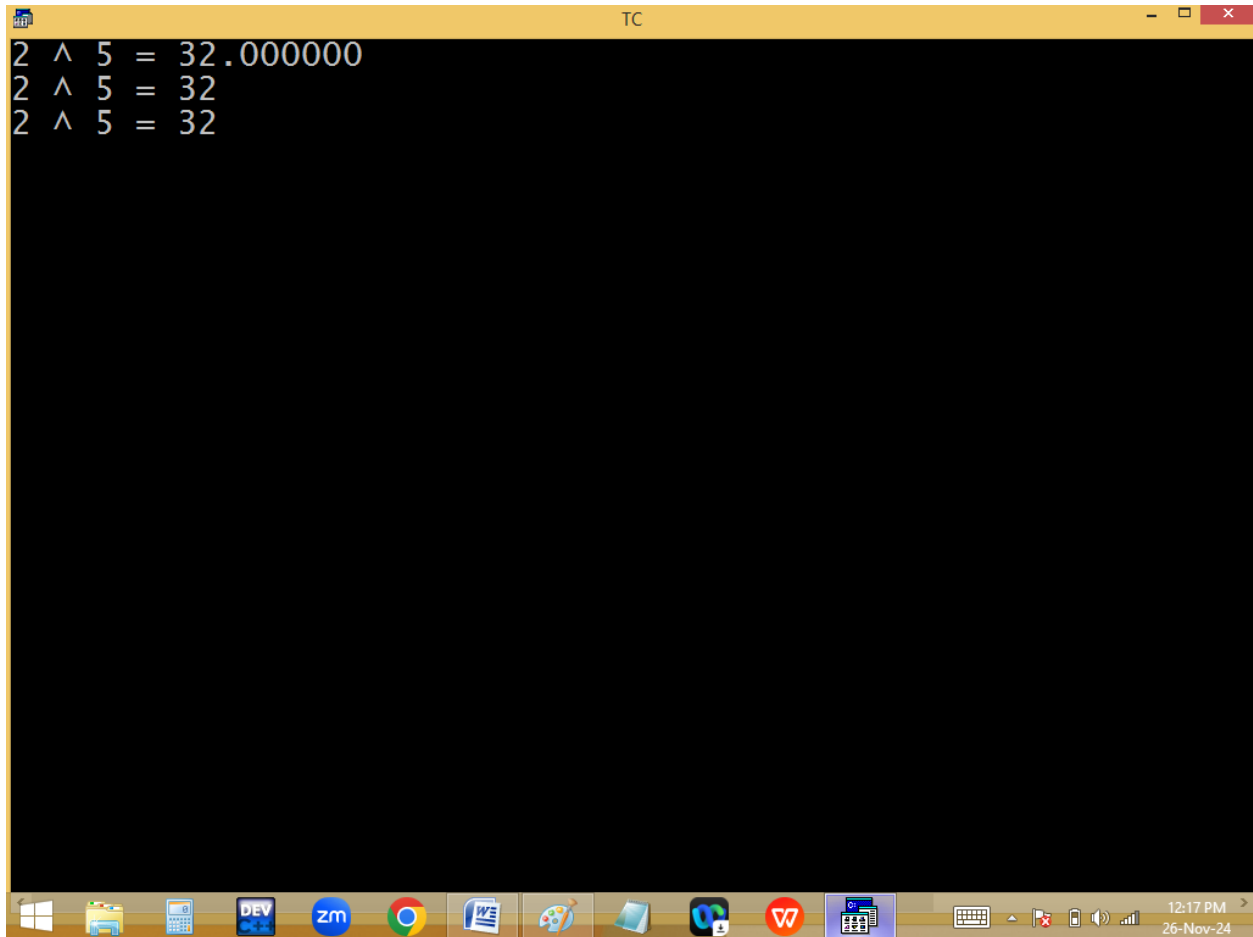

```
2 ^ 5 = 32.000000
2 ^ 5 = 32
2 ^ 5 = 32
```

scanf():

It is a predefined function available in `stdio.h`

It is the major input function in c

It always refers standard input device i.e. keyboard.


In `scanf`, `f` means formatted.

Syntax:

int `scanf`("conversion characters", &variable, &variable,...);

- Here scanf() returns an integer which indicates the no of conversion characters we have used in scanf().
- Generally conversion characters are the first arguments and they should be placed in " " .
- Space is optional in between the conversion characters. When comma / any character is entered in between conversion characters, at run time also we have to enter the same letter in between the values.
- & indicates address of variable. & is mandatory for all data types **except string** type variables.


Find the no of conversion characters in scanf():

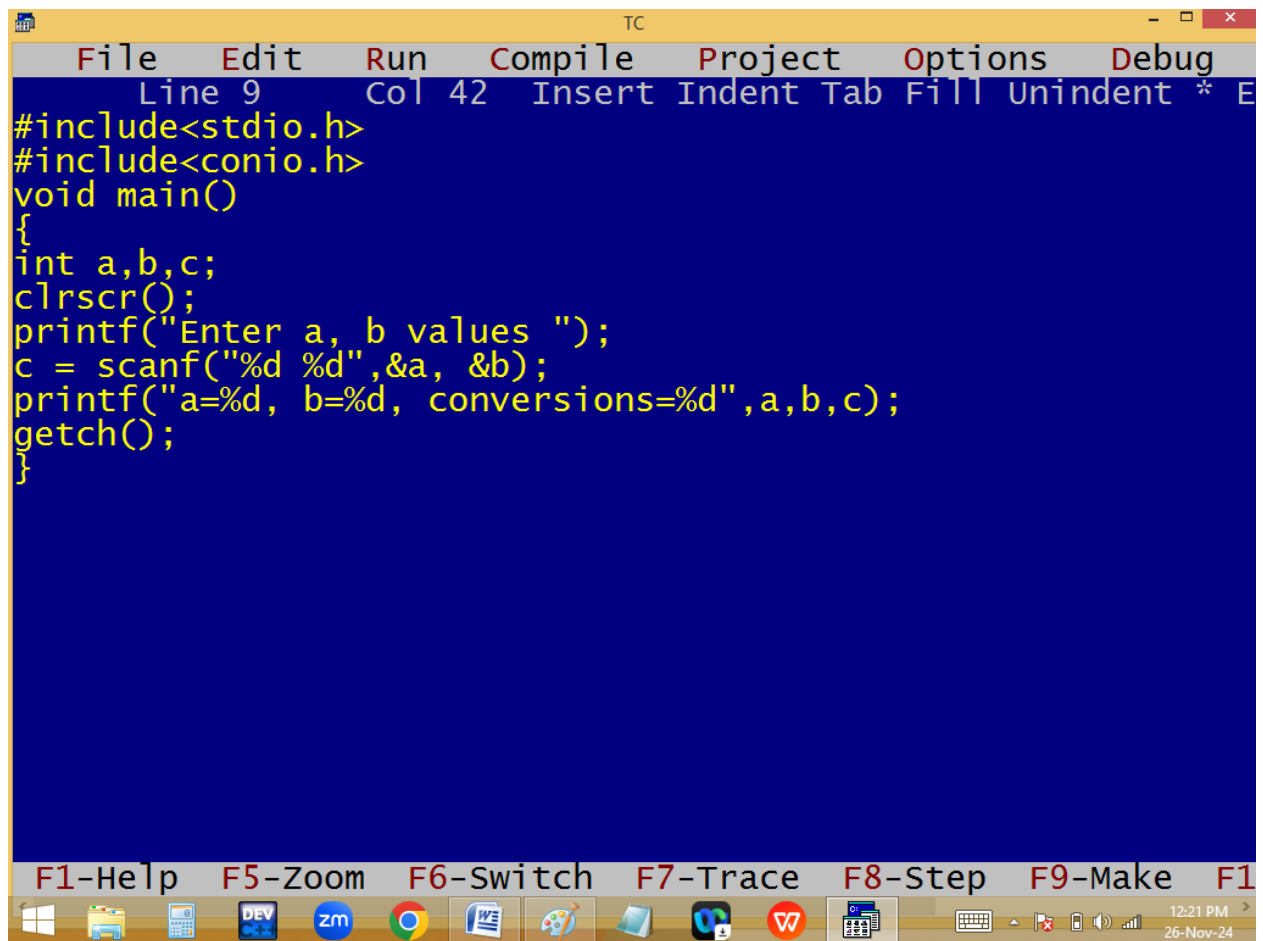


```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 42 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b,c;
clrscr();
printf("Enter a, b values ");
c = scanf("%d %d",&a, &b);
printf("a=%d, b=%d, conversions=%d",a,b,c);
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

12:21 PM 26-Nov-24

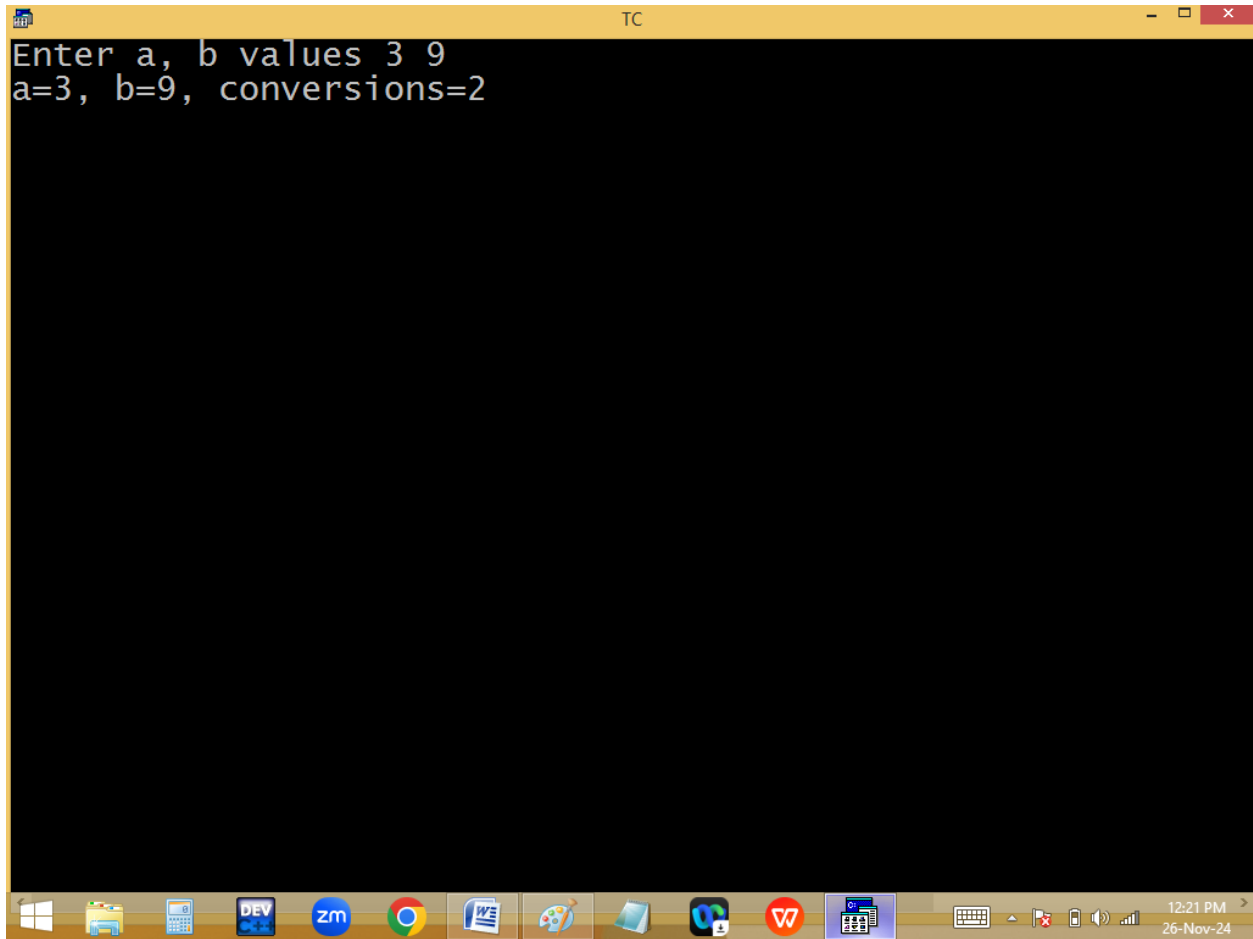


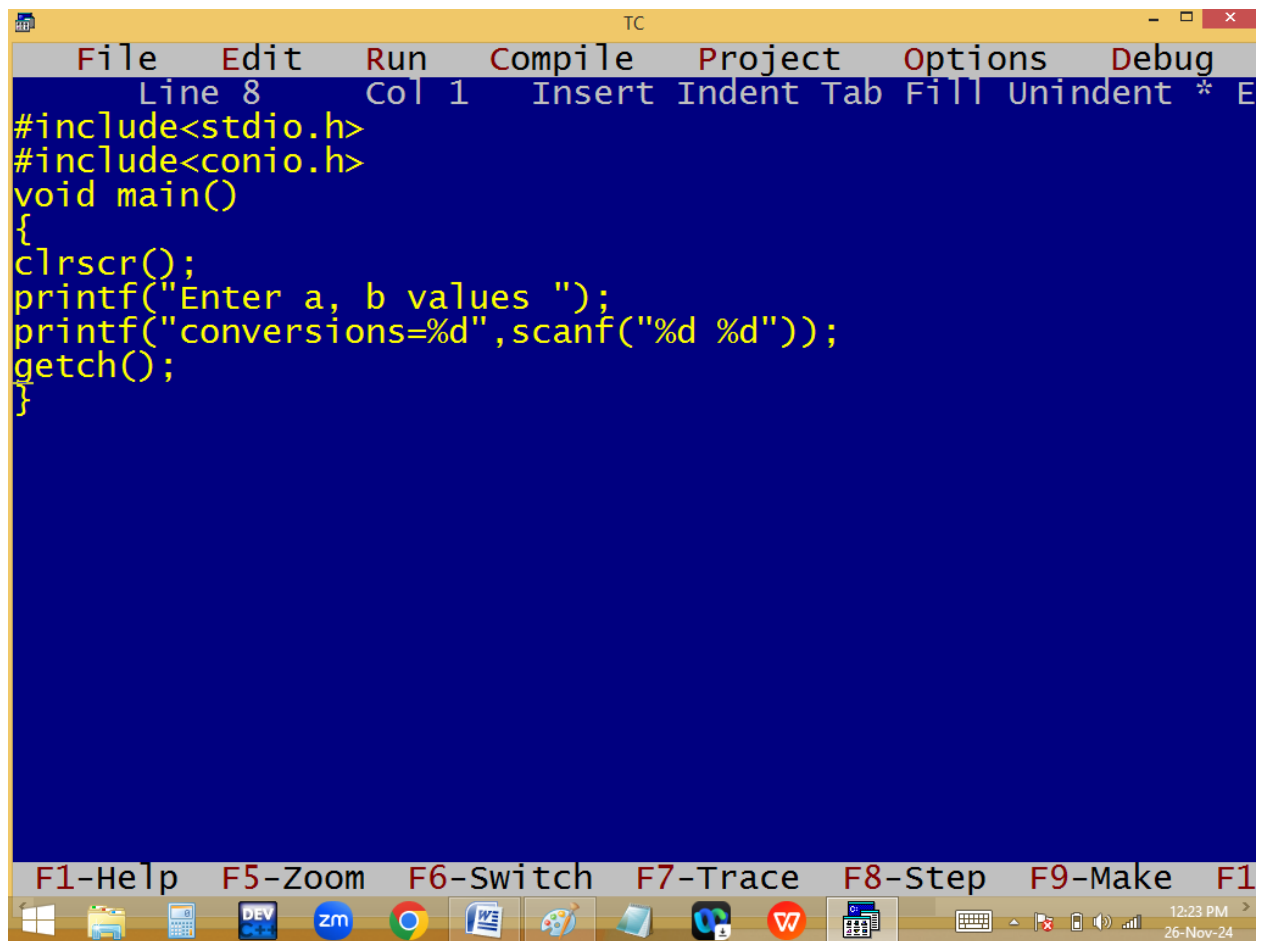


The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 8", "Col 1", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and "* E". The main editing area has a dark blue background and contains the following C code in yellow text:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("Enter a, b values ");
printf("conversions=%d",scanf("%d %d"));
getch();
}
```

At the bottom of the window, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". Below the toolbar is a Windows taskbar with various application icons, including the Start button, File Explorer, Calculator, DEV C++, Zoom, Google Chrome, Word, and others. The system clock in the bottom right corner shows "12:23 PM" and "26-Nov-24".

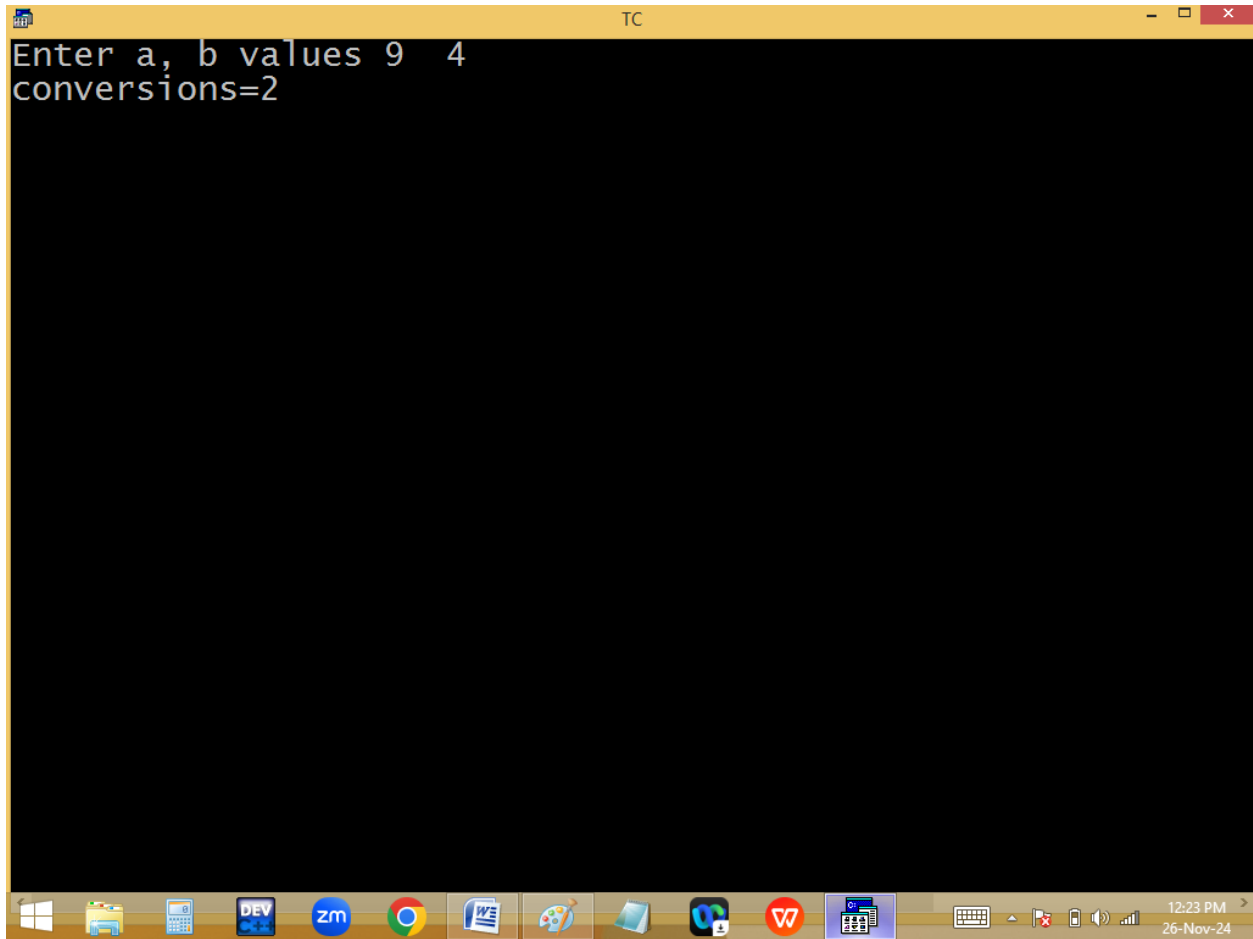


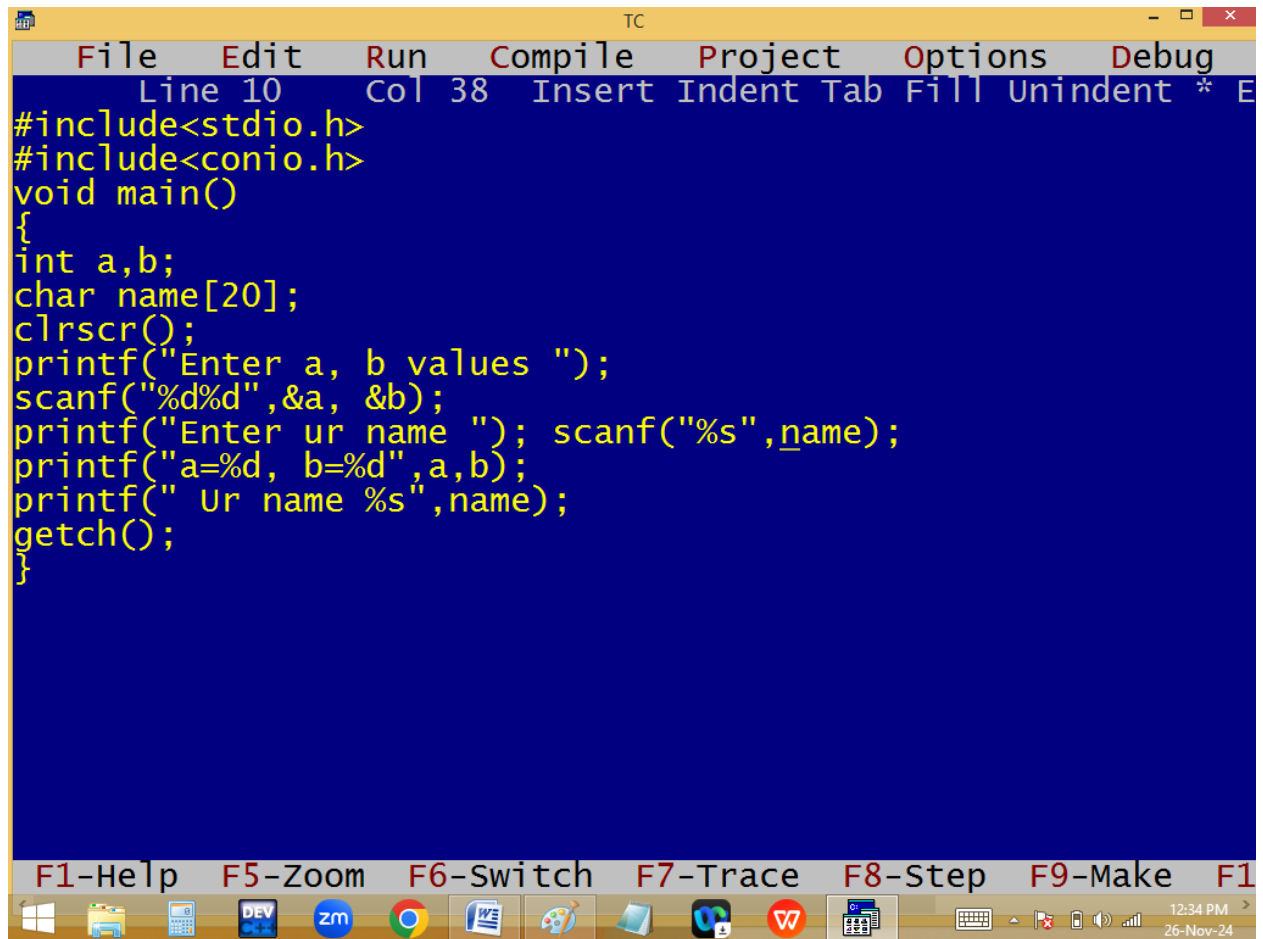


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 10", "Col 38", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and "* E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b;
char name[20];
clrscr();
printf("Enter a, b values ");
scanf("%d%d",&a, &b);
printf("Enter ur name "); scanf("%s",_name);
printf("a=%d, b=%d",a,b);
printf(" Ur name %s",name);
getch();
}
```

Below the code editor, there is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the bottom, showing icons for various applications and the system clock displaying "12:34 PM" and "26-Nov-24".

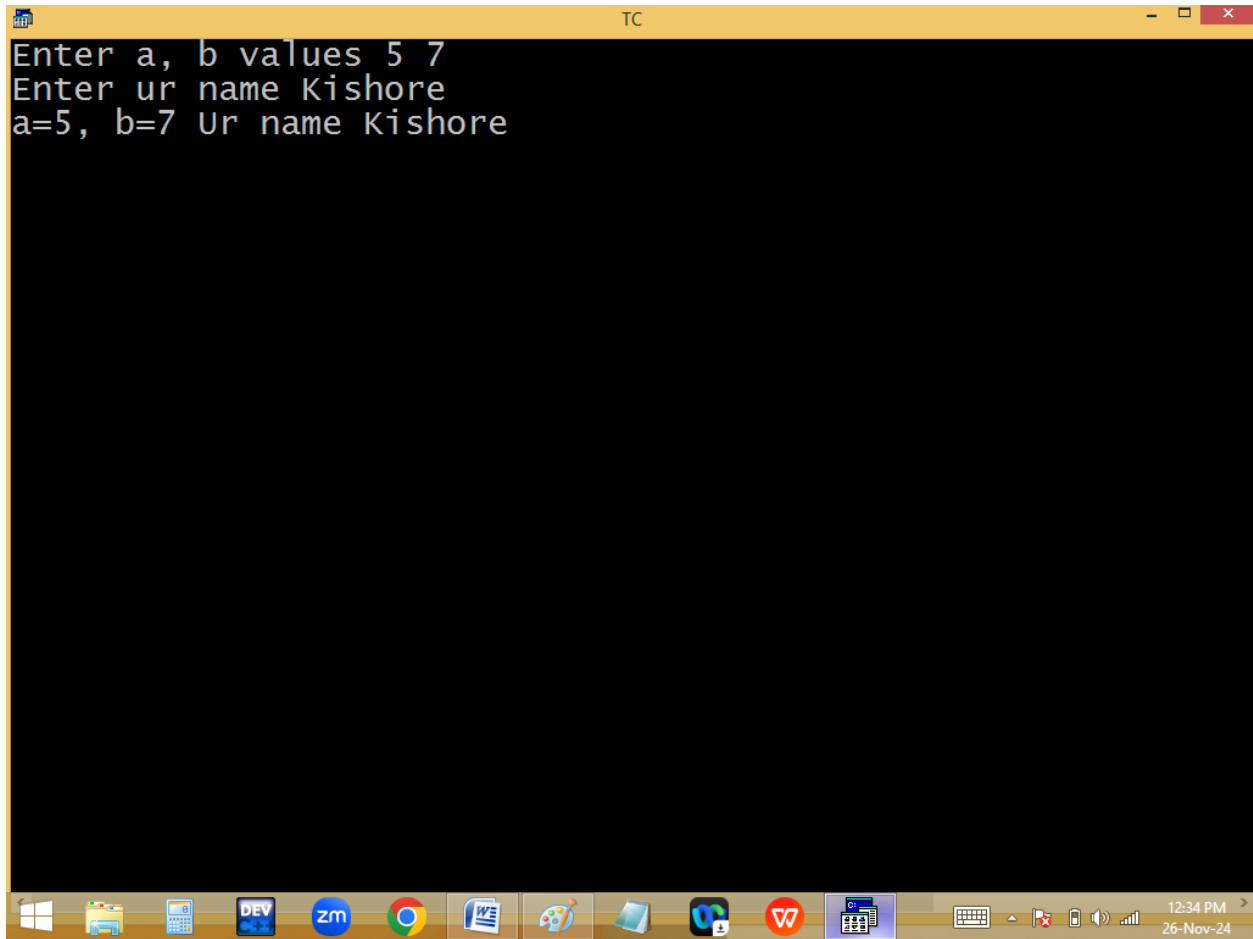


Controlling inputs in scanf():

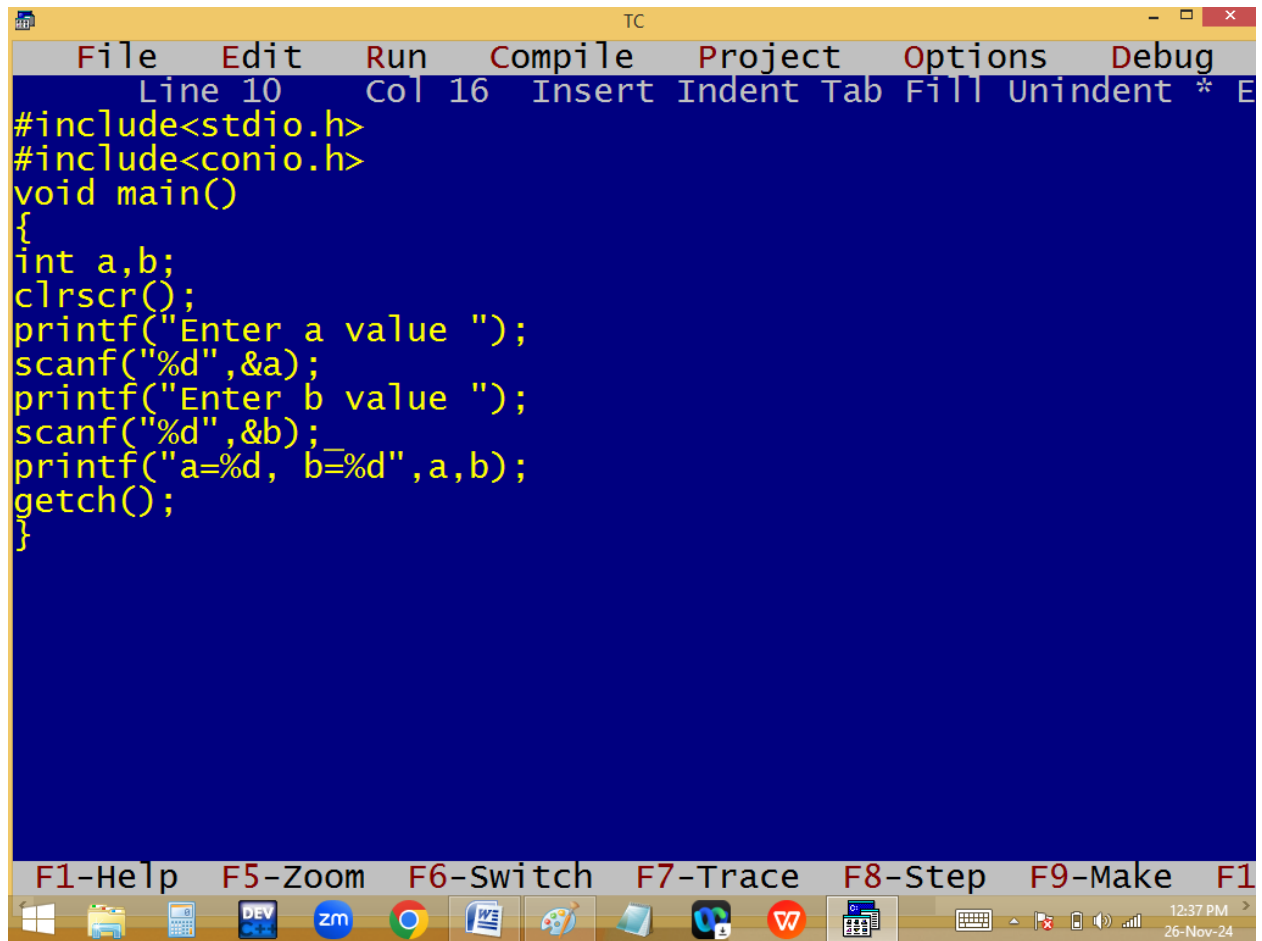


```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 16 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b;
clrscr();
printf("Enter a value ");
scanf("%d",&a);
printf("Enter b value ");
scanf("%d",&b);
printf("a=%d, b=%d",a,b);
getch();
}
```


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

12:37 PM
26-Nov-24

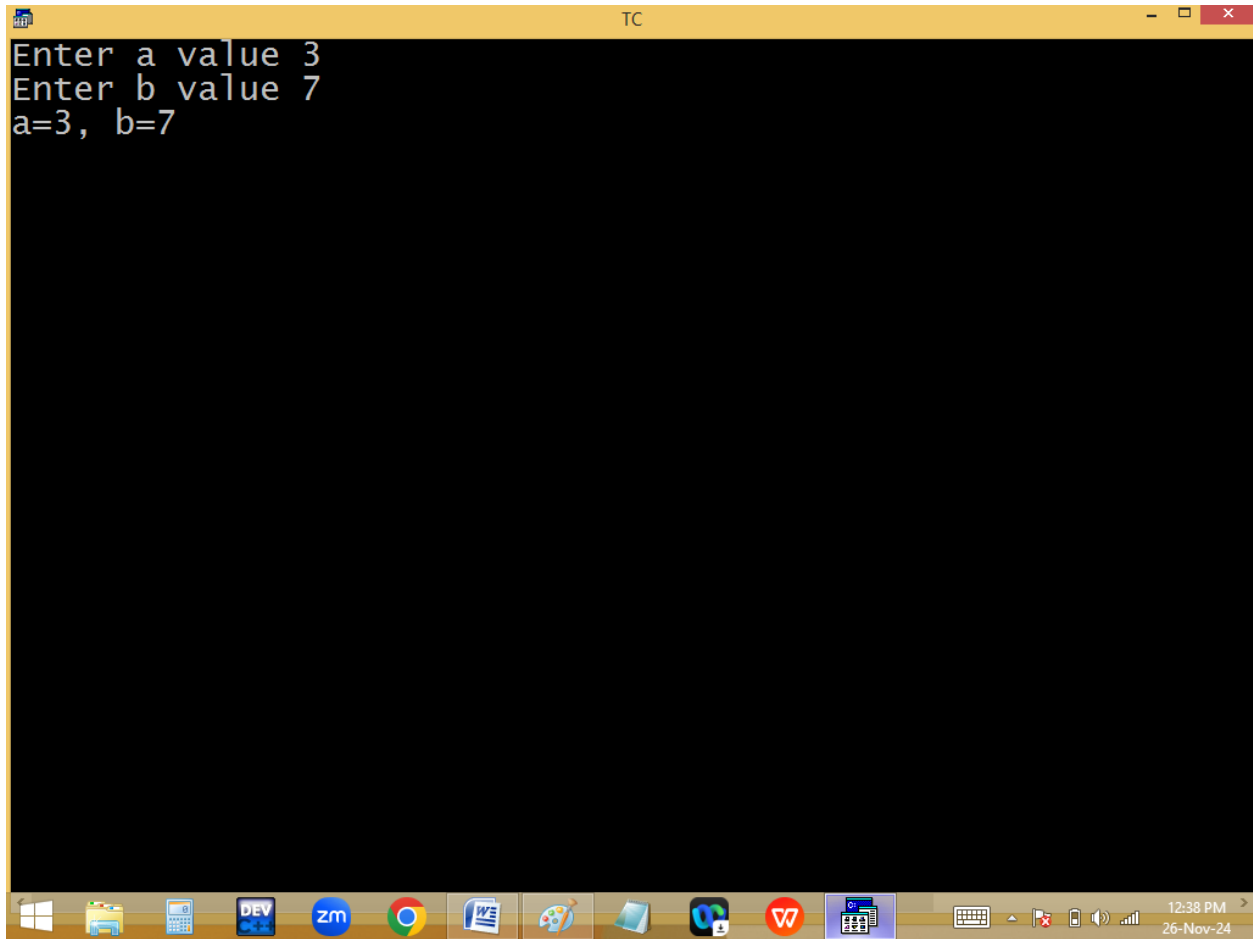

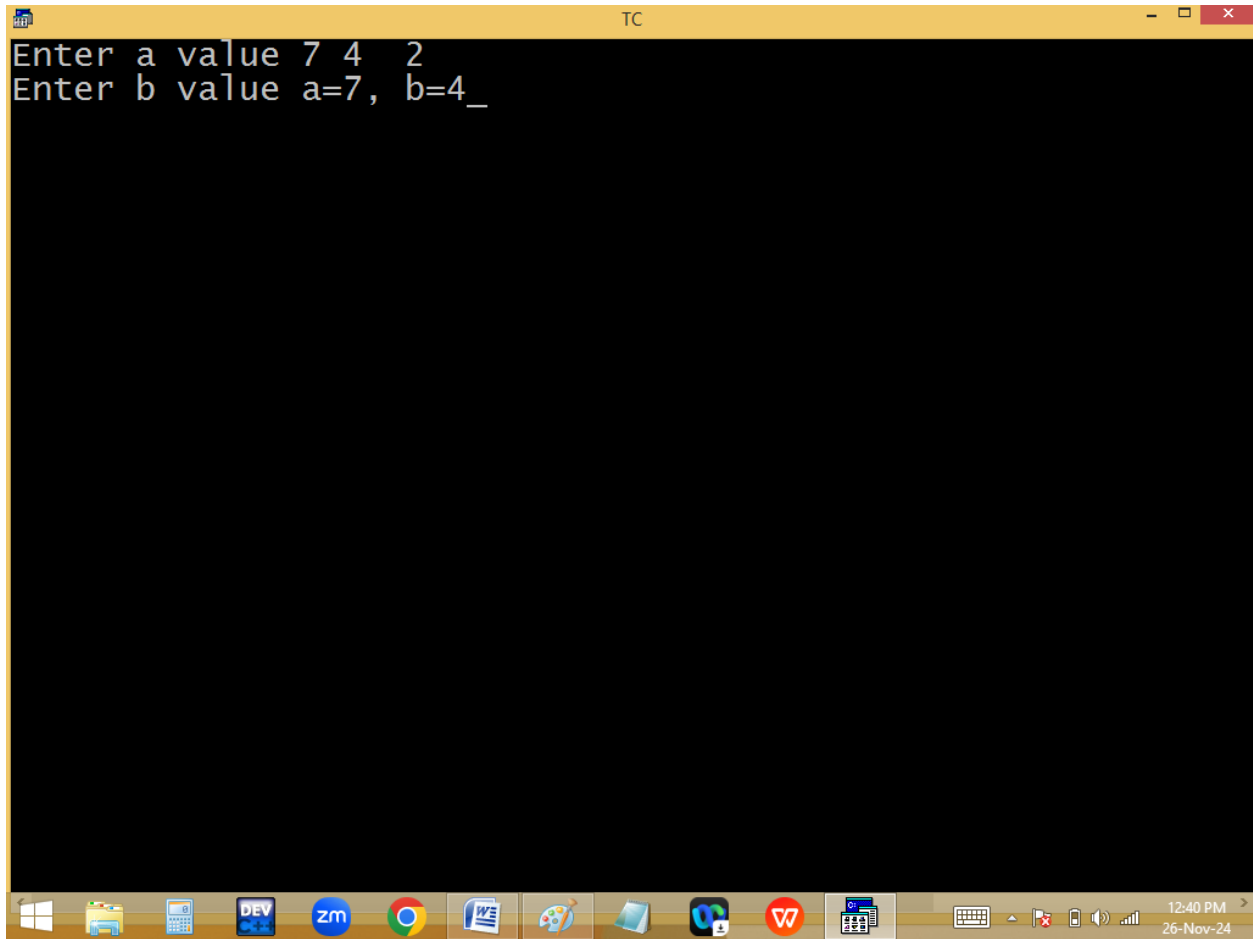


flushall():

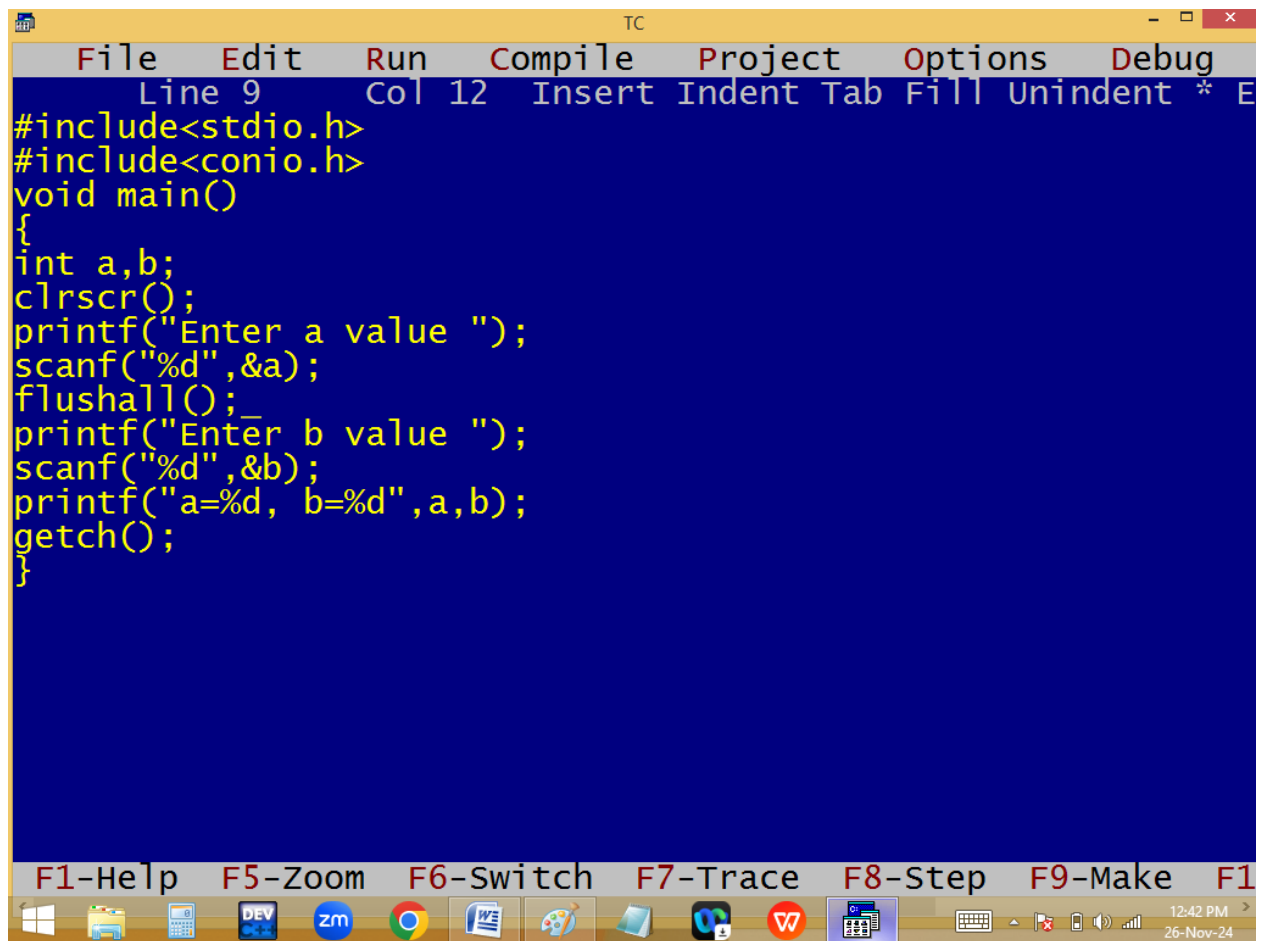


The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 9", "Col 12", and various editing options like "Insert", "Indent", "Tab", "Fill", "Unindent", and "E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b;
clrscr();
printf("Enter a value ");
scanf("%d",&a);
flushall();
printf("Enter b value ");
scanf("%d",&b);
printf("a=%d, b=%d",a,b);
getch();
}
```

At the bottom of the window, there is a toolbar with icons for various functions and a status bar. The status bar displays the time "12:42 PM" and the date "26-Nov-24".

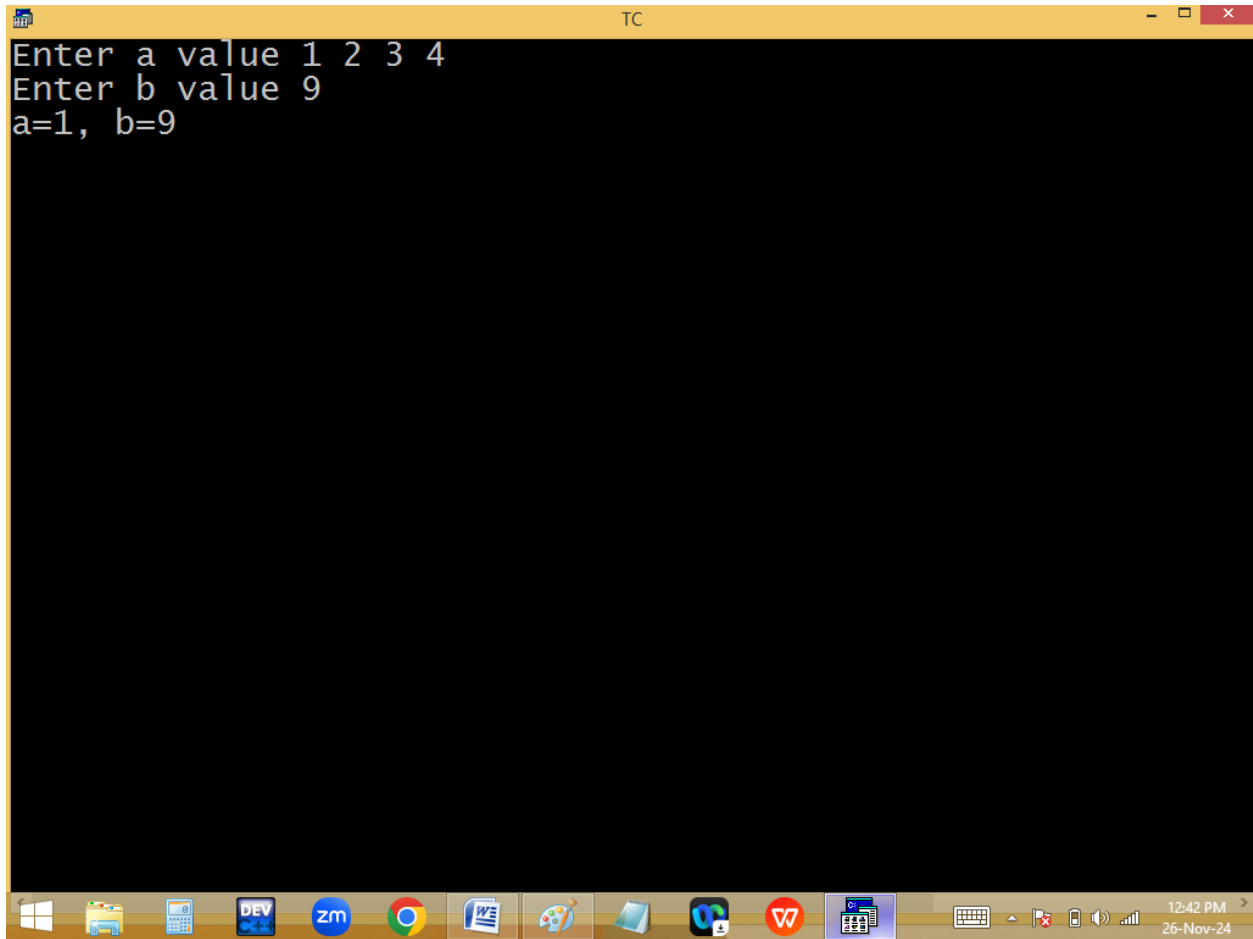


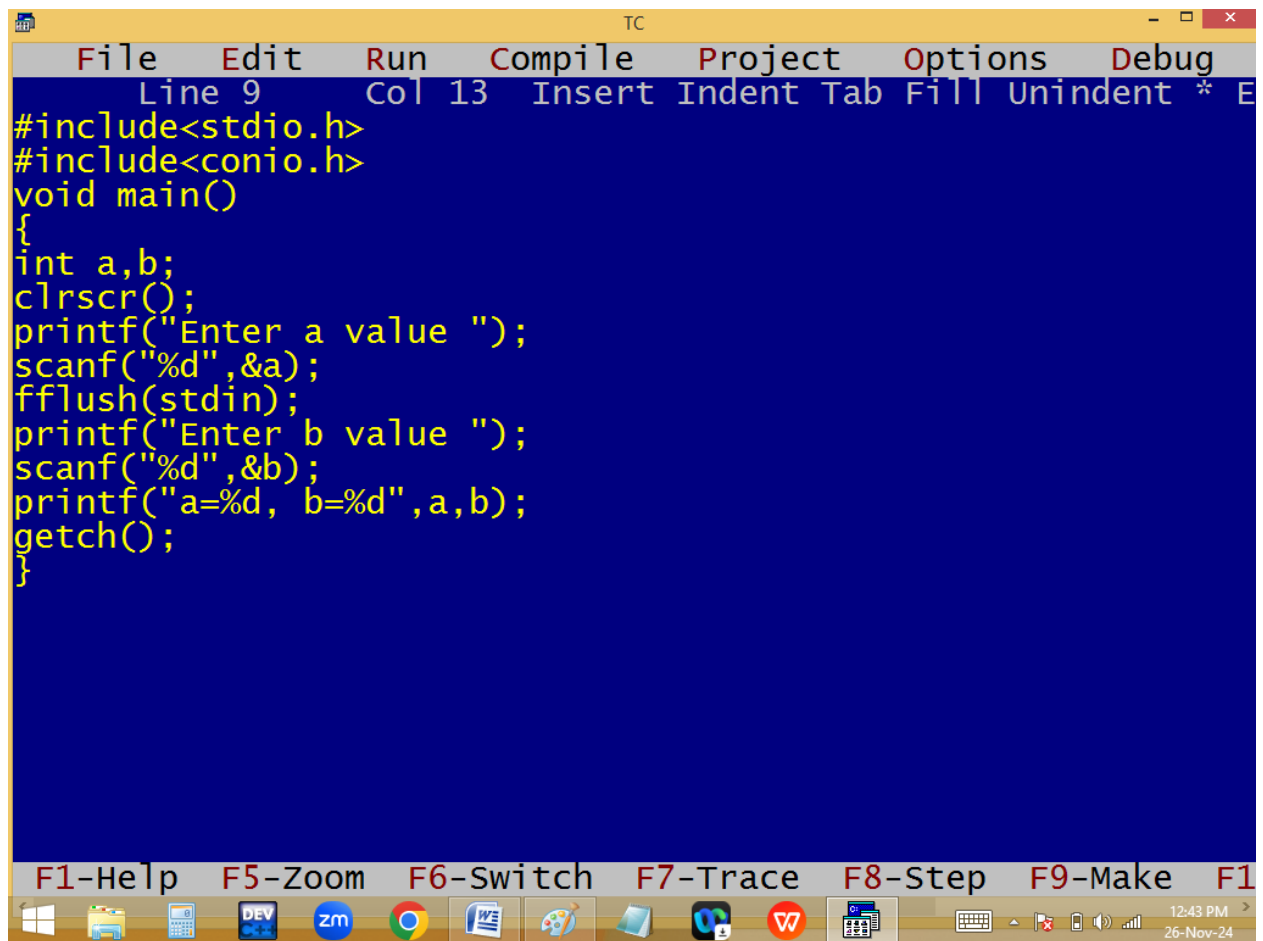


The image shows a screenshot of the Turbo C++ (TC) integrated development environment. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. Below the menu bar, the status bar shows "Line 9 Col 13 Insert Indent Tab Fill Unindent * E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b;
clrscr();
printf("Enter a value ");
scanf("%d",&a);
fflush(stdin);
printf("Enter b value ");
scanf("%d",&b);
printf("a=%d, b=%d",a,b);
getch();
}
```

At the bottom of the window, there is a toolbar with function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar is visible at the very bottom, showing various application icons and the system clock indicating 12:43 PM on 26-Nov-24.

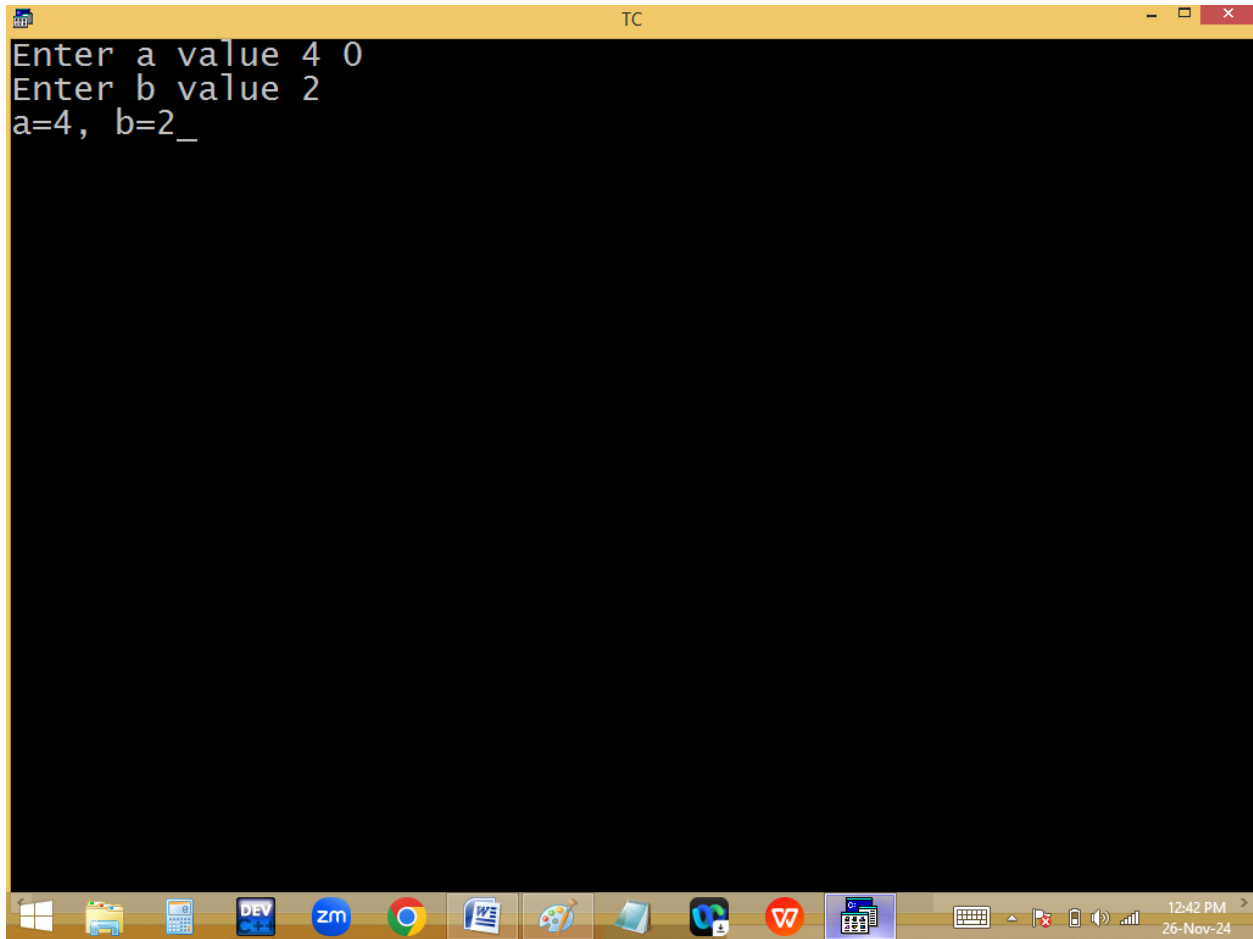

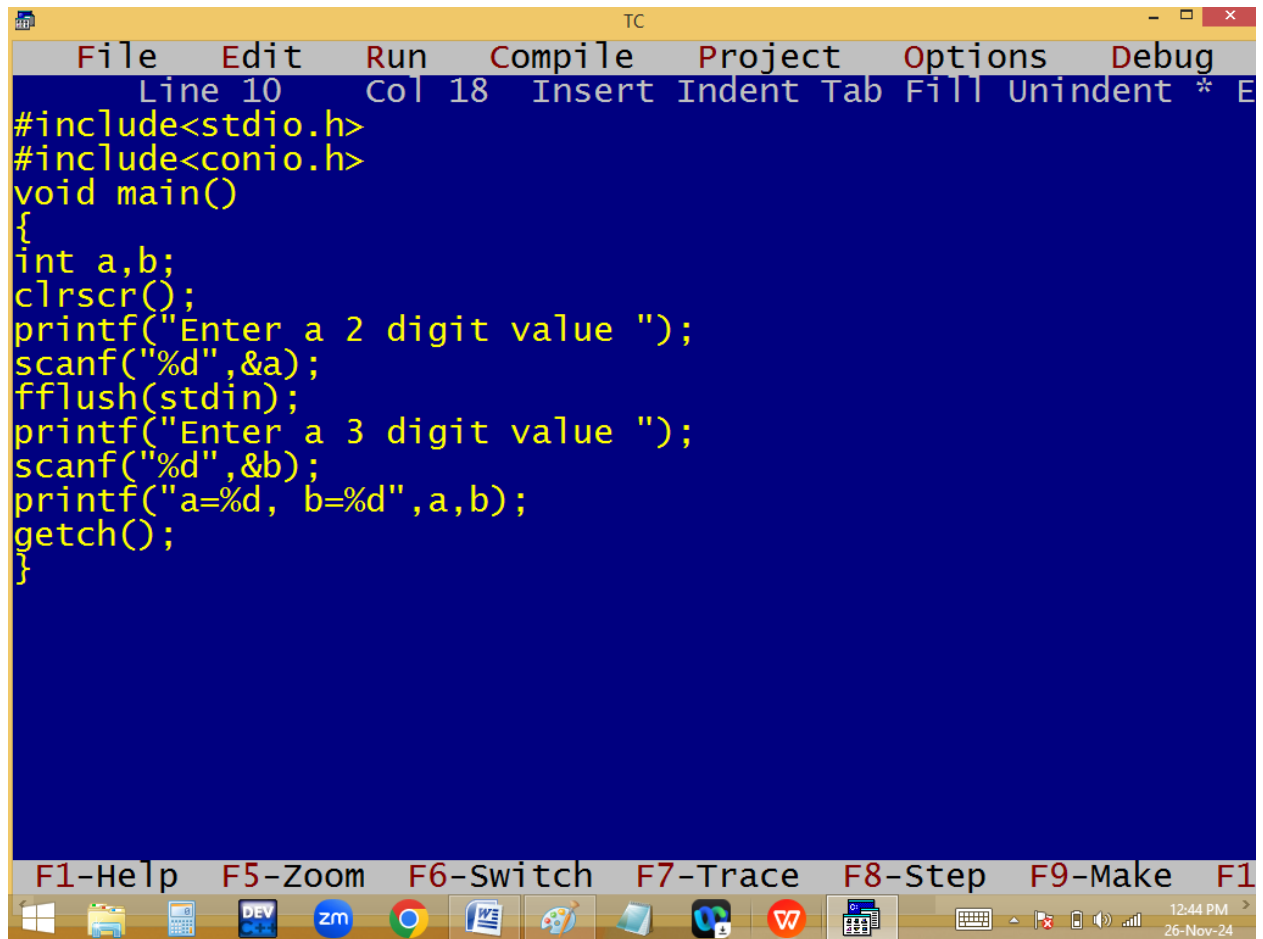


The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 10", "Col 18", and a list of editing options: "Insert", "Indent", "Tab", "Fill", "Unindent", and a cursor icon. The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b;
clrscr();
printf("Enter a 2 digit value ");
scanf("%d",&a);
fflush(stdin);
printf("Enter a 3 digit value ");
scanf("%d",&b);
printf("a=%d, b=%d",a,b);
getch();
}
```

At the bottom of the window, there is a toolbar with icons for various functions. Above the toolbar, a row of function key shortcuts is displayed: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Exit". The Windows taskbar is visible at the very bottom, showing several application icons and the system clock indicating "12:44 PM" on "26-Nov-24".

```
TC
Enter a 2 digit value 1234
Enter a 3 digit value 4567
a=1234, b=4567
```




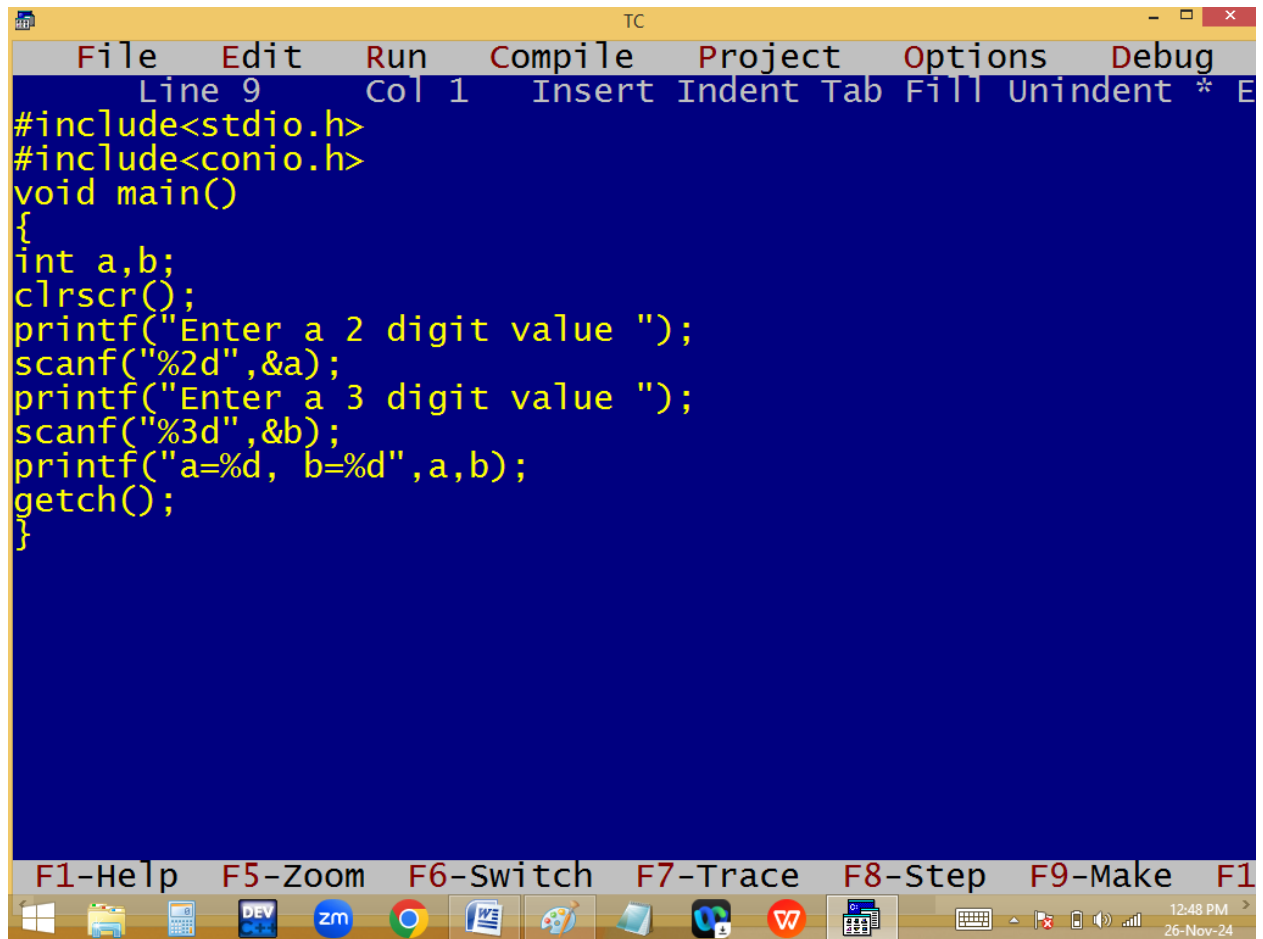


The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 9", "Col 1", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and "* E". The main editing area has a blue background and contains the following C code in yellow text:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b;
clrscr();
printf("Enter a 2 digit value ");
scanf("%2d",&a);
printf("Enter a 3 digit value ");
scanf("%3d",&b);
printf("a=%d, b=%d",a,b);
getch();
}
```

At the bottom of the window, there is a toolbar with icons for various functions and a status bar. The status bar displays the time "12:48 PM" and the date "26-Nov-24".

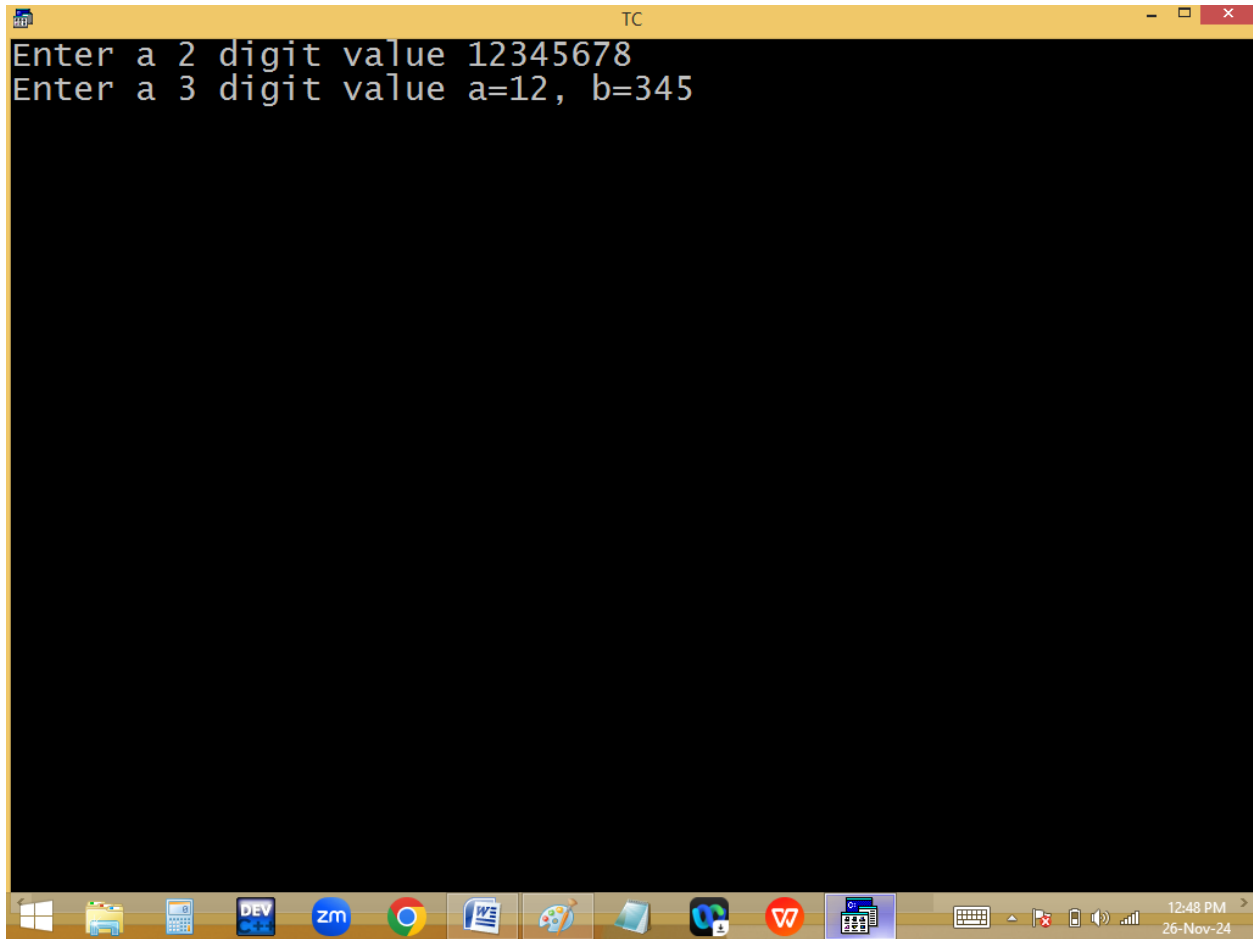

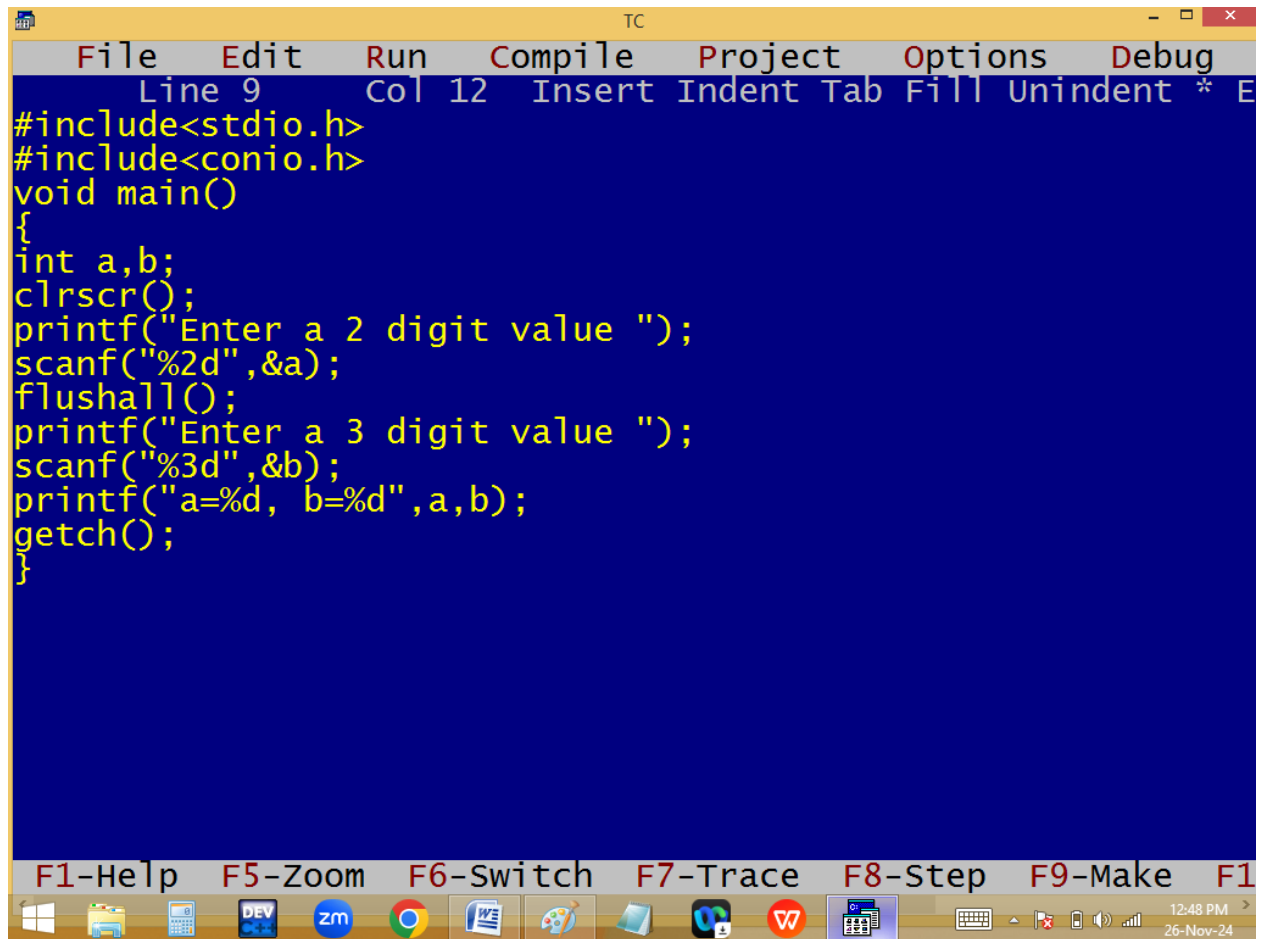

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 9", "Col 12", and "Insert" mode. The code is written in yellow text on a dark blue background. It includes headers for `stdio.h` and `conio.h`, and defines a `main` function. The program prompts the user to enter a 2-digit value and a 3-digit value, reads them using `scanf`, prints them, and then waits for a key press with `getch()`. The bottom status bar shows function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar at the bottom displays various application icons and the system clock showing 12:48 PM on 26-Nov-24.

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b;
clrscr();
printf("Enter a 2 digit value ");
scanf("%2d",&a);
flushall();
printf("Enter a 3 digit value ");
scanf("%3d",&b);
printf("a=%d, b=%d",a,b);
getch();
}
```

```
TC
Enter a 2 digit value 1234
Enter a 3 digit value 5678
a=12, b=567
```

