

Практическое задание 1.

Выполнил: Береснев Роман


1. Создание локального репозитория

```
● moltse@moltse-laptop:~/Documents/projects/gittest$ git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: is subject to change. To configure the initial branch name to use in all
hint: of your new repositories, which will suppress this warning, call:
hint:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:
hint:   git branch -m <name>
Initialized empty Git repository in /home/moltse/Documents/projects/gittest/.git/
● moltse@moltse-laptop:~/Documents/projects/gittest$ git status
On branch master

No commits yet

nothing to commit (create/copy files and use "git add" to track)
○ moltse@moltse-laptop:~/Documents/projects/gittest$
```

2. Создал два текстовых файла и закоммитил их

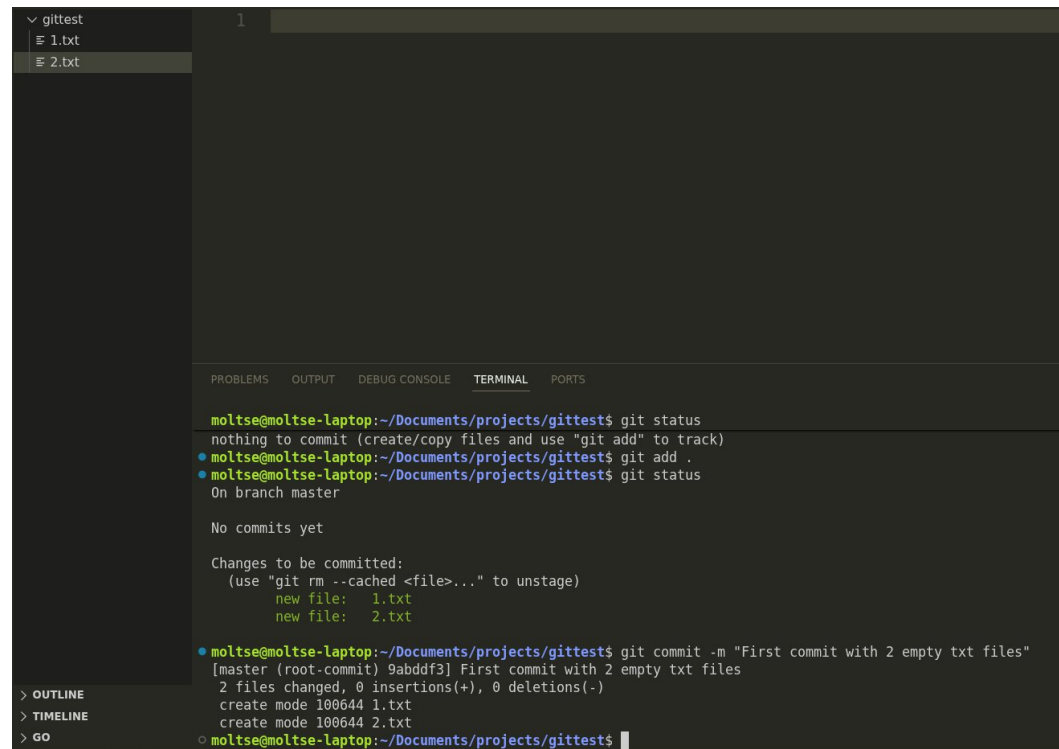

The screenshot shows a VS Code editor with a file explorer on the left containing 'gittest', '1.txt', and '2.txt'. The main editor area is empty. Below the editor is a terminal window with the following output:

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

moltse@moltse-laptop:~/Documents/projects/gittest$ git status
nothing to commit (create/copy files and use "git add" to track)
● moltse@moltse-laptop:~/Documents/projects/gittest$ git add .
● moltse@moltse-laptop:~/Documents/projects/gittest$ git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   1.txt
        new file:   2.txt
● moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "First commit with 2 empty txt files"
[master (root-commit) 9abddf3] First commit with 2 empty txt files
 2 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 1.txt
 create mode 100644 2.txt
○ moltse@moltse-laptop:~/Documents/projects/gittest$
```

3. Добавил файл .gitignore и добавил два типа файлов для игнорирования

```
EXPLORER  ...  1.txt  2.txt  .gitignore x
v UNTITLED (WORKSPACE)
v gittest
  .gitignore
  1.txt
  2.txt

gittest > .gitignore
1 *.log
2 *.bin

PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL  PORTS

moltse@moltse-laptop:~/Documents/projects/gittest$ git status

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   1.txt
        new file:   2.txt

• moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "First commit with 2 empty txt files"
[master (root-commit) 9abddf3] First commit with 2 empty txt files
 2 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 1.txt
 create mode 100644 2.txt
• moltse@moltse-laptop:~/Documents/projects/gittest$ git add .
• moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "Add .gitignore for ignoing .bin and .log files"
[master ec5ffb6] Add .gitignore for ignoing .bin and .log files
 1 file changed, 2 insertions(+)
 create mode 100644 .gitignore
> OUTLINE
```


4. Изменил первый файл и сделал коммит

```
1.txt  x  2.txt  .gitignore
gittest > 1.txt
1 Some example words here <----

PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL  PORTS

moltse@moltse-laptop:~/Documents/projects/gittest$ git status
• moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "First commit with 2 empty txt files"
[master (root-commit) 9abddf3] First commit with 2 empty txt files
 2 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 1.txt
 create mode 100644 2.txt
• moltse@moltse-laptop:~/Documents/projects/gittest$ git add .
• moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "Add .gitignore for ignoing .bin and .log files"
[master ec5ffb6] Add .gitignore for ignoing .bin and .log files
 1 file changed, 2 insertions(+)
 create mode 100644 .gitignore
• moltse@moltse-laptop:~/Documents/projects/gittest$ git status
On branch master
nothing to commit, working tree clean
• moltse@moltse-laptop:~/Documents/projects/gittest$ git add .
• moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "Change in 1.txt file some words"
[master dcf3477] Change in 1.txt file some words
 1 file changed, 1 insertion(+)
```

5. Создал вторую ветку «SecondBranch» и изменение во втором текстовом файле в той же ветке

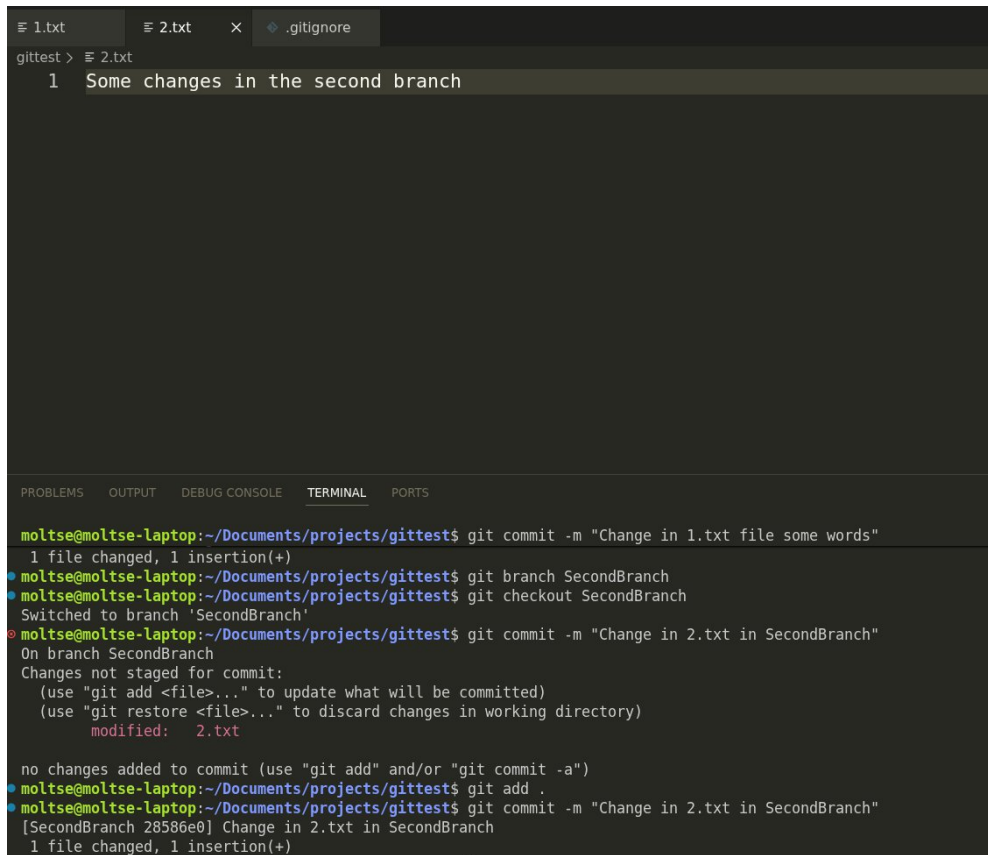

The screenshot shows a code editor with two tabs: '1.txt' and '2.txt'. The '2.txt' tab is active, showing the text '1 Some changes in the second branch'. Below the editor is a terminal window with the following output:

```
moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "Change in 1.txt file some words"
1 file changed, 1 insertion(+)
moltse@moltse-laptop:~/Documents/projects/gittest$ git branch SecondBranch
moltse@moltse-laptop:~/Documents/projects/gittest$ git checkout SecondBranch
Switched to branch 'SecondBranch'
moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "Change in 2.txt in SecondBranch"
On branch SecondBranch
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   2.txt

no changes added to commit (use "git add" and/or "git commit -a")
moltse@moltse-laptop:~/Documents/projects/gittest$ git add .
moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "Change in 2.txt in SecondBranch"
[SecondBranch 28586e0] Change in 2.txt in SecondBranch
1 file changed, 1 insertion(+)
```

6. Вернулся с главную ветку master, затем соединил ее вместе со второй веткой



The screenshot shows a terminal window with the following output:

```
moltse@moltse-laptop:~/Documents/projects/gittest$ git checkout master
Switched to branch 'master'
moltse@moltse-laptop:~/Documents/projects/gittest$ git merge SecondBranch
Updating dcf3477..28586e0
Fast-forward
 2.txt | 1 +
1 file changed, 1 insertion(+)
```

7. Изменил второй файл во второй ветке

```
1 Some example words here <---
2 some words to create conflict
```

PROBLEMS OUTPUT DEBUG CONSOLE **TERMINAL** PORTS

```
moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "changes for step 7 in the master branch"
1 file changed, 2 insertions(+), 1 deletion(-)
moltse@moltse-laptop:~/Documents/projects/gittest$ git checkout SecondBranch
Switched to branch 'SecondBranch'
moltse@moltse-laptop:~/Documents/projects/gittest$ git checkout master
error: Your local changes to the following files would be overwritten by checkout:
1.txt
Please commit your changes or stash them before you switch branches.
Aborting
moltse@moltse-laptop:~/Documents/projects/gittest$ git add .
moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "changes in the second branch to create conflict"
git: 'git' is not a git command. See 'git --help'.

The most similar command is
init
moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "changes in the second branch to create conflict"
[SecondBranch d309618] changes in the second branch to create conflict
1 file changed, 2 insertions(+), 1 deletion(-)
```

8. Изменил файл во второй ветке для создания конфликта

```
1.txt x 2.txt .gitignore
gittest > 1.txt
1 Some example words here <---
2 Other changes for step 7
3 some words to create conflict
```

PROBLEMS OUTPUT DEBUG CONSOLE **TERMINAL** PORTS

```
moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "changes in the second branch to create conflict"
The most similar command is
init
moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "changes in the second branch to create conflict"
[SecondBranch d309618] changes in the second branch to create conflict
1 file changed, 2 insertions(+), 1 deletion(-)
moltse@moltse-laptop:~/Documents/projects/gittest$ git status
On branch SecondBranch
nothing to commit, working tree clean
moltse@moltse-laptop:~/Documents/projects/gittest$ git checkout master
Switched to branch 'master'
moltse@moltse-laptop:~/Documents/projects/gittest$ git merge SecondBranch
Auto-merging 1.txt
CONFLICT (content): Merge conflict in 1.txt
Automatic merge failed; fix conflicts and then commit the result.
moltse@moltse-laptop:~/Documents/projects/gittest$ git add .
moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "resolved the conflict"
[master 038c5cc] resolved the conflict
```

```
1.txt 1 X 2.txt .gitignore
gittest > 1.txt
1 Some example words here <----
  Accept Current Change | Accept Incoming Change | Accept Both Changes | Compare Changes
2 <<<<<< HEAD (Current Change)
3 Other changes for step 7
4 =====
5 some words to create conflict
6 >>>>>> SecondBranch (Incoming Change)
7

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
moltse@moltse-laptop:~/Documents/projects/gittest$ git add .
moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "changes in the second branch to create conflict"
git: 'git' is not a git command. See 'git --help'.

The most similar command is
  init
moltse@moltse-laptop:~/Documents/projects/gittest$ git commit -m "changes in the second branch to create conflict"
[SecondBranch d309618] changes in the second branch to create conflict
1 file changed, 2 insertions(+), 1 deletion(-)
moltse@moltse-laptop:~/Documents/projects/gittest$ git status
On branch SecondBranch
nothing to commit, working tree clean
moltse@moltse-laptop:~/Documents/projects/gittest$ git checkout master
Switched to branch 'master'
moltse@moltse-laptop:~/Documents/projects/gittest$ git merge SecondBranch
Auto-merging 1.txt
CONFLICT (content): Merge conflict in 1.txt
Automatic merge failed; fix conflicts and then commit the result.
```


9. История коммитов (ветка)

```
moltse@moltse-laptop:~/Documents/projects/gittest$ git log --oneline --graph --all
* 038c5cc (HEAD -> master) resolved the conflict
| \
| * d309618 (SecondBranch) changes in the second branch to create conflict
* | 4bfc7ba changes for step 7 in the master branch
|/
* 28586e0 Change in 2.txt in SecondBranch
* dcf3477 Change in 1.txt file some words
* ec5ffb6 Add .gitignore for ignoing .bin and .log files
* 9abddf3 First commit with 2 empty txt files
o moltse@moltse-laptop:~/Documents/projects/gittest$
```

10. Перекинул репозиторий на github

```
moltse@moltse-laptop:~/Documents/projects/gittest$ git remote add git-test https://github.com/moltse/firstgit-test.git
moltse@moltse-laptop:~/Documents/projects/gittest$ git remote -v
git-test      https://github.com/moltse/firstgit-test.git (fetch)
git-test      https://github.com/moltse/firstgit-test.git (push)
```

11. Создал файл README.MD

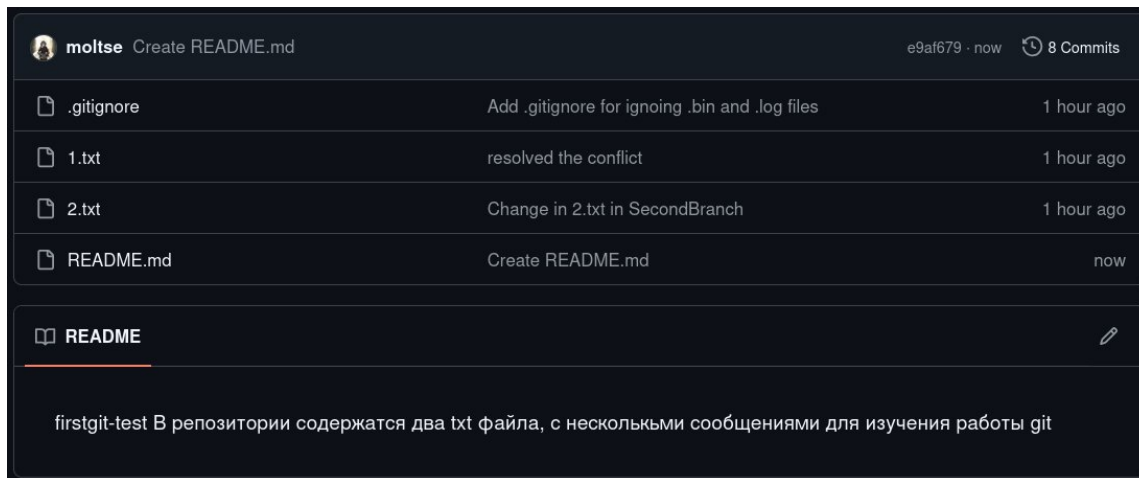

12. С помощью команды `git pull` получил изменения в ветке которые я сделал на сайте

