Transforms

update(): modifies series values in place using another series

`ser.update(other_series)`
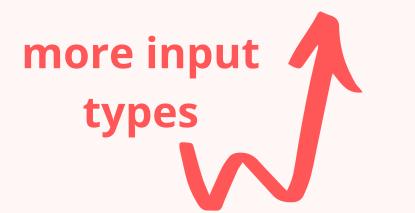
apply(): applies function (or ufunc) on each series value

`ser.apply(np.sqrt)`

most flexible

map(): subs series values with others from a function, series, or dict

`ser.map({'old_value' : 'new_value'})`

more input types

andybek.com