Front-end webdevelopment

Module : Bootstrap

Peter Kassenaar –
info@kassenaar.com

Kennismaken met Bootstrap

Pagina’s opmaken en vormgeven met ondersteunde, industrie-brede bibliotheken

"Het wiel niet opnieuw uitvinden"

Bootstrap quick tour

- Progressive Enhancement voor het Grid System
  - Grid : pagina's makkelijk verdelen in rijen en kolommen
  - Kolommen worden onder elkaar (gestapeld) weergegeven op kleine schermen
- Basis componenten alvast gestyled:
  - Buttons, images, thumbnails, dropdowns, enzovoort.
  - Wiel niet opnieuw uitvinden
- http://getbootstrap.com/examples/theme/

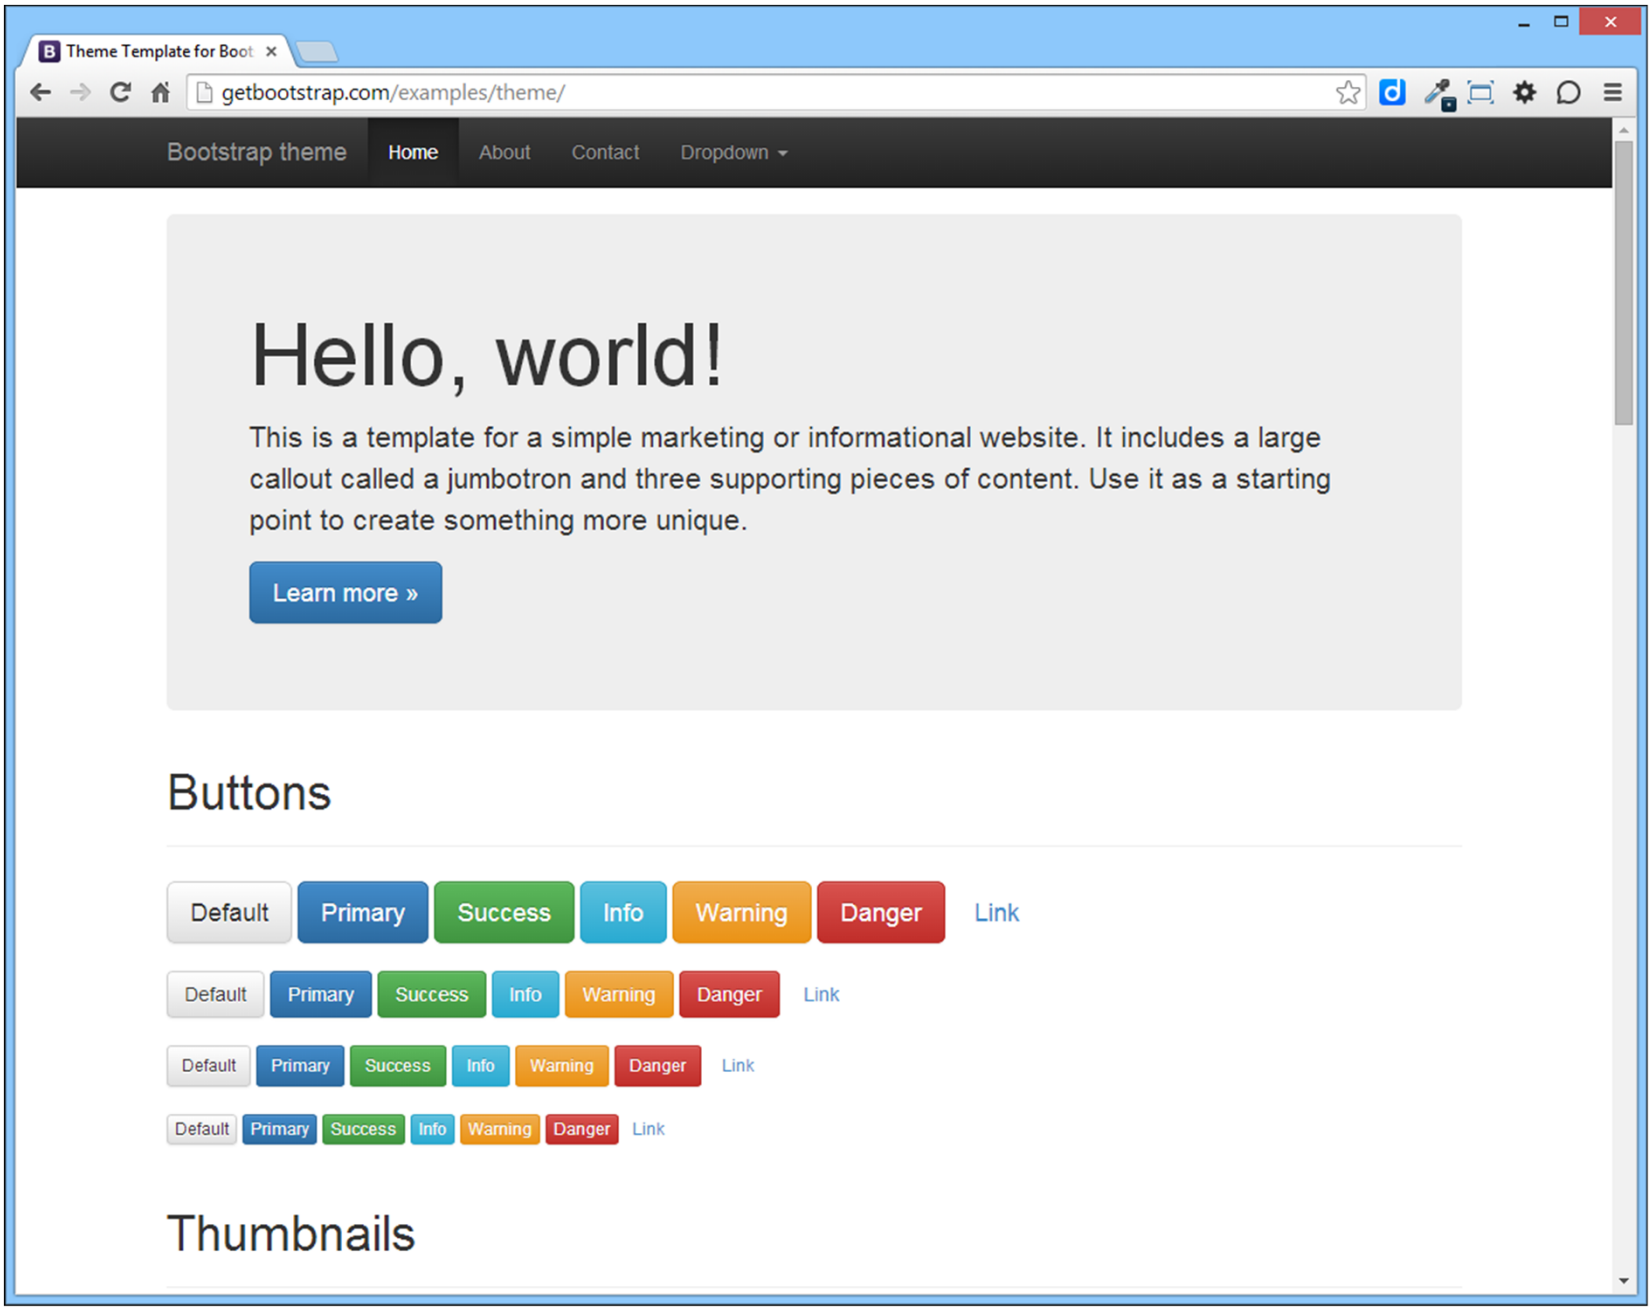
Theme Template for Boot
getbootstrap.com/examples/theme/
Bootstrap theme
Home
About
Contact
Dropdown
Hello, world!
This is a template for a simple marketing or informational website. It includes a large callout called a jumbotron and three supporting pieces of content. Use it as a starting point to create something more unique.
Learn more »
Buttons
Default
Primary
Success
Info
Warning
Danger
Link
Thumbnails

https://www.webnl.nl/

LINK | Lezen wat je leuk vi

www.uitgeverijlink.nl

link UITGEVERIJ

(zoeken) Registreer | Over ons | winkelmandje [0]

■ BOEKEN ■ AUTEURS ■ SHORTS ■ NIEUWS ■ PERS ■ CONTACT ■ MANUSCRIPTEN

Een historische roman met een spannend plot, een overtuigend tijdsbeeld en een zinderende finale in de onderwereld van Rome waarbij een complot in de hoogste regionen van het Vaticaan wordt blootgelegd.

lees meer...

Het levensverhaal van Jack Nicholson, een van de allergrootste acteurs van de laatste decennia. Alles over zijn films, zijn prijzen... en zijn verslaving aan drugs en vrouwen.

lees meer...





Theming Bootstrap

- Voorkom het standaard ‘Bootstrap-sausje’
- Thema’s – kopen
  - http://builtwithbootstrap.com/
- Zelf maken :
  - http://getbootstrap.com/customize

Basiscomponenten - CSS

Layouts voor : code, tables, forms, buttons, images

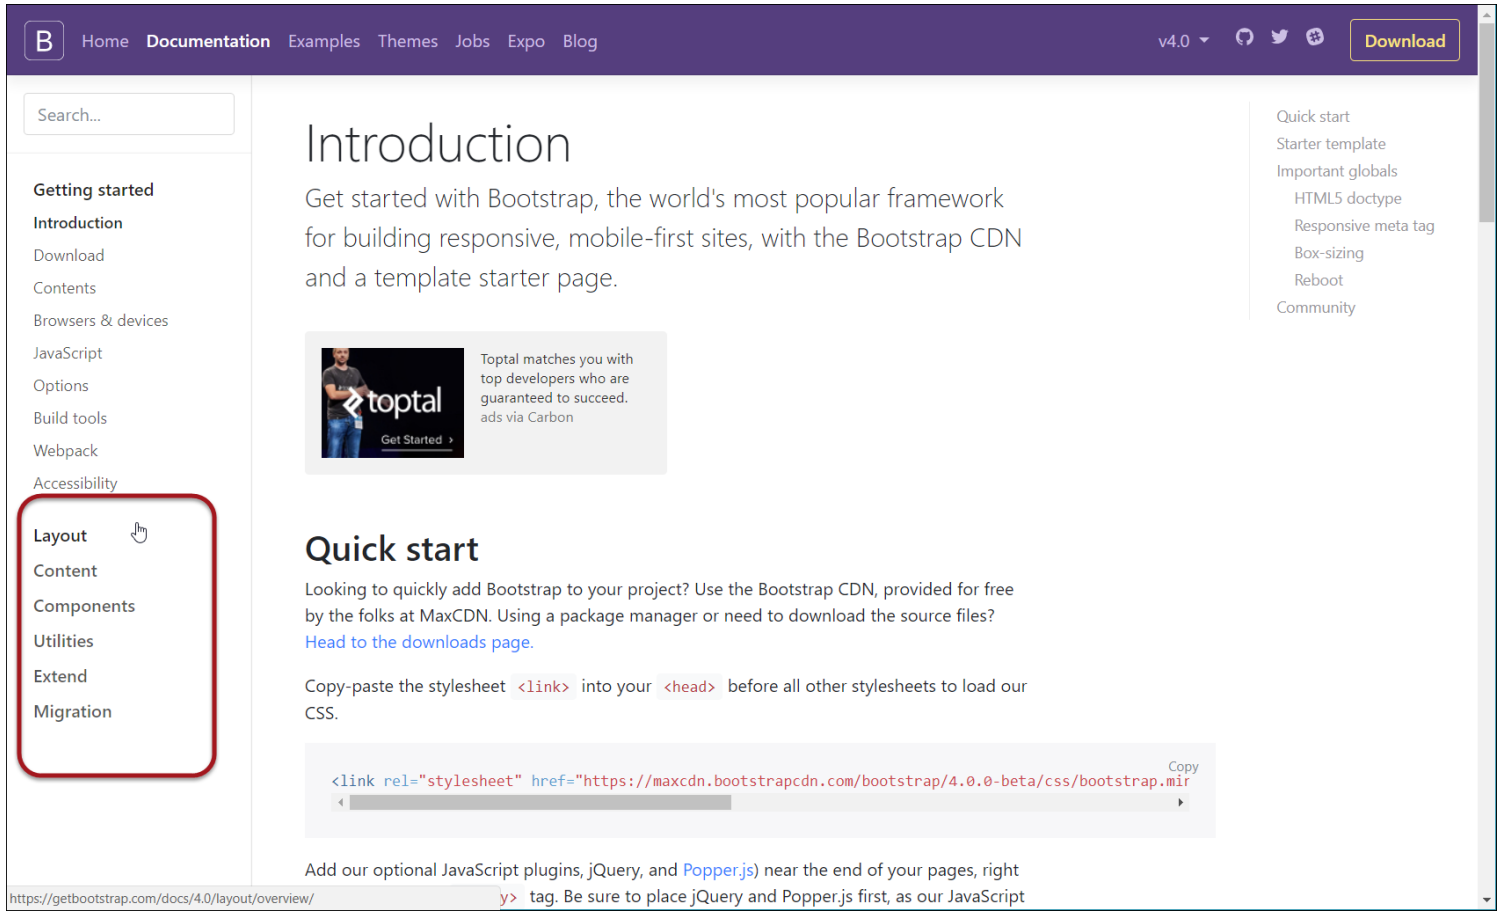

Getting Bootstrap

Downloaden of via CDN

Bootstrap via CDN

Quick start

Looking to quickly add Bootstrap to your project? Use the Bootstrap CDN, provided for free by the folks at MaxCDN. Using a package manager or need to download the source files? Head to the downloads page.

Copy-paste the stylesheet `<link>` into your `<head>` before all other stylesheets to load our CSS.

Copy

```
<link rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0-beta/css/bootstrap.mir
```

Add our optional JavaScript plugins, jQuery, and Popper.js) near the end of your pages, right before the closing `</body>` tag. Be sure to place jQuery and Popper.js first, as our JavaScript plugins depend on them. While we use jQuery's slim build in our docs, the full version is also supported.

Copy

```
<script src="https://code.jquery.com/jquery-3.2.1.slim.min.js" integrity="sha384-KJ3o2DKtIkvYIK3UEN
<script src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.11.0/umd/popper.min.js" integrity="
<script src="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0-beta/js/bootstrap.min.js" integrity="s
```

Bootstrap via Package Manager

- NPM
  - Node.JS: `nodejs.org`
  - `Npm install bootstrap`

- Andere package managers
  - (Bower: verouderd, maar soms nog gebruikt)
  - http://bower.io/
    - `bower install bootstrap`
  - Nuget:
    - `Install-Package bootstrap)`

Daarna: zelf tags/referenties toevoegen

Bootstrap basic template

Starter template

Be sure to have your pages set up with the latest design and development standards. That means using an HTML5 doctype and including a viewport meta tag for proper responsive behaviors. Put it all together and your pages should look like this:

Copy

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <!-- Required meta tags -->
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">

    <!-- Bootstrap CSS -->
    <link rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0-beta/css/bootstrap
  </head>
  <body>
    <h1>Hello, world!</h1>

    <!-- Optional JavaScript -->
    <!-- jQuery first, then Popper.js, then Bootstrap JS -->
    <script src="https://code.jquery.com/jquery-3.2.1.slim.min.js" integrity="sha384-KJ3o2DKtIkvYIk
    <script src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.11.0/umd/popper.min.js" integri
    <script src="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0-beta/js/bootstrap.min.js" integrit
  </body>
</html>
```

Bootstrap Grid system

Optimale rijen en kolommen voor elke device

Mobile first – base classes

- Totaal: 12 kolommen
- `col-xs-*`
- `col-sm-*`
- `col-md-*`
- `col-lg-*`

Rijen en kolommen

- Algemeen: maak een
- Maak je rijen binnen de container

- Maak je kolommen binnen de rij

  …

  …

Media queries

We use the following media queries in our Less files to create the key breakpoints in our grid system.

```
/* Extra small devices (phones, less than 768px) */
/* No media query since this is the default in Bootstrap */

/* Small devices (tablets, 768px and up) */
@media (min-width: @screen-sm-min) { ... }

/* Medium devices (desktops, 992px and up) */
@media (min-width: @screen-md-min) { ... }

/* Large devices (large desktops, 1200px and up) */
@media (min-width: @screen-lg-min) { ... }
```

Grid options

See how aspects of the Bootstrap grid system work across multiple devices with a handy table.

	Extra small devices Phones (<768px)	**Small devices** Tablets (≥768px)	**Medium devices** Desktops (≥992px)	**Large devices** Desktops (≥1200px)
Grid behavior	Horizontal at all times	Collapsed to start, horizontal above breakpoints		
Container width	None (auto)	750px	970px	1170px
Class prefix	`.col-xs-`	`.col-sm-`	`.col-md-`	`.col-lg-`
# of columns	12			
Column width	Auto	60px	78px	95px
Gutter width	30px (15px on each side of a column)			
Nestable	Yes			
Offsets	Yes			
Column ordering	Yes			

Rijen en kolommen maken

```
<div class="container">
    <!-- Geen classes: altijd 100% breed binnen de container -->
    <div>Ik ben de eerste div</div>
    <div>Ik ben de tweede div</div>
</div>
```

```
<!-- 1. Met kolommen. 50%/50%-verdeling op medium devices and up -->
<div class="container">
    <div class="col-md-6">Ik ben de eerste div</div>
    <div class="col-md-6">Ik ben de tweede div</div>
</div>
```

```
<!-- 2. Verbeterde kolommen. Ingesloten door een .row -->
<div class="container">
    <div class="row">
        <div class="col-md-6">Ik ben de eerste div</div>
        <div class="col-md-6">Ik ben de tweede div</div>
    </div>
</div>
```

Algemene lessen

- Gebruik altijd een container. Gebruik voor 100% breedte een `.container-fluid`.
- Gebruik geen containers binnen containers. Nooit.
- Gebruik geen `.row` buiten een container.
- Gebruik geen `.col-*` buiten een .row.

```html
<!-- 3. ALTIJD twee kolommen. Ook op kleine devices -->
<div class="container">
    <div class="row">
        <div class="col-xs-6 light">Ik ben de eerste div</div>
        <div class="col-xs-6 dark">Ik ben de tweede div</div>
    </div>
</div>


<!-- 4. ALTIJD twee kolommen. 50%/50% op kleine devices,
        33%/66% op grotere devices -->
<div class="container">
    <div class="row">
        <div class="col-xs-6 col-md-3 light">Ik ben de eerste div</div>
        <div class="col-xs-6 col-md-9 dark">Ik ben de tweede div</div>
    </div>
</div>
```

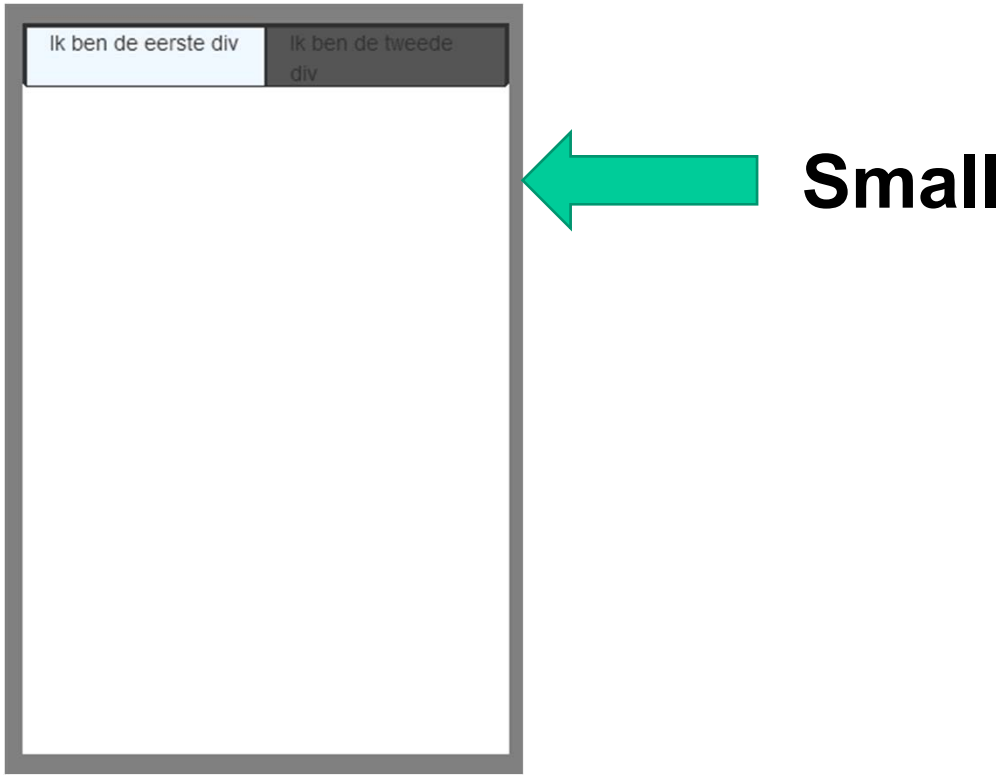

Small

Medium/Large

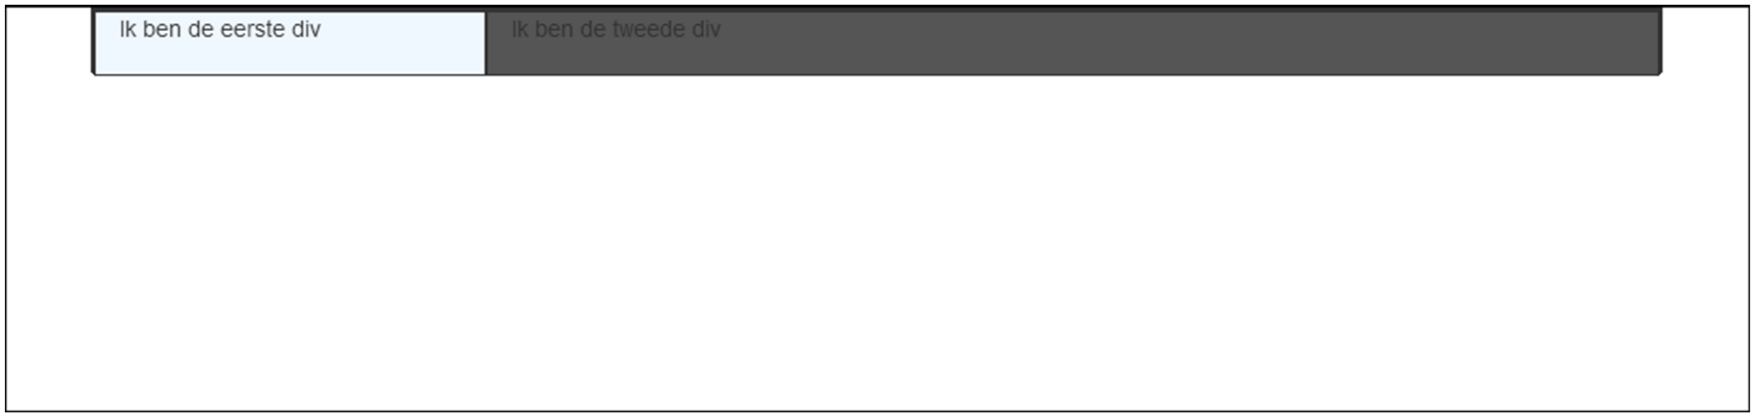

Meer kolommen in één rij?

- Bootstrap wrapt automatisch bij 12 kolommen (niet aanbevolen, werkt wel)

```
<div class="row">
    <div class="col-md-3">Ik ben de eerste div</div>
    <div class="col-md-3">Ik ben de tweede div</div>
    <div class="col-md-3">Ik ben de derde div</div>
    <div class="col-md-3">Ik ben de vierde  div</div>
    <div class="col-md-3">Ik ben de eerste div</div>
    <div class="col-md-3">Ik ben de tweede div</div>
    <div class="col-md-3">Ik ben de derde div</div>
</div>
```

Element Styling

Basis HTML-elementen opmaken: forms, buttons, tables

Algemene werkwijze:

- Meestal is het niks meer of minder dan een class toevoegen aan een element
- Bootstrap zorgt voor de styling
- Aanpassen?
  - Schrijf een eigen CSS-override, OF
  - Pas het thema aan via Custom Build

Buttons

Basisklasse: `.btn`

6 states: `.btn-default`, `.btn-success`, `.btn-info`,

`.btn-warning`, `.btn-danger`, `.btn-link`

Omvang: `.btn-lg`, `.btn-sm`, `.btn-xs`, `.btn-block`

Combineer classes waar nodig

Tables

- Gebruik `<table class="table">…</table>`
- Beschikbaar:

  `.table-striped`

  `.table-bordered`

  `.table-hover`

  `.table-condensed`

  `<div class="table-responsive">…</div>`

Striped rows

Use `.table-striped` to add zebra-striping to any table row within the `<tbody>`.

Cross-browser compatibility

Striped tables are styled via the `:nth-child` CSS selector, which is not available in Internet Explorer 8.

EXAMPLE

#	First Name	Last Name	Username
1	Mark	Otto	@mdo
2	Jacob	Thornton	@fat
3	Larry	the Bird	@twitter

```
<table class="table table-striped">
  ...
</table>
```


Code
Tables
Basic example
Striped rows
Bordered table
Hover rows
Condensed table
Contextual classes
Responsive tables
Forms
Buttons
Images
Helper classes
Responsive utilities
Using Less
Using Sass
Back to top

Zie verder documentatie: http://getbootstrap.com/css/#tables

Images

- Belangrijkste: `.img-responsive`
  - `max-width: 100%, height: auto;`
- Voorgedefinieerde vormen:

EXAMPLE

140x140 140x140 140x140

```
<img src="..." alt="..." class="img-rounded">
<img src="..." alt="..." class="img-circle">
<img src="..." alt="..." class="img-thumbnail">
```

Verder:

Helper classes

Context colors, close icon, context background, show/hide element, …

Responsive utilities

`.visible-*`, `.hidden-*`, `.visible-print`, `.hidden-print`

Meer…

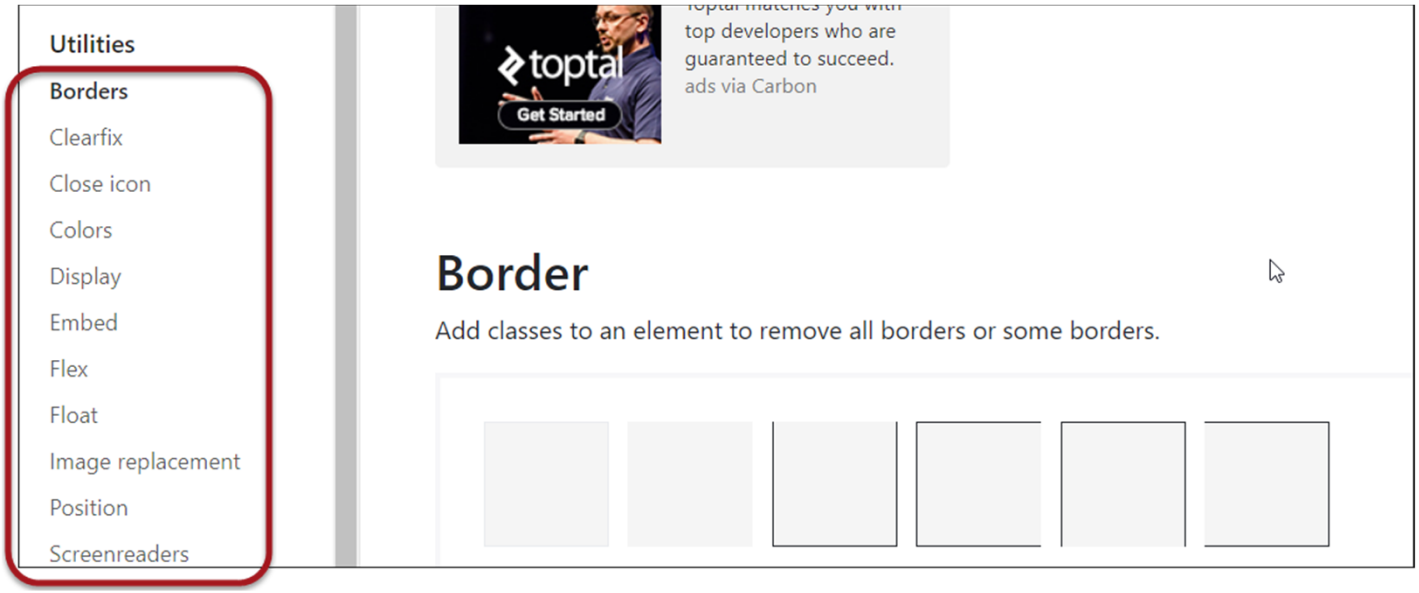

https://getbootstrap.com/docs/4.0/utilities