


# Users Manual

Use „input.txt“ as Datasource. The Syntax is shown in the picture below.

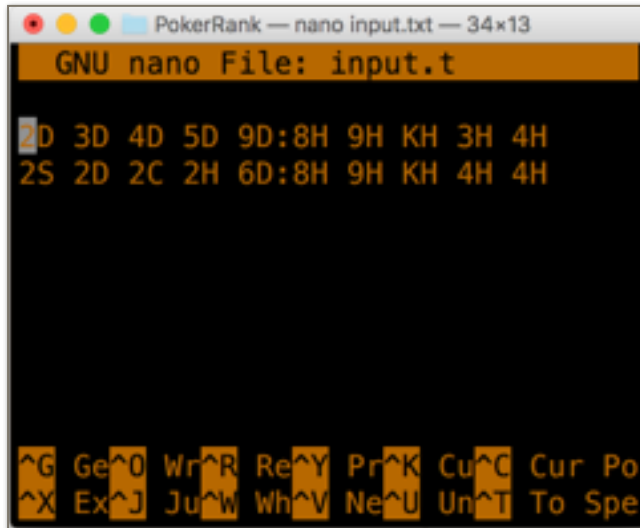


```
GNU nano File: input.t
2D 3D 4D 5D 9D:8H 9H KH 3H 4H
2S 2D 2C 2H 6D:8H 9H KH 4H 4H
^G Ge^O Wr^R Re^Y Pr^K Cu^C Cur Po
^X Ex^J Ju^W Wh^V Ne^U Un^T To Spe
```

Each line ist a pair. The hands are separated by colon.

You can run the program by using netbeans IDE or Console. The file has to be in the same directory as the .jar app.

example:

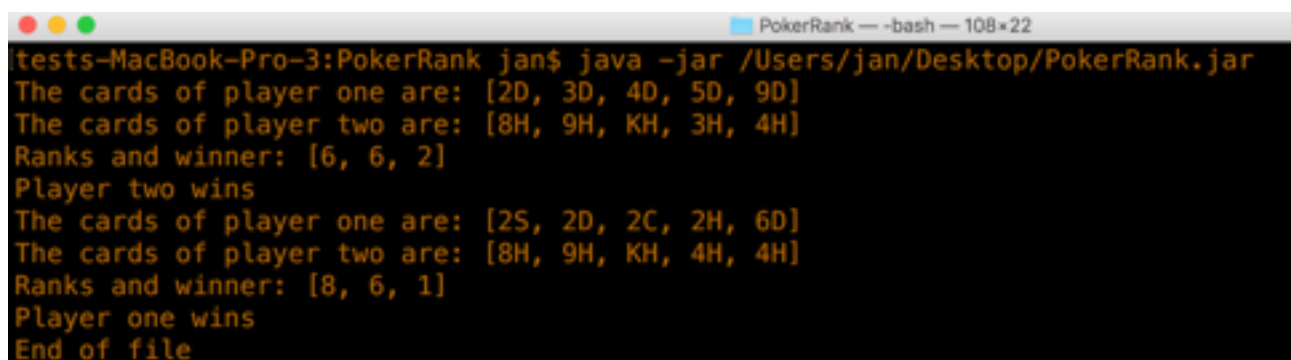

```
PokerRank — -bash — 108x22
tests-MacBook-Pro-3:PokerRank jan$ java -jar /Users/jan/Desktop/PokerRank.jar
The cards of player one are: [2D, 3D, 4D, 5D, 9D]
The cards of player two are: [8H, 9H, KH, 3H, 4H]
Ranks and winner: [6, 6, 2]
Player two wins
The cards of player one are: [2S, 2D, 2C, 2H, 6D]
The cards of player two are: [8H, 9H, KH, 4H, 4H]
Ranks and winner: [8, 6, 1]
Player one wins
End of file
```

The output is shown in Console.

The Ranks are described as Numbers ,1 is HighCard , 2 is Pair and so on.