

# Classifying Hand Written Digits Using Neural Networks

Monika Baloda

## Contents

Setup . . . . .	1
-----------------	---

## Setup

- Going to utilize the mnist data for the challenge.
- Data is classifying hand written digits (0 - 10) for  $Y = 0, 1, 2, \dots 9$  classification
- Each observation is 28 x 28 matrix of 0/1's representing a 28 x 28 pixel grid whether or not a pixel is filled in.
- Total training data size is a three dimensional array (60000 x 28 x 28) representing 60,000 data points
- We are going to use Neural Networks to build a model taking the pixel representation of X's and predict the 0-10 as a classifier

*Loading the data and library*

```
library(tensorflow)
library(keras)

# Load the MNIST dataset
mnist <- dataset_mnist()

# Split the dataset into training and testing sets
x_train <- mnist$train$x
y_train <- mnist$train$y
x_test  <- mnist$test$x
y_test  <- mnist$test$y

# Standardization of X points
x_train <- x_train / 255
x_test  <- x_test  / 255
```

- Building a Neural Network requires 4 steps:
- Initialization of the Neural Network
- Neural Network Layer Architype
- Neural Network Optimization Algorithm setup
- Neural Network Fitting step

### Step-1: - Initialization of the Neural Network

```
#I've setup the neural network initialization step, the data in a 28 x 28 matrix and is specified here
model <- keras_model_sequential(input_shape = c(28,28)) # Create a model object we will configure
```

### Step-2 :- Neural Network Layer Architype

```
#I've included the first step to the Neural Network and that's to flatten the 28 x 28 matrix down
#Activation functions include: Relu, sigmoid, softplus, softsign, tanh, selu, elu, exponential
```

```
# Input layer
model <- model %>%
  layer_flatten(input_shape = c(28,28))

# Hidden layers
model <- model %>%
  layer_dense(units = 128, activation = "relu")
model <- model %>%
  layer_dense(units = 64, activation = "sigmoid")
model <- model %>%
  layer_dense(units = 32, activation = "softplus")
model <- model %>%
  layer_dense(units = 16, activation = "tanh")

# Output layer
model <- model %>%
  layer_dense(units = 10, activation = "softmax")

#Use this to see the number of parameters and design of your neural network
model
```

```
## Model: "sequential"
## -----
## Layer (type)                Output Shape                Param #
## =====
## flatten (Flatten)           (None, 784)                 0
## dense (Dense)                (None, 128)                 100480
## dense_1 (Dense)              (None, 64)                  8256
## dense_2 (Dense)              (None, 32)                  2080
## dense_3 (Dense)              (None, 16)                   528
## dense_4 (Dense)              (None, 10)                   170
## =====
## Total params: 111,514
## Trainable params: 111,514
## Non-trainable params: 0
## -----
```

### Step-3: Neural Network Optimization Algorithm setup


```
model <- model %>%
  compile(loss = loss_sparse_categorical_crossentropy(from_logits = TRUE),
          optimizer = optimizer_rmsprop(), # Gradient Optimization Algorithm
          metrics = "accuracy")
```

#### Step-4 Neural Network Fitting step

```
history <-  
  model %>%  
  fit(x_train,y_train, # Plug in formatted Data  
      batch_size=100, #  
      epochs =10 ,  
      validation_split = 0.2)  
#print out the fitted summary  
history
```

```
##  
## Final epoch (plot to see history):  
##      loss: 0.0334  
##      accuracy: 0.9901  
##      val_loss: 0.1023  
## val_accuracy: 0.9733
```

```
# Plot the training and validation accuracy  
plot(history$metrics$accuracy, type = "l", col = "blue", xlab = "Epoch", ylab = "Accuracy", main = "Training and Validation Accuracy", ylim=c(0,1))  
lines(history$metrics$val_accuracy, type = "l", col = "red")  
legend("topright", legend = c("Training", "Validation"), col = c("blue", "red"), lty = 1)
```

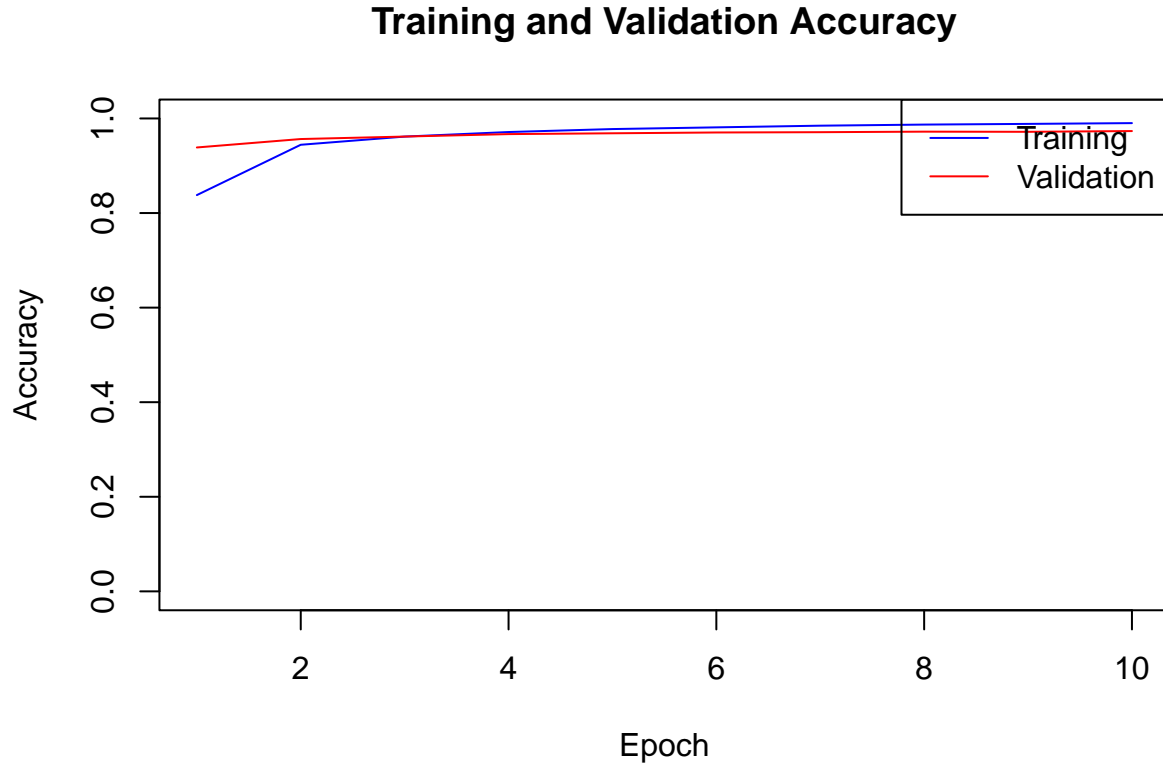

```
# Plot the training and validation loss
plot(history$metrics$loss, type = "l", col = "blue", xlab = "Epoch", ylab = "Loss", main = "Training and Validation Loss")
lines(history$metrics$val_loss, type = "l", col = "red")
legend("topright", legend = c("Training", "Validation"), col = c("blue", "red"), lty = 1)
```

