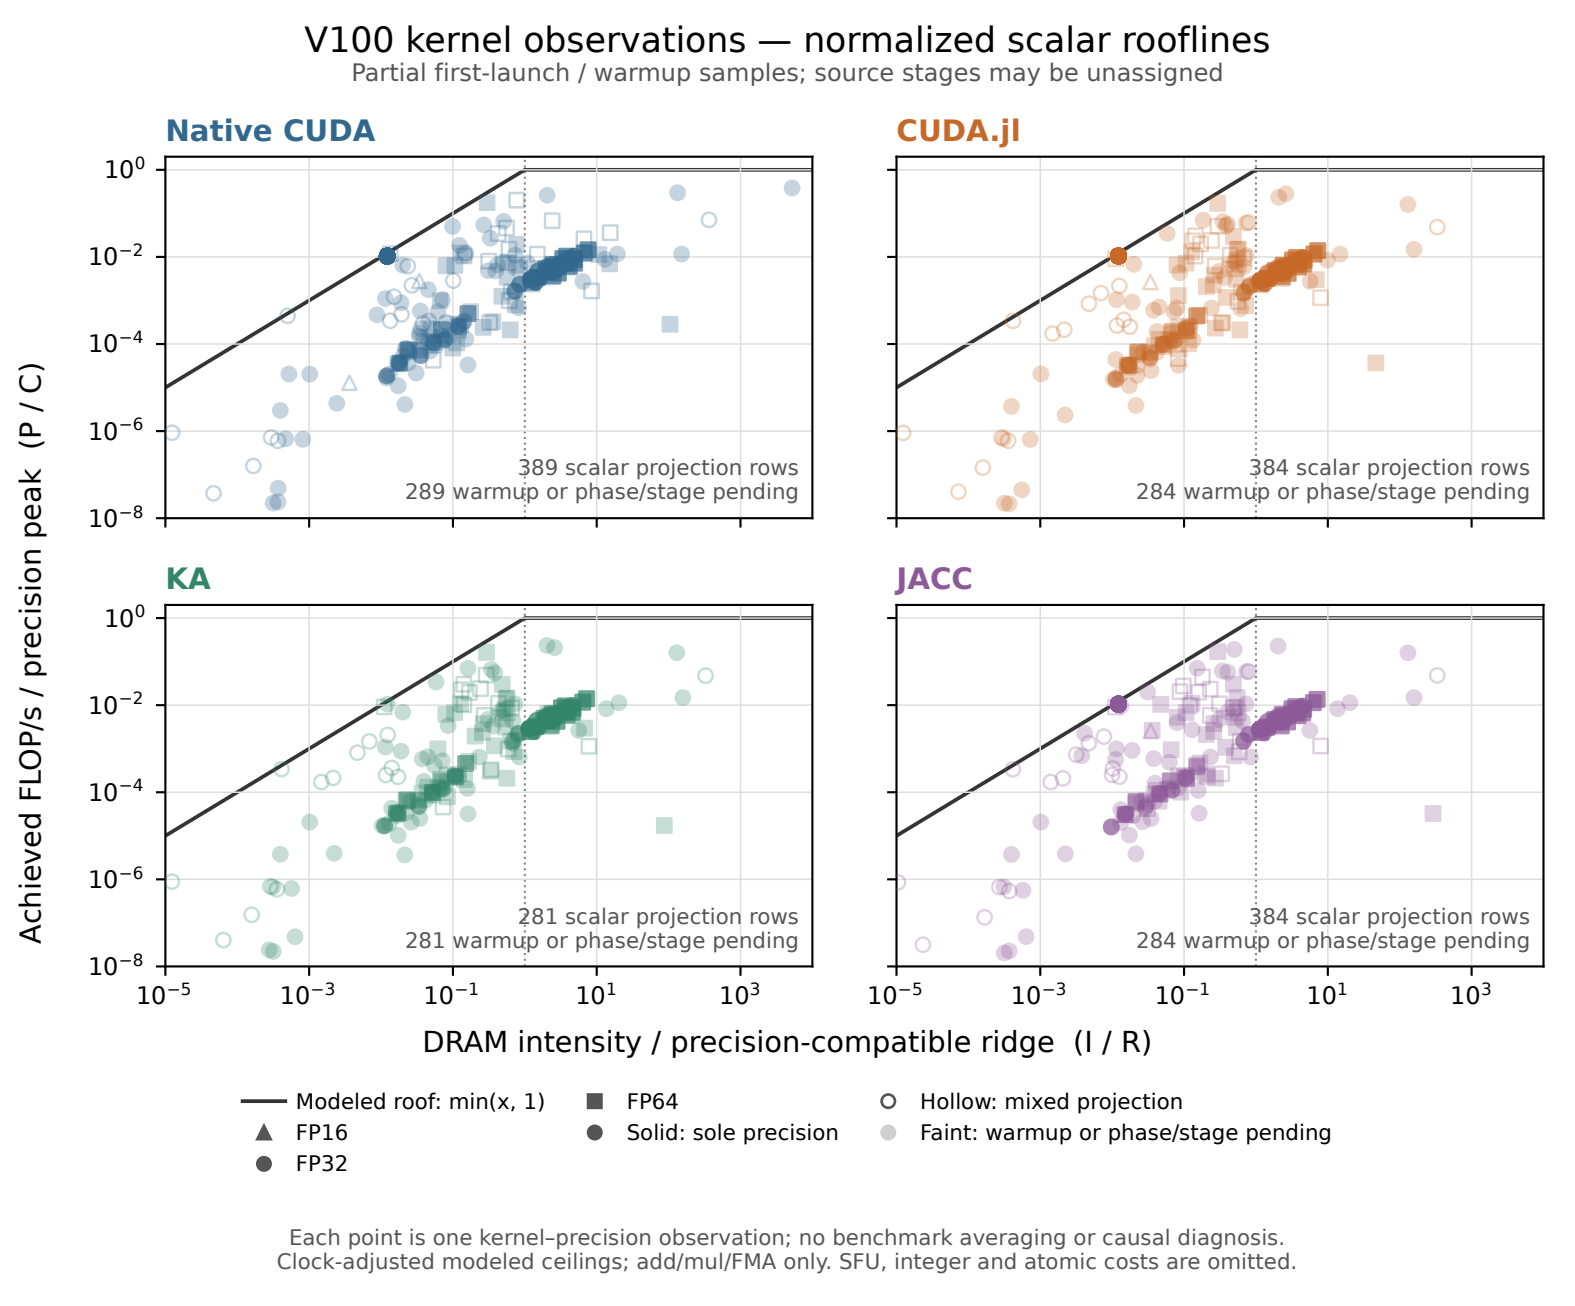
V100 kernel observations — normalized scalar rooflines
Partial first-launch / warmup samples; source stages may be unassigned
Native CUDA
CUDA.jl
KA
JACC
389 scalar projection rows
289 warmup or phase/stage pending
384 scalar projection rows
284 warmup or phase/stage pending
281 scalar projection rows
281 warmup or phase/stage pending
384 scalar projection rows
284 warmup or phase/stage pending
Achieved FLOP/s / precision peak (P / C)
DRAM intensity / precision-compatible ridge (I / R)
Modeled roof: min(x, 1)
FP16
FP32
FP64
Solid: sole precision
Hollow: mixed projection
Faint: warmup or phase/stage pending
Each point is one kernel–precision observation; no benchmark averaging or causal diagnosis.
Clock-adjusted modeled ceilings; add/mul/FMA only. SFU, integer and atomic costs are omitted.