Prerequisites:


1. Install **Stack, GHC**, and **GHCi** to run the **parser**. You can install them all together by using **GHCup** for Haskell. The detailed installation process is described well in the following link (Professor Kwanghoon Choi's lecture slides [**65-75**]).

https://docs.google.com/presentation/d/1fhXvoLHFgYE4AOfdl4MD_Puk7Vbj-8eKqquTi7b0t9I/edit#slide=id.g2bed8681a8e_0_205

2. Install **Visual Studio Code** (if it is not already installed on your machine). Additionally, install the necessary extensions to support **TypeScript** programming if required.

Download/Clone the three folders [two folders from Professor Kwanghoon Choi's github repository]:


1. Download *sbparser* from this link: https://github.com/kwanghoon/sbparser/tree/data-based

Unzip and rename the folder: 

2. git clone 'https://github.com/kwanghoon/yapb'

3. git clone 'https://github.com/monircse061/Small-Basic-Extension'

Put these three folders in the same directory.

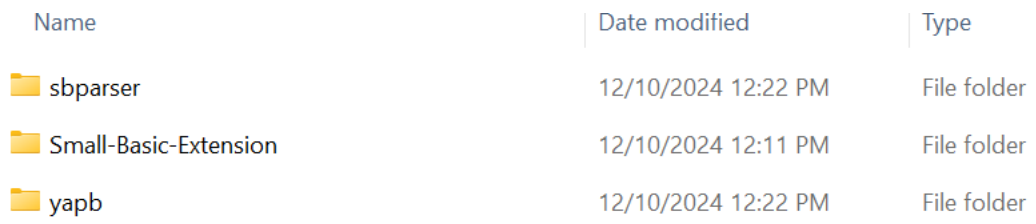

Run in Terminal:

Go to the *sbparser* folder and run the following two commands:

1) PS…\sbparser> stack build

```
stack build
```

2) PS …\sbparser> stack run sbparser-exe.exe emacs

```
stack run sbparser-exe.exe emacs
```

Open VS Code (API-key insert):

Open the *Small-Basic-Extension* folder in VS Code.

Then insert your openai **api-key** `apiKey:"api-key"` in the following **four** files:

src\extension.ts

src\sbSnippetGenerator.ts


out\extension.js

out\sbSnippetGenerator.js

Run the extension:

open **`src/extension.ts`** file and start VSC extension by **pressing F5** (debugging)


or *click Run-> Start Debugging*



Ignore any messages that appear

A new vscode window will appear

Test Program: Create an empty sb file in the new window (Ex: test.sb)

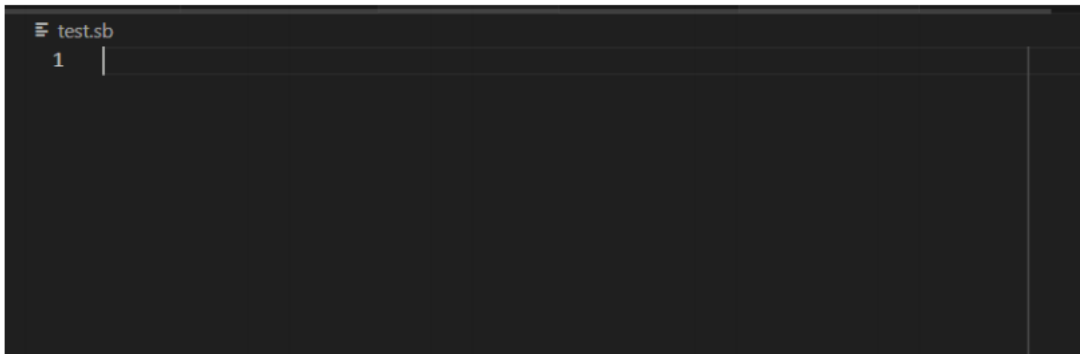


Write sample program and Test:

There are some sample test program in the below file:

src\test_programs.sb

- Write/copy some code from test_program.sb file into the **newly opened editor**, then press ***Ctrl + c*** to get a suggestion.
- Wait a few seconds for the response to appear.
- Use the *keyboard*, not the mouse, to select a suggestion. Instead of selecting suggestions by mouse click, select by *keyboard* keypad down arrow button.
- After selecting on specific the suggestion then press *Enter*.
- In the debug console, you can view the output to see more information during the running process.

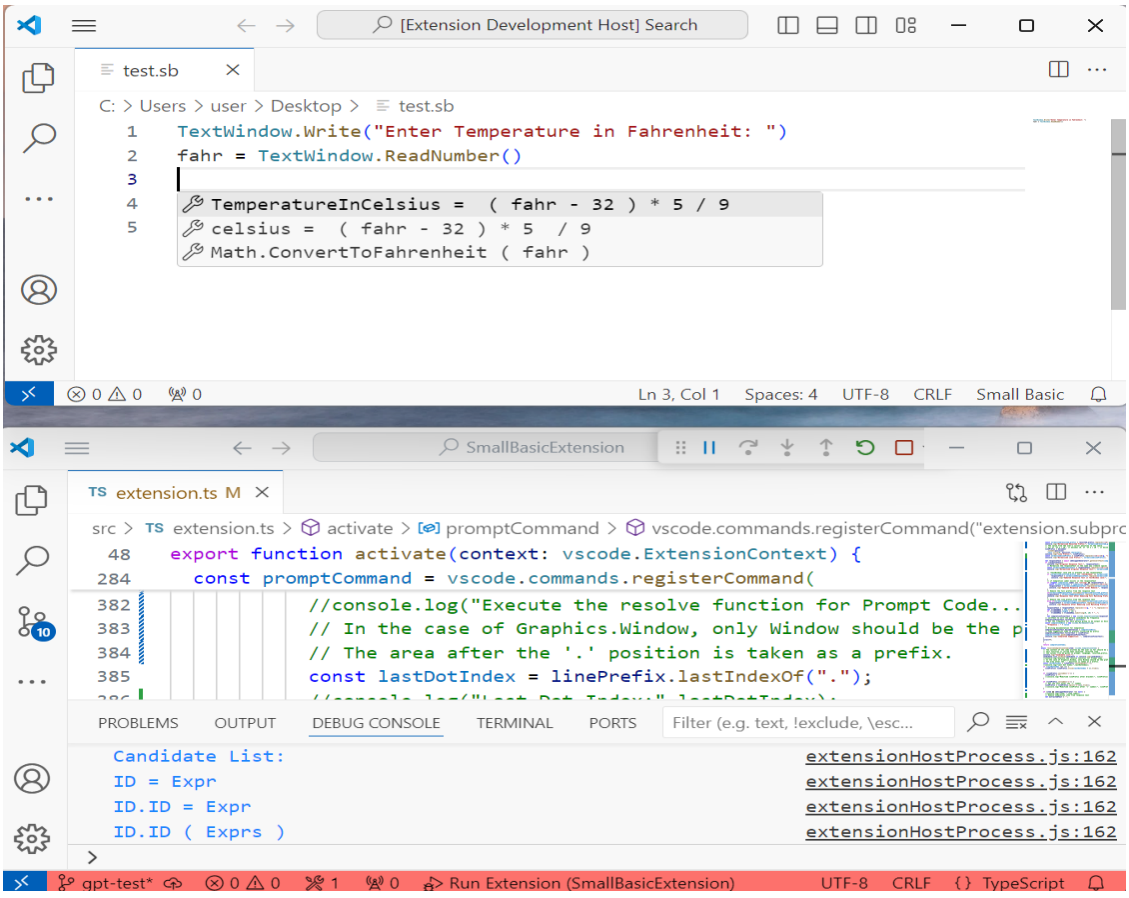

N.B. Sometimes, you may need to check the terminal to see if **sbparser** is running or connect lost. If it is not running, restart **sbparser** by executing the command in terminal (inside **sbparser** folder as previous): **stack run sbparser-exe.exe emacs**

Then, click **Run -> Start Debugging** again to restart the debugging process.

Or click here 