

Name: Monisha Raghini Chelle

Roll No:2520030537

Subject: OSSP

1.Pipes.c

```
monis@DESKTOP-C3GM4T6: ~/OSLAB/OSLAB28
GNU nano 8.7.1
#include <stdio.h>
#include <unistd.h>
#include <sys/wait.h>
#include <string.h>

int main()
{
    int fd[2];
    pid_t pid;
    char message[] = "Hello from Parent";
    char buffer[100];

    pipe(fd);

    pid = fork();

    if (pid == 0)
    {
        // Child
        close(fd[1]);

        read(fd[0], buffer, sizeof(buffer));

        printf("Child received: %s\n", buffer);

        close(fd[0]);
    }
    else
    {
        // Parent
        close(fd[0]);


        write(fd[1], message, strlen(message) + 1);

        close(fd[1]);

        wait(NULL);
    }

    return 0;
}
```

Help	Write Out	Where Is	Cut	Execute	Location
Exit	Read File	Replace	Paste	Justify	Go To Line

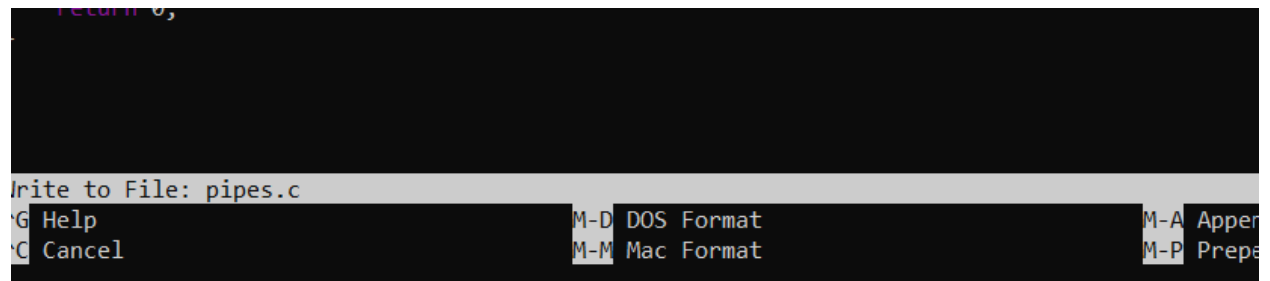

```
monis@DESKTOP-C3GM4T6: ~/OSLAB/OSLAB28
monis@DESKTOP-C3GM4T6:~$ ls
Linux-System-Programming-Week1  OSSP-Practical  Program1.c.save  Program3  Program4.1  Program5  Program6.c  Simple-Commands-Week1  hello  monis  program3  program4.c  sample1
OSLAB                           Program1        Program2        Program3.c  Program4.1.c  Program5.c  Program7     example.txt  hello.c  program2  program3.c  program5  sample1.c
OSLAB14                         Program1.c      Program2.c      Program4    Program4.c    Program6    Program7.c   foldername   moni     program2.c  program4    program5.c  sample1.c.save
monis@DESKTOP-C3GM4T6:~$ cd OSLAB
monis@DESKTOP-C3GM4T6:~/OSLAB$ mkdir OSLAB28
monis@DESKTOP-C3GM4T6:~/OSLAB$ ls
OSLAB28  file1.txt  hello  hello.c  hello.c:Zone.Identifier  hello:Zone.Identifier  hello_link  hello_shortcut  newfile.txt  skill  test1
monis@DESKTOP-C3GM4T6:~/OSLAB$ cd OSLAB28
monis@DESKTOP-C3GM4T6:~/OSLAB/OSLAB28$ nano pipes.c
monis@DESKTOP-C3GM4T6:~/OSLAB/OSLAB28$ gcc pipes.c -o pipes
monis@DESKTOP-C3GM4T6:~/OSLAB/OSLAB28$ ./pipes
Child received: Hello from Parent
monis@DESKTOP-C3GM4T6:~/OSLAB/OSLAB28$
```

2.Signal.c

```
monis@DESKTOP-C3GM4T6: ~/OSLAB/OSLAB28
GNU nano 8.7.1 signal.c *
#include <stdio.h>
#include <stdlib.h>
#include <signal.h>

void myhandler(int signo)
{
    printf("\nSignal Received\n");
    printf("Signal Number = %d\n", signo);
    exit(1);
}

int main()
{
    signal(SIGSEGV, myhandler);

    int x = 0;

    printf("Enter the number : ");
    scanf("%d", &x);

    printf("The entered number is %d\n", x);

}

^G Help      ^O Write Out  ^F Where Is   ^K Cut        ^T Execute    ^C Location   ^U Undo       ^M-A Set Mark  ^M-J To
^X Exit      ^R Read File  ^\ Replace    ^U Paste      ^J Justify    ^/_ Go To Line ^E Redo       ^M-G Copy     ^B Whe
```

```
Write to File: signal.c
^G Help      ^M-D DOS Format  ^M-A Append    ^M-B Backup File
^C Cancel    ^M-N Mac Format  ^M-P Prepend   ^Q Discard buffer
```

monis@DESKTOP-C3GM4T6: ~/OSLAB/OSLAB28

```
monis@DESKTOP-C3GM4T6:~$ ls
Linux-System-Programming-Week1  Program2      Program4.c  Simple-Commands-Week1  program2      program5.c
OSLAB                          Program2.c   Program5    example.txt             program2.c   sample1
OSLAB14                        Program3     Program5.c  foldername              program3.c   sample1.c
OSSP-Practical                 Program3.c   Program6    hello                   program3.c   sample1.c.save
Program1                       Program4     Program6.c  hello.c                 program4
Program1.c                     Program4.1   Program7    moni                    program4.c
Program1.c.save                Program4.1.c Program7.c   monis                   program5
```

monis@DESKTOP-C3GM4T6:~\$ cd OSLAB28
-bash: cd: OSLAB28: No such file or directory
monis@DESKTOP-C3GM4T6:~\$ cd OSLAB
monis@DESKTOP-C3GM4T6:~/OSLAB\$ ls
OSLAB28 hello hello.c:Zone.Identifier hello_link newfile.txt test1
file1.txt hello.c hello:Zone.Identifier hello_shortcut skill
monis@DESKTOP-C3GM4T6:~/OSLAB\$ cd OSLAB28
monis@DESKTOP-C3GM4T6:~/OSLAB/OSLAB28\$ nano signal.c

monis@DESKTOP-C3GM4T6: ~/OSLAB/OSLAB28

```
monis@DESKTOP-C3GM4T6:~/OSLAB/OSLAB28$ nano signal.c
monis@DESKTOP-C3GM4T6:~/OSLAB/OSLAB28$ gcc signal.c -o signal
monis@DESKTOP-C3GM4T6:~/OSLAB/OSLAB28$ ./signal
Enter the number : 5
The entered number is 5
monis@DESKTOP-C3GM4T6:~/OSLAB/OSLAB28$
```