

VIBE CODING


Playwright+Typescript


Ask mode :

Read my entire workspace and confirm me what are the files will be impacted if I want to add playwright typescript same like implemented for Selenium Java

Agent Code:

- Add the Playwright TypeScript prompt templates.
- Add / register new prompt key constants in [CODE_GENERATOR_TYPES](#).
- Go to chat.js Extend getPromptKeys() so languageBinding === 'ts' && browserEngine === 'playwright' returns the new Playwright TS prompt keys.
Add any helper methods like isTypeScriptPlaywright().
Adjust the generate-label logic if you want the UI spinner/text to say “Playwright” instead of “Selenium”
- Go to panel.html change the UI flow or add a separate selector for Playwright TS generation, this is the file to update.

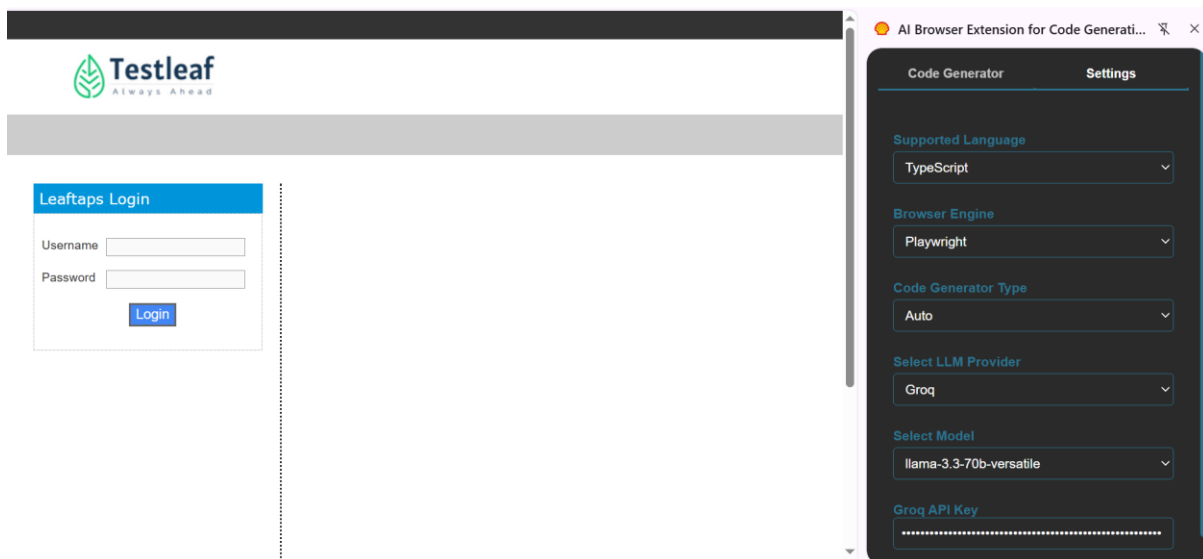

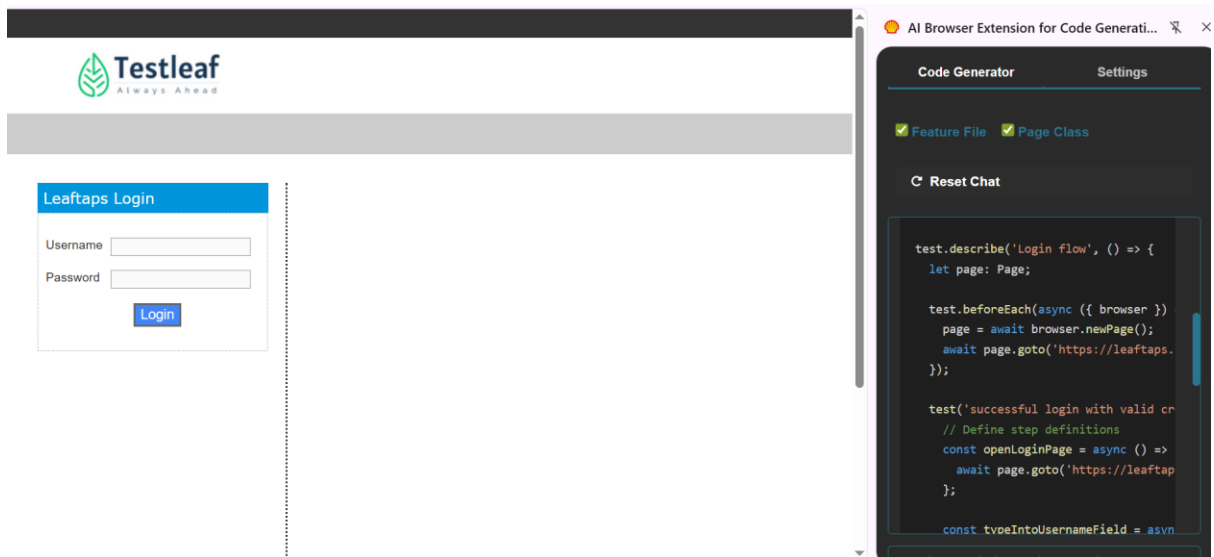

Selenium +Python

Ask Mode:

Read my entire workspace and confirm me what are the files will be impacted if I want to add Selenium Python same like implemented for Selenium Java

Agent Mode:

Add new Selenium Python prompt templates.

Register new prompt keys in CODE_GENERATOR_TYPES.

go to chat.js Extend getPromptKeys() to return Python Selenium prompt keys when:

languageBinding === 'python'

browserEngine === 'selenium'

Add a helper like isPythonSelenium().

Update unsupported combo messaging if needed.

Optionally adjust loader text if you want Generating Python/Selenium Code explicitly.

Go to panel.html and i want an explicit extra selector or UI label for Python Selenium generation.

**Testleaf**
Always Ahead

Leaftaps Login

Username

Password

Login

AI Browser Extension for Code Generati...

Code Generator

Settings

Supported Language

Python

Browser Engine

Selenium

Code Generator Type

Auto

Select LLM Provider

Groq

Select Model

llama-3.3-70b-versatile

Groq API Key

**Testleaf**
Always Ahead

Leaftaps Login

Username

Password

Login

AI Browser Extension for Code Generati...

Code Generator

Settings

☒ Feature File

☒ Page Class

Reset Chat

```
def enter_password(context, password):
    el = WebDriverWait(context.driver,
        EC.element_to_be_clickable((By
        )
        el.send_keys(password)

@when('I click the Login button')
def click_login(context):
    el = WebDriverWait(context.driver,
        EC.element_to_be_clickable((By
        )
        el.click()

@then('I should be logged in successfu
def verify_login(context):
    # Since the success message is not
```