





Tutorial 1 - Oficina de Git/Github

Tutorial de configuração do Git, criação de um repositório, Push e Pull.

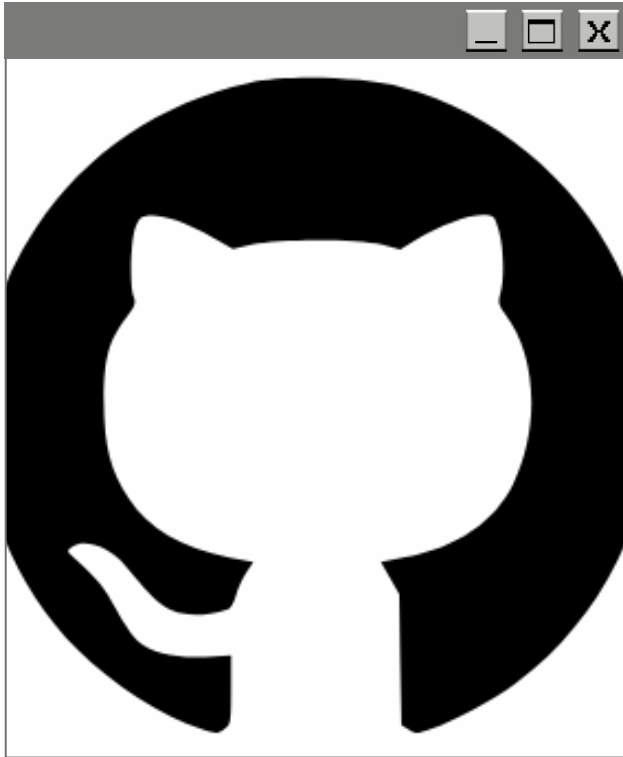

01 Criação de repositório

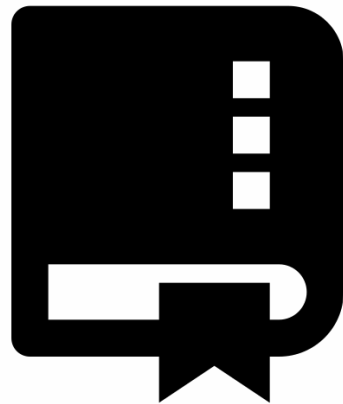

“LESG000000!” - HaMuDi Habibi

HaMoZI006 ▾

Top repositories

Find a repository...

New

Home

Ask anything or type @ to add context

Ask ▾

All repositories ▾

+

Auto ▾

Optimized for: Balance ▾

🔒

▶

Debug

Agent

Create issue

Write code ▾

Git ▾

Pull requests ▾



You've been added to the **monitoria-ti-ceub** organization.

View organization

✕

Feed

Filter



pedrocalderon52 started following you
yesterday

...



Pedro Calderón pedrocalderon52 **Vulgo: caldegoat**
22 repositories 50 followers

Follow



gathddu started following you
yesterday

...



Jess gathddu
nix dependency is no laughing matter
41 repositories 111 followers

Trending repositories · [See more](#)



NVIDIA/OpenShell



UNIVERSE*26

✕

New GitHub Universe sessions just dropped.
IRL passes are going fast.

Register now

Latest from our changelog

- 4 hours ago
Opt-in dist-tag permissions for npm trusted publishing
- 8 hours ago
GitHub Advanced Security trials for GitHub Team
- 10 hours ago
HydraFusion in VS Code and the GitHub Copilot app
- 11 hours ago
X25519-only TLS ends for GHE.com on

Passo 1 - Entre no site do Github em sua conta e clique em criar um novo repositório.



HaMoZi006 / deveres-de-casa-oficina-de-git

Search Type to search



Code Issues Pull requests Agents Actions Projects Wiki Security and quality Insights Settings

deveres-de-casa-oficina-de-git Public



Watch 0

Fork 0

Star 0



Start coding with Codespaces

Add a README file and start coding in a secure, configurable, and dedicated development environment.

Create a codespace



Add collaborators to this repository

Search for people using their GitHub username or email address.

Invite collaborators

Quick setup — if you've done this kind of thing before

Set up in GitHub Desktop

or

HTTPS

SSH

https://github.com/HaMoZi006/deveres-de-casa-oficina-de-git.git



Get started by [creating a new file](#) or [uploading an existing file](#). We recommend every repository include a [README](#), [LICENSE](#), and [.gitignore](#).

...or create a new repository on the command line

```
echo "# deveres-de-casa-oficina-de-git" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/HaMoZi006/deveres-de-casa-oficina-de-git.git
git push -u origin main
```




...or push an existing repository from the command line

```
git remote add origin https://github.com/HaMoZi006/deveres-de-casa-oficina-de-git.git
git branch -M main
git push -u origin main
```

Repositório criado!

02 Configuração do Git, primeiro push e pull

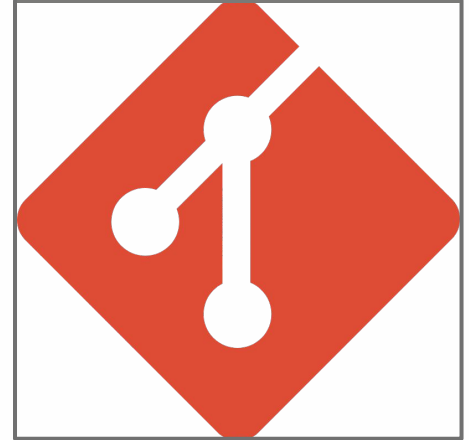

“¡Vamos!” - HaMuDi Habibi



Windows PowerShell

Copyright (C) Microsoft Corporation. All rights reserved.

```
PS C:\Users\lipiu_x32dt0z> git config --global user.name HaMoZi006
```

```
PS C:\Users\lipiu_x32dt0z> git config --global user.email felipe.rioss@sempreceub.com
```

Passo 1 - Em um terminal configure as suas informações no Git.

```
git config --global user.name <Seu-usuário-no-Github>
```

```
git config --global user.email <seuemail@email.com>
```

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

```
PS C:\Users\lipiu_x32dt0z\Desktop\deveres> git init
Initialized empty Git repository in C:/Users/lipiu_x32dt0z/Desktop/deveres/.git/
PS C:\Users\lipiu_x32dt0z\Desktop\deveres> git add .
PS C:\Users\lipiu_x32dt0z\Desktop\deveres> git commit -m "Dever de casa aula 2"
[master (root-commit) af3c548] Dever de casa aula 2
 1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 "Exerc\303\255cios Git 2.pdf"
PS C:\Users\lipiu_x32dt0z\Desktop\deveres> git remote add origin https://github.com/HaMoZi006/deveres-de-casa-oficina-
de-git.git
PS C:\Users\lipiu_x32dt0z\Desktop\deveres> git branch -M main
PS C:\Users\lipiu_x32dt0z\Desktop\deveres> git push -u origin main
```

Passo 2 - Após isso, vá para a pasta que deseja colocar em seu repositório e digite os seguintes comandos:

```
git init
git add .
git commit -m "<commit>"
git remote add origin https://github.com/SEU_USUARIO/meu-projeto.git
git branch -M main
git push -u origin main
```

Connect to GitHub

✕

GitHub


Sign in

Browser/Device

Token

Sign in with your browser

Sign in with a code

Don't have an account? [Sign up](#)

```
PS C:\Users\lipiu_x32dt0z\Desktop\deveres> git push -u origin main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 67.66 KiB | 22.55 MiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/HaMoZi006/deveres-de-casa-oficina-de-git.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
PS C:\Users\lipiu_x32dt0z\Desktop\deveres>
```

Push concluído!

Passo 3 - Após executar os comandos, logue em sua conta do Github. Caso dê tudo certo, o push será realizado em seu repositório.

Caso queira realizar quaisquer alterações no seu repositório, digite os seguintes comandos:

`git add .`

`git commit -m "<commit>"`

`git push`

Nota:

Caso queira adicionar apenas um arquivo específico, faça o seguinte comando

`git add <nome-do-seu-arquivo>`

Caso queira adicionar arquivos que existem apenas no Github em seu repositório local, digite:

`git pull`

```
PS C:\Users\lipiu_x32dt0z\Desktop\deveres> git pull
remote: Enumerating objects: 4, done.
remote: Counting objects: 100% (4/4), done.
remote: Compressing objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (3/3), 65.78 KiB | 3.87 MiB/s, done.
From https://github.com/HaMoZi006/deveres-de-casa-oficina-de-git
   af3c548..6bf158d  main      -> origin/main
Updating af3c548..6bf158d
Fast-forward
 "Exerc\303\255cios Git 3.pdf" | Bin 0 -> 76363 bytes
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 "Exerc\303\255cios Git 3.pdf"
PS C:\Users\lipiu_x32dt0z\Desktop\deveres> 
```