

1.SOLUTION FOR TWO SUM

The screenshot shows the LeetCode interface for the 'Two Sum' problem. The submission is accepted, with 65/65 testcases passed. The runtime is 49 ms, beating 7.94% of other submissions. The memory usage is 47.21 MB, beating 23.95%. The code is written in Java and uses a nested loop approach to find two numbers that sum to the target.

Runtime: 49 ms | Beats 7.94%

Memory: 47.21 MB | Beats 23.95%

Code (Java):

```
1 class Solution
2 {
3     public int[] twoSum(int[] nums, int target)
4     {
5         int[] answer=new int[2];
6         for(int i=0;i<nums.length;i++)
7         {
8             for(int j=i+1;j<nums.length;j++)
9             {
10                 if(nums[i]+nums[j]==target)
11                 {
12                     answer[0]=i;
13                     answer[1]=j;
14                 }
15             }
16         }
17         return answer;
18     }
19 }
```

2.SOLUTION FOR REVERSE STRING

The screenshot shows the LeetCode interface for the 'Reverse String' problem. The submission is accepted, with 477/477 testcases passed. The runtime is 0 ms, beating 100.00% of other submissions. The memory usage is 17.67 MB, beating 91.55% of other submissions. The code is written in C and uses a two-pointer approach to reverse the string in place.

Runtime: 0 ms | Beats 100.00%

Memory: 17.67 MB | Beats 91.55%

Code (C):

```
1 void reverseString(char* s, int sSize)
2 {
3     char temp;
4     for(int i=0;i<sSize/2;i++)
5     {
6         temp=s[i];
7         s[i]=s[sSize-1-i];
8         s[sSize-1-i]=temp;
9     }
10 }
```

3.VALID ANAGRAM

My Semester Courses | REVA x B25CS0311_176_566: Assignments x Valid Anagram - LeetCode x + Ask Gemini

leetcode.com/problems/valid-anagram/submissions/2156392860/

Problem List < > < > < >

Description Editorial Solutions Submissions Accepted x

All Submissions

Accepted 55 / 55 testcases passed

PRAJWAL NAIK submitted at Sep 29, 2026 00:43

Analysis Solution

Runtime

0 ms | Beats 100.00%

Memory

8.84 MB | Beats 88.57%

Code | C

```
1 bool isAnagram(char* s, char* t)
2 {
3     int i=0;
4     if(strlen(s)!=strlen(t))
5     {
6         return false;
7     }
8     int count[26]={0};
9
10    for(i=0;s[i]!='\0';i++)
11    {
12        count[s[i]-'a']++;
13        count[t[i]-'a']--;
14    }
15
16    for(i=0;i<26;i++)
17    {
18        if(count[i]!=0)
19        {
```

Testcase | Test Result

You must run your code first

4.BEST TIME TO BUY AND SELL STOCK

My Semester Courses | REVA x B25CS0311_176_566: Assignments x Best Time to Buy and Sell Stock - LeetCode x solution for this asap - Google x + Ask Gemini

leetcode.com/problems/best-time-to-buy-and-sell-stock/submissions/2157331141/

Problem List < > < > < >

Description Accepted x Editorial Solutions Submissions

All Submissions

Accepted 213 / 213 testcases passed

PRAJWAL NAIK submitted at Sep 29, 2026 22:08

School's in. Let's on. Get LeetCode Annual Premium for \$99!

Runtime

1 ms | Beats 99.94%

Memory

94.20 MB | Beats 84.58%

Code | Java

```
1 class Solution {
2     public int maxProfit(int[] prices) {
3         // Track the lowest price seen so far
4         int minPrice = Integer.MAX_VALUE;
5         // Track the maximum profit possible
6         int maxProfit = 0;
7
8         for (int i = 0; i < prices.length; i++) {
9             if (prices[i] < minPrice) {
10                // Update minimum price if a lower price is found
11                minPrice = prices[i];
12            } else if (prices[i] - minPrice > maxProfit) {
13                // Update max profit if current profit is higher
14                maxProfit = prices[i] - minPrice;
15            }
16        }
17
18        return maxProfit;
19    }
20 }
```

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 Case 2

Input

prices = [7,1,5,3,6,4]

Output

05.SOLUTION FOR LONGEST COMMON PREFIX

Problem List < > ✕

Description Accepted Editorial Solutions Submissions

All Submissions

Accepted 126 / 126 testcases passed

PRAJWAL NAIK submitted at Sep 29, 2026 22:11

Unlock the Full LeetCode Experience

₹583.25 Save over 50%

Company problems, Ask Leet, and expert editorials – all in one p...

Runtime

0 ms Beats 100.00%

Memory

8.97 MB Beats 38.77%

Code | C

```
1 #include <stdlib.h>
2 #include <string.h>
```

Code

```
23     if (prefixLen == 0) {
24         break;
25     }
26 }
27
28 // Allocate memory for the result string (+1 for the null terminator)
29 char* result = (char*)malloc((prefixLen + 1) * sizeof(char));
30 for (int i = 0; i < prefixLen; i++) {
31     result[i] = strs[0][i];
32 }
33 result[prefixLen] = '\0';
34
35 return result;
36 }
37
```

Testcase Test Result

Accepted Runtime: 0 ms

Case 1 Case 2

Input

strs =

["flower", "flow", "flight"]

Output

06.SOLUTION FOR BINARY SEARCH

Problem List < > ✕

Description Accepted Editorial Solutions Submissions

All Submissions

Accepted 47 / 47 testcases passed

PRAJWAL NAIK submitted at Sep 29, 2026 22:17

School's in. Let's on.

Get LeetCode Annual Premium for \$99!

Runtime

0 ms Beats 100.00%

Memory

10.06 MB Beats 43.98%

Code | C

```
1 int search(int* nums, int numsSize, int target) {
2     int left = 0;
```

Code

```
6 // Prevent overflow compared to (left + right) / 2
7 int mid = left + (right - left) / 2;
8
9 if (nums[mid] == target) {
10     return mid; // Target found
11 } else if (nums[mid] < target) {
12     left = mid + 1; // Search the right half
13 } else {
14     right = mid - 1; // Search the left half
15 }
16 }
17
18 return -1; // Target does not exist
19 }
20
```

Testcase Test Result

Accepted Runtime: 0 ms

Case 1 Case 2

Input

nums =

[-1, 0, 3, 5, 9, 12]

target =

07.SOLUTION FOR MOVE ZERO

The screenshot shows the LeetCode interface for the 'Move Zeroes' problem. The submission is accepted, with 75/75 testcases passed. The user is PRAJWAL NAIK, who submitted the solution on Sep 29, 2026, at 22:21. The runtime is 0 ms, and the memory usage is 20.45 MB, both of which are 100.00% efficient. The code is written in C and implements a two-step algorithm: moving non-zero elements forward and then filling the rest of the array with zeros. The test result shows the input [0,1,0,3,12] and the output [1,3,12,0,0].

Accepted 75 / 75 testcases passed
PRAJWAL NAIK submitted at Sep 29, 2026 22:21

Runtime
0 ms | Beats 100.00%

Memory
20.45 MB | Beats 9.12%

Code

```
1 void moveZeroes(int* nums, int numsSize) {  
2     int lastNonZeroFoundAt = 0;  
3  
4     // Step 1: Move all non-zero elements forward  
5     for (int i = 0; i < numsSize; i++) {  
6         if (nums[i] != 0) {  
7             nums[lastNonZeroFoundAt] = nums[i];  
8             lastNonZeroFoundAt++;  
9         }  
10    }  
11  
12    // Step 2: Fill the rest of the array with zeroes  
13    for (int i = lastNonZeroFoundAt; i < numsSize; i++) {  
14        nums[i] = 0;  
15    }  
16 }  
17
```

Testcase | **Test Result**

Accepted Runtime: 0 ms

Case 1 **Case 2**

Input
nums =
[0,1,0,3,12]

Output

08.SOLUTION FOR VALID PARENTHESES

The screenshot shows the LeetCode interface for the 'Valid Parentheses' problem. The submission is accepted, with 103/103 testcases passed. The user is PRAJWAL NAIK, who submitted the solution on Sep 29, 2026, at 22:24. The runtime is 0 ms, and the memory usage is 8.84 MB, both of which are 100.00% efficient. The code is written in C and uses a stack to validate the parentheses. The test result shows the message 'You must run your code first'.

Accepted 103 / 103 testcases passed
PRAJWAL NAIK submitted at Sep 29, 2026 22:24

Runtime
0 ms | Beats 100.00%

Memory
8.84 MB | Beats 50.50%


Code

```
8 // An odd length string can never be valid  
9 if (len % 2 != 0) {  
10     return false;  
11 }  
12  
13 // Allocate memory for the stack  
14 char* stack = (char*)malloc(len * sizeof(char));  
15 int top = -1;  
16  
17 for (int i = 0; i < len; i++) {  
18     char current = s[i];  
19  
20     // Push opening brackets onto the stack  
21     if (current == '(' || current == '{' || current == '[') {  
22         stack[++top] = current;  
23     }  
24     // Handle closing brackets  
25     else {  
26         // If stack is empty, there is no matching opening bracket
```


Testcase | **Test Result**

You must run your code first


09.ALL THE MD FILES AND FOLDER STRUCTURE

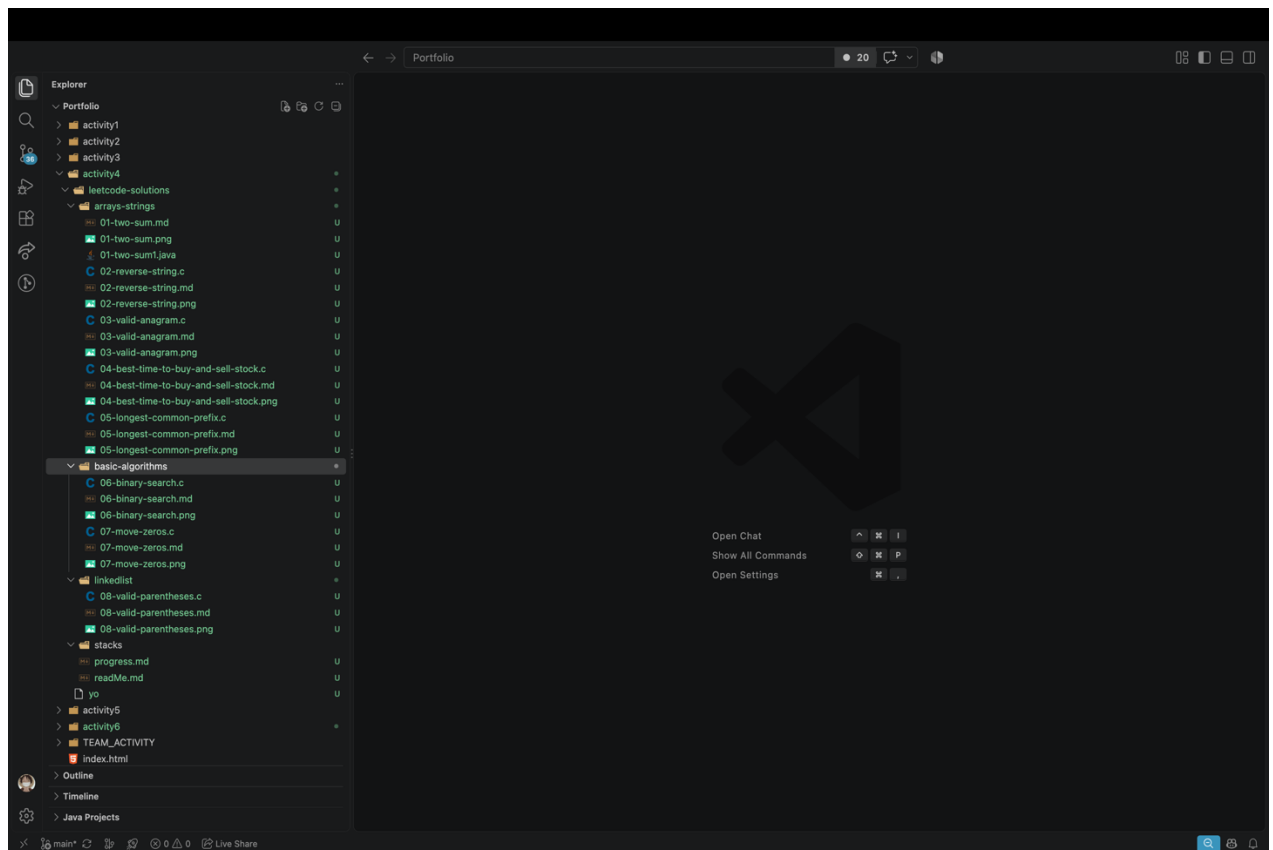

10.COMMIT AND PUSH FOR LEETCODE-SOLUTIONS

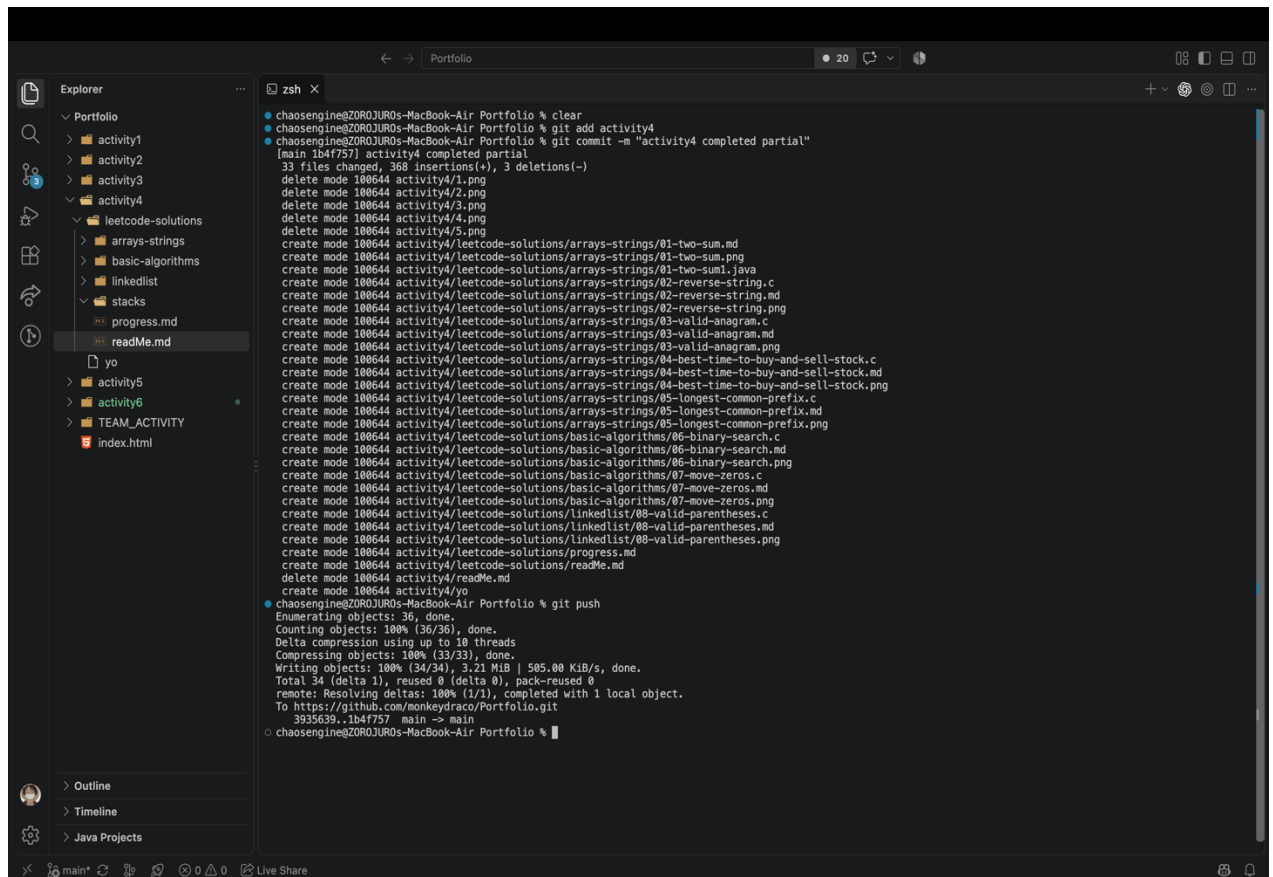

11.COMPLETION OF PROGRESS.MD FILE

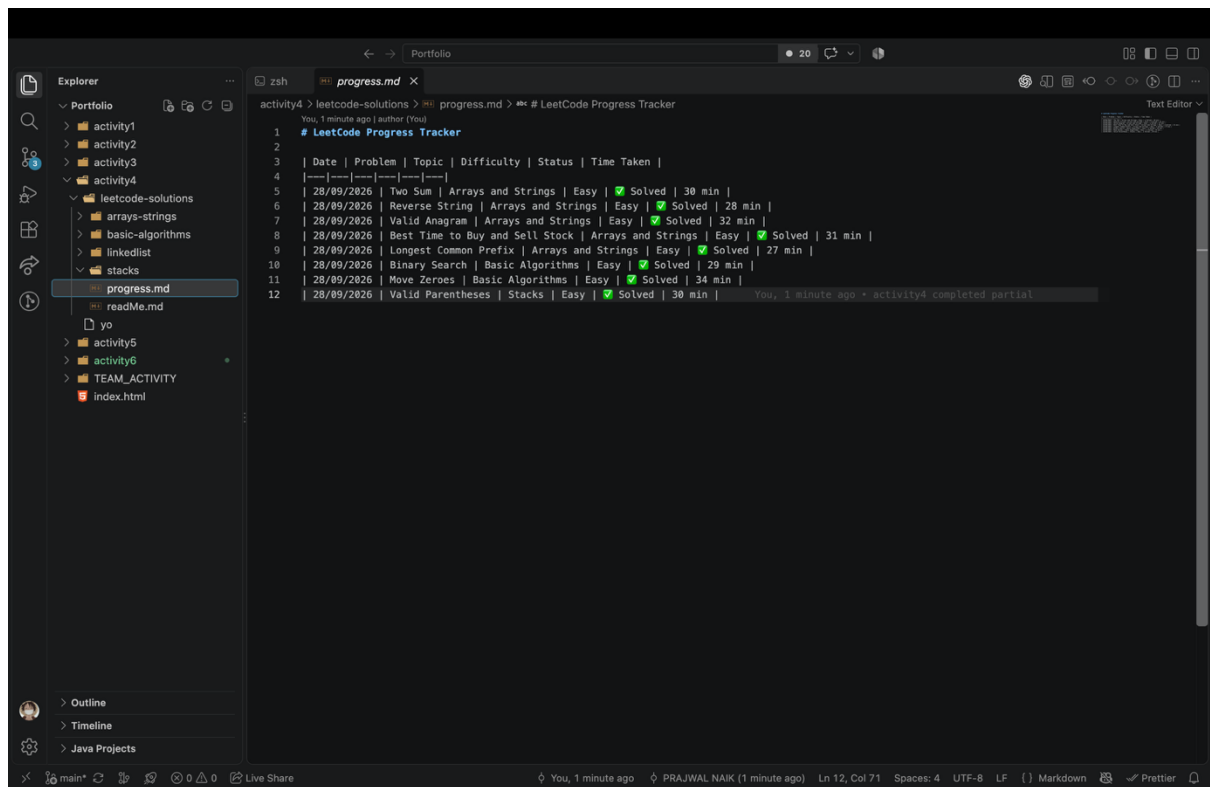

```
1 # LeetCode Progress Tracker
2
3 | Date | Problem | Topic | Difficulty | Status | Time Taken |
4 |-----|-----|-----|-----|-----|-----|
5 | 28/09/2026 | Two Sum | Arrays and Strings | Easy | ☒ Solved | 30 min |
6 | 28/09/2026 | Reverse String | Arrays and Strings | Easy | ☒ Solved | 28 min |
7 | 28/09/2026 | Valid Anagram | Arrays and Strings | Easy | ☒ Solved | 32 min |
8 | 28/09/2026 | Best Time to Buy and Sell Stock | Arrays and Strings | Easy | ☒ Solved | 31 min |
9 | 28/09/2026 | Longest Common Prefix | Arrays and Strings | Easy | ☒ Solved | 27 min |
10 | 28/09/2026 | Binary Search | Basic Algorithms | Easy | ☒ Solved | 29 min |
11 | 28/09/2026 | Move Zeroes | Basic Algorithms | Easy | ☒ Solved | 34 min |
12 | 28/09/2026 | Valid Parentheses | Stacks | Easy | ☒ Solved | 30 min |
```

LEETCODE-SOLUTIONS GITHUB REPO LINK:

<https://github.com/monkeydraco/Portfolio/tree/main/activity4/leetcode-solutions>