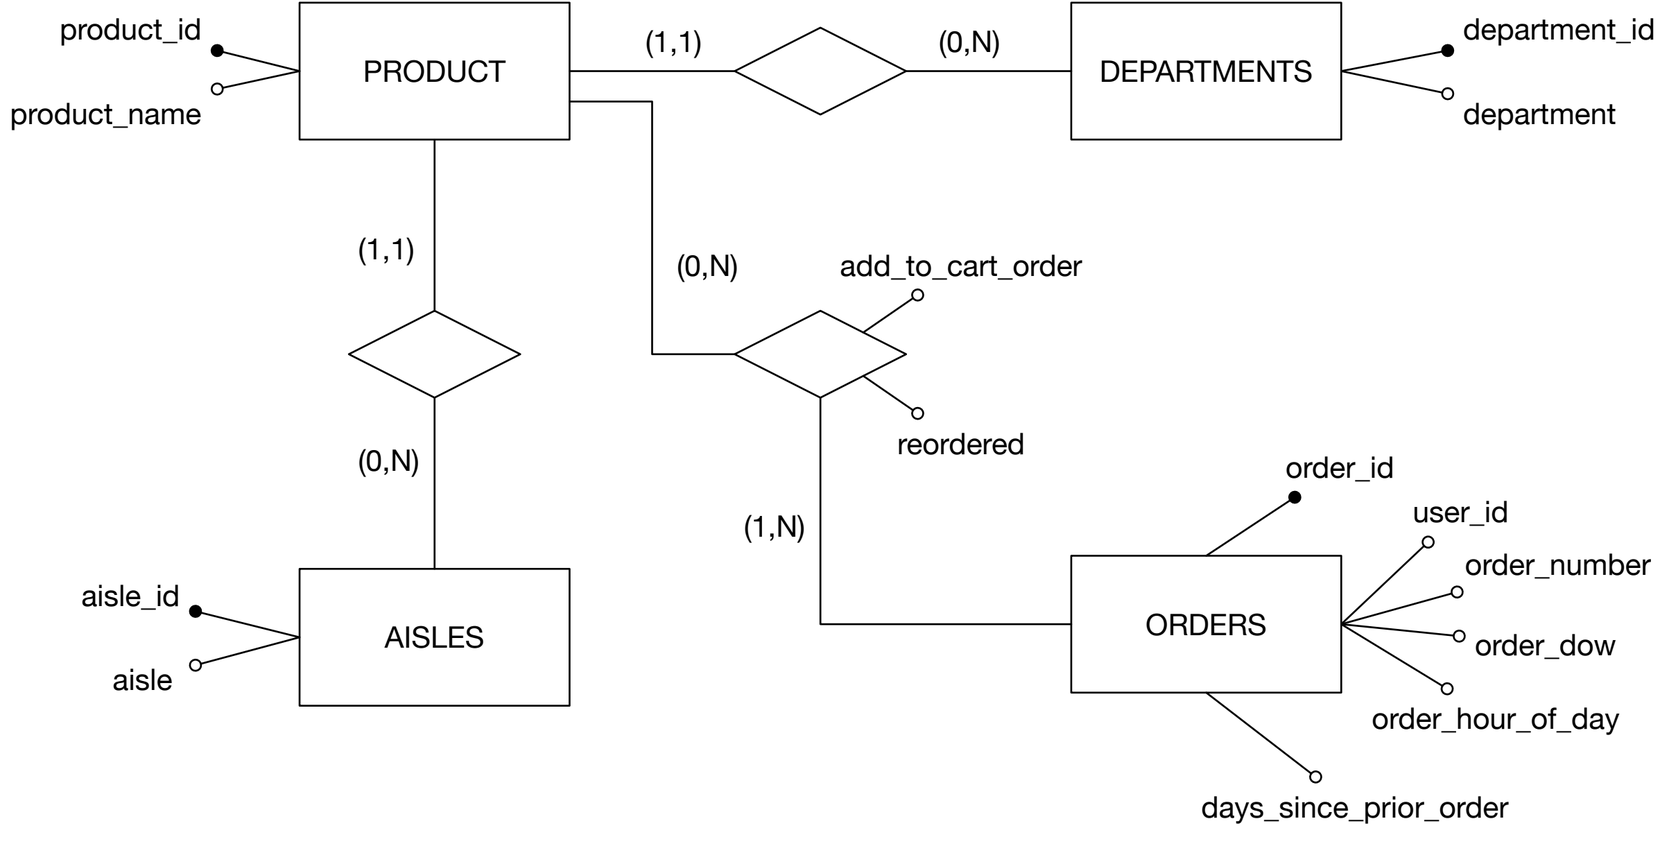


departments(<u>department_id</u>, department)
-- examples of department: frozen, bakery, pets
aisles(<u>aisle_id</u>, aisle)
-- examples of aisle: frozen meals, bakery desserts, dog food care
products(<u>product_id</u>, product_name, aisle_id, department_id)
orders(<u>order_id</u>, user_id, order_number, order_dow,
order_hour_of_day, days_since_prior_order)
order_products(<u>order_id, product_id</u>, add_to_cart_order, reordered)

FOREIGN KEYS
products.department_id ▶ departments.department_id
products.aisle_id ▶ aisles.aisle_id
order_products.order_id ▶ orders.order_id
order_products.product_id ▶ products.product_id

```
CREATE TABLE departments(
  department_id INTEGER PRIMARY KEY,
  department VARCHAR(15)
);

CREATE TABLE aisles(
  aisle_id INTEGER PRIMARY KEY,
  aisle VARCHAR(50)
);

CREATE TABLE products(
  product_id INTEGER PRIMARY KEY,
  product_name VARCHAR(300),
  aisle_id INTEGER REFERENCES aisles(aisle_id),
  department_id INTEGER
    REFERENCES departments(department_id)
    ON UPDATE CASCADE
);
```

```
CREATE TABLE orders(
  order_id INTEGER PRIMARY KEY,
  user_id INTEGER,
  order_number INTEGER,
  order_dow INTEGER,
  order_hour_of_day INTEGER,
  days_since_prior_order REAL
);

CREATE TABLE order_products(
  order_id INTEGER
    REFERENCES orders(order_id),
  product_id INTEGER
    REFERENCES products(product_id)
    ON UPDATE CASCADE ON DELETE CASCADE,
  add_to_cart_order INTEGER,
  reordered INTEGER,
  PRIMARY KEY(order_id, product_id)
);
```