




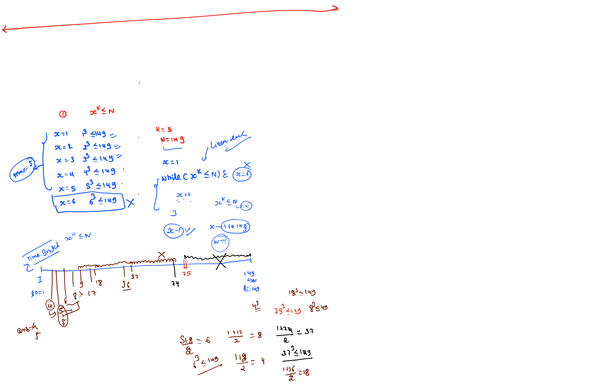

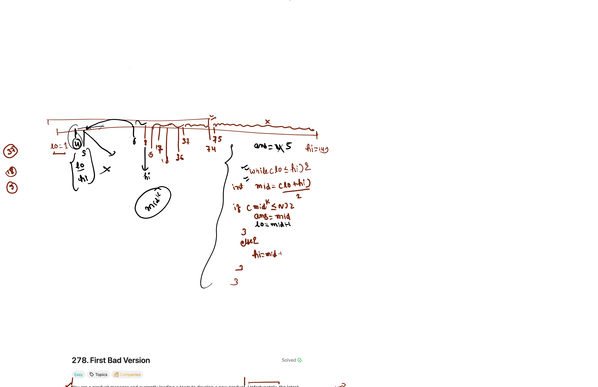

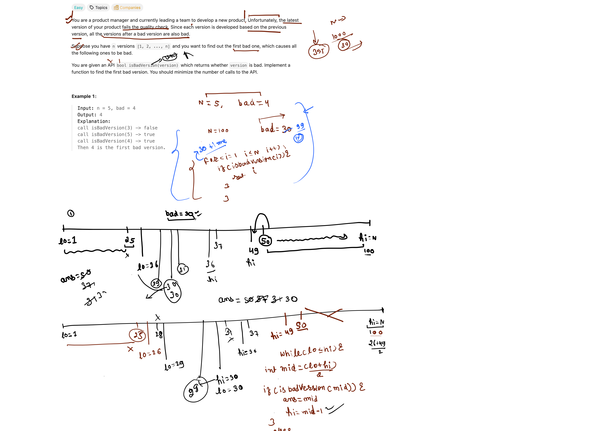

278. First Bad Version

Solved

Easy | Topics | Companies


You are a product manager and currently leading a team to develop a new product. Unfortunately, the latest version of your product fails the quality check. Since each version is developed based on the previous version, all the versions after a bad version are also bad.


Suppose you have `n` versions `[1, 2, ..., n]` and you want to find out the first bad one, which causes all the following ones to be bad.


You are given an API `bool isBadVersion(version)` which returns whether `version` is bad. Implement a function to find the first bad version. You should minimize the number of calls to the API.

Example 1:

```
Input: n = 5, bad = 4
Output: 4
Explanation:
call isBadVersion(3) -> false
call isBadVersion(5) -> true
call isBadVersion(4) -> true
Then 4 is the first bad version.
```

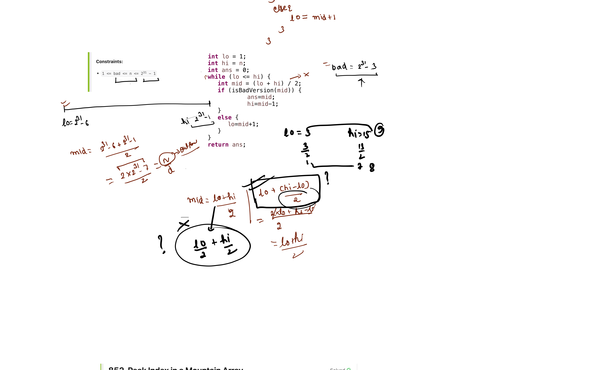

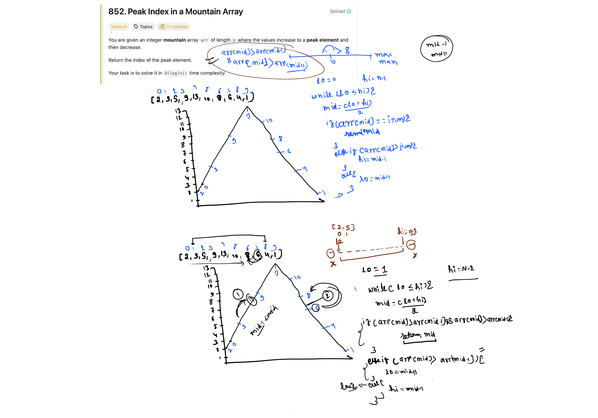

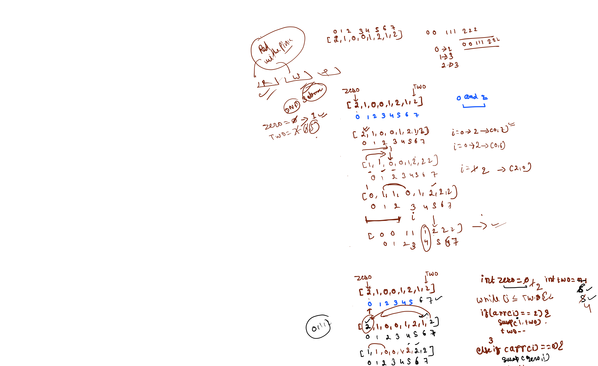

852. Peak Index in a Mountain Array

Solved

Medium | Topics | Companies

You are given an integer **mountain** array `arr` of length `n` where the values increase to a **peak element** and then decrease.

Return the index of the peak element.

Your task is to solve it in `O(log(n))` time complexity.

