Lec-15

01/06/26 7:13 PM

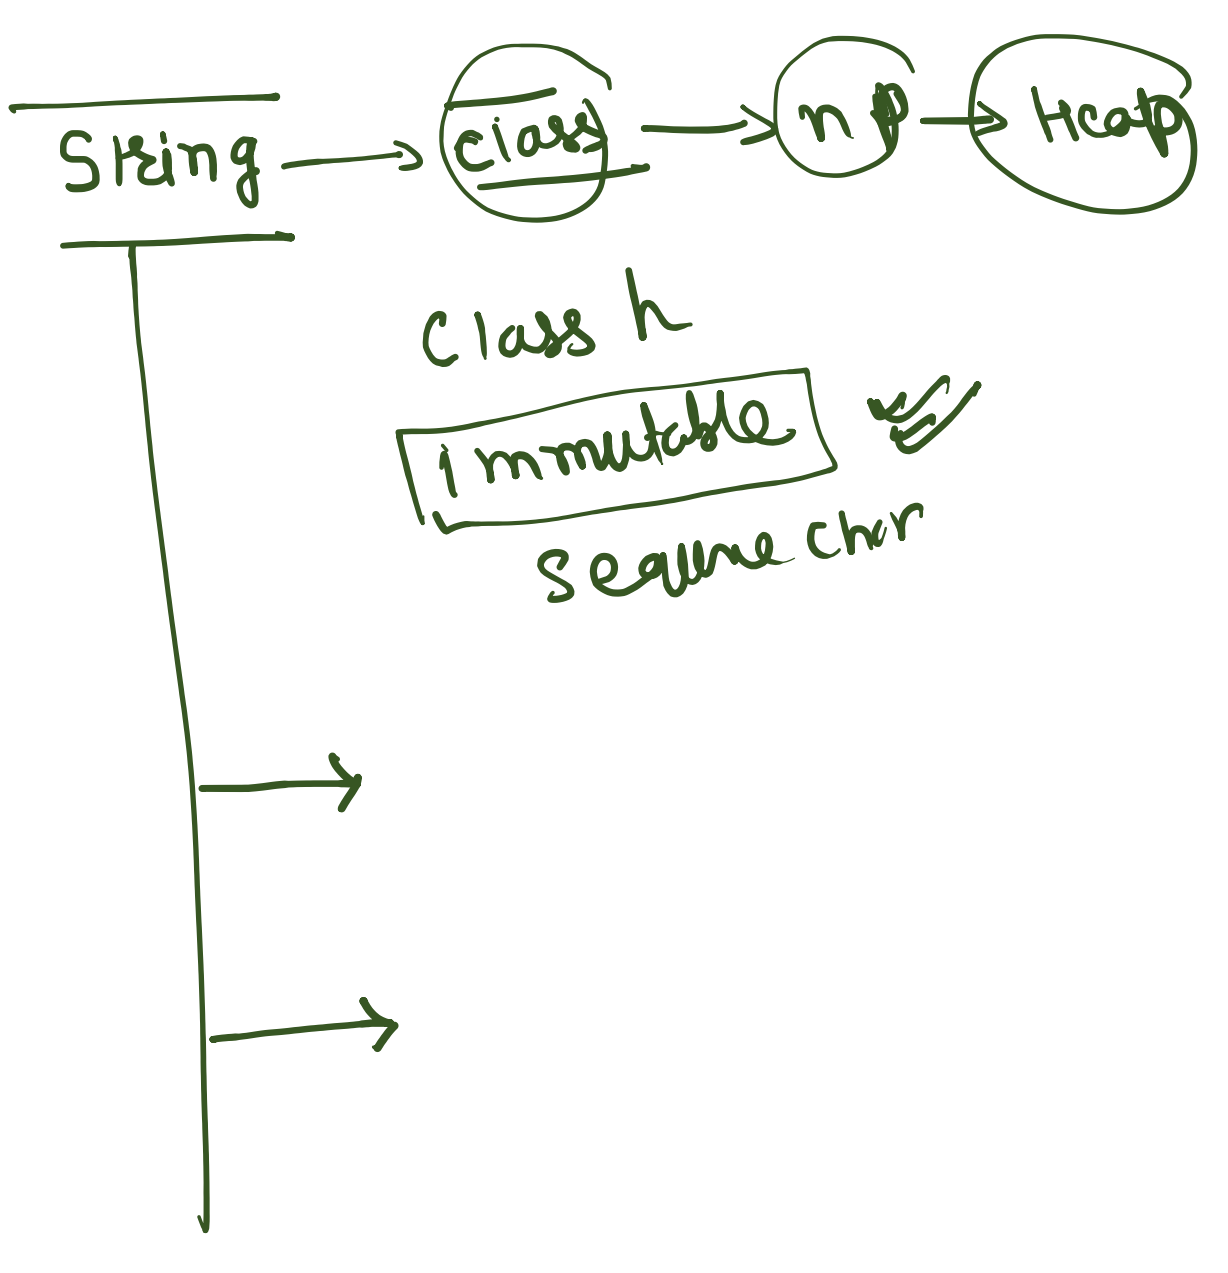
String
class
np
Heap
Class h
Immutable
Sequence char

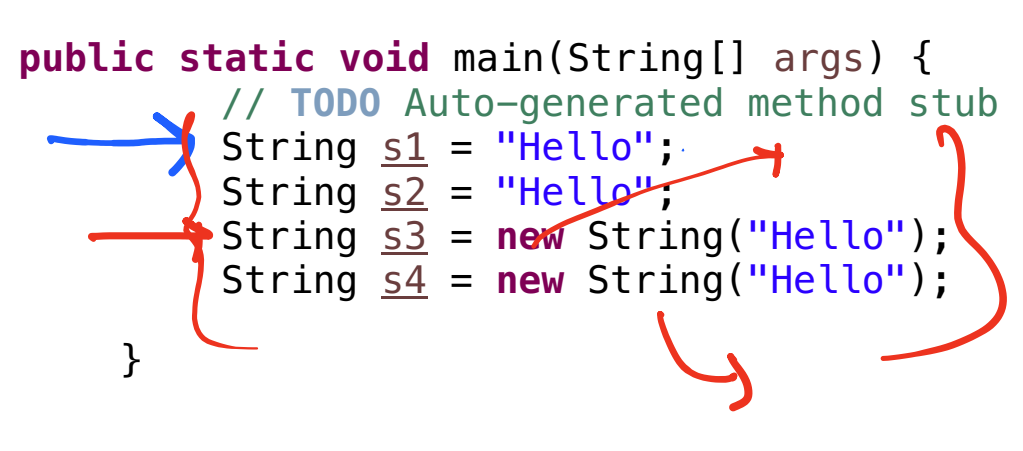

```
public static void main(String[] args) {
        // TODO Auto-generated method stub
        String s1 = "Hello";
        String s2 = "Hello";
        String s3 = new String("Hello");
        String s4 = new String("Hello");
    }
```

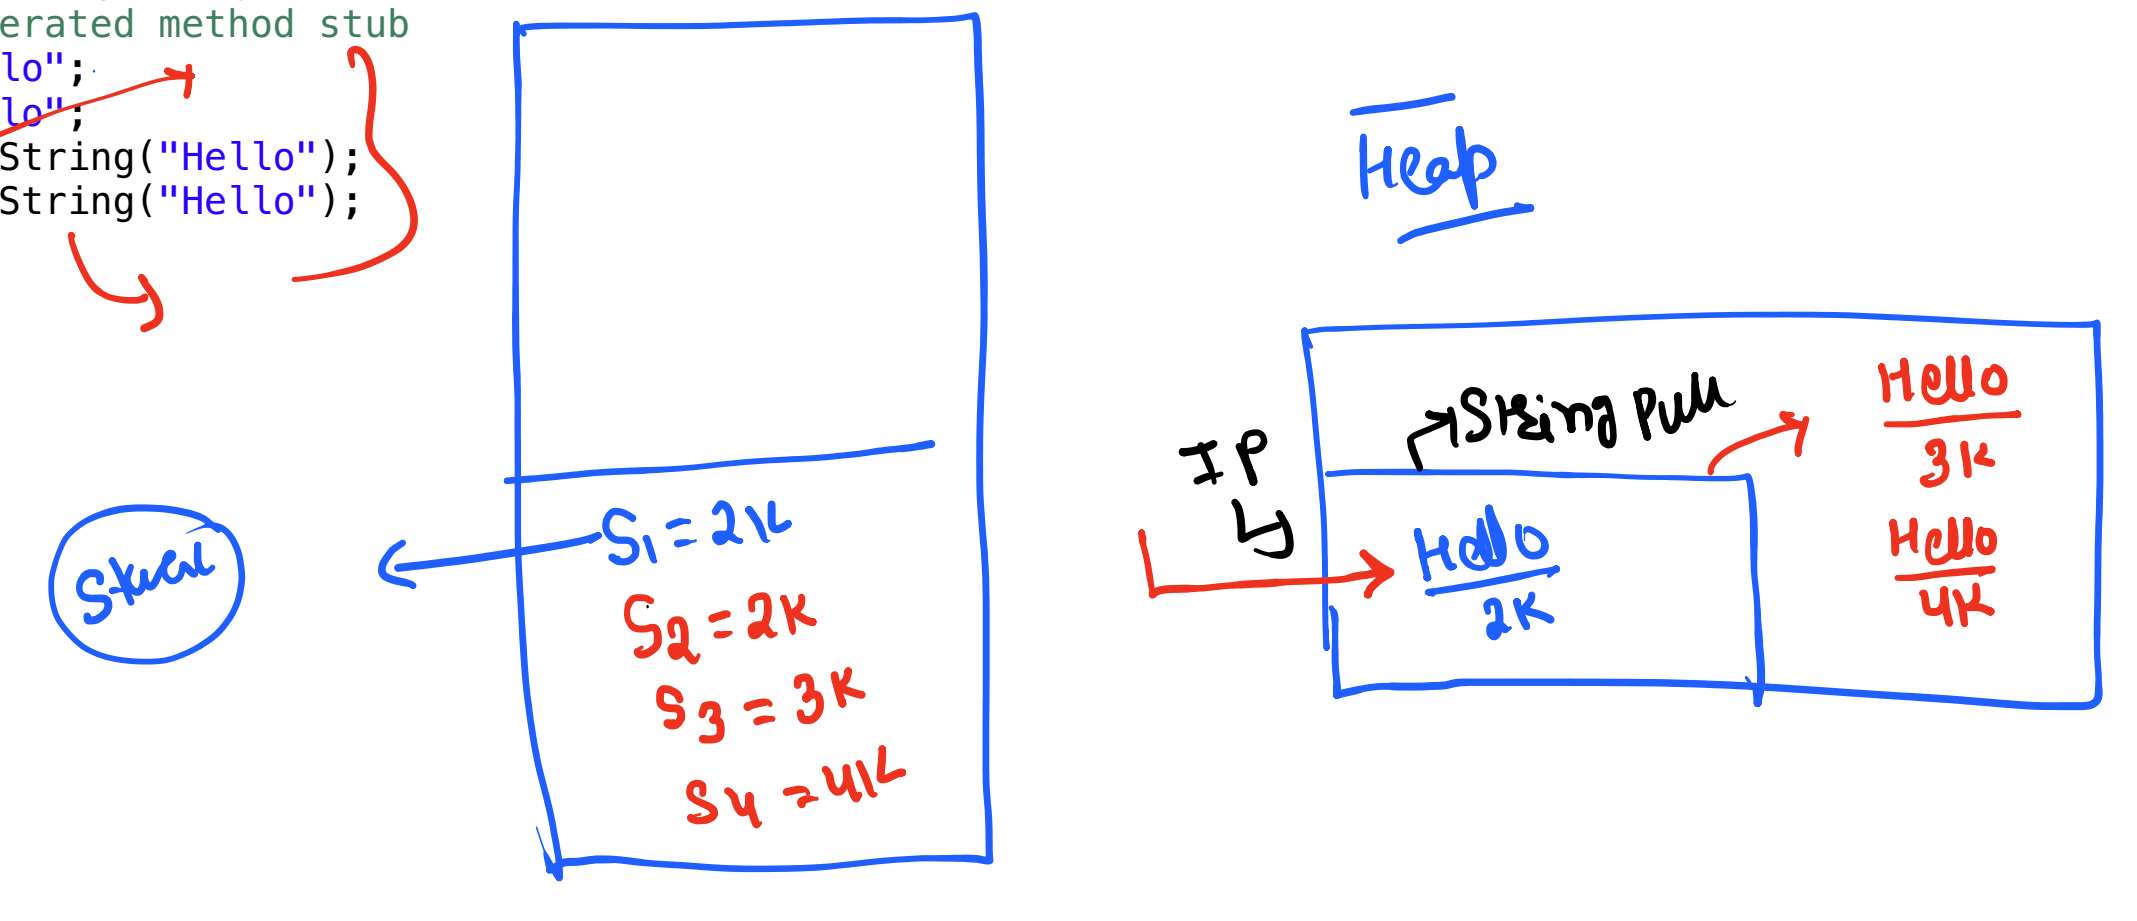
Stack
S1 = 2K
S2 = 2K
S3 = 3K
S4 = 4K
Heap
IP
String Pull
Hello
2K
Hello
3K
Hello
4K

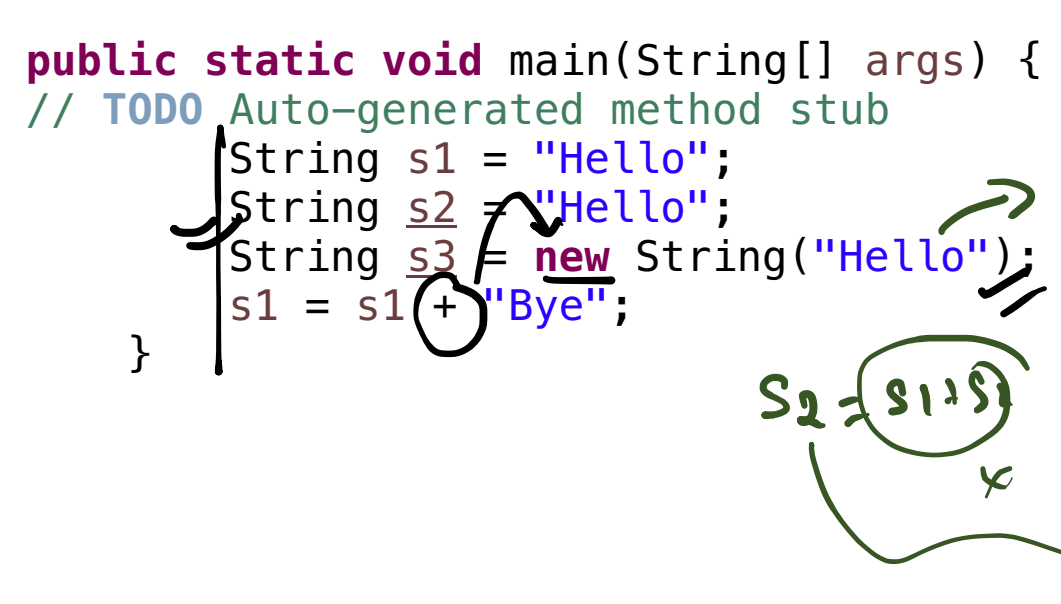

```
public static void main(String[] args) {
// TODO Auto-generated method stub
        String s1 = "Hello";
        String s2 = "Hello";
        String s3 = new String("Hello");
        s1 = s1 + "Bye";
    }
```

S2 = (s1+s)

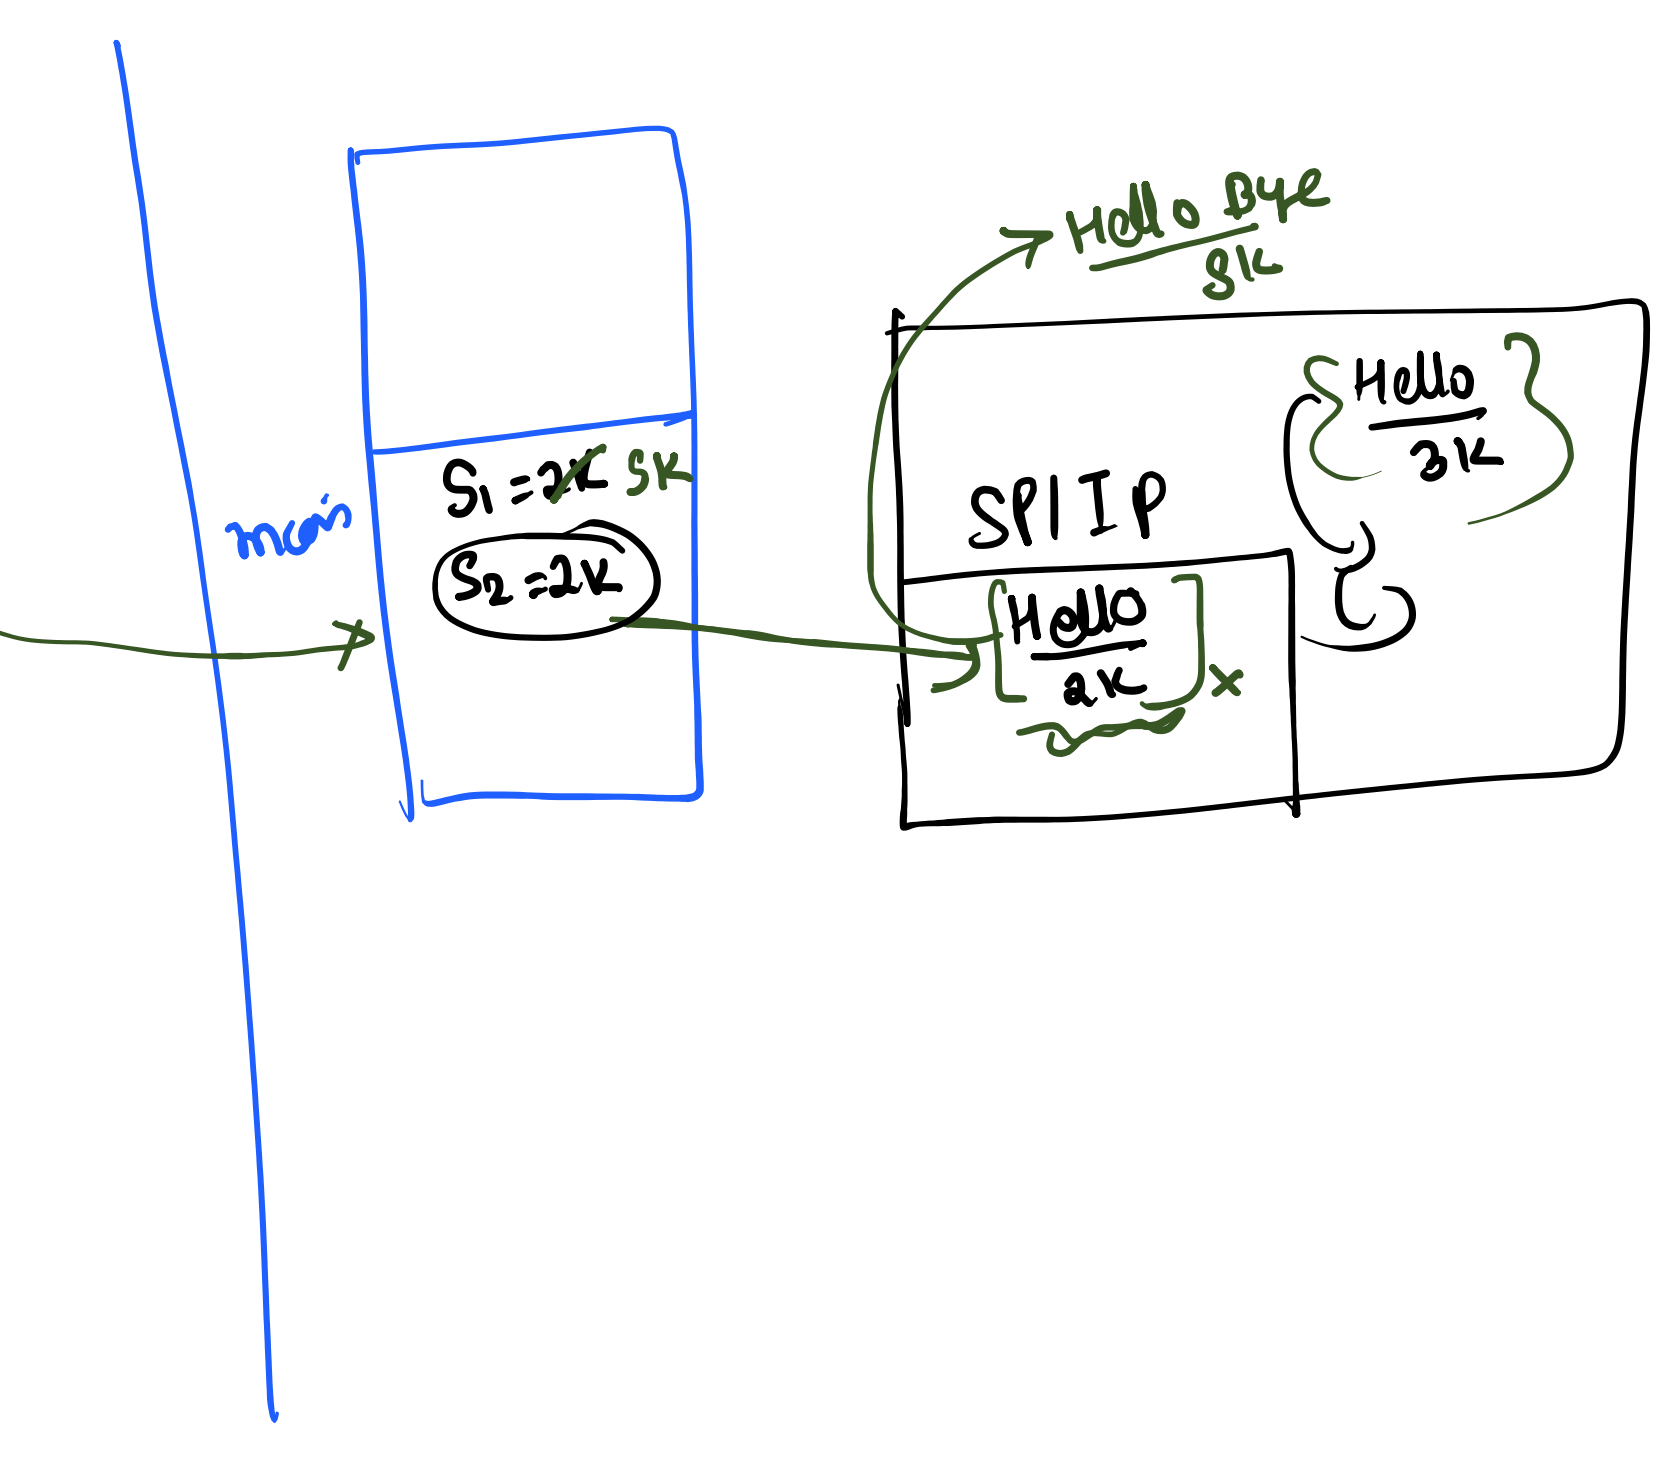
main
S1 = ~~2K~~ 5K
S2 = 2K
Hello Bye
5K
SPIP
Hello
3K
Hello
2K

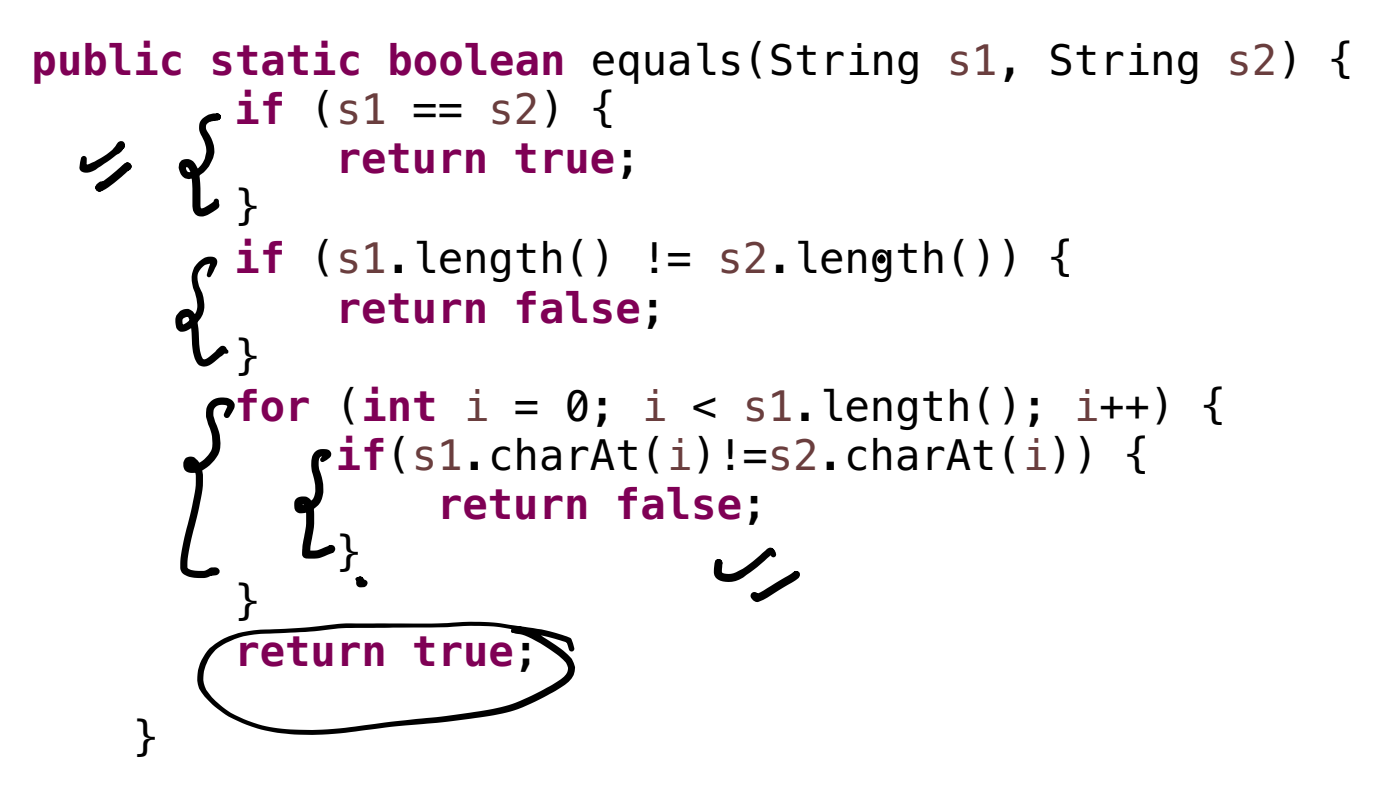

```
public static boolean equals(String s1, String s2) {
        if (s1 == s2) {
            return true;
        }
        if (s1.length() != s2.length()) {
            return false;
        }
        for (int i = 0; i < s1.length(); i++) {
            if(s1.charAt(i)!=s2.charAt(i)) {
                return false;
            }
        }
        return true;
    }
```

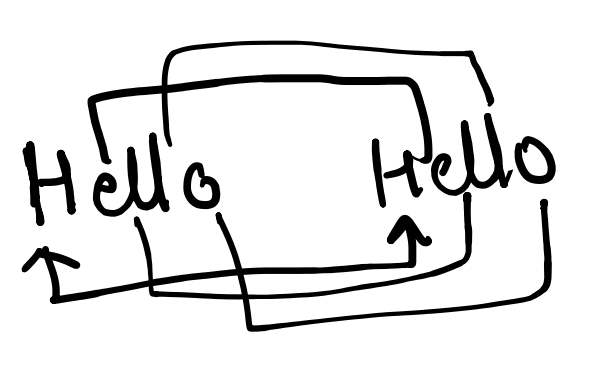
Hello
Hello

Komal
Kunal

Komal < Kunal

o < u

ankit
ankita

ankit < ankita

Raj
Rajesh

Raj
Rajesh

ankit → 5
ankita - 6

nitin

i j
nitin

i = 0
j = s.len() - 1
while (i < j) {
if (s.charAt(i) != s.charAt(j)) {
ret False
}
i++
j--

True

Substring

hello
01234

[0-1] ← h
[0-2] he
[0-3] hel
[0-4] hell
[0-5] hello

[1-2] ← e
[1 3 el
[1 4] ell
[1 5] ello

2-3 l
2-4 ll
2-5 llo

3 4 l
3 5 lo

[0, 5)

0
4-5

for (i=0 i < n i++) {
for (j=i+1 j ≤ n j++)
c(i,j)
}

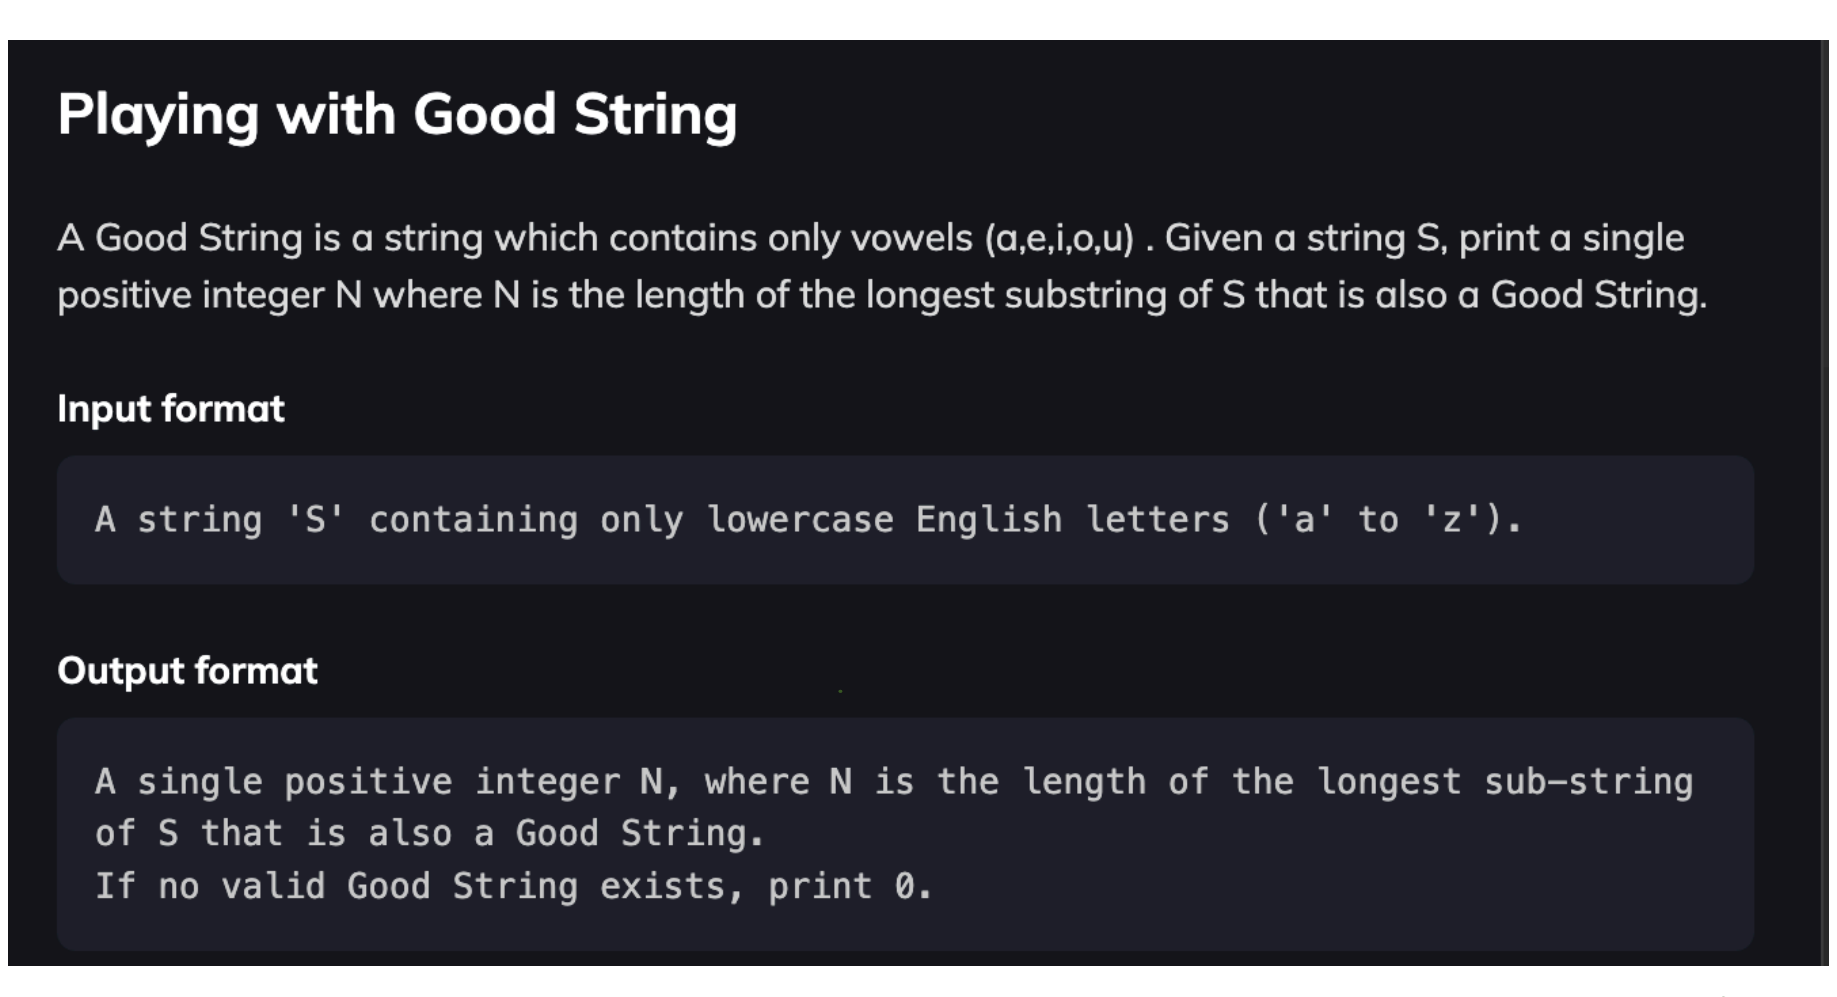

Playing with Good String

A Good String is a string which contains only vowels (a,e,i,o,u) . Given a string S, print a single positive integer N where N is the length of the longest substring of S that is also a Good String.

Input format

```
A string 'S' containing only lowercase English letters ('a' to 'z').
```

Output format

```
A single positive integer N, where N is the length of the longest sub-string
of S that is also a Good String.
If no valid Good String exists, print 0.
```

klmpae rstu aioea kmpaq

~~ans = 2~~ 7

klmpae rstu uaioeakmpaq

ans = 0
c = 0

for (i=0 i < n i++) {
ch = s.charAt(i)
if (isVowel(ch)) {
c++
}
else {
ans = max(ans, c)
c = 0
}
}

ans = max(ans, c)