




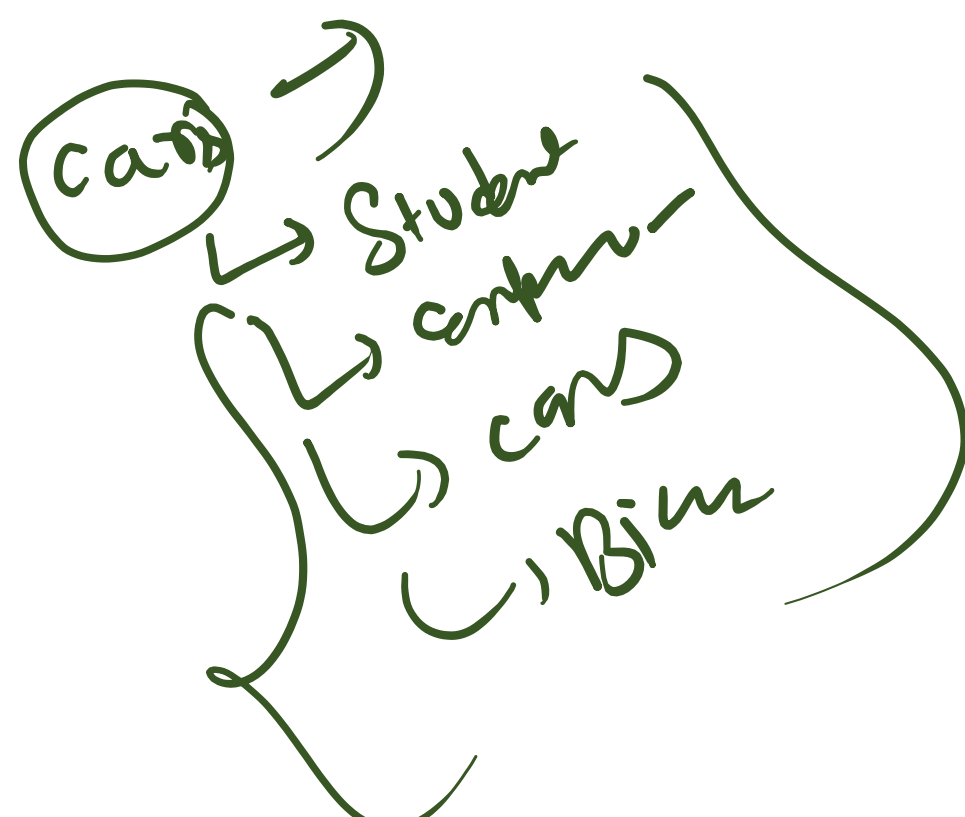

```
public static void Sort(int[] arr) {
    // TODO Auto-generated method stub
    for (int turn = 1; turn < arr.length; turn++) {
        for (int i = 0; i < arr.length - turn; i++) {
            if (arr[i] > arr[i + 1]) {
                int temp = arr[i];
                arr[i] = arr[i + 1];
                arr[i + 1] = temp;
            }
        }
    }
}
```

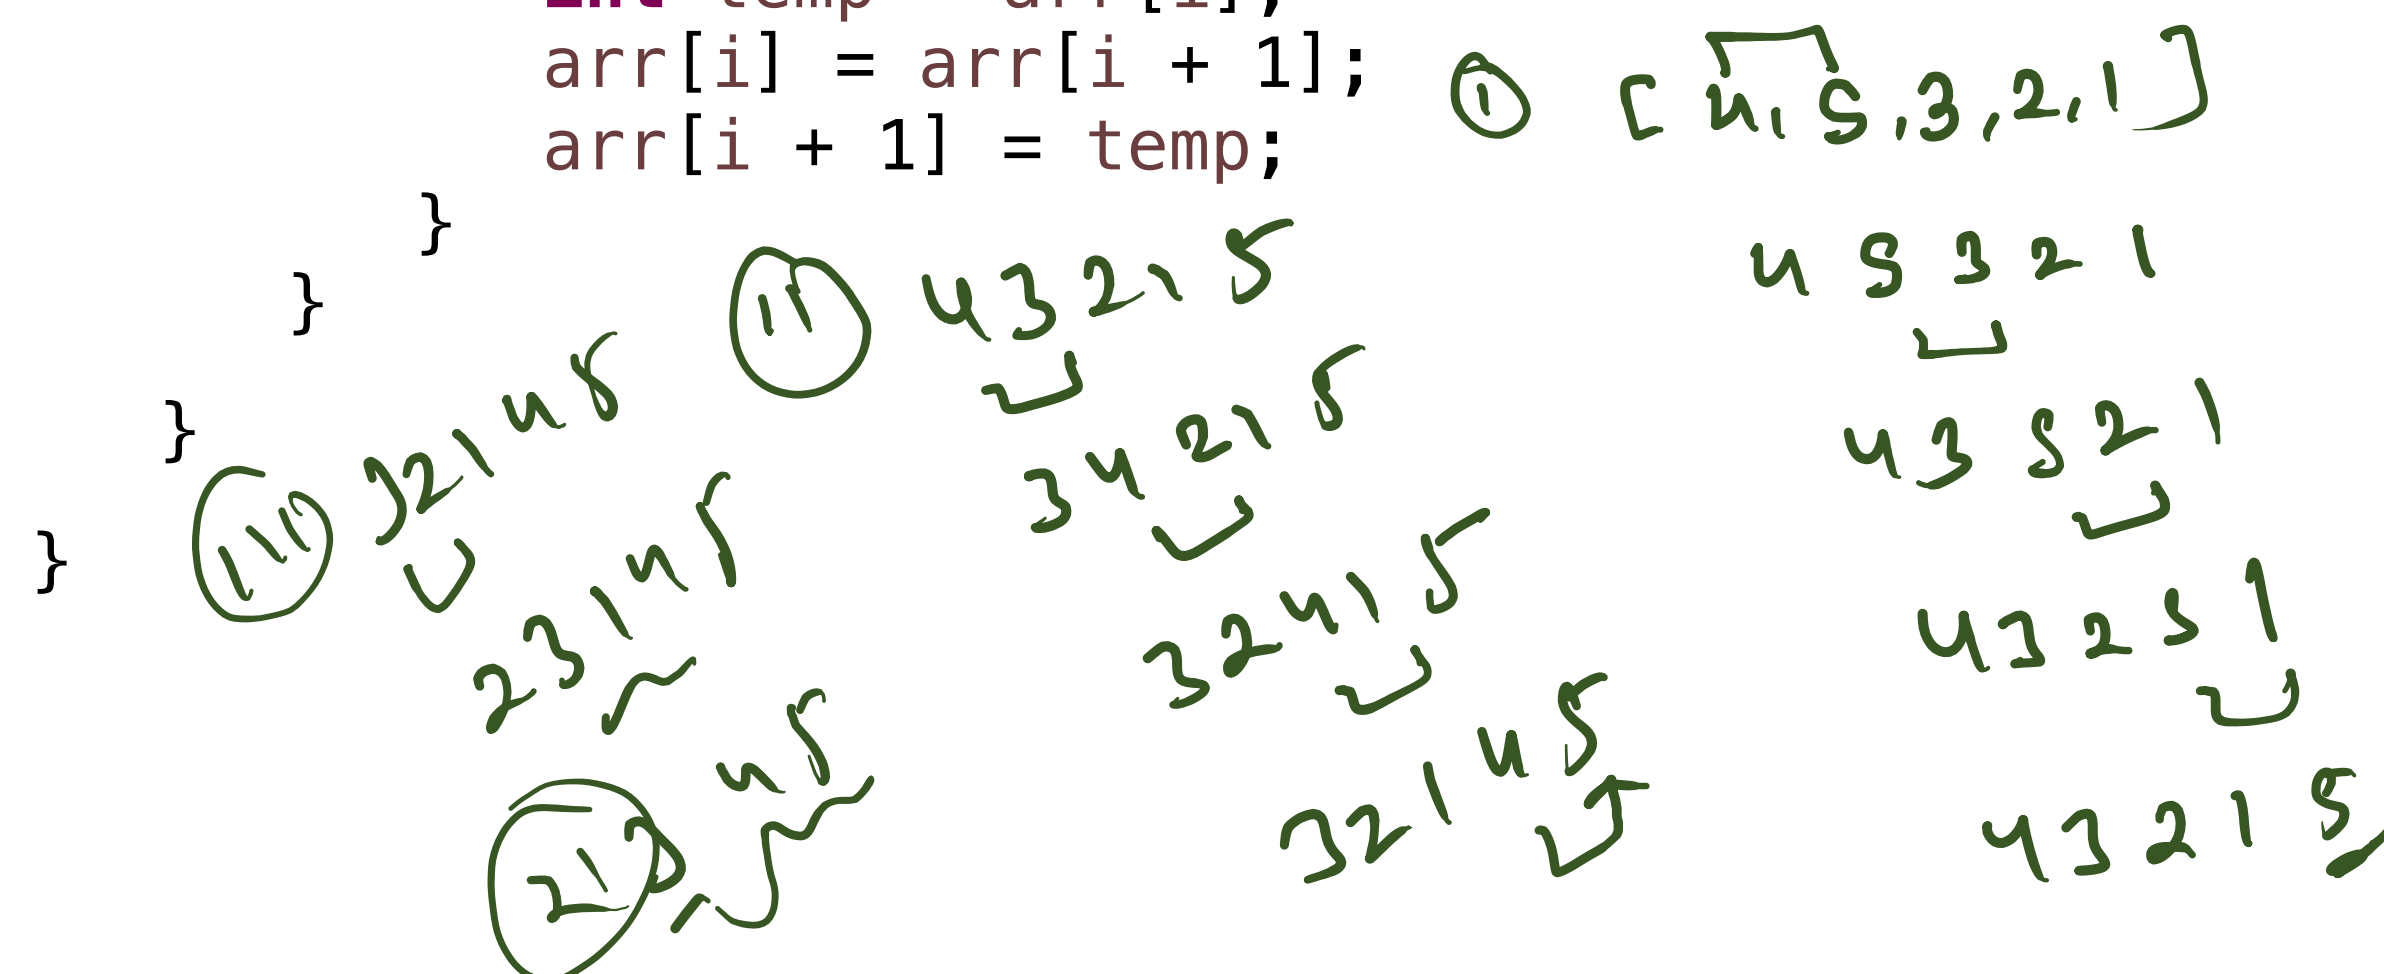


```
public static <T>void Sort(T[] arr) {
    // TODO Auto-generated method stub
    for (int turn = 1; turn < arr.length; turn++) {
        for (int i = 0; i < arr.length - turn; i++) {
            if (arr[i] > arr[i + 1]) {
                T temp = arr[i];
                arr[i] = arr[i + 1];
                arr[i + 1] = temp;
            }
        }
    }
}
```

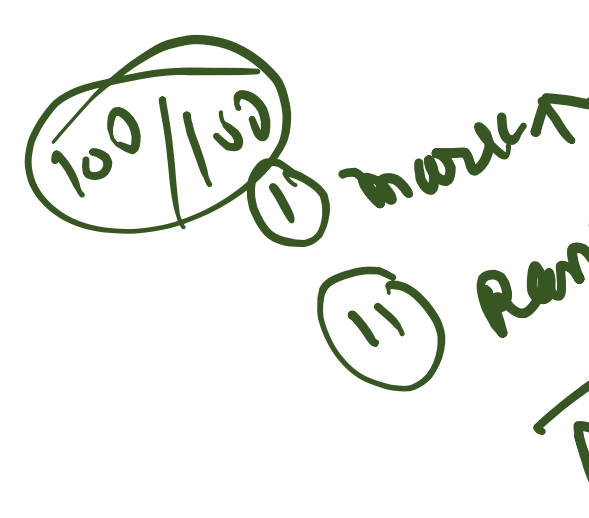

$$\frac{\text{O. Speed} - \text{O. Speed}}{70} \rightarrow \text{H/W}$$

Amk in bill - 0.4%

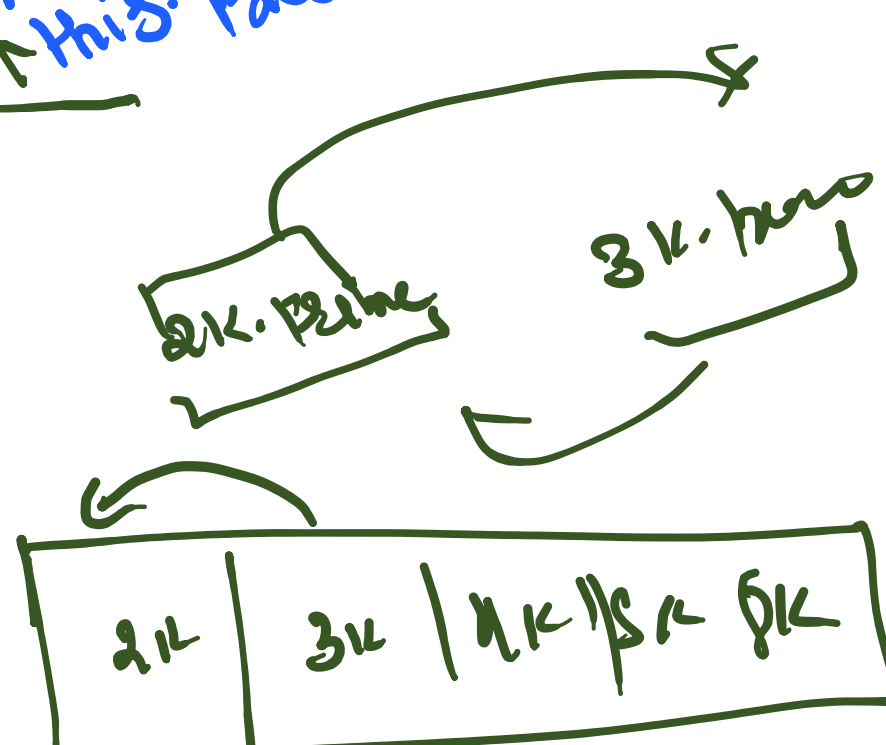




pass run
O - this
grade. later
this O

```
@Override
public int compareTo(Cars o) {
    // TODO Auto-generated method stub
    return 0;
}
```

Handwritten notes:
 - A green arrow points from the parameter `o` to the `o` in the `compareTo` signature.
 - The text `this price - o.price > 0` is written in blue below the `return 0;` line.


```
public static <T extends Comparable<T>>void Sort(T[] arr) {  
    // TODO Auto-generated method stub  
    for (int turn = 1; turn < arr.length; turn++) {  
        for (int i = 0; i < arr.length - turn; i++) {  
            if (arr[i].compareTo(arr[i+1])>0) {  
                T temp = arr[i];  
                arr[i] = arr[i + 1];  
                arr[i + 1] = temp;  
            }  
        }  
    }  
}
```

```
Cars[] arr = new Cars[5];
arr[0] = new Cars(200, 10, "White");// P S C
arr[1] = new Cars(1000, 20, "Black");//
arr[2] = new Cars(345, 3, "Yellow");
arr[3] = new Cars(34, 89, "Grey");
arr[4] = new Cars(8907, 6, "Red");
```

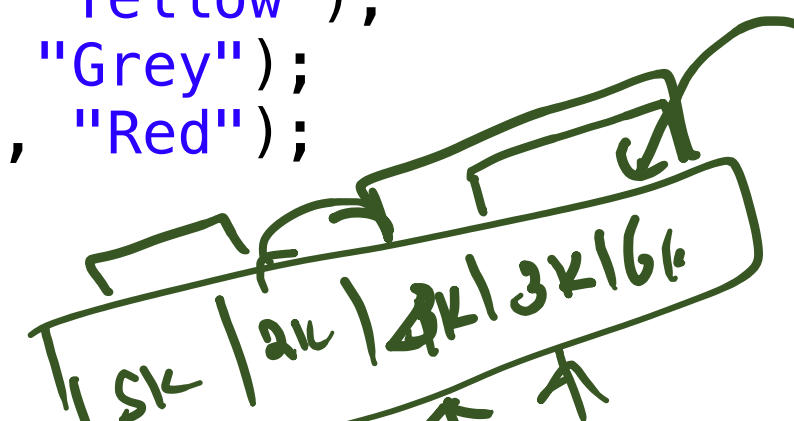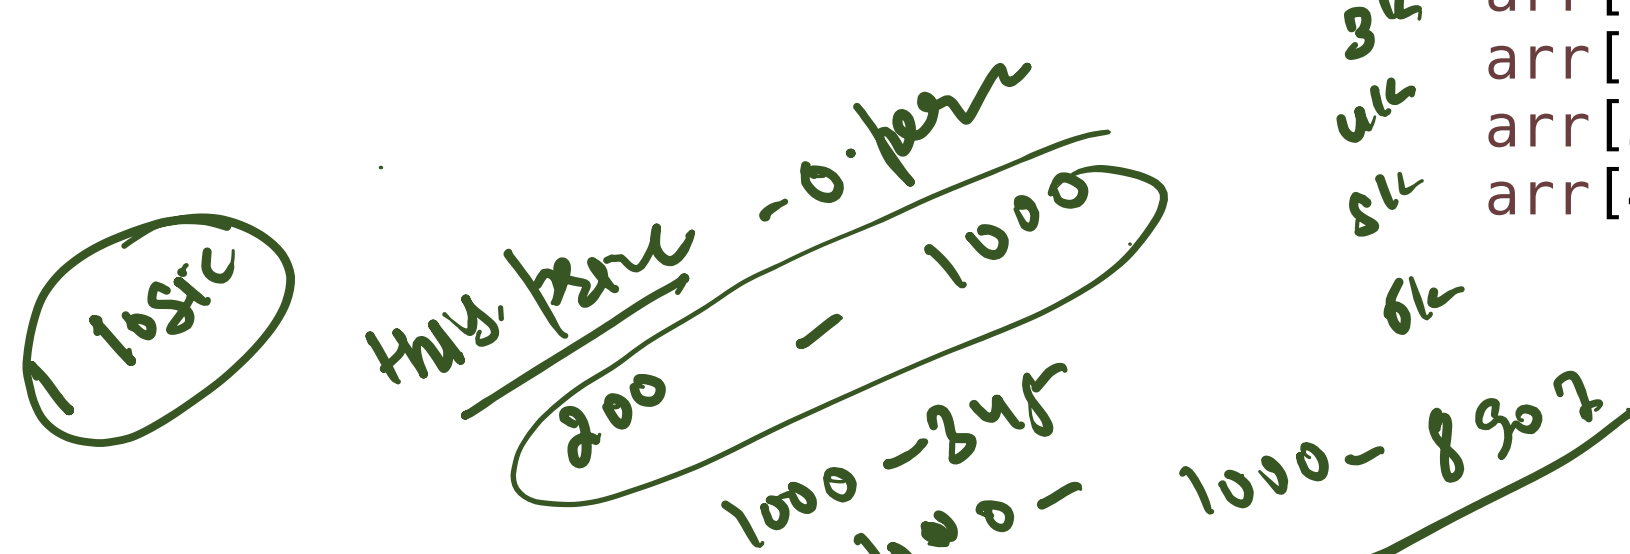

```
public static <T extends Comparable<T>>void Sort(T[] arr) {  
    // TODO Auto-generated method stub  
    for (int turn = 1; turn < arr.length; turn++) {  
        for (int i = 0; i < arr.length - turn; i++) {  
            if (arr[i].compareTo(arr[i+1])>0) {  
                T temp = arr[i];  
                arr[i] = arr[i + 1];  
                arr[i + 1] = temp;  
            }  
        }  
    }  
}
```

2K.com (4K)
4K.com (8K)
3K.com (3K)
3K.com (4K)
3K.com (8K)
3K.com (6K)
345-74.
4K.com

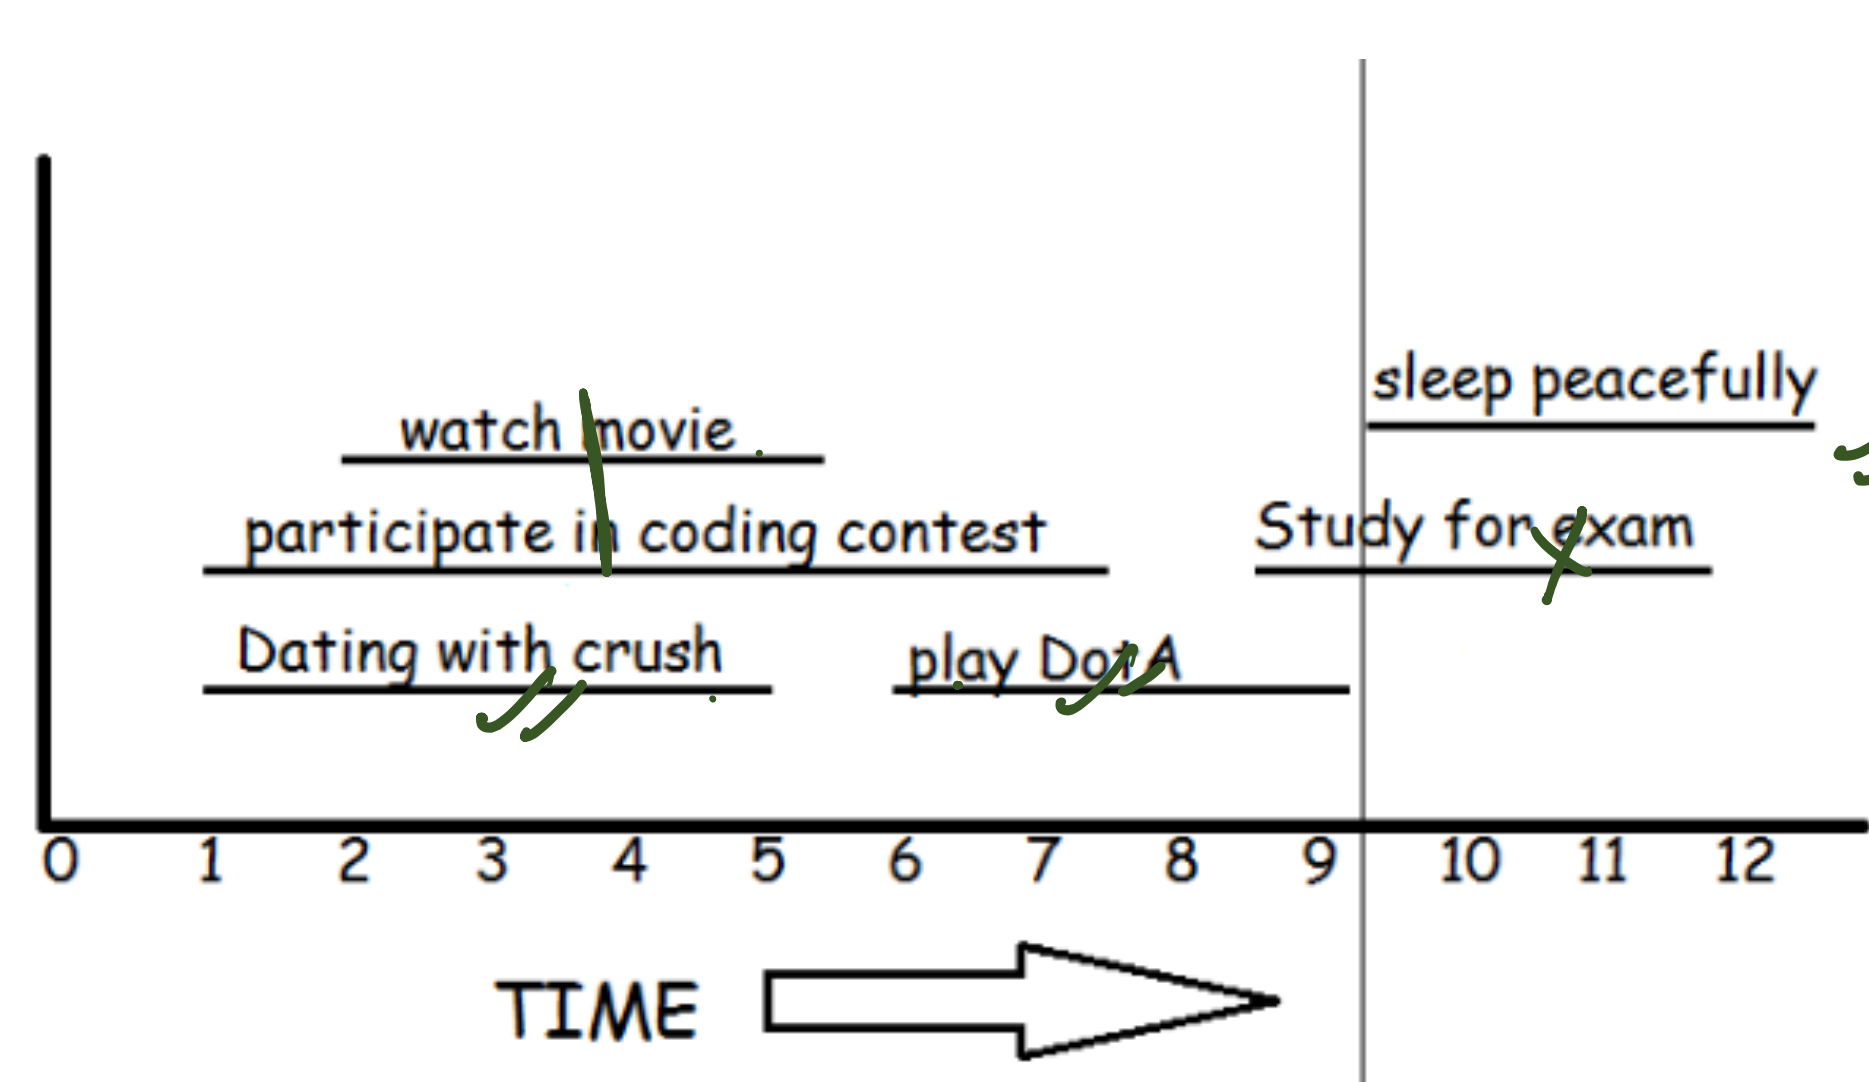


max $\rightarrow$ ②
②
③

C
Dating

plus Dot

sleep

6
7 9
0 10
4 5
8 9
4 10
5 7

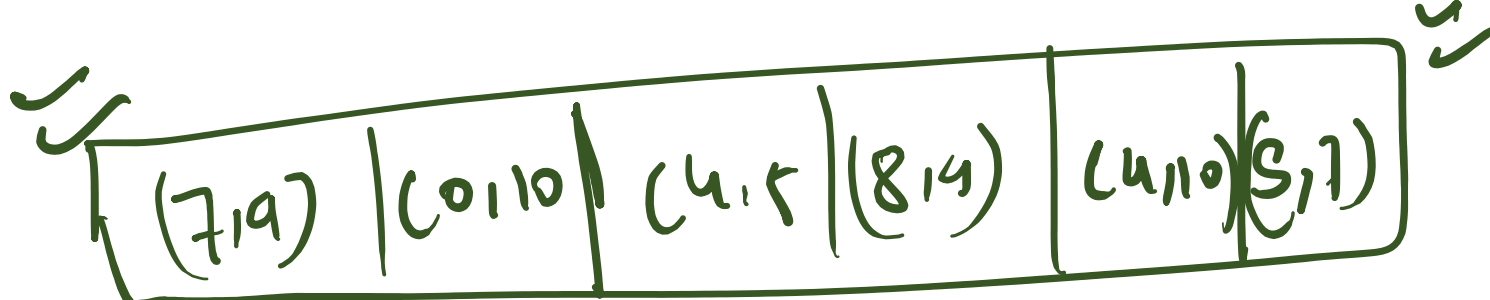

priority

u 5 →

5 7 =

7 9 =

= 8 9

→ u 10

→ 0 10

active = 1 2 3