

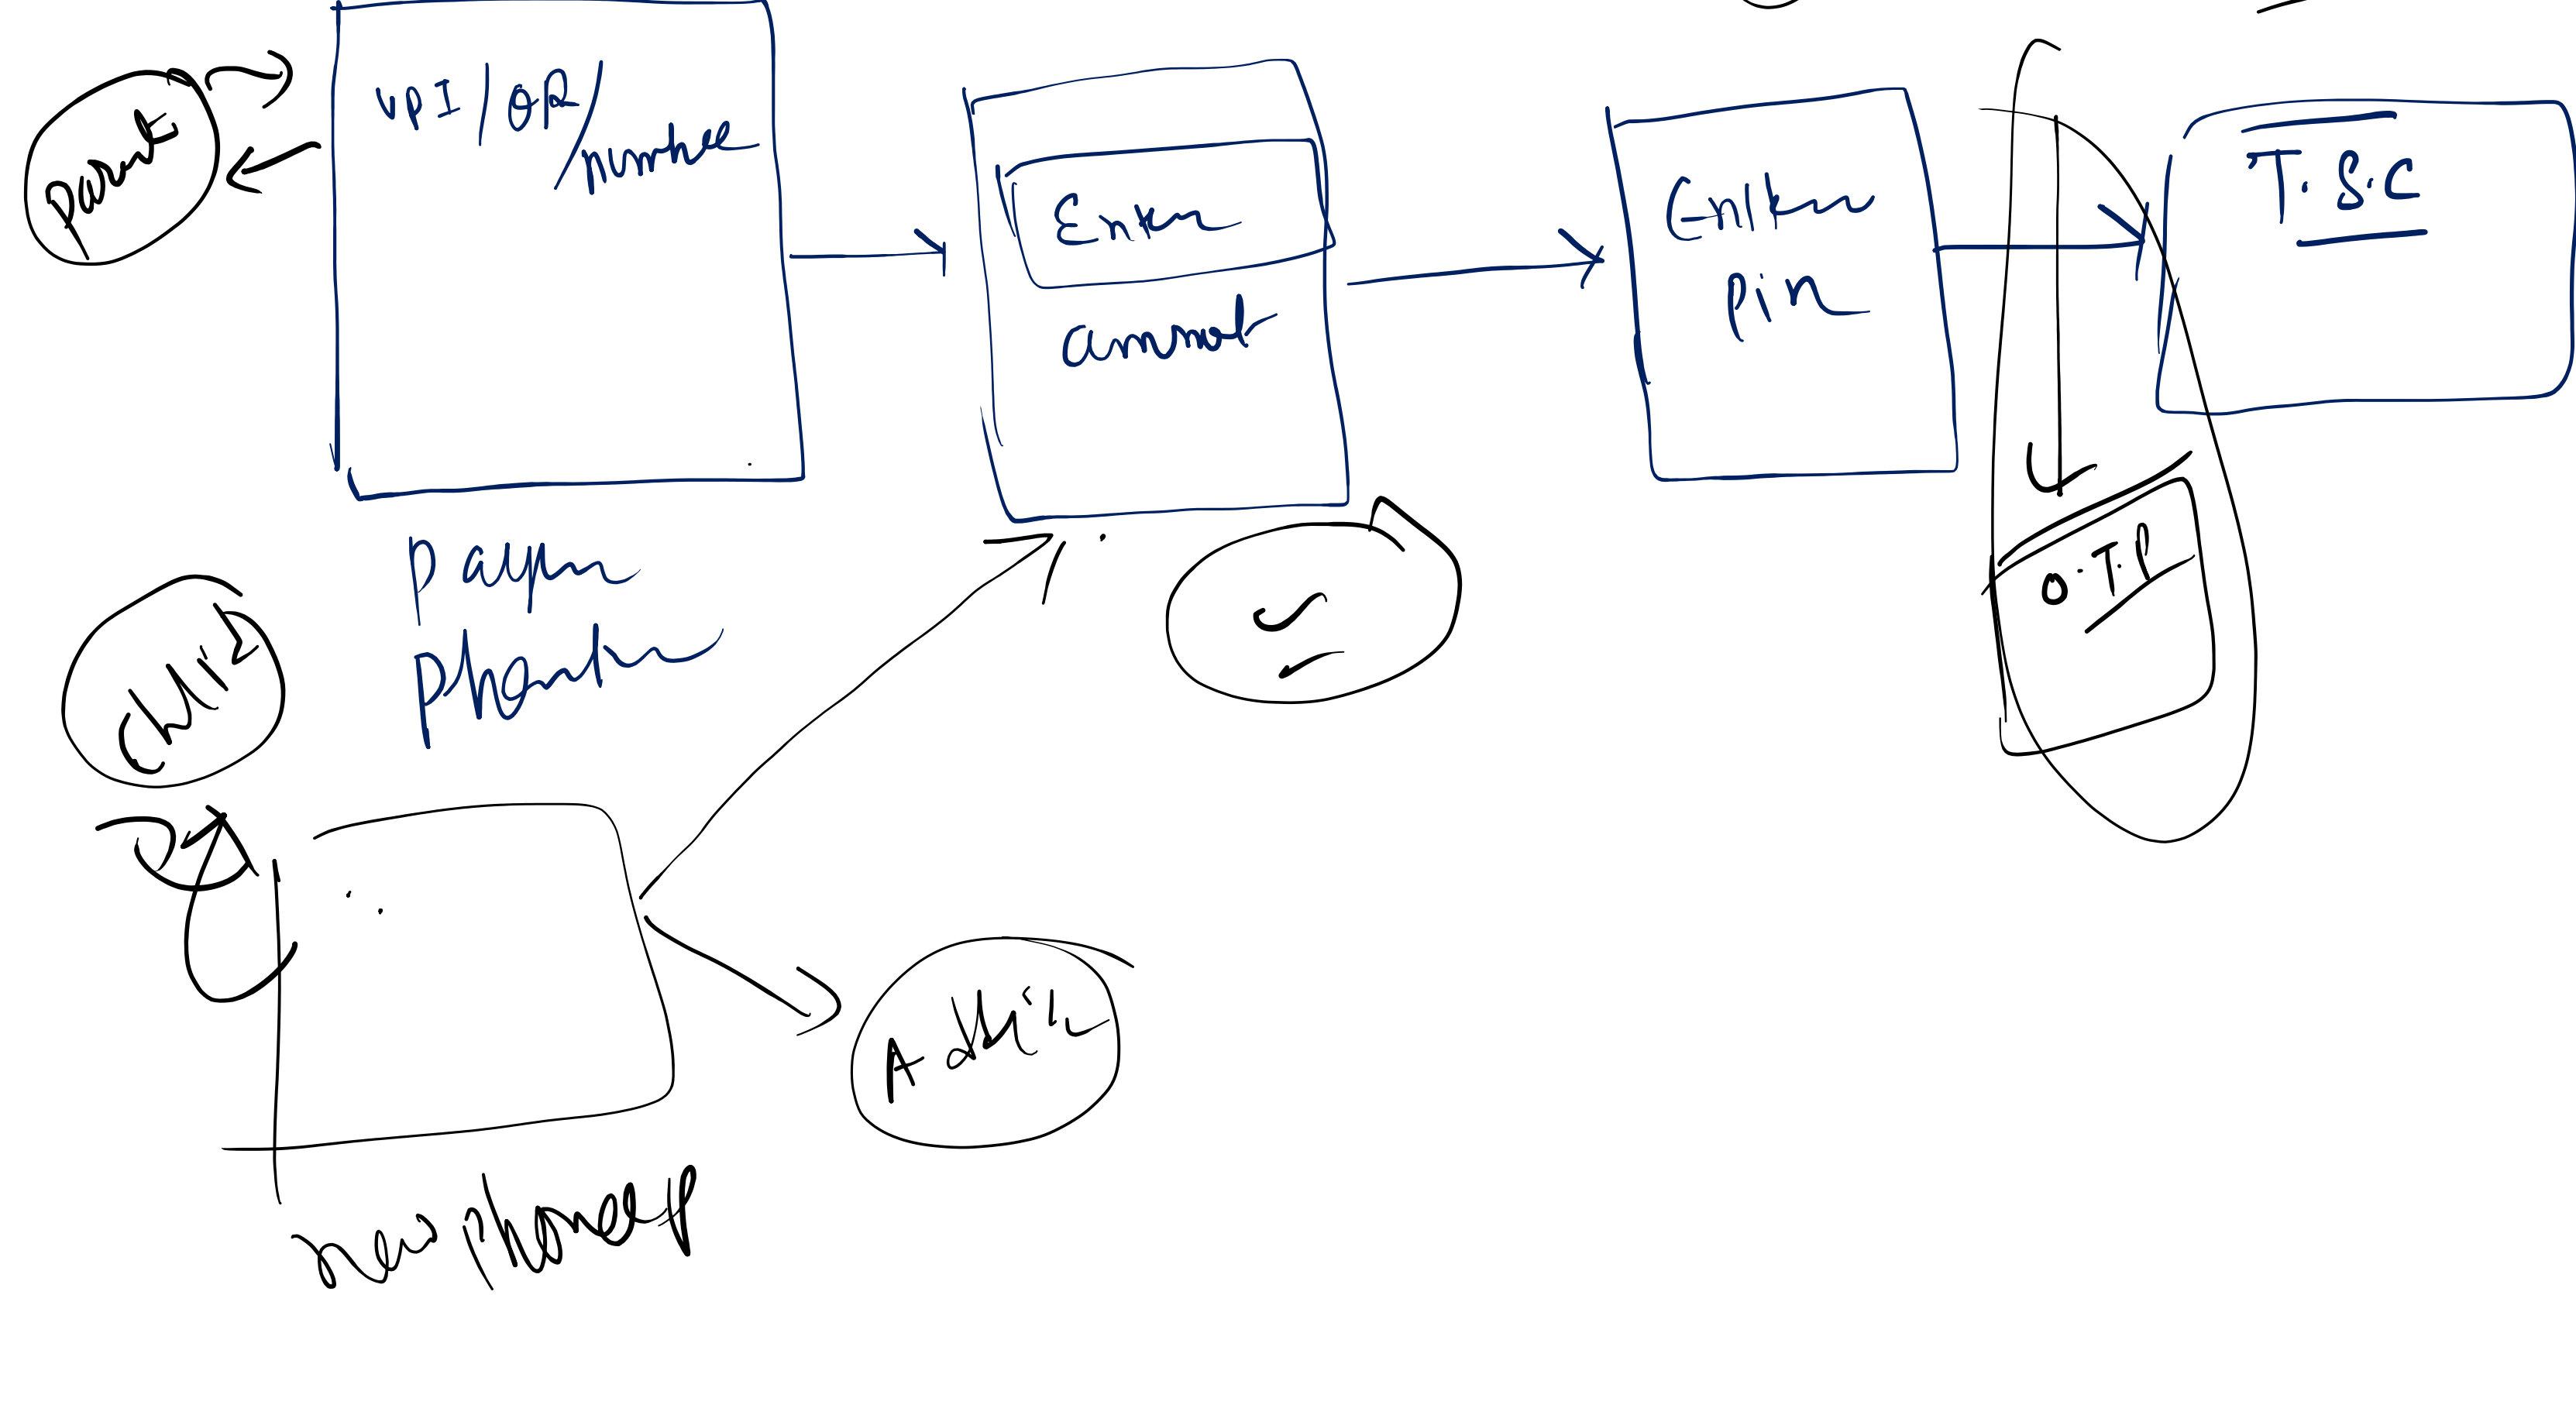


String s = "hello"
 ↗ ↘
 s.length() → 5

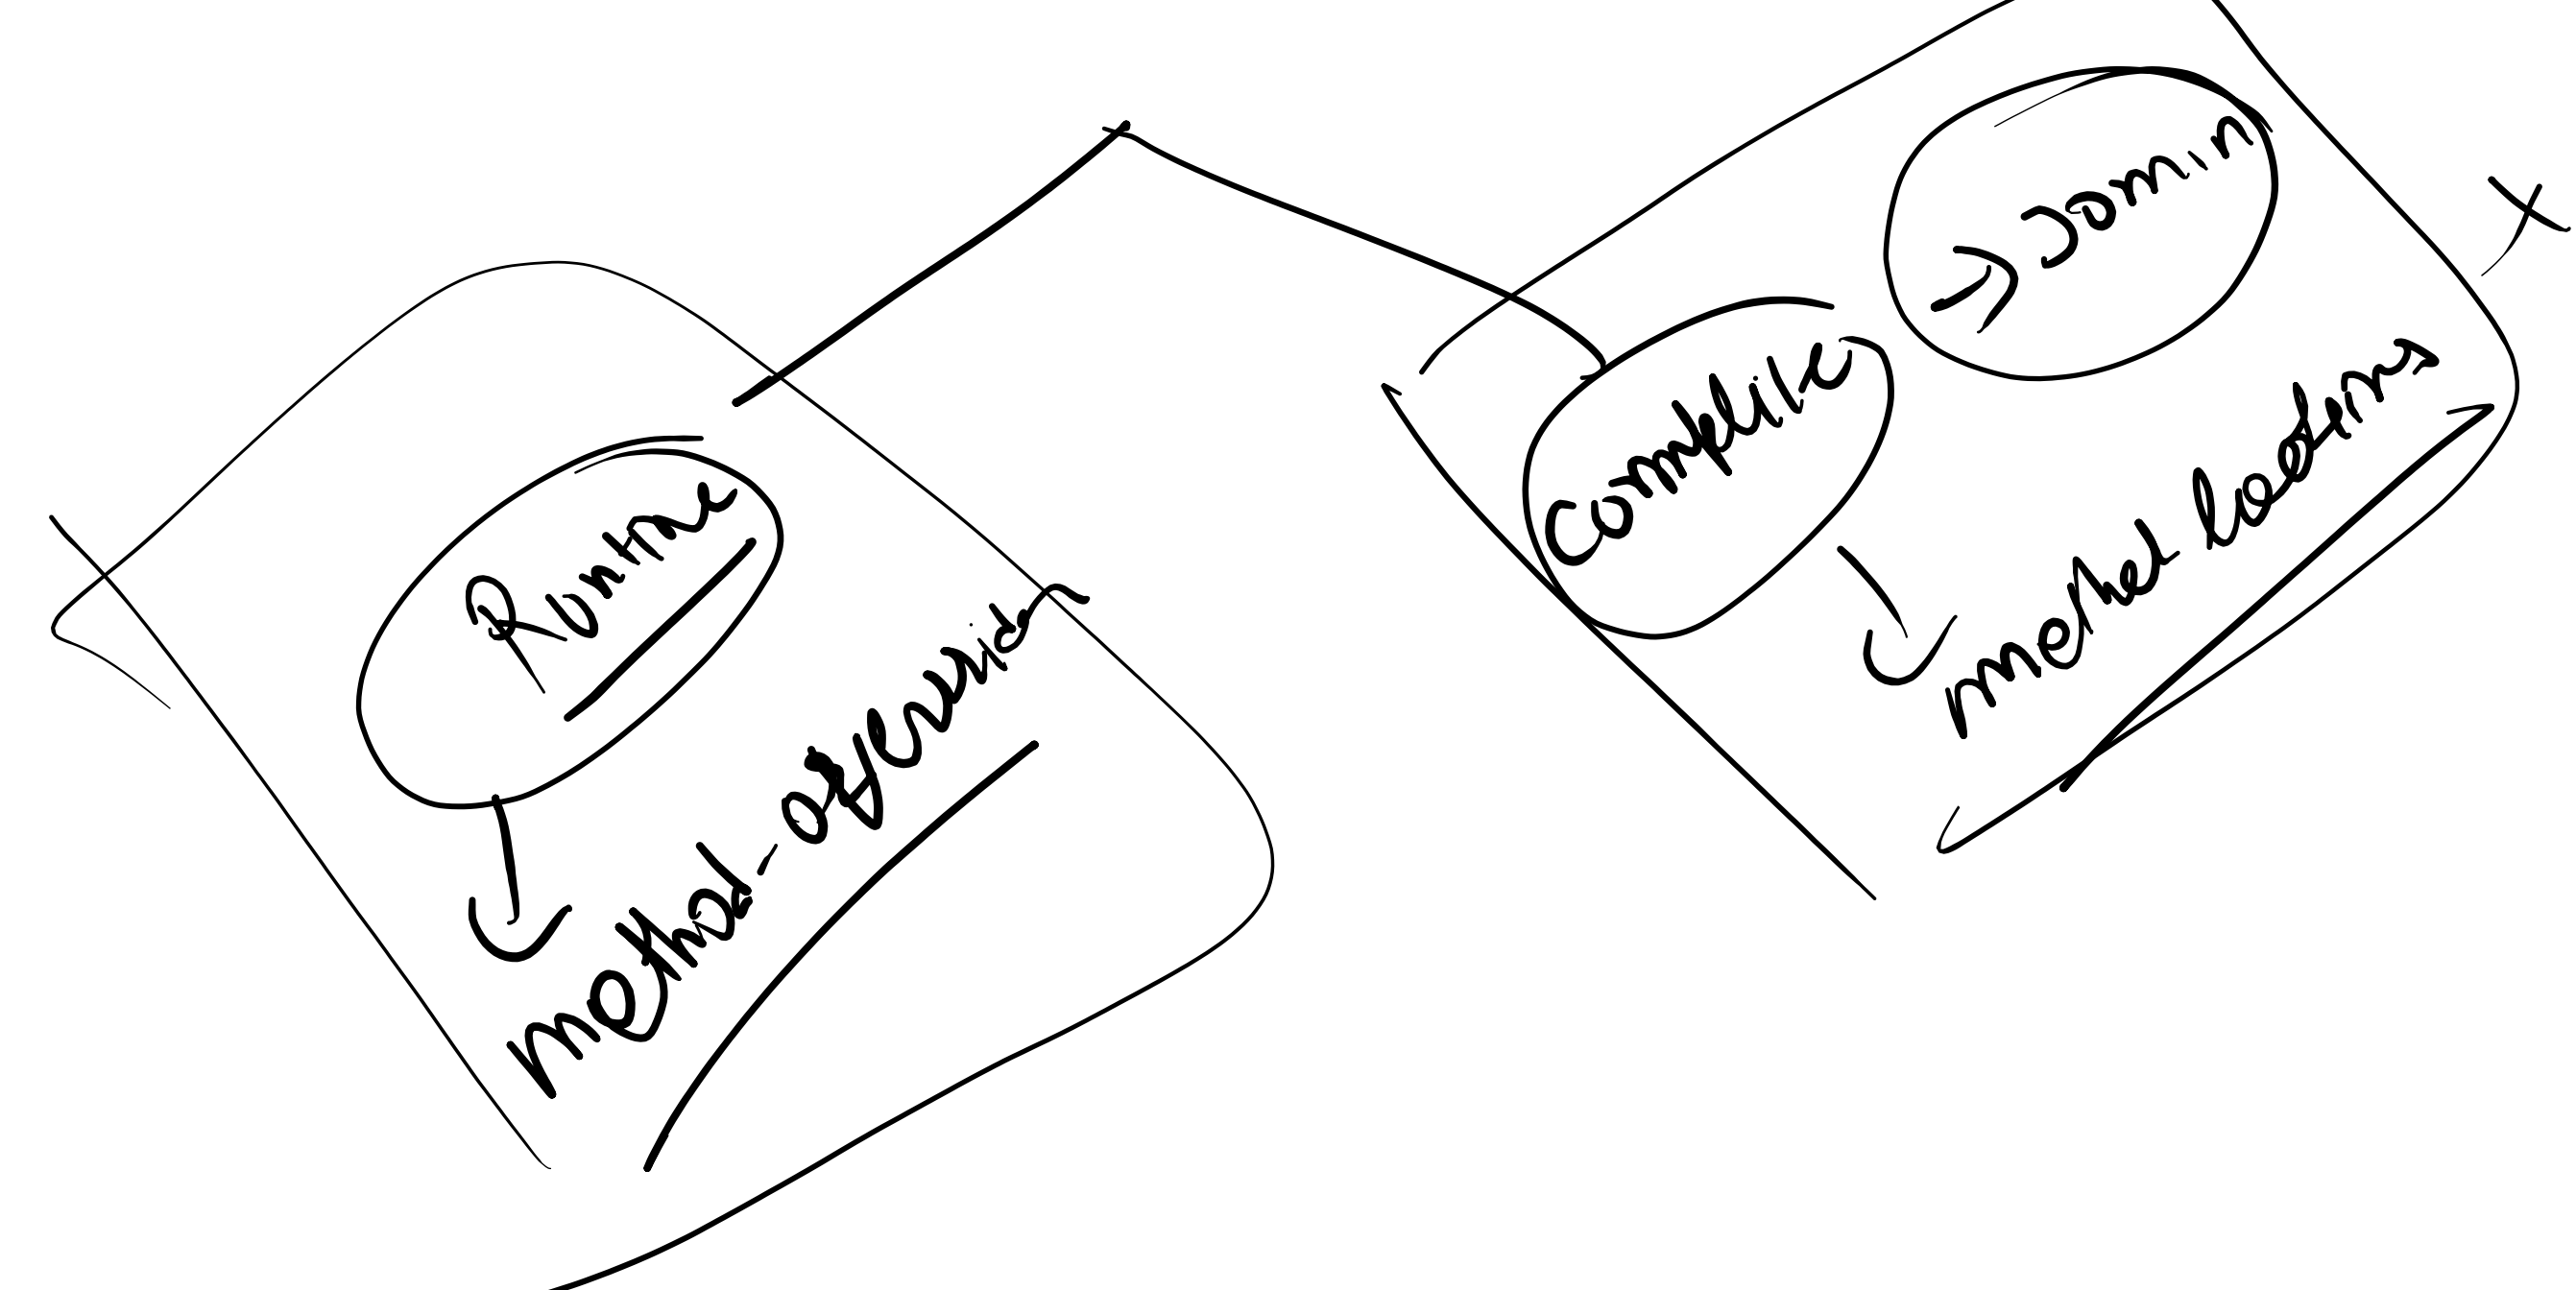


	className	val	new className()
i	P	obj	new P()
ii	P	obj	new C()
iii	C	obj	new P()
iv	C	obj	new C()



```
public class Client {
    public static void main(String[] args) {
        // TODO Auto-generated method stub
        // Case-1
        P obj = new P();
        System.out.println(obj.d);
        System.out.println(obj.d1);
        obj.fun();
        obj.fun1();
        // Case-2
        P obj = new C();
        System.out.println(obj.d);
        System.out.println(obj.d1);
        System.out.println(obj.d2);
    }
}
```

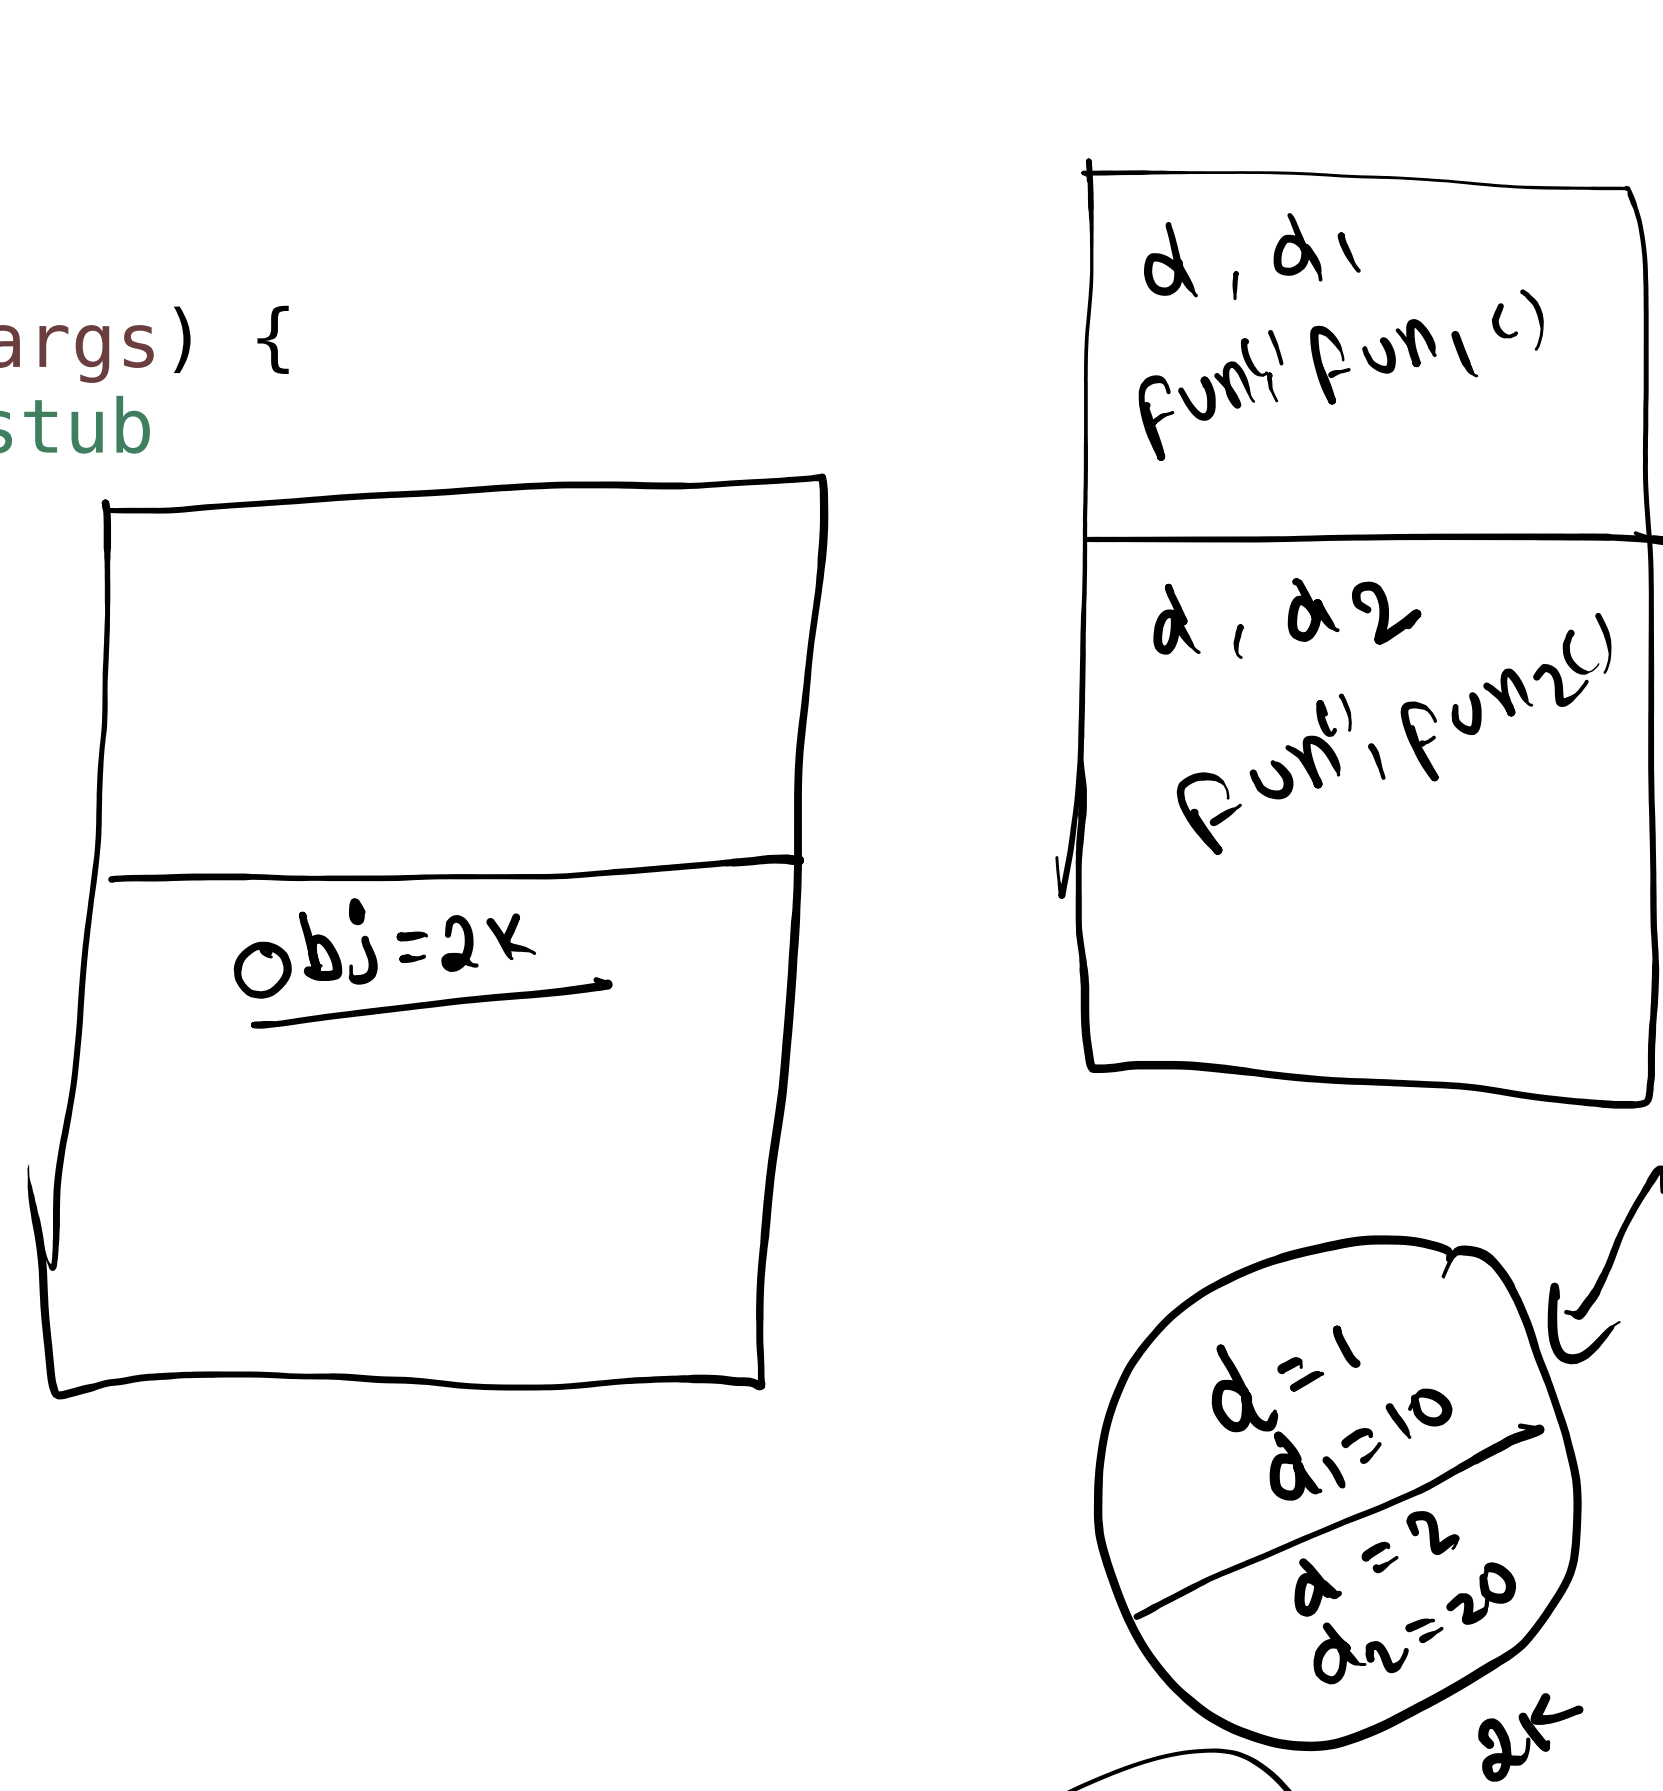

```
public static void main(String[] args) {
    // TODO Auto-generated method stub
    // Case-1
    P obj = new P();
    System.out.println(obj.d);
    System.out.println(obj.d1);
    obj.fun();
    obj.fun1();
    // Case-2
    P obj = new C();
    System.out.println(obj.d);
    System.out.println(obj.d1); // 10
    System.out.println(((C) obj).d2);
    System.out.println(((C) obj).d);
    obj.fun(); // P
    obj.fun1(); // P
    ((C) obj).fun2(); // C
}
```

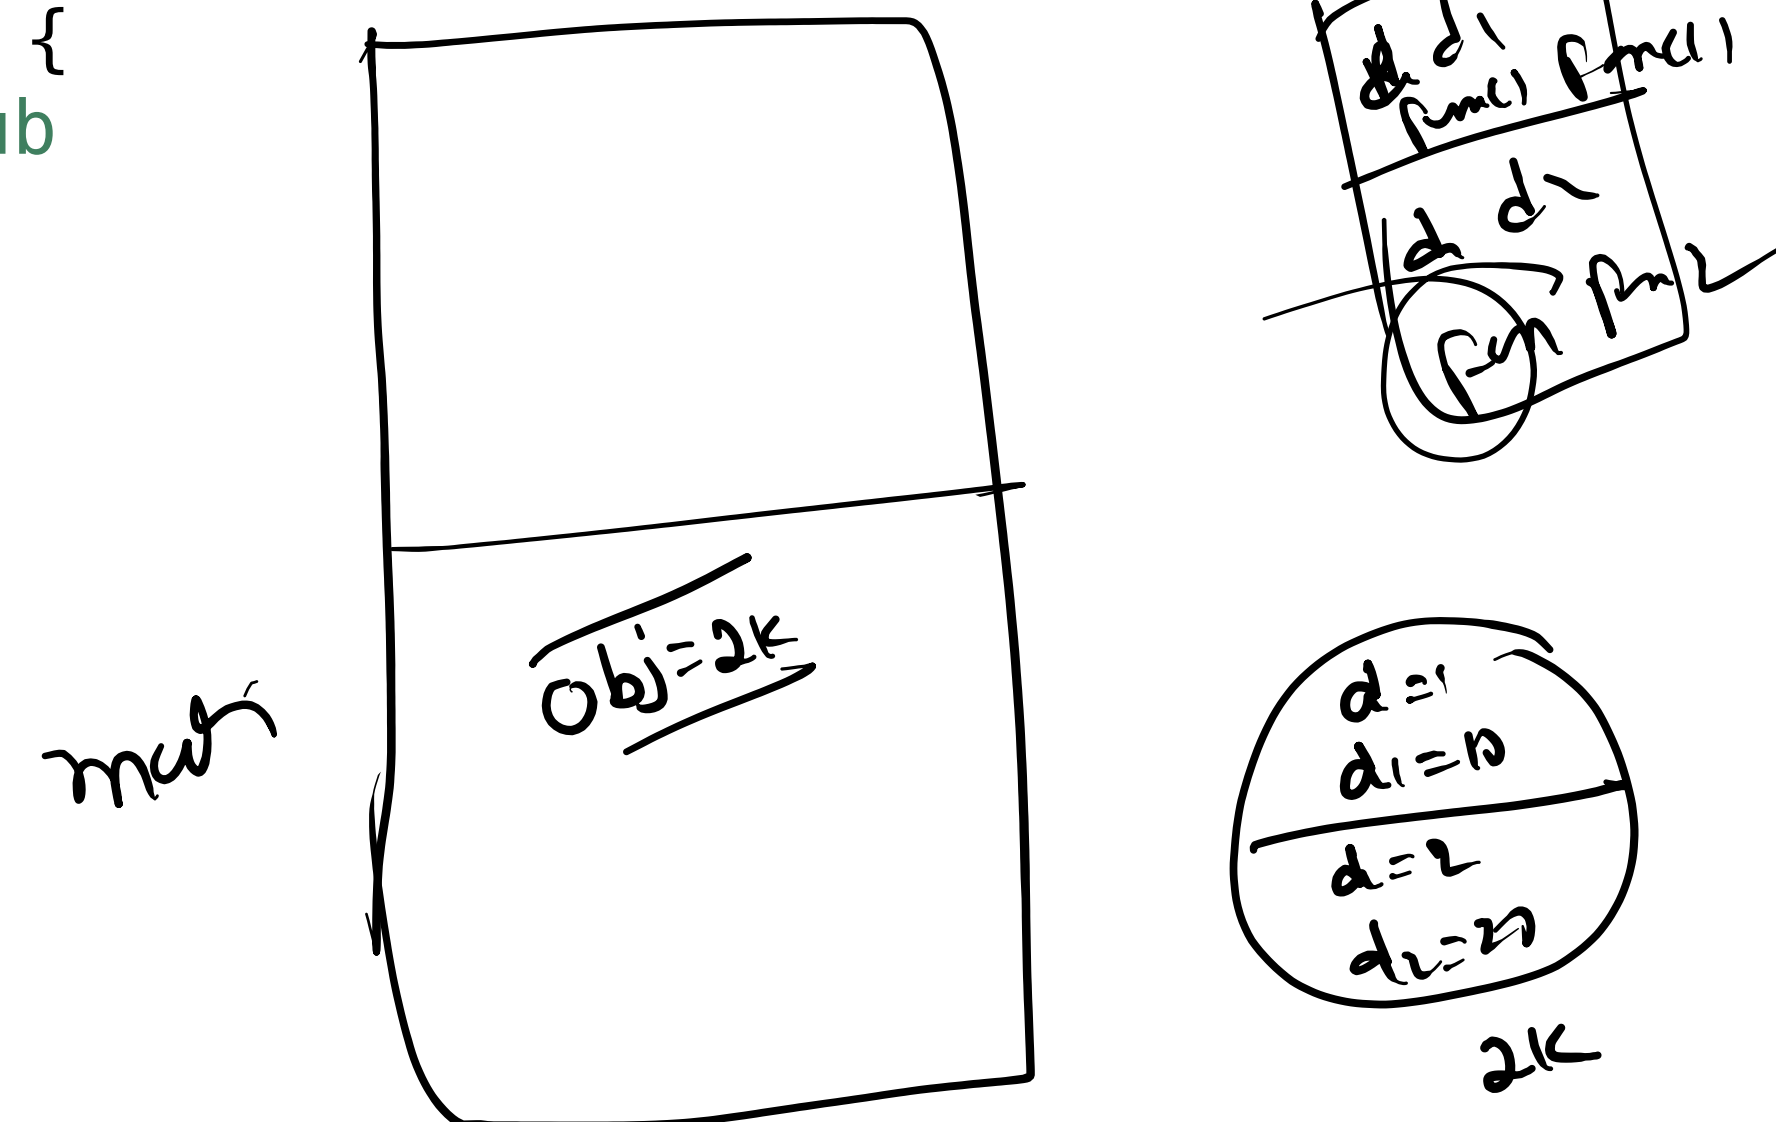


```
C obj = new P();
System.out.println(obj.d);
System.out.println(obj.d1);
System.out.println(obj.d2);
```

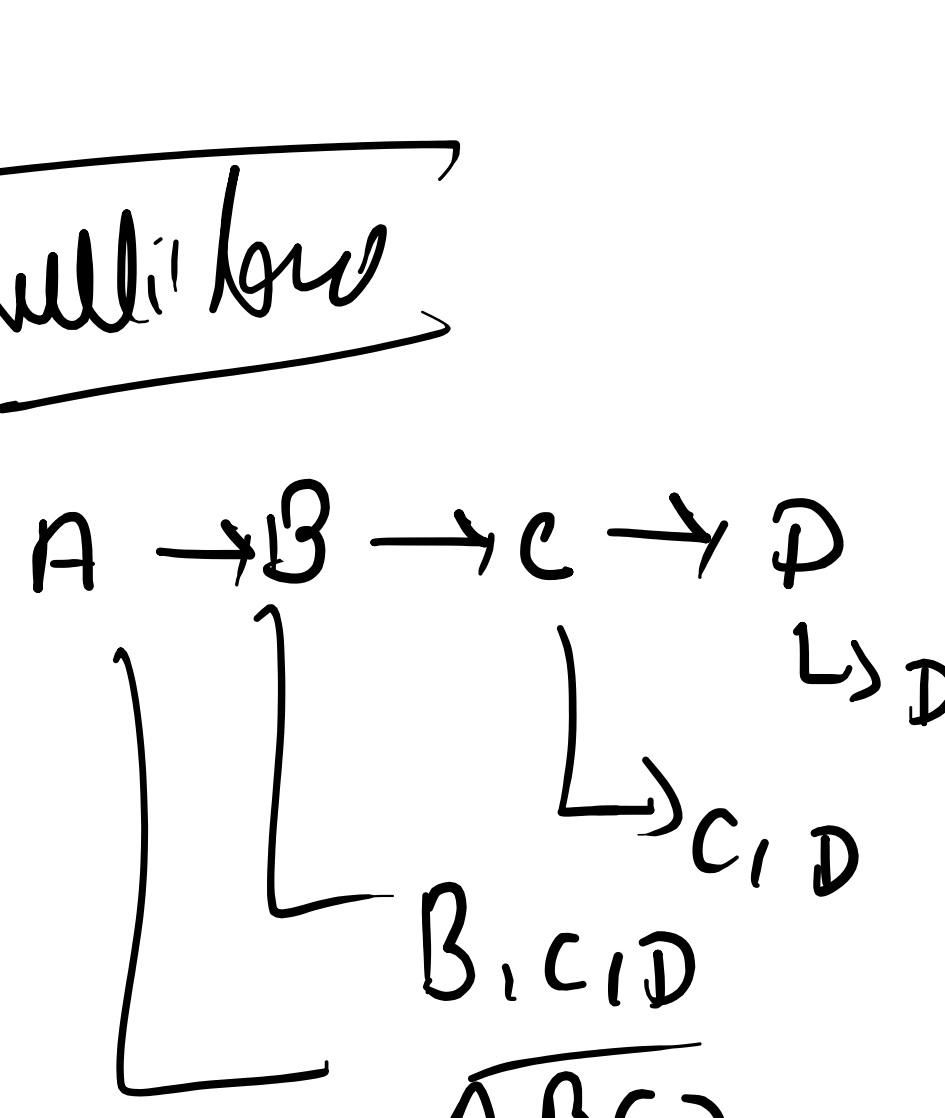
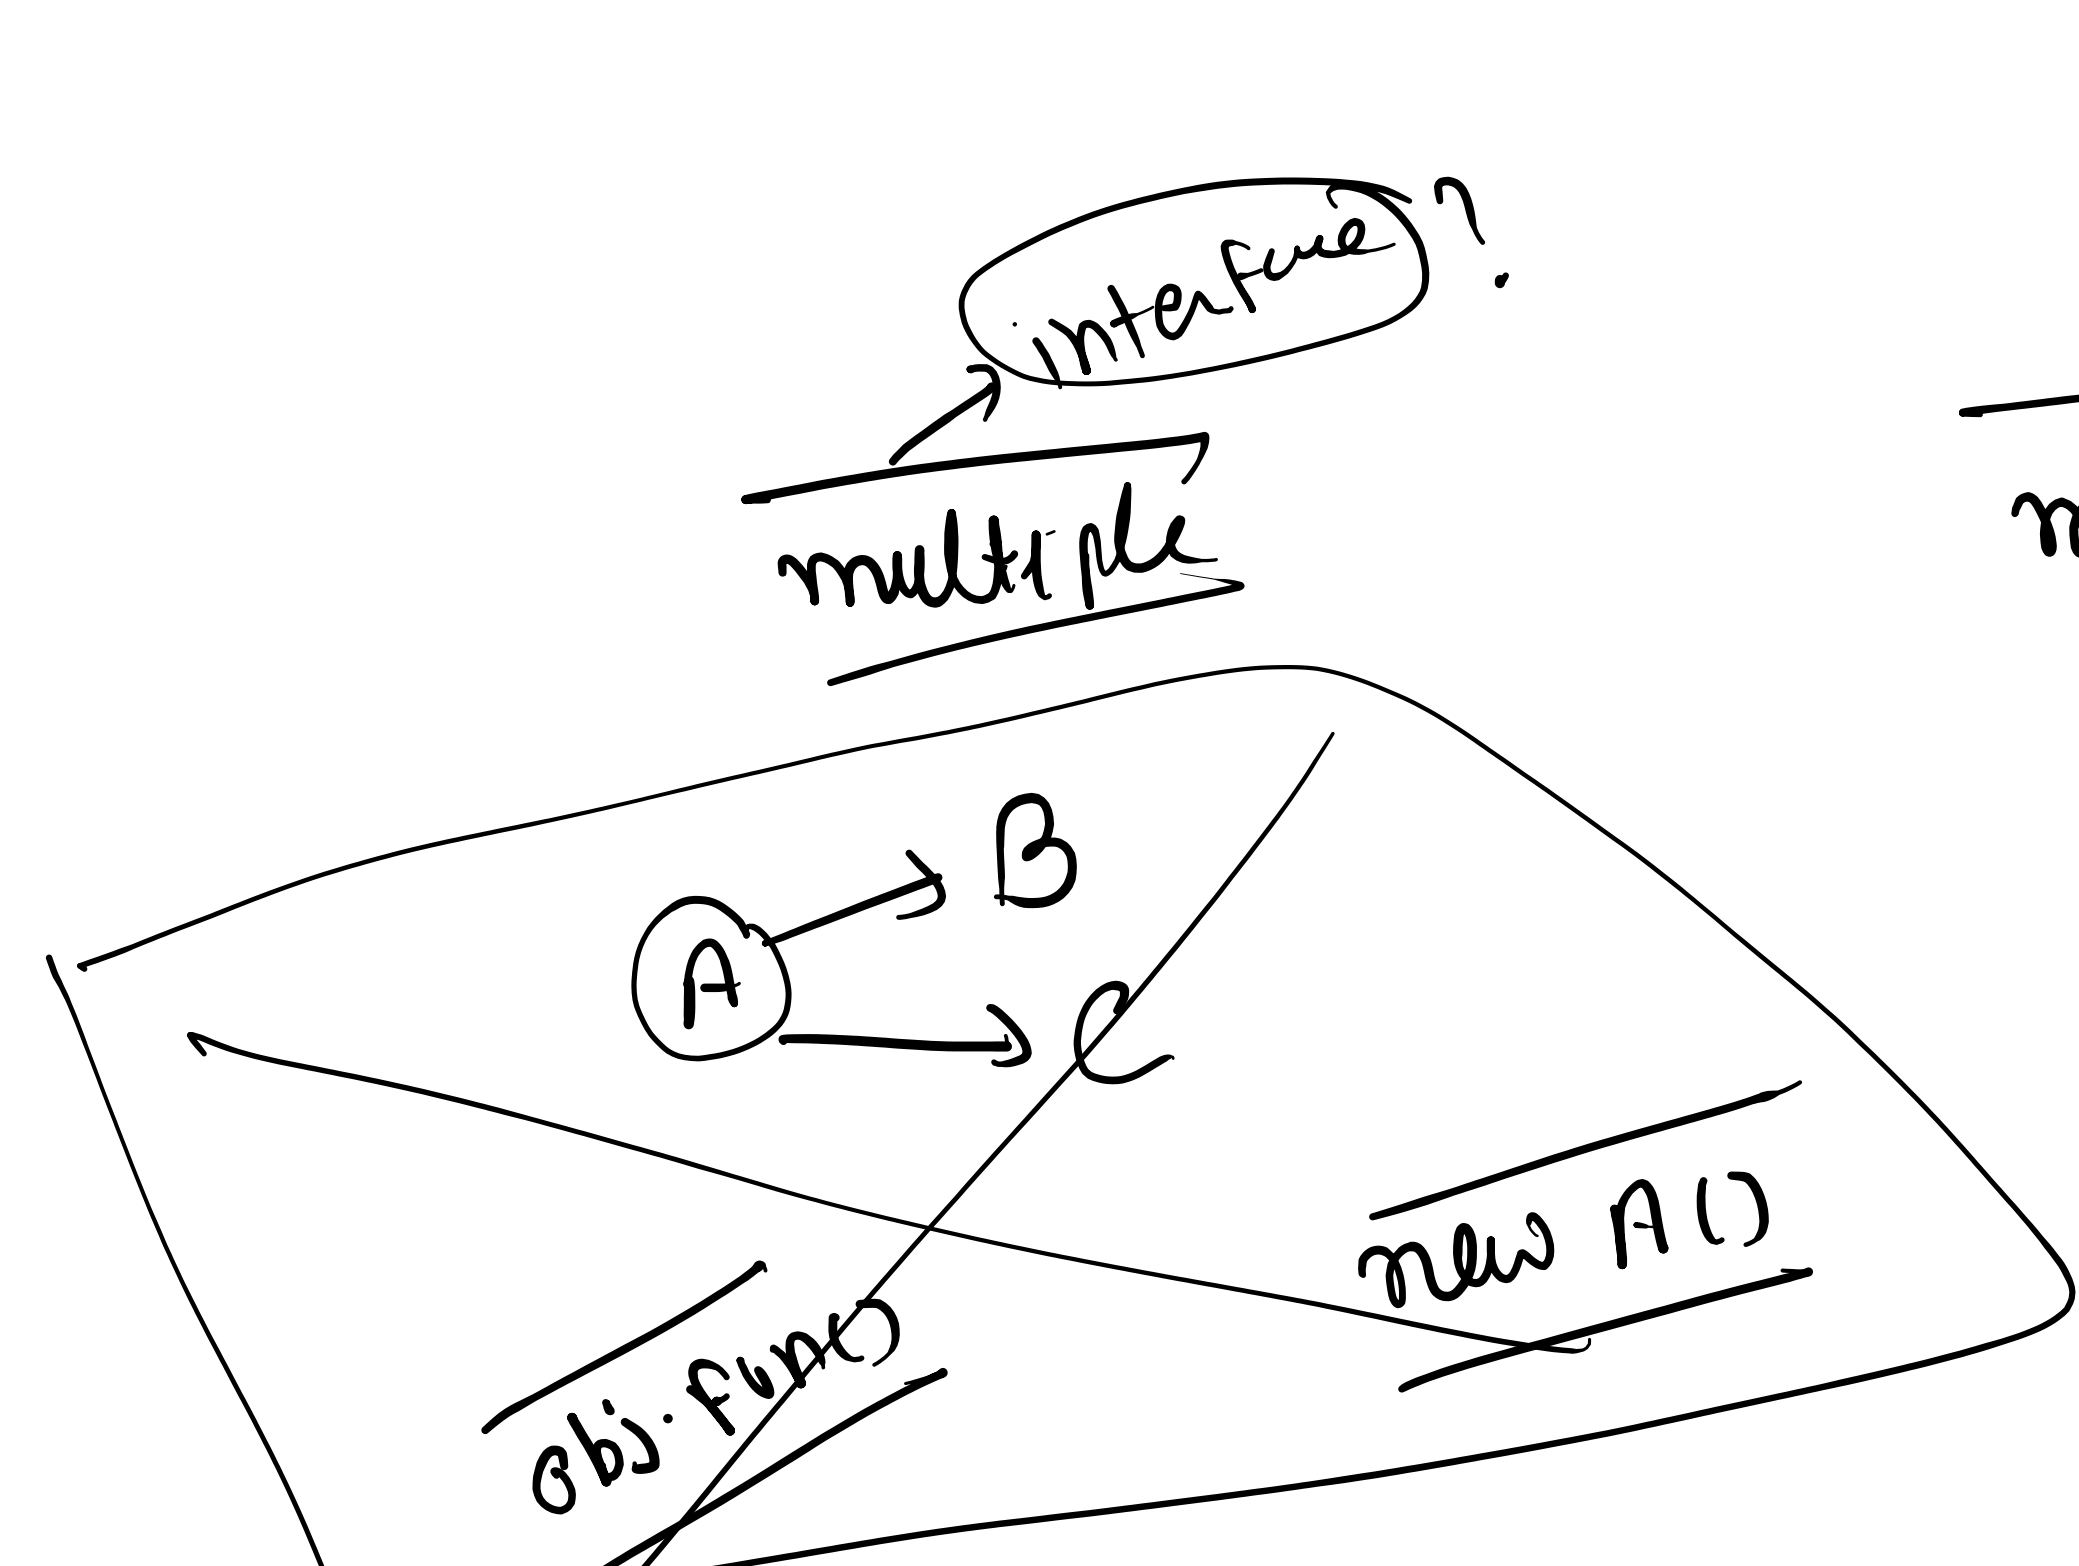


```
public class DynamicStack extends Stack {
    @Override
    public void push(int x) {
    }
}



public class DynamicStack_Client {
    public static void main(String[] args) {
        // TODO Auto-generated method stub
        DynamicStack st = new DynamicStack();
    }
}
```

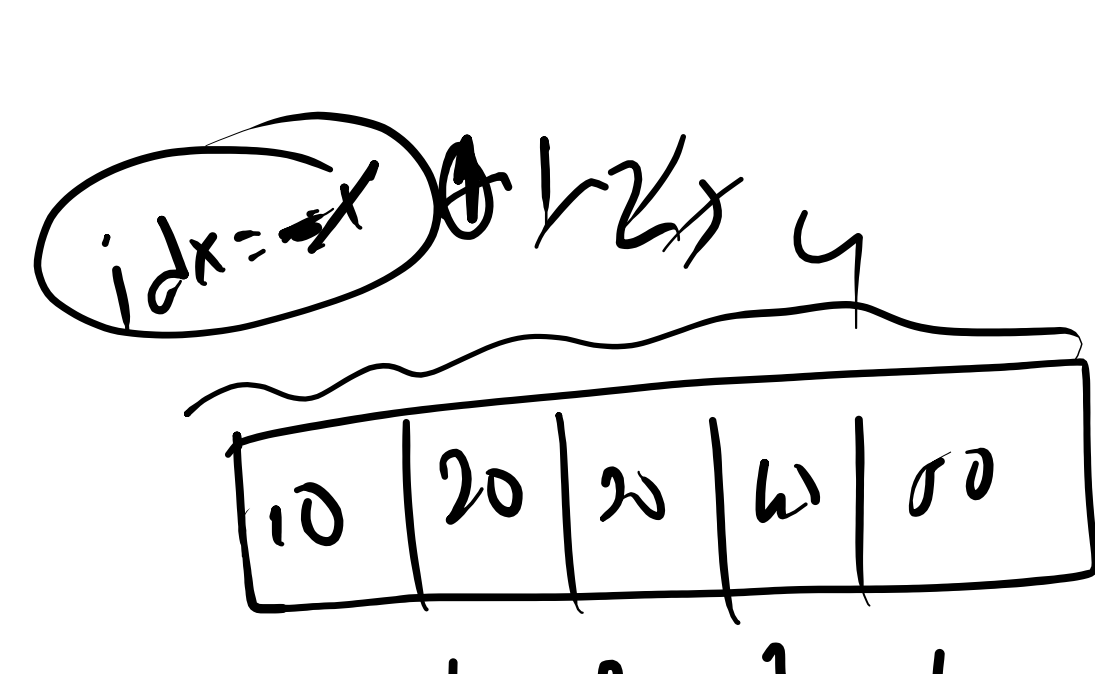

st.push(10)
 st.push(20)
 st.push(30)
 st.push(40)
 st.push(50)

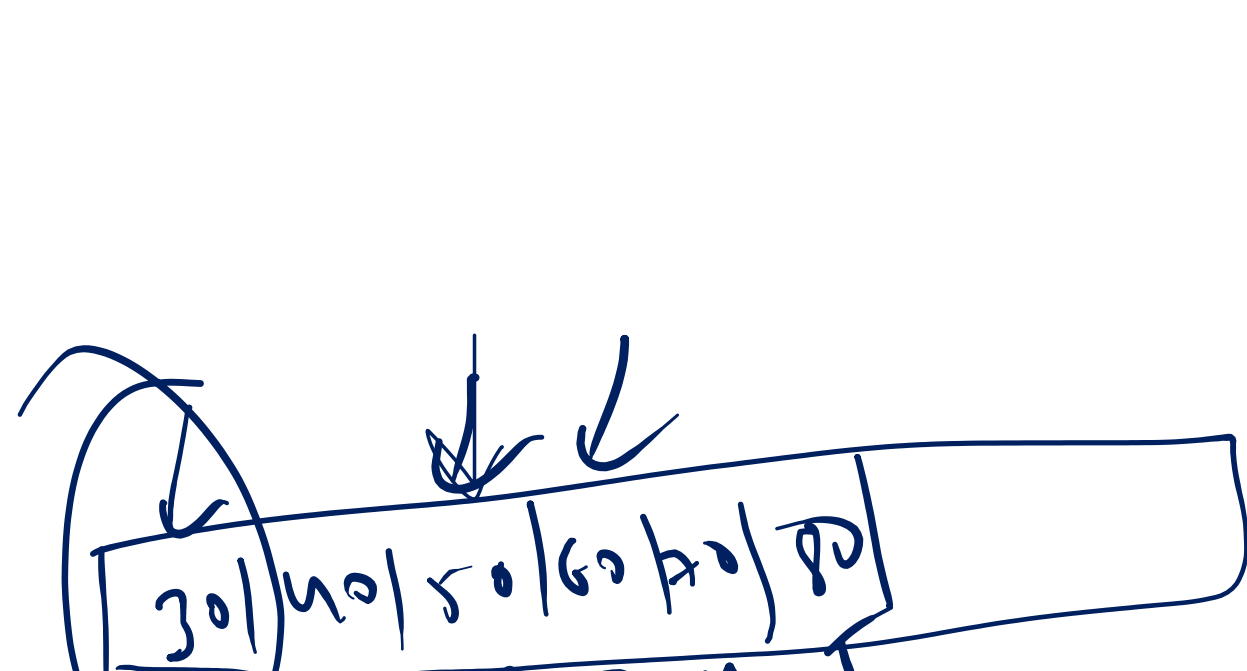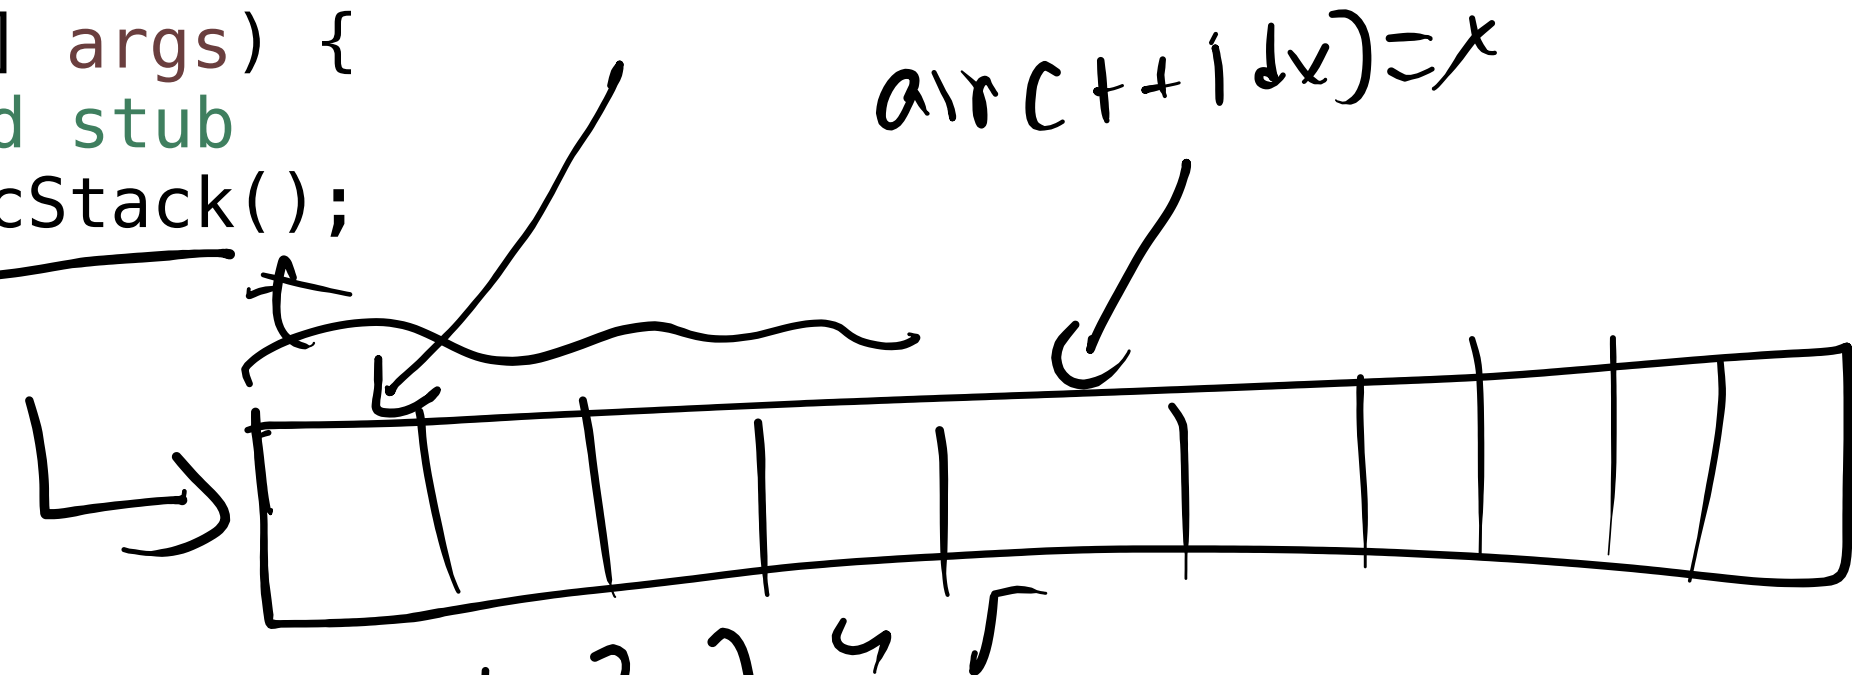

For C: i = arr.length
 idx = (i-1) % arr.length
 newarr[i] = arr[idx]

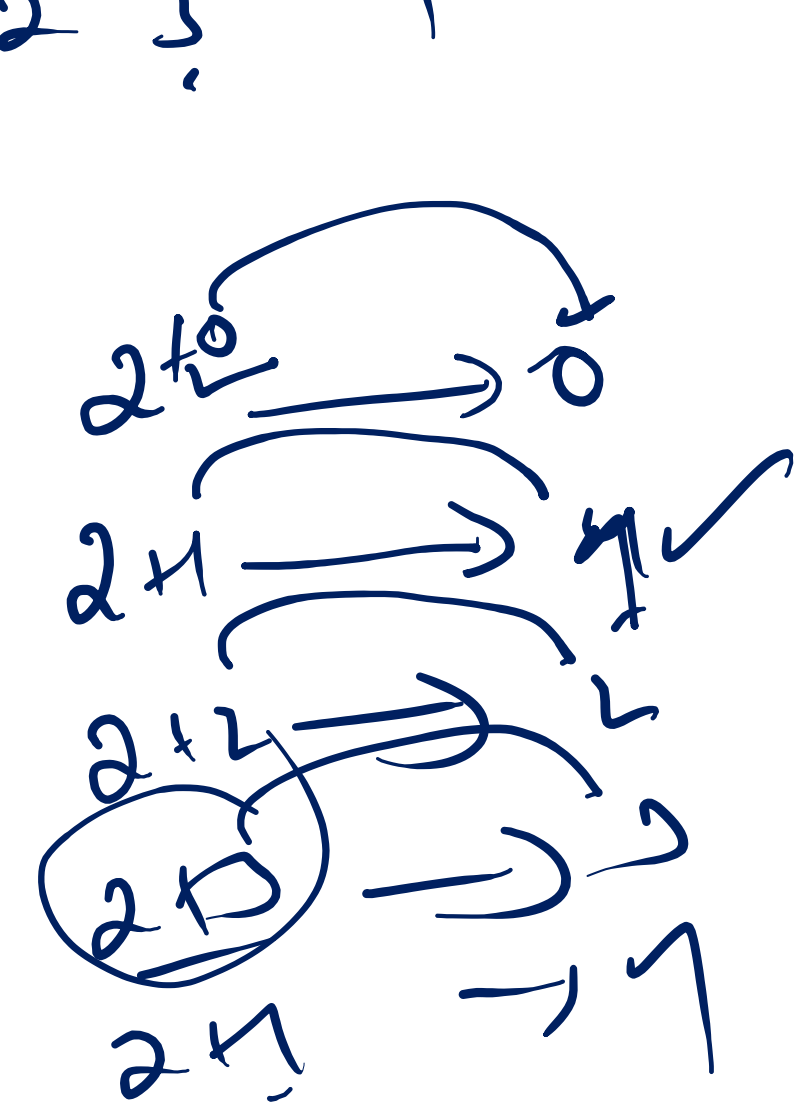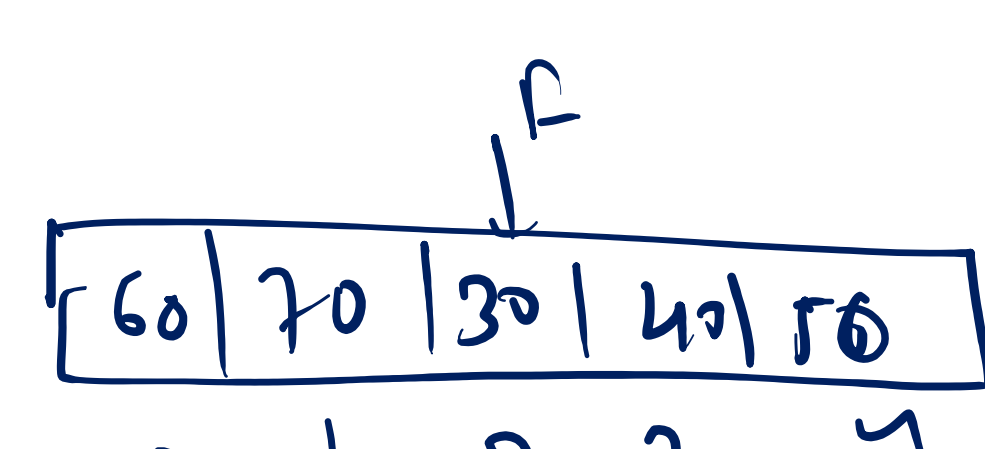

arr[i] = 1 || arr[i] = 0

	0	1	2	3
0	0	1	1	1
1	1	0	1	1
2	0	0	0	0
3	1	1	1	0

0/2=0
 1/2=0
 2/2=0



a=3
 b=2

a=2, b=0
 a=2, b=1

ops = ["5", "-2", "4", "C", "D", "9", "+", "+"]

