Lec-36

28/03/26 12:45 PM

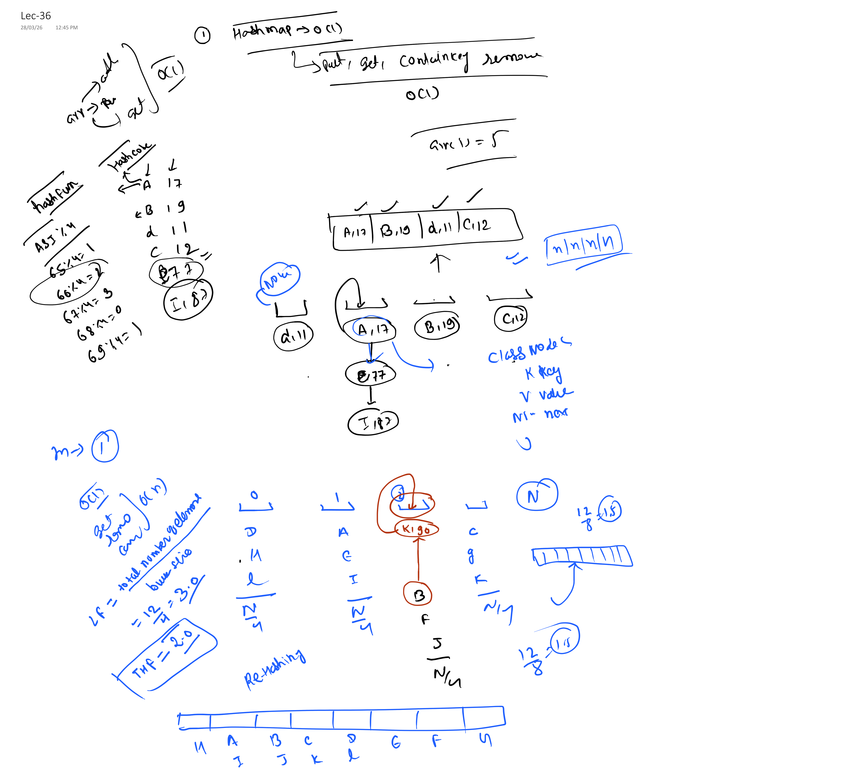

```
public void put(K key, V value) {
        int idx = hashfun(key);
        Node head = arr.get(idx);
        while (head != null) {
            if (head.key.equals(key)) {
                head.value = value;
                return;
            }
            head = head.next;
        }
        Node nn = new Node();
        nn.key = key;
        nn.value = value;
        head = arr.get(idx);
        nn.next = head;
        size++;
        arr.set(idx, nn);// new head

    }
```

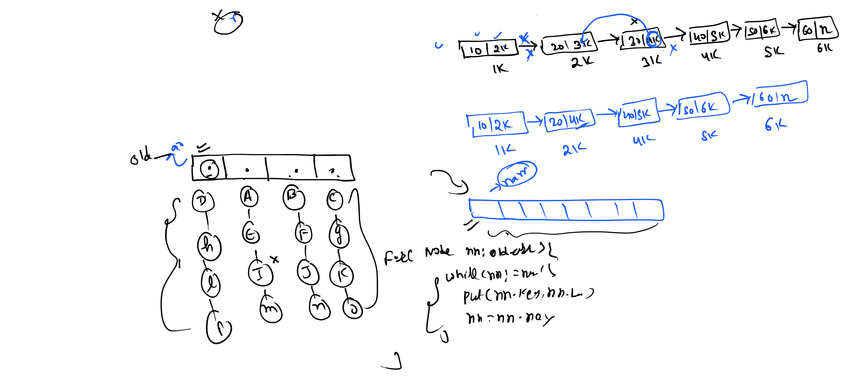

Given an array of strings `strs`, group the anagrams together. You can return the answer in **any order**.

Example 1:

Input: strs = `["eat","tea","tan","ate","nat","bat"]`

Output: `[["bat"],["nat","tan"],["ate","eat","tea"]]`

Explanation:

- There is no string in strs that can be rearranged to form `"bat"`.
- The strings `"nat"` and `"tan"` are anagrams as they can be rearranged to form each other.
- The strings `"ate"`, `"eat"`, and `"tea"` are anagrams as they can be rearranged to form each other.

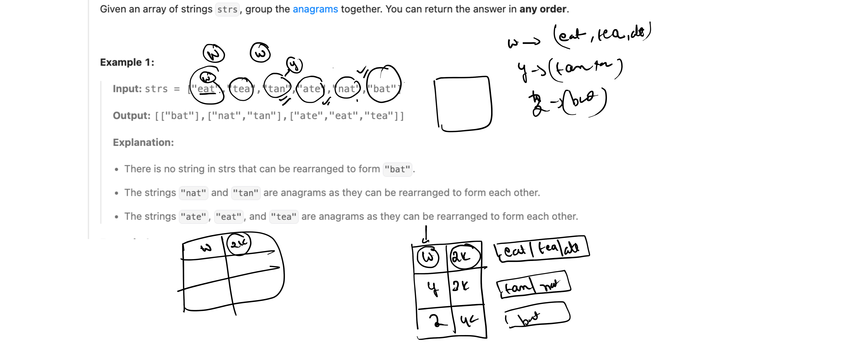

```
public static List<List<String>> Anagrams(String[] strs) {
        HashMap<String, List<String>> map = new HashMap<>();

        for (int i = 0; i < strs.length; i++) {
            String key = Key_Anagrams(strs[i]);
            if(!map.containsKey(key)) {
                map.put(key, new ArrayList<>());
            }
            map.get(key).add(strs[i]);

        }
    }
```

Example 1:

Input: strs = `["eat","tea","tan","ate","nat","bat"]`
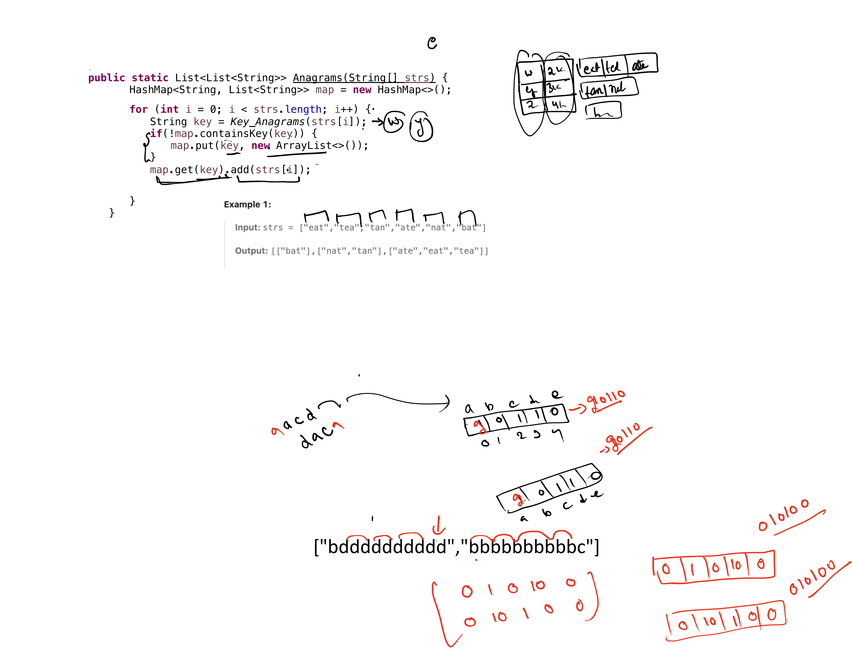
Output: `[["bat"],["nat","tan"],["ate","eat","tea"]]`