


SELECT name, release_date FROM Games;

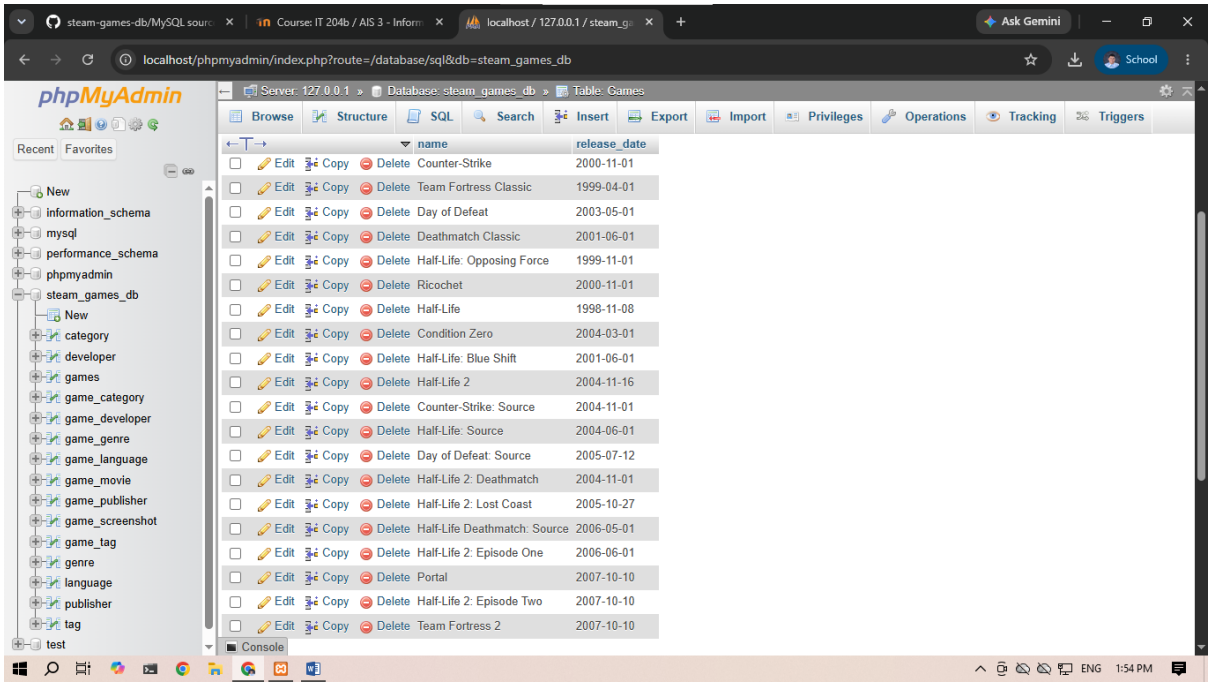


SELECT appID, peak_ccu FROM Games;

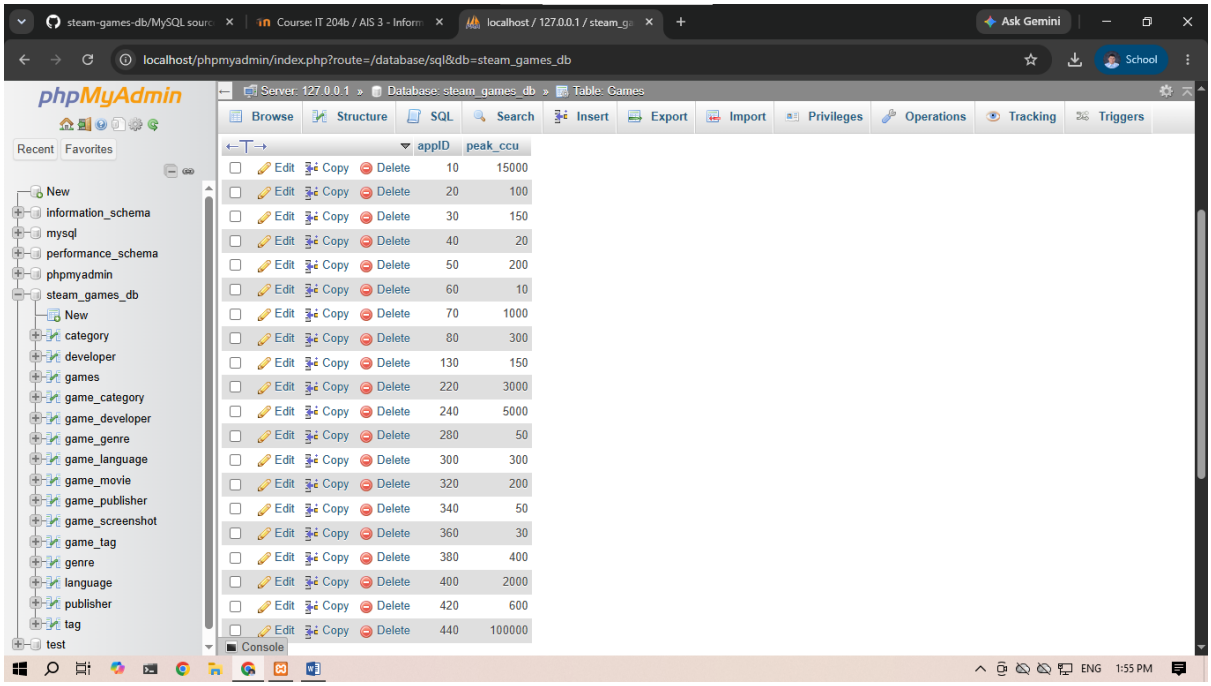


SELECT * FROM Games;

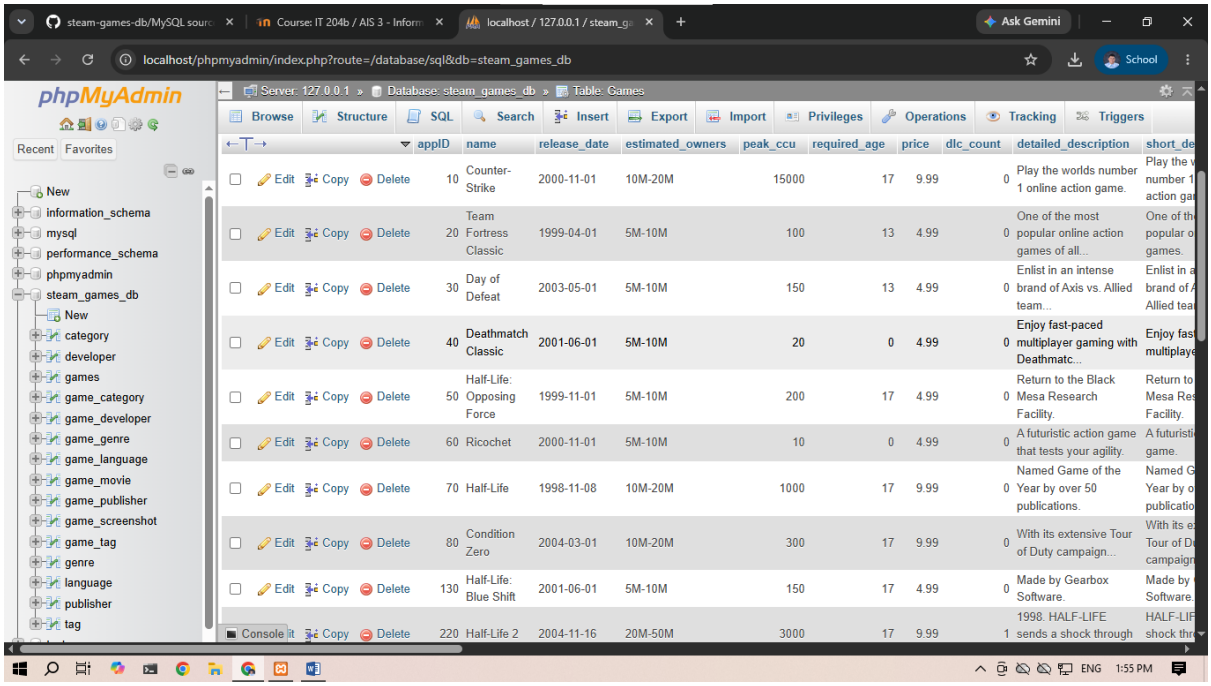


SELECT * FROM Developer;

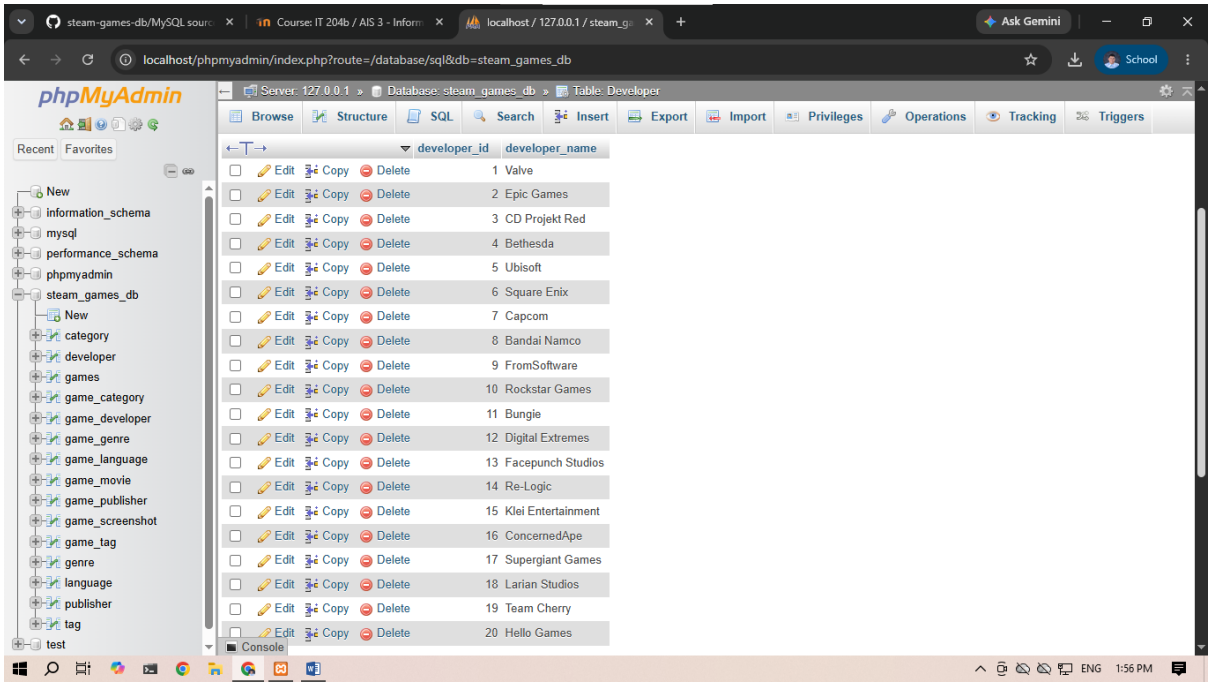


SELECT CONCAT(name, ' (ID: ', appID, ')') AS Game_Title FROM Games;

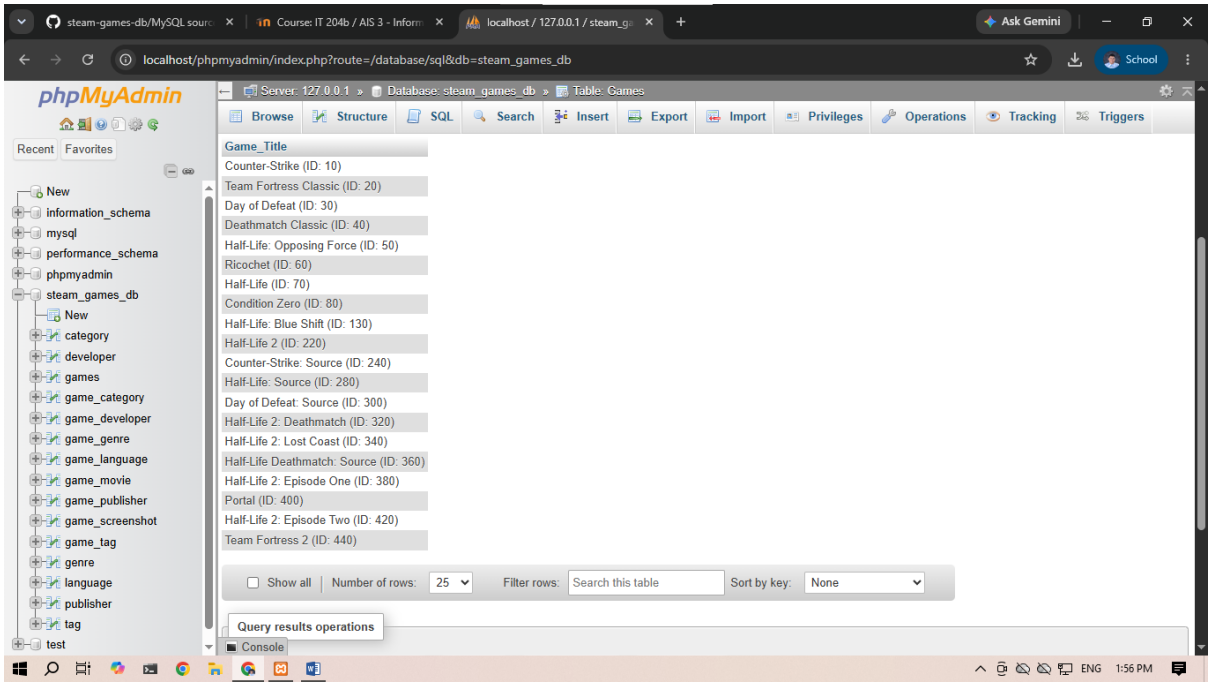


SELECT average_playtime_forever AS Total_Playtime FROM Games;

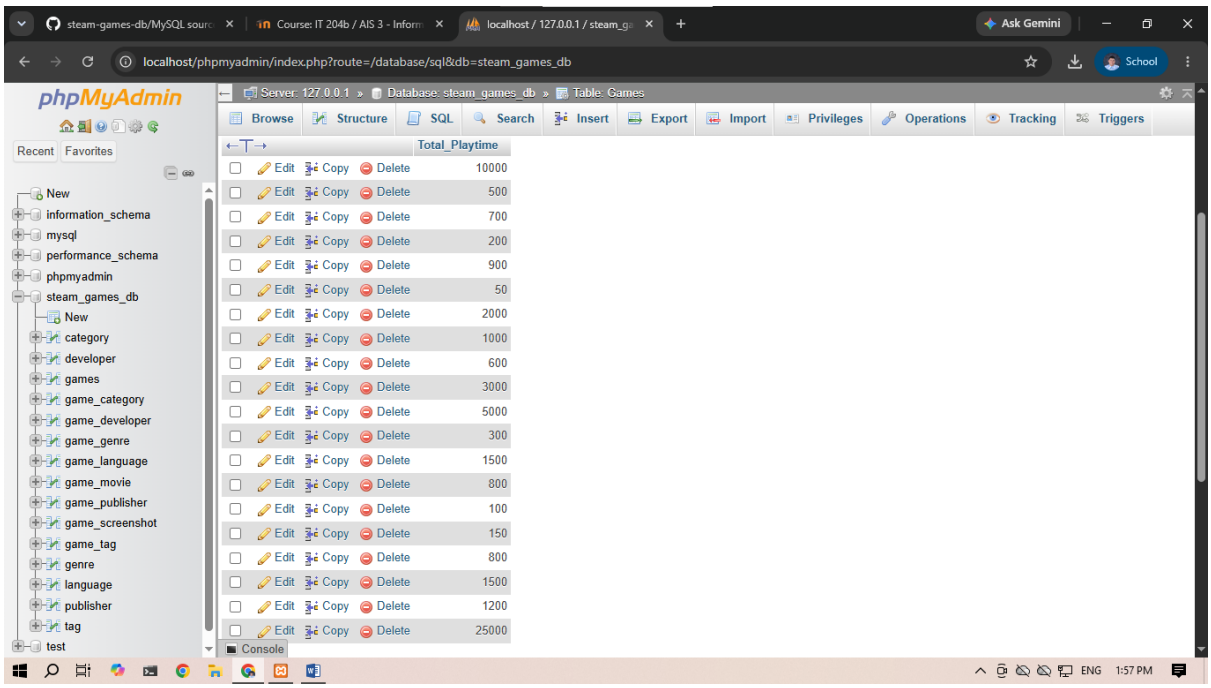


SELECT name FROM Games WHERE name LIKE 'Half-Life%';

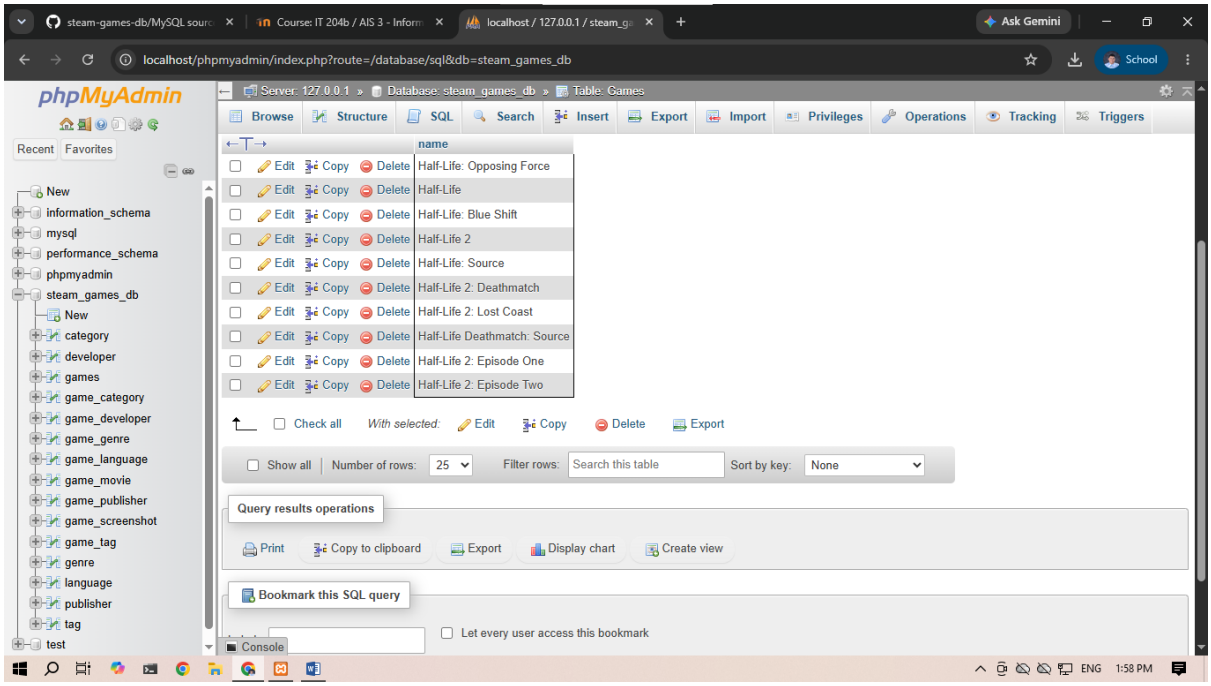


SELECT publisher_name FROM Publisher WHERE publisher_name LIKE '%Interactive';

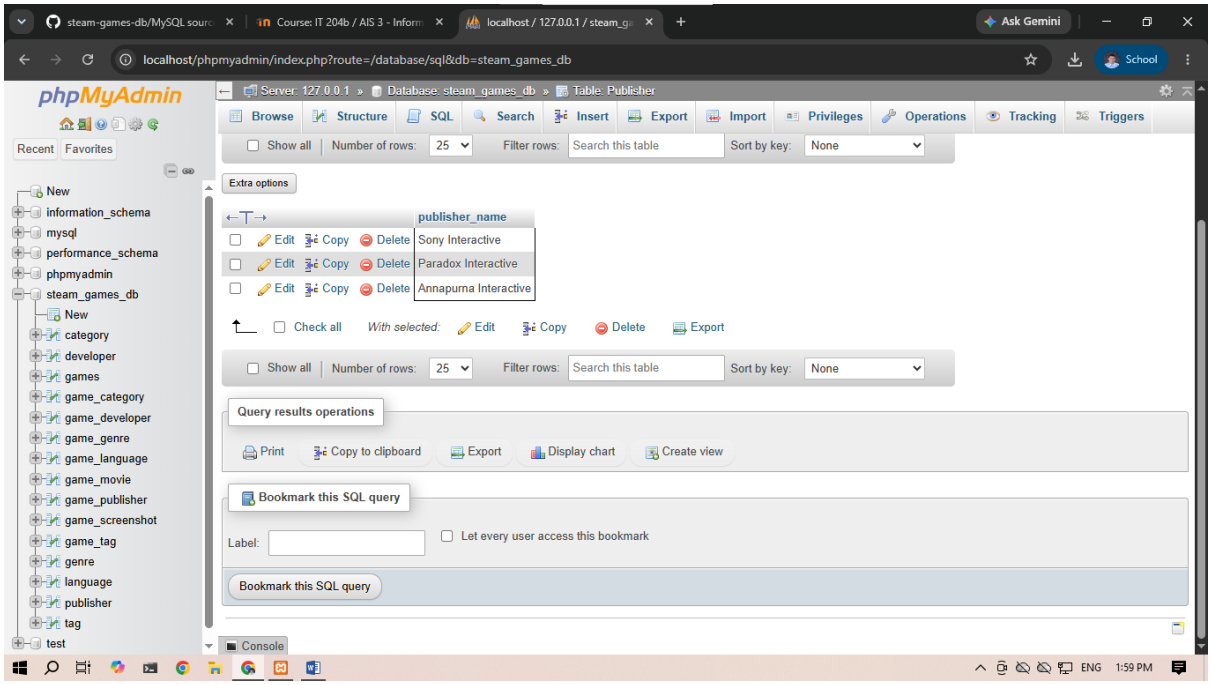


SELECT name FROM Games WHERE name LIKE 'P_rtal';

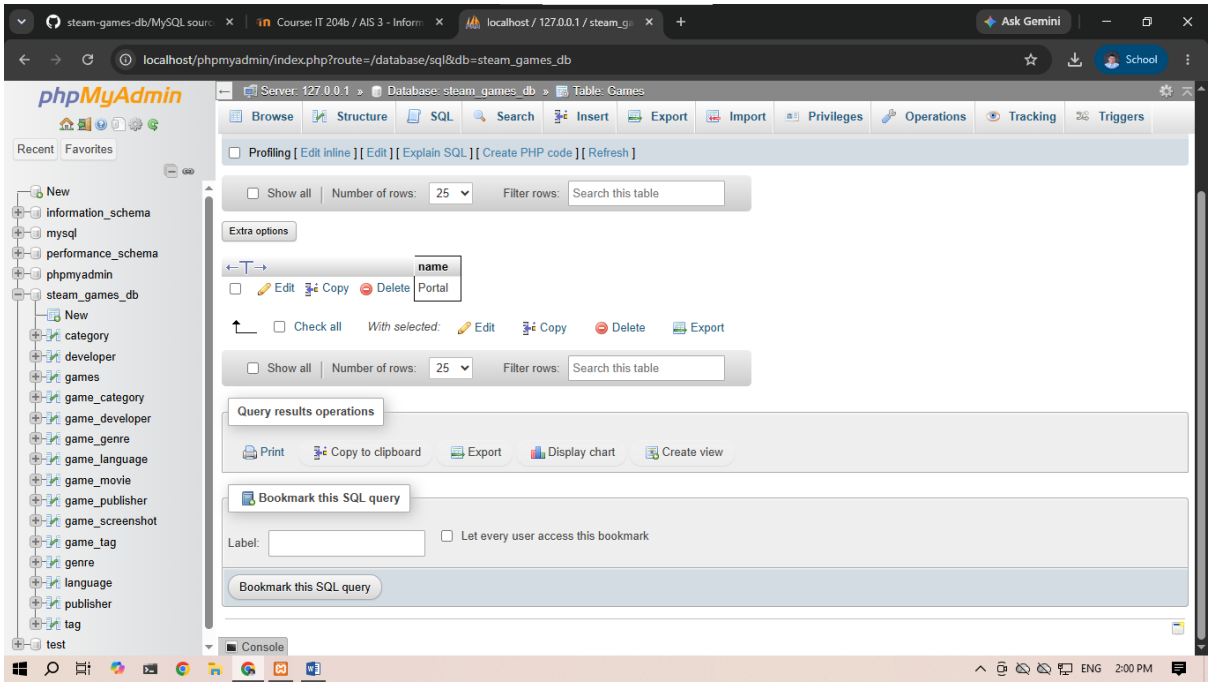


SELECT appID FROM Games WHERE appID LIKE '2_0';

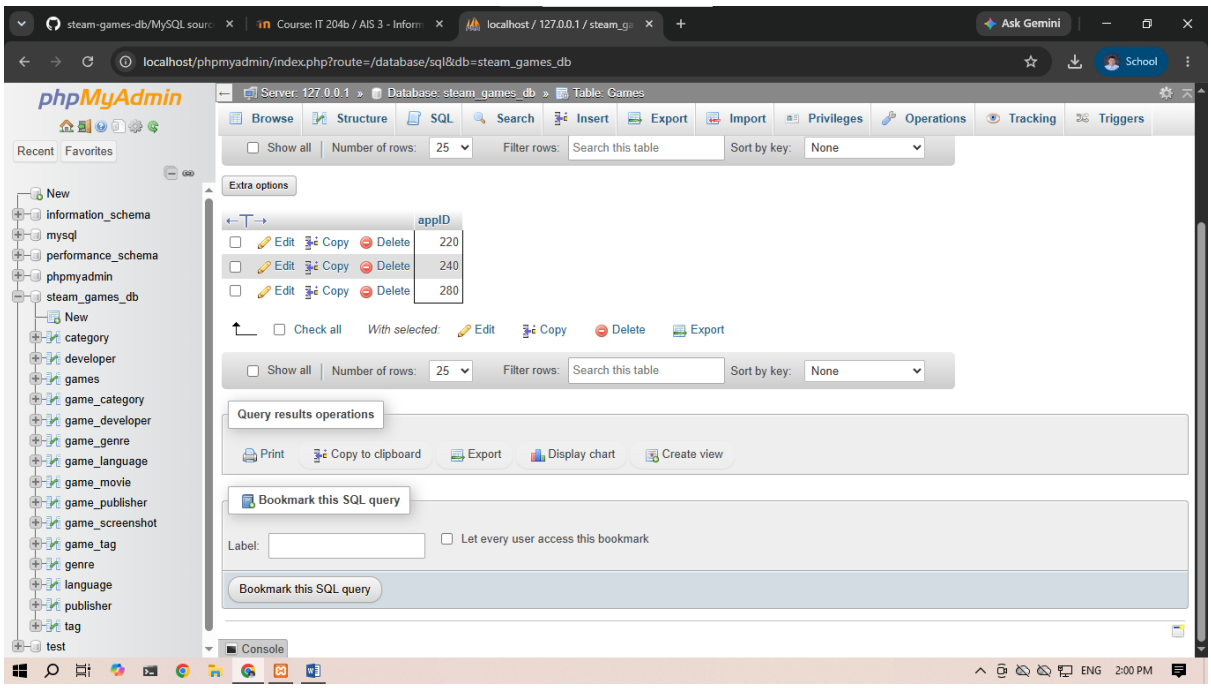


SELECT name, price FROM Games WHERE price < 10.00 AND required_age >= 13;

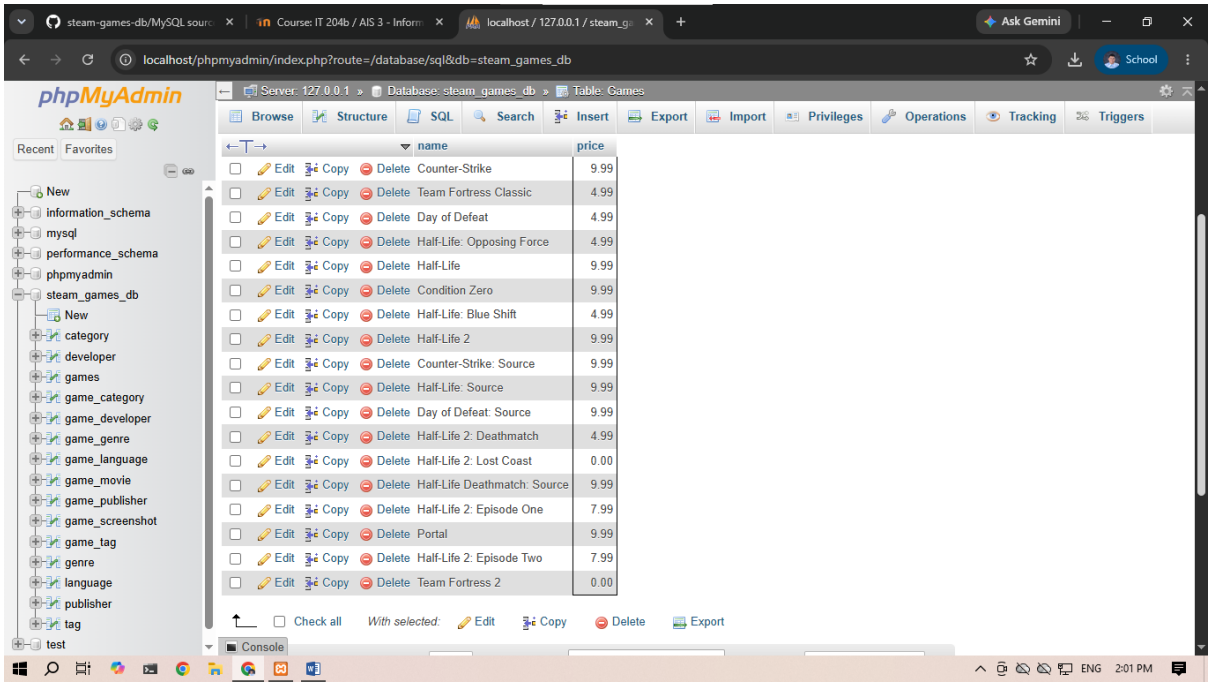


SELECT name FROM Games WHERE price = 0.00 OR price > 9.00;

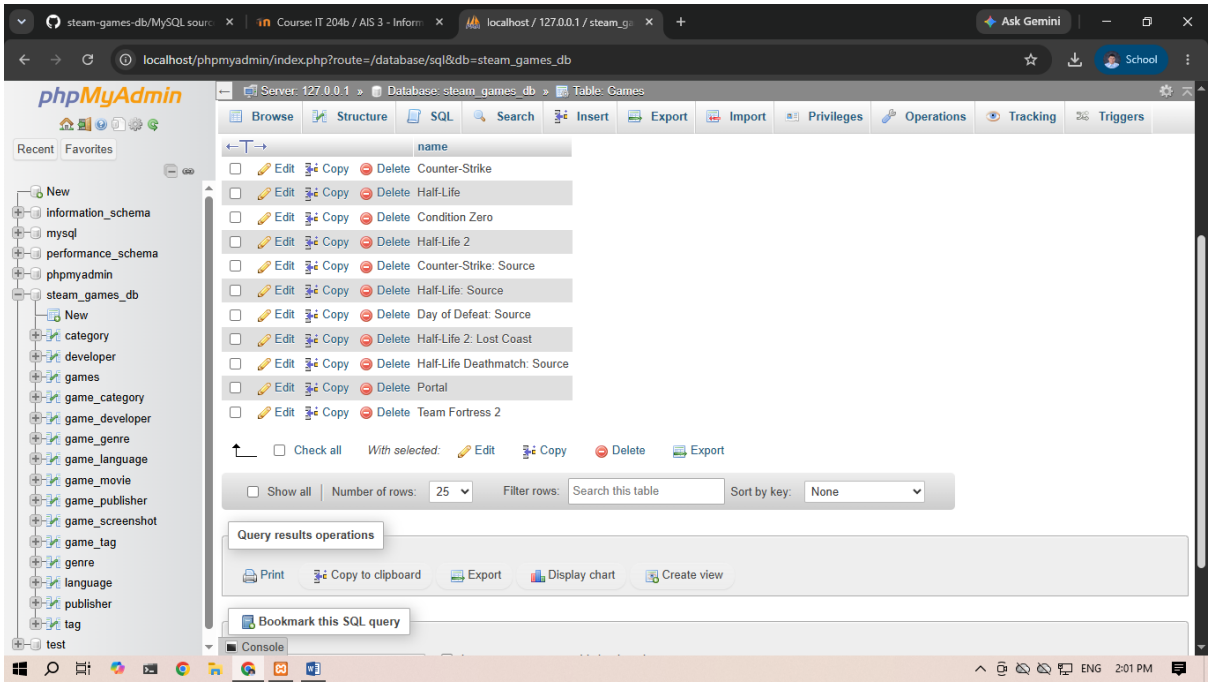


SELECT genre_name FROM Genre WHERE NOT genre_name = 'Action';

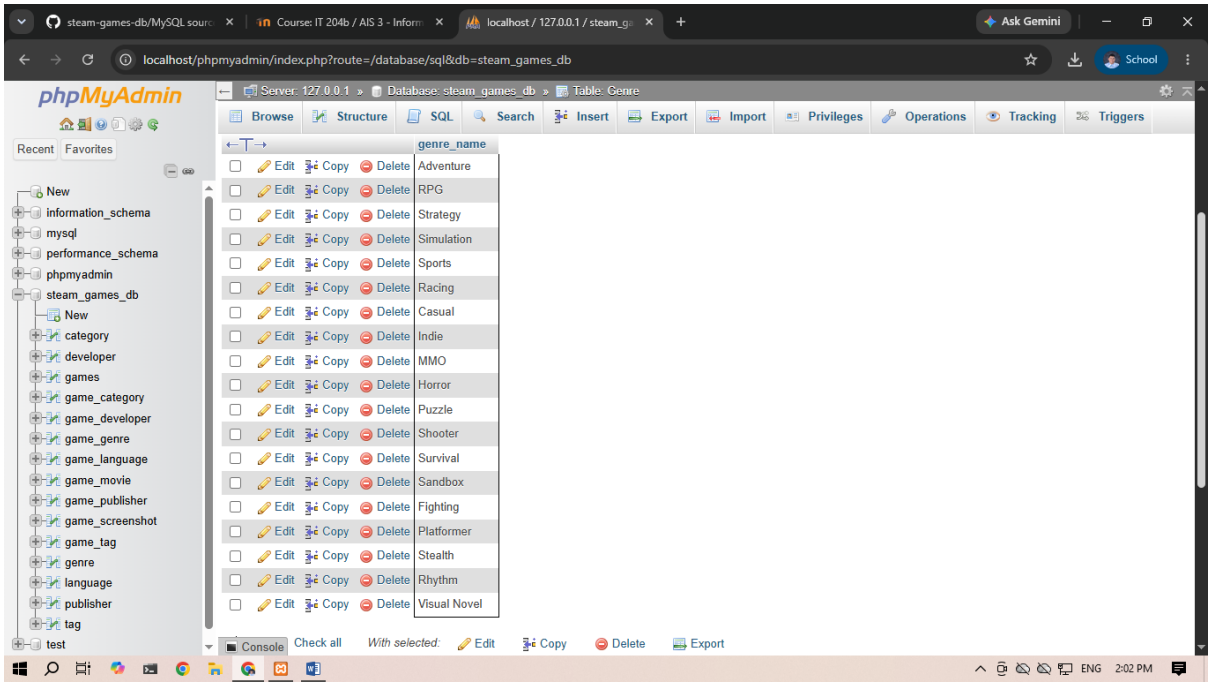


SELECT name, release_date FROM Games ORDER BY release_date DESC;

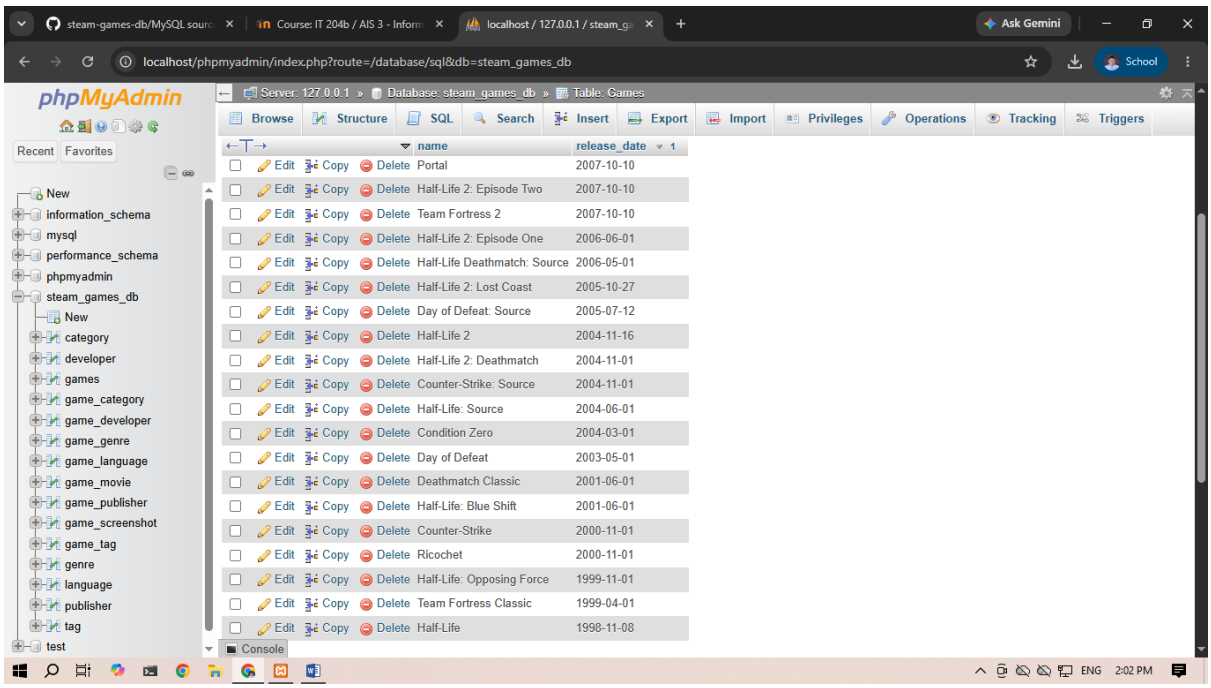


SELECT publisher_name FROM Publisher ORDER BY publisher_name ASC;

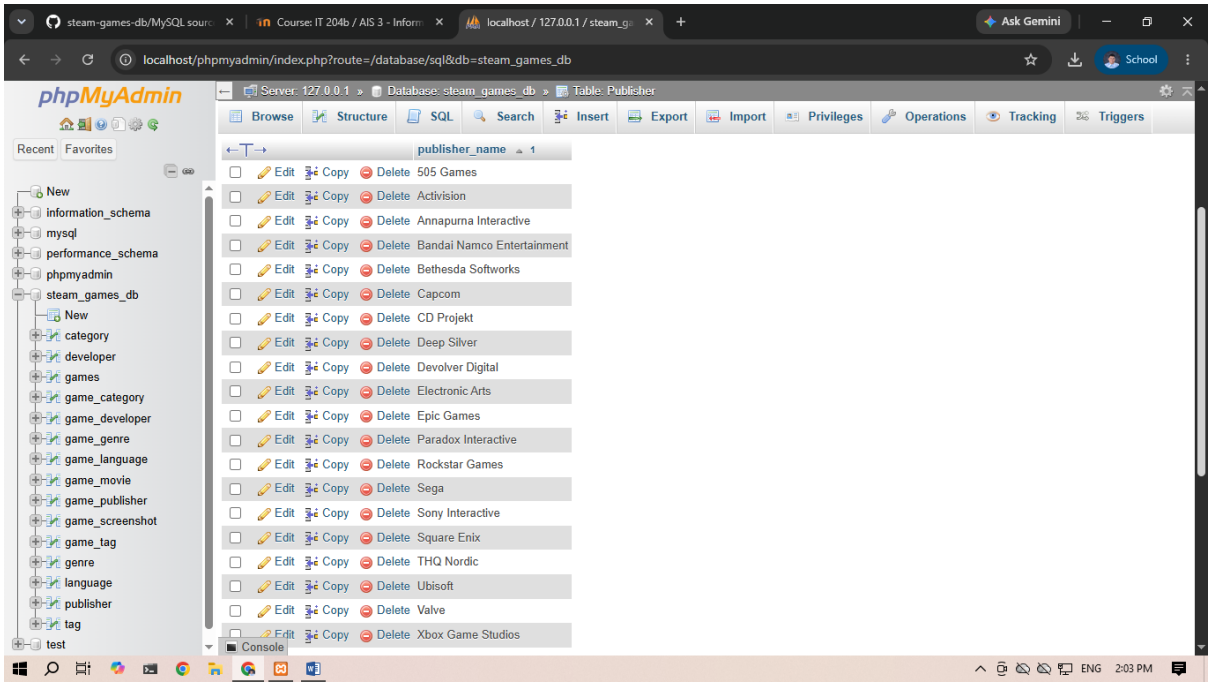


SELECT name FROM Games ORDER BY price DESC LIMIT 5;

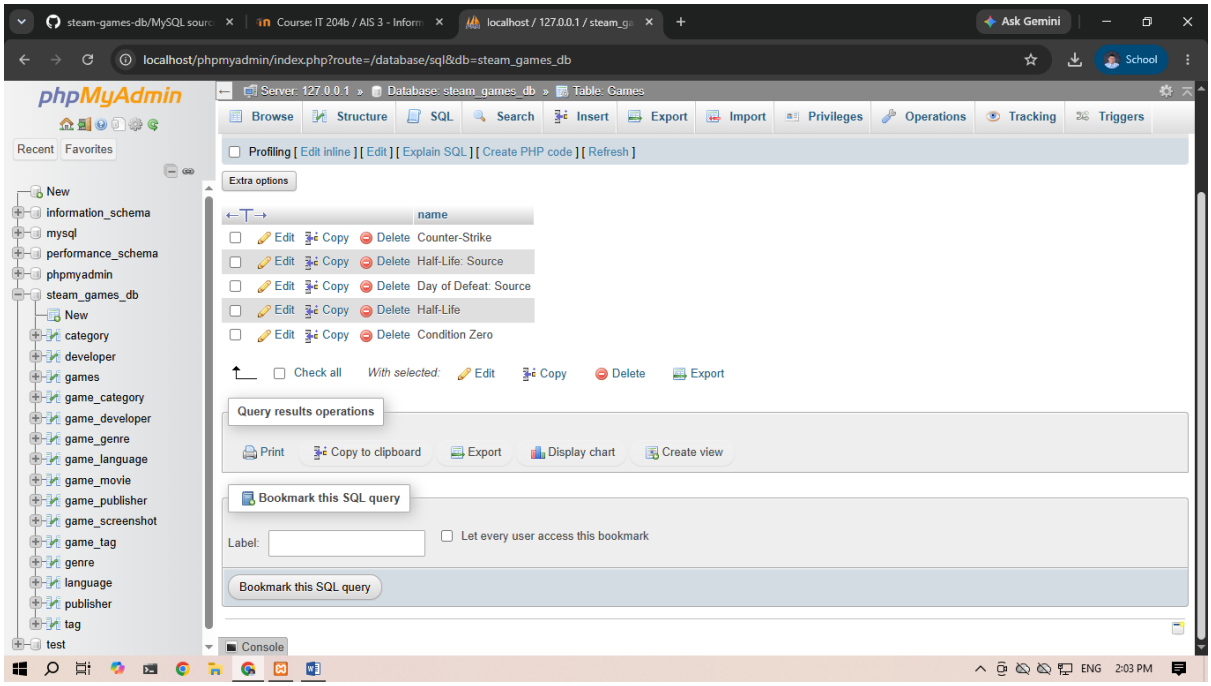


SELECT MIN(price) AS lowest_price FROM Games;

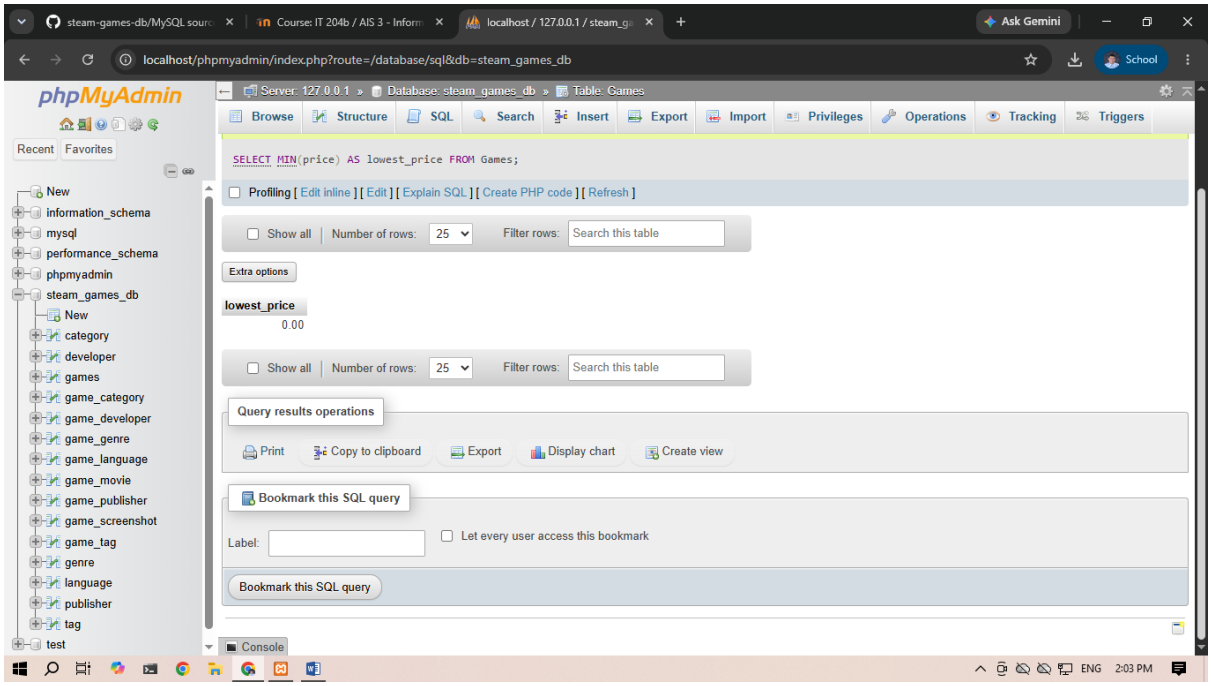


SELECT MAX(peak_ccu) AS highest_peak_players FROM Games;

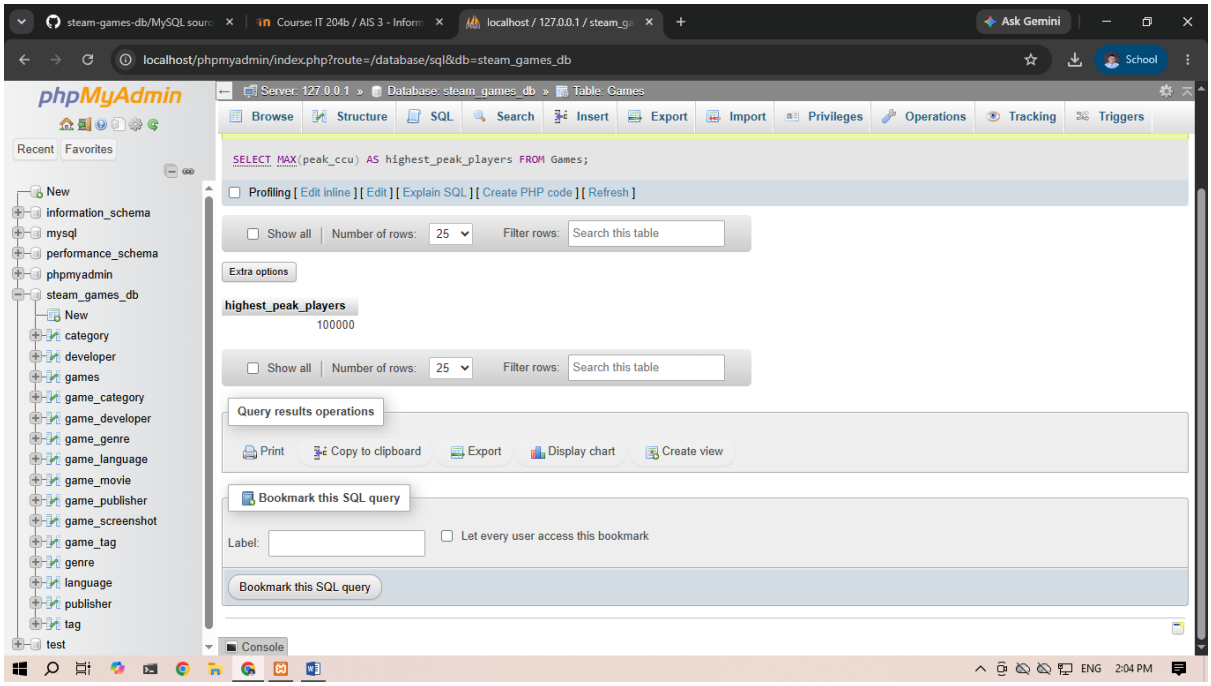


SELECT SUM(positive) AS total_positive_feedback FROM Games;

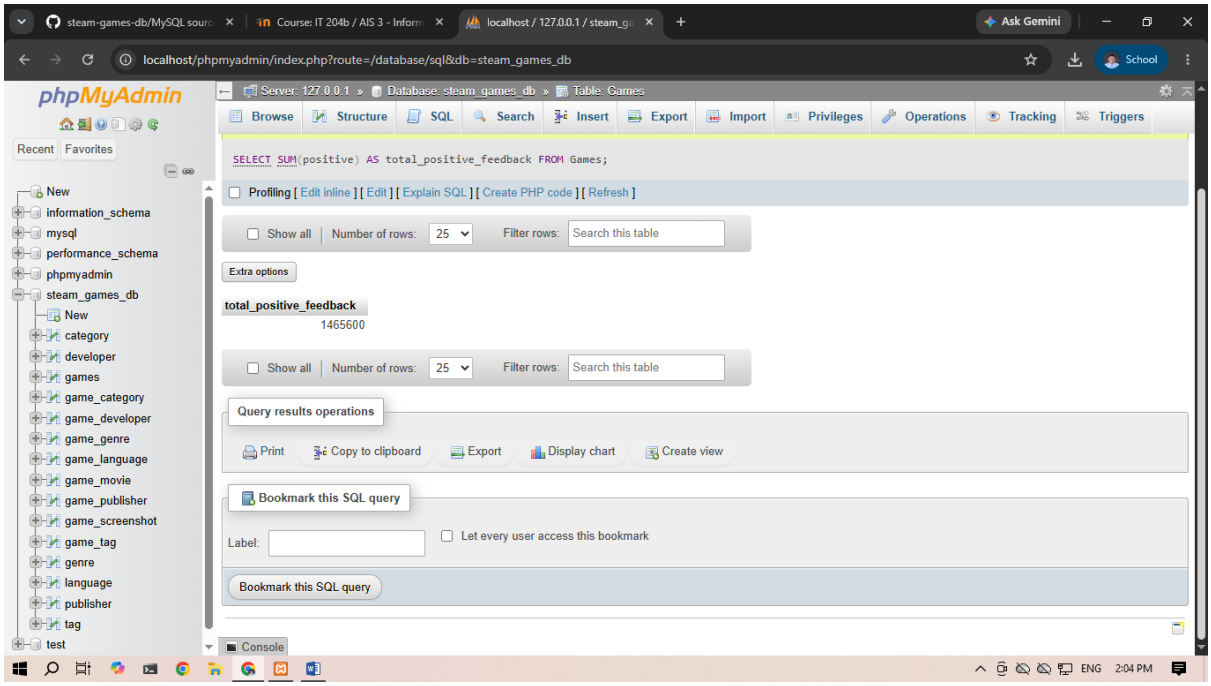


SELECT AVG(metacritic_score) AS average_metacritic FROM Games WHERE metacritic_score IS NOT NULL;

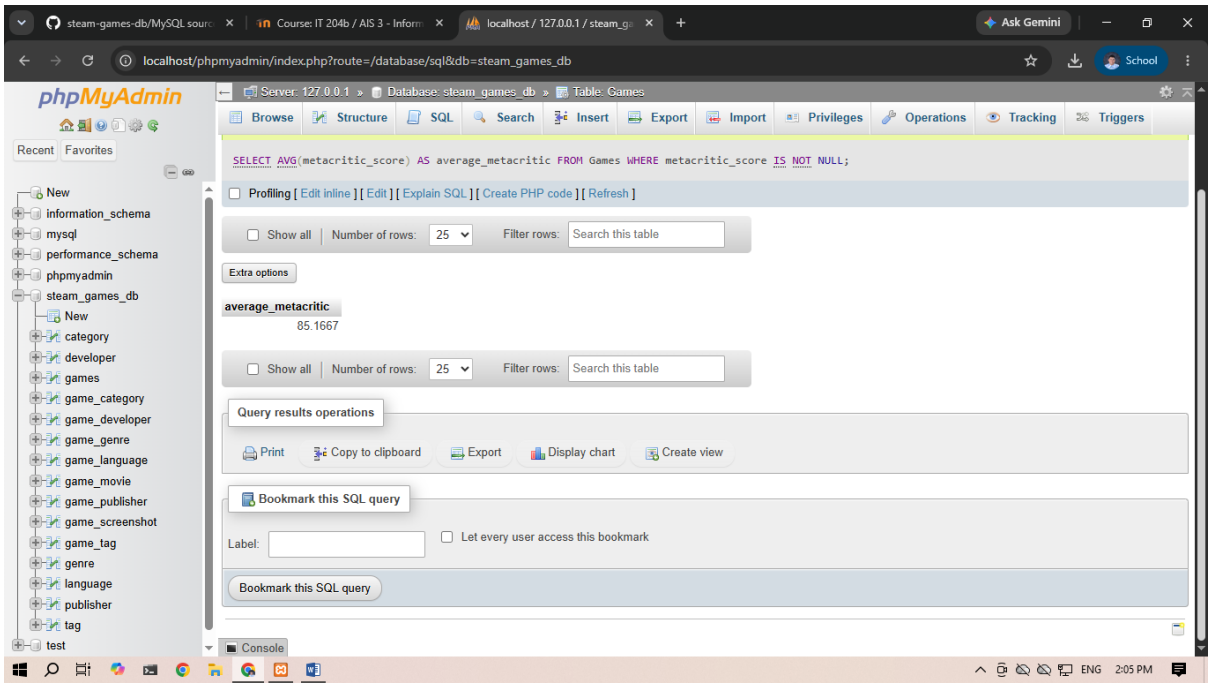


SELECT COUNT(*) AS total_games_listed FROM Games;

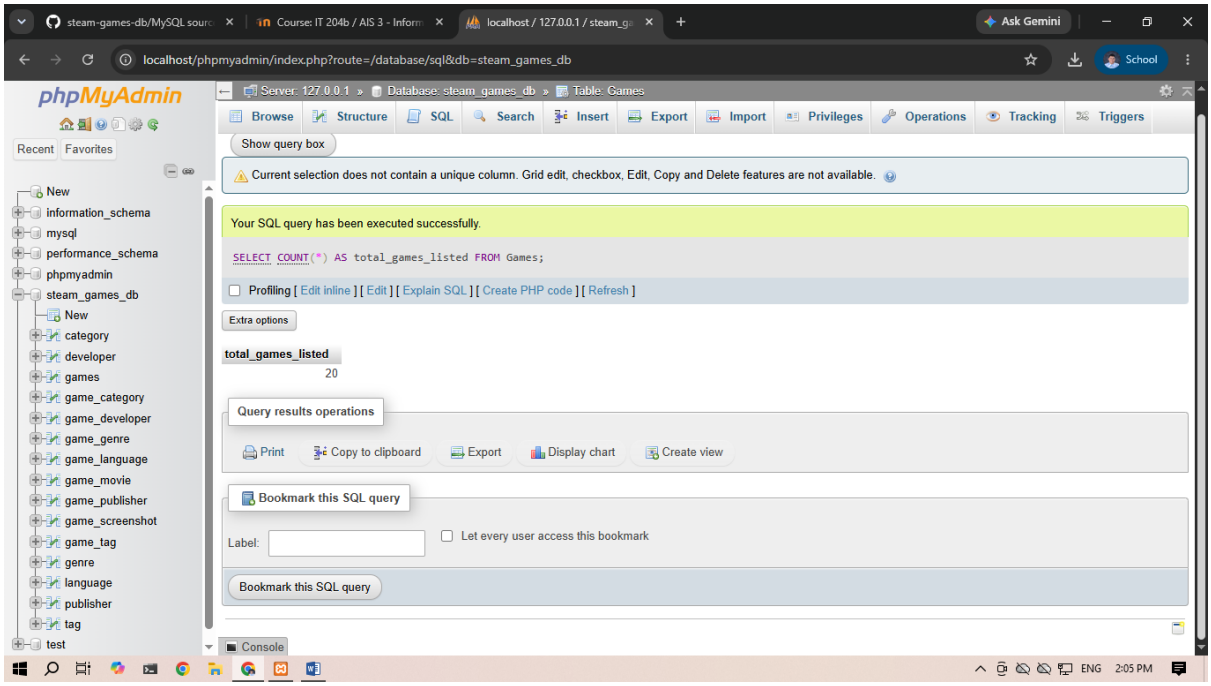


SELECT required_age, COUNT(*) AS game_count FROM Games GROUP BY required_age;

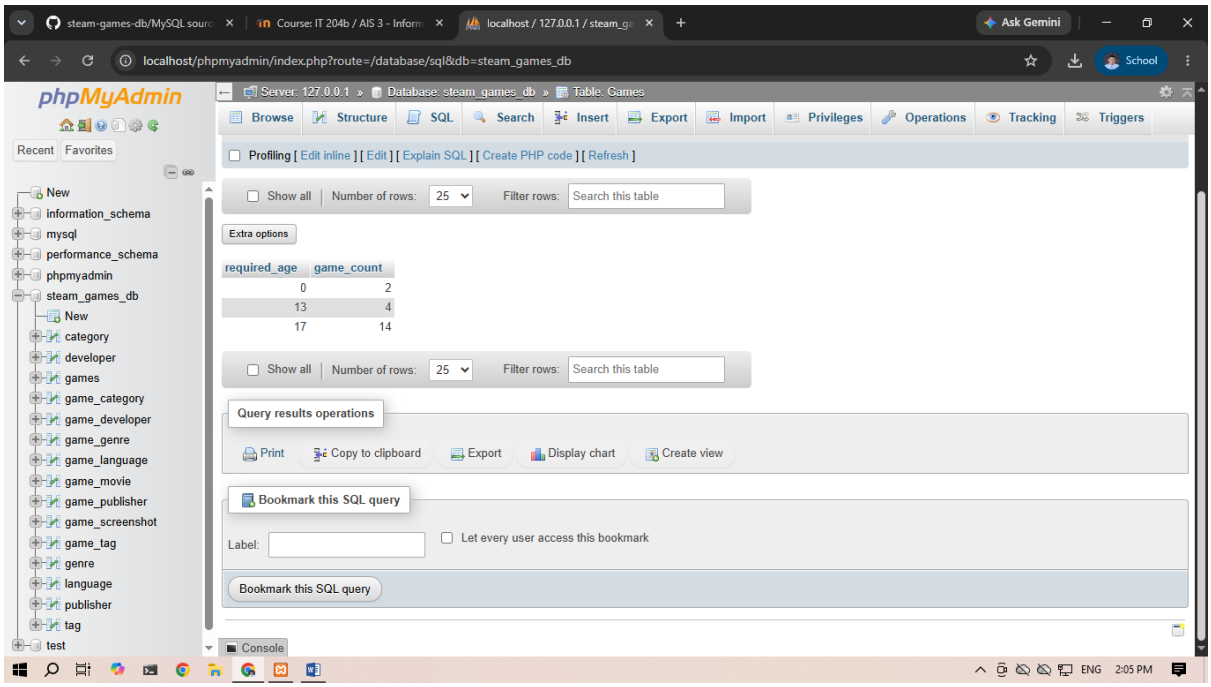


SELECT estimated_owners, AVG(peak_ccu) AS avg_ccu FROM Games GROUP BY estimated_owners;

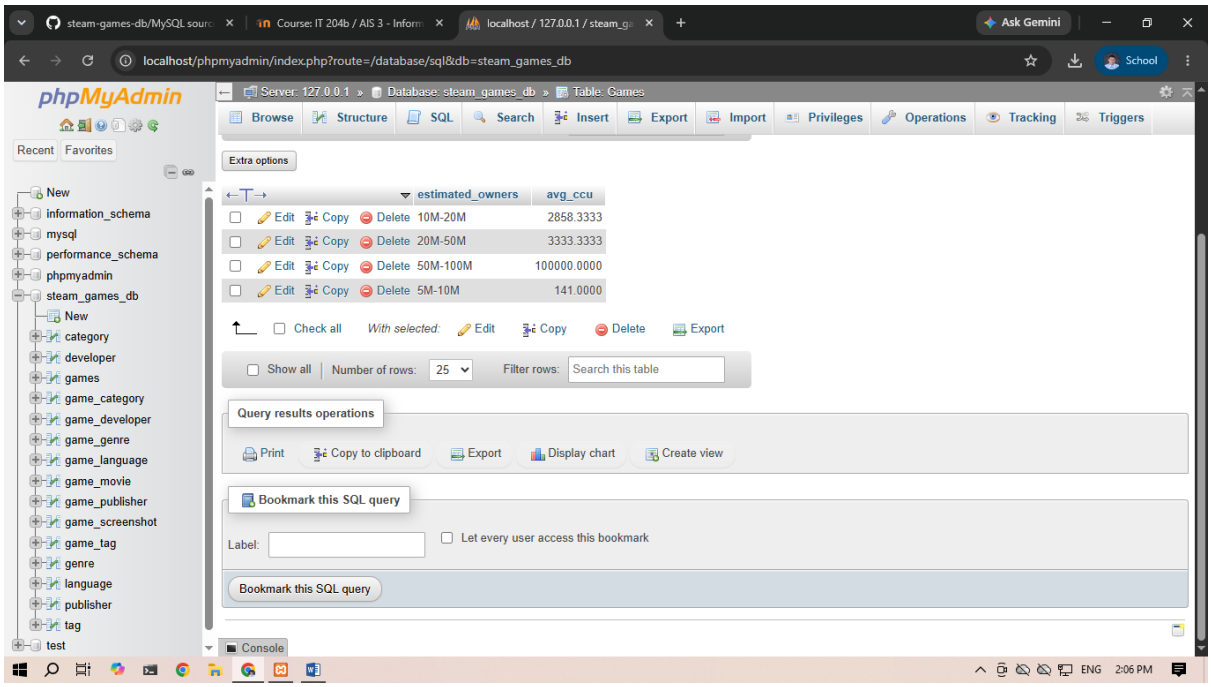


SELECT required_age, COUNT(*) AS game_count FROM Games GROUP BY required_age HAVING COUNT(*) > 5;

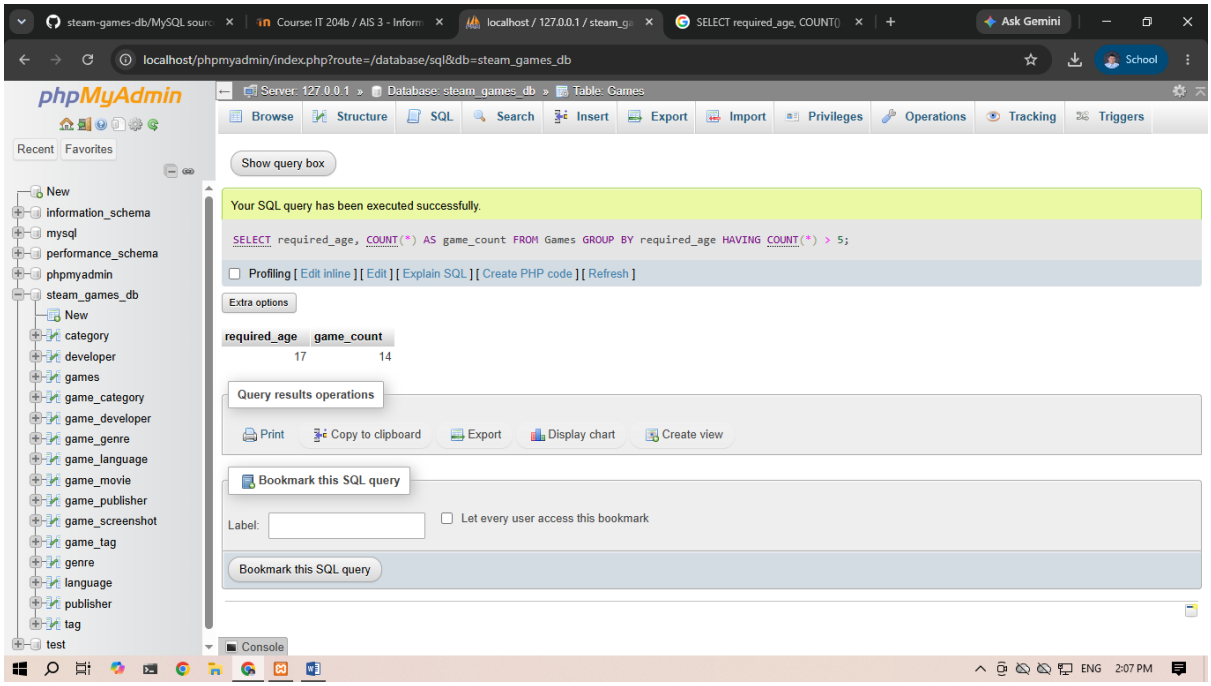


SELECT estimated_owners, SUM(positive) AS total_pos FROM Games GROUP BY estimated_owners HAVING SUM(positive) > 50000;

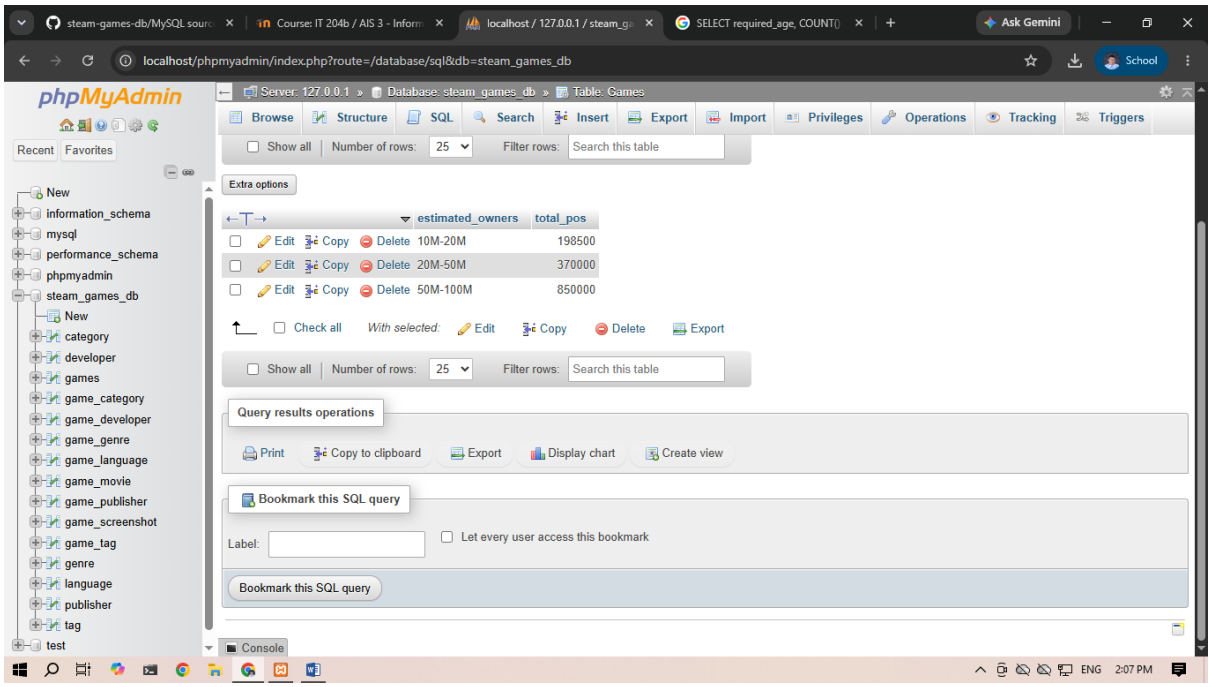

SELECT name FROM Games WHERE appID IN (10, 70, 220, 400);

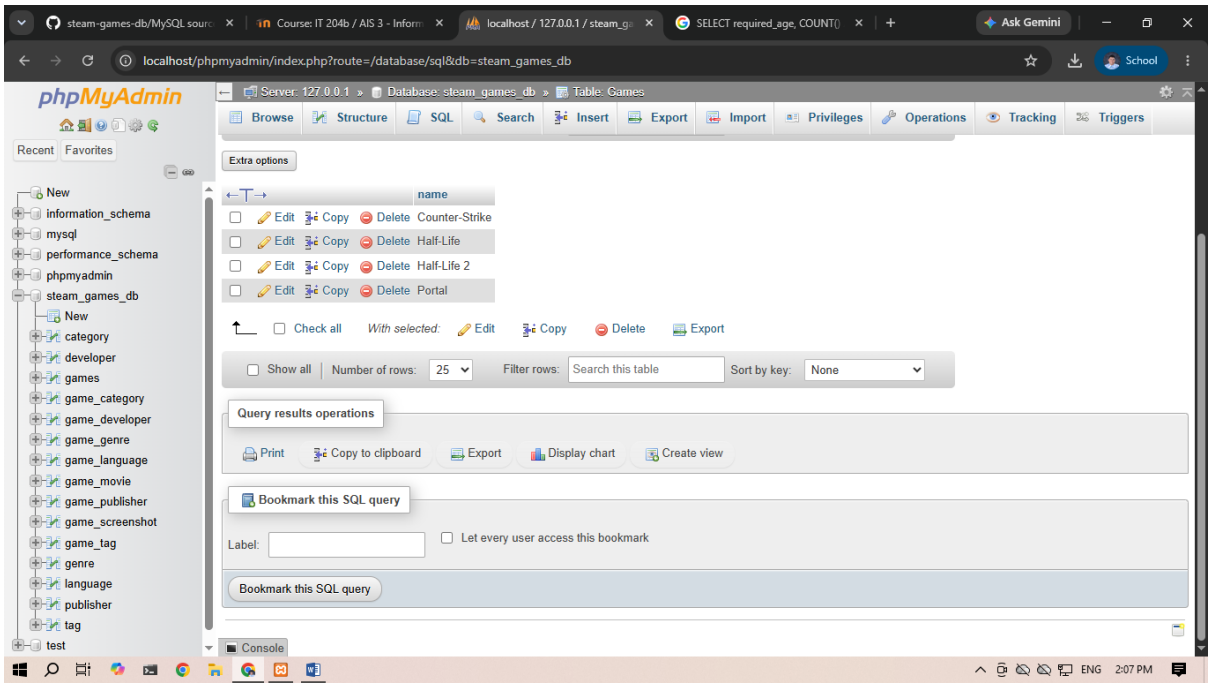

SELECT name, release_date FROM Games WHERE release_date BETWEEN '2000-01-01' AND '2005-12-31';

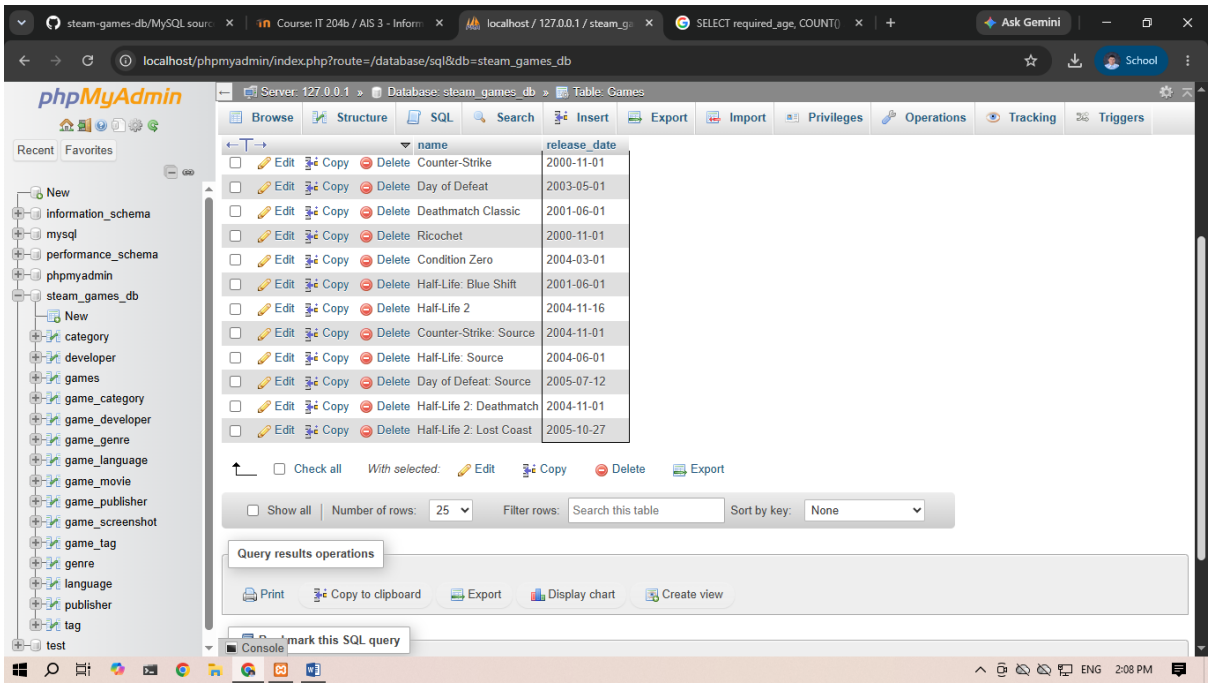


SELECT G.name, D.developer_name

FROM Games G

INNER JOIN Game_Developer GD ON G.appID = GD.appID

INNER JOIN Developer D ON GD.developer_id = D.developer_id;

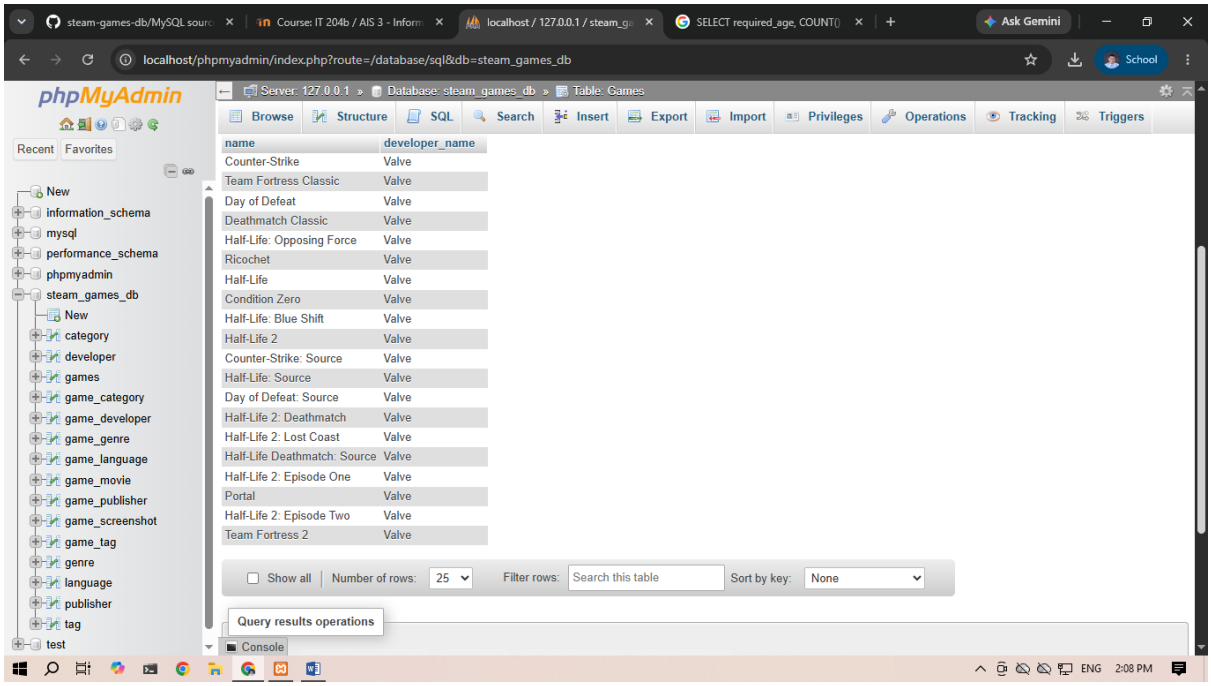


```
SELECT G.name, P.publisher_name

FROM Games G

INNER JOIN Game_Publisher GP ON G.appID = GP.appID


INNER JOIN Publisher P ON GP.publisher_id = P.publisher_id;
```

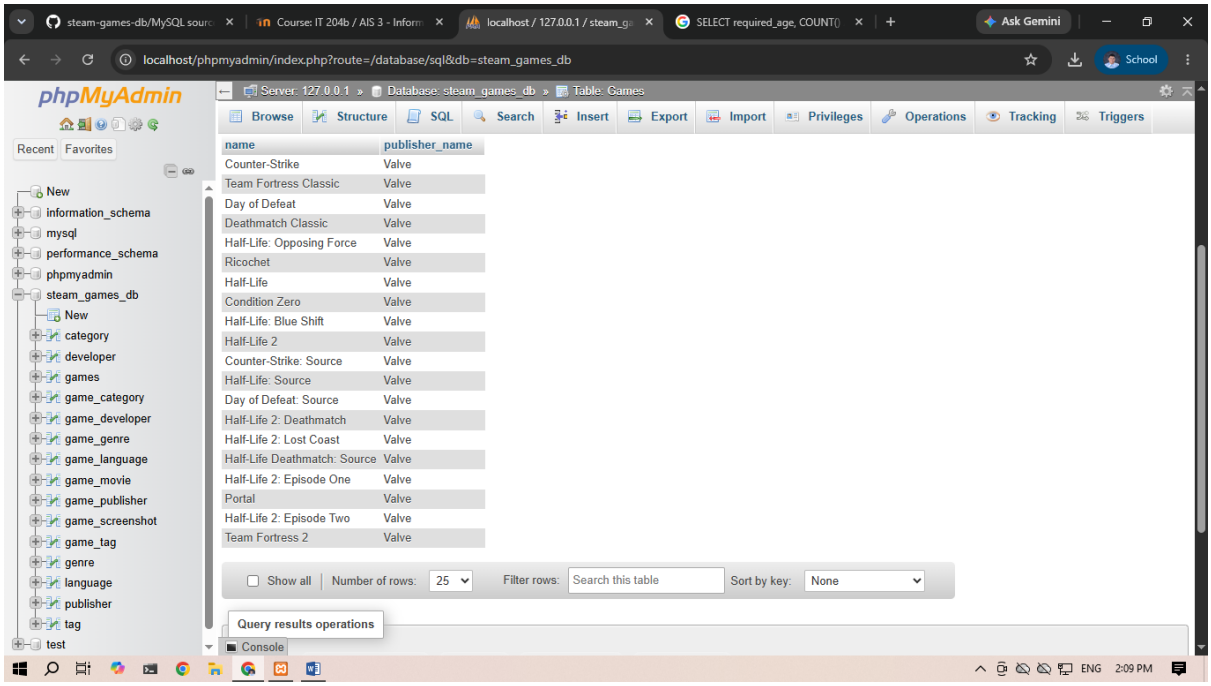

SELECT G.name, G.positive, G.negative

FROM Games G

WHERE G.positive / (G.positive + G.negative) > 0.90;

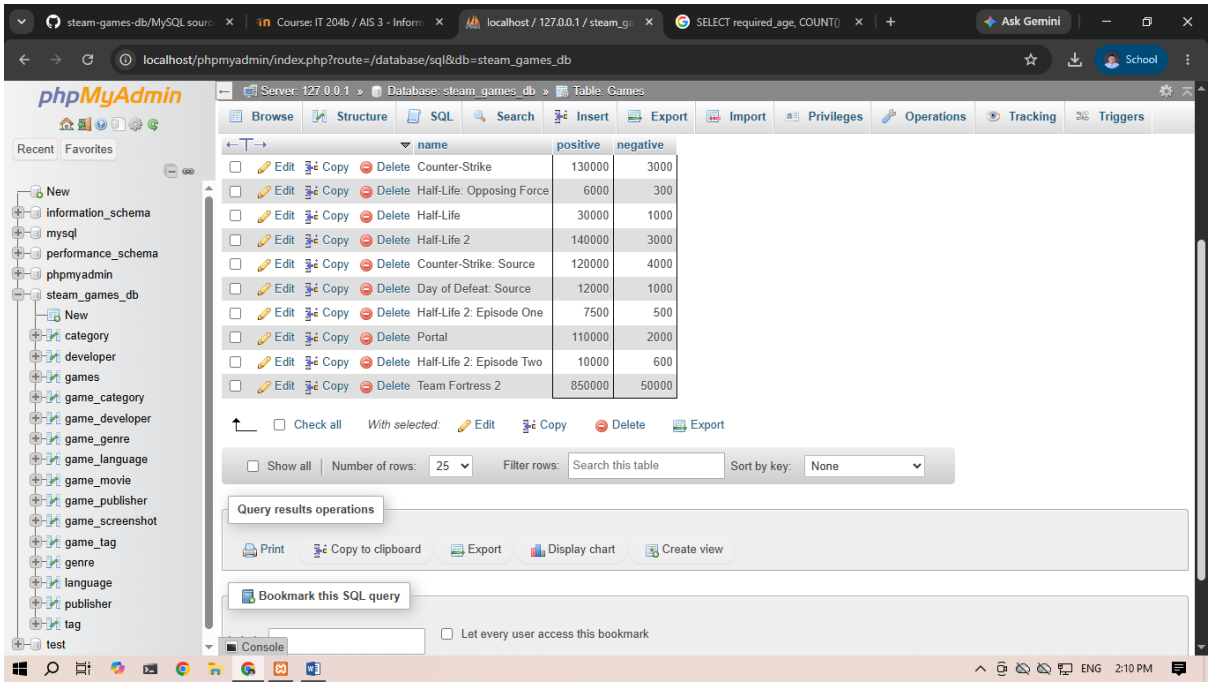


```
SELECT G.name, G.peak_ccu

FROM Games G

WHERE G.price = 0.00

ORDER BY G.peak_ccu DESC;
```

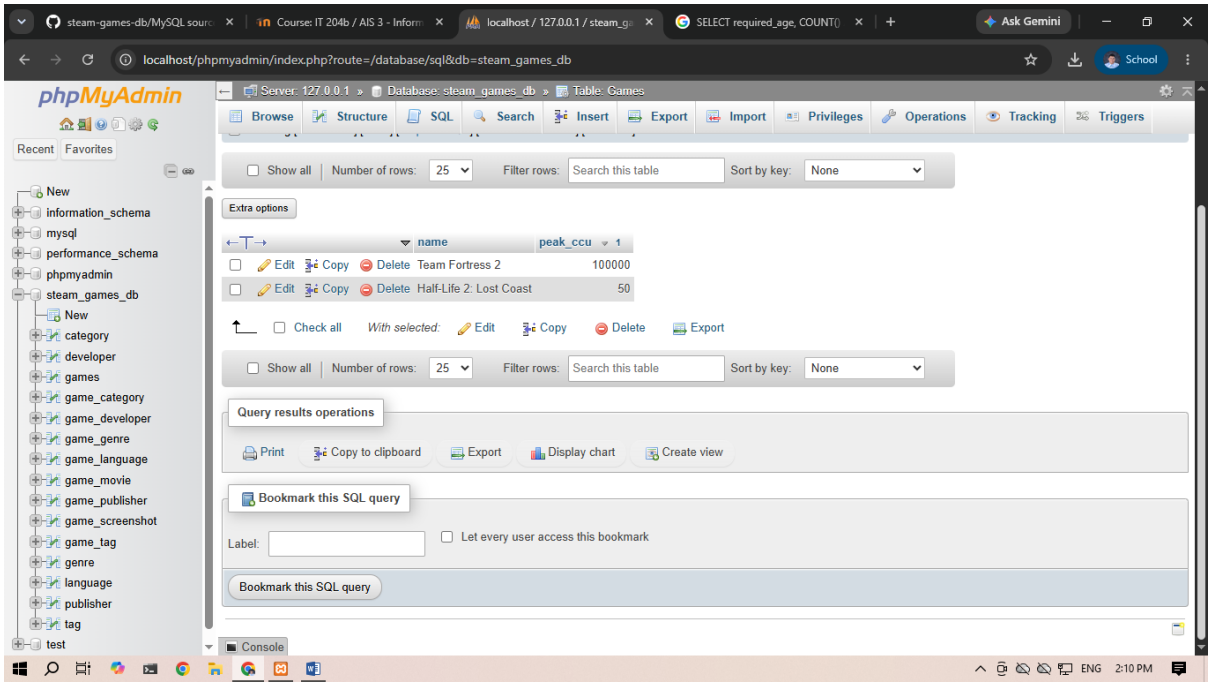


```
SELECT G.name, C.category_name

FROM Games G


JOIN Game_Category GC ON G.appID = GC.appID

JOIN Category C ON GC.category_id = C.category_id

WHERE G.appID = 10;
```

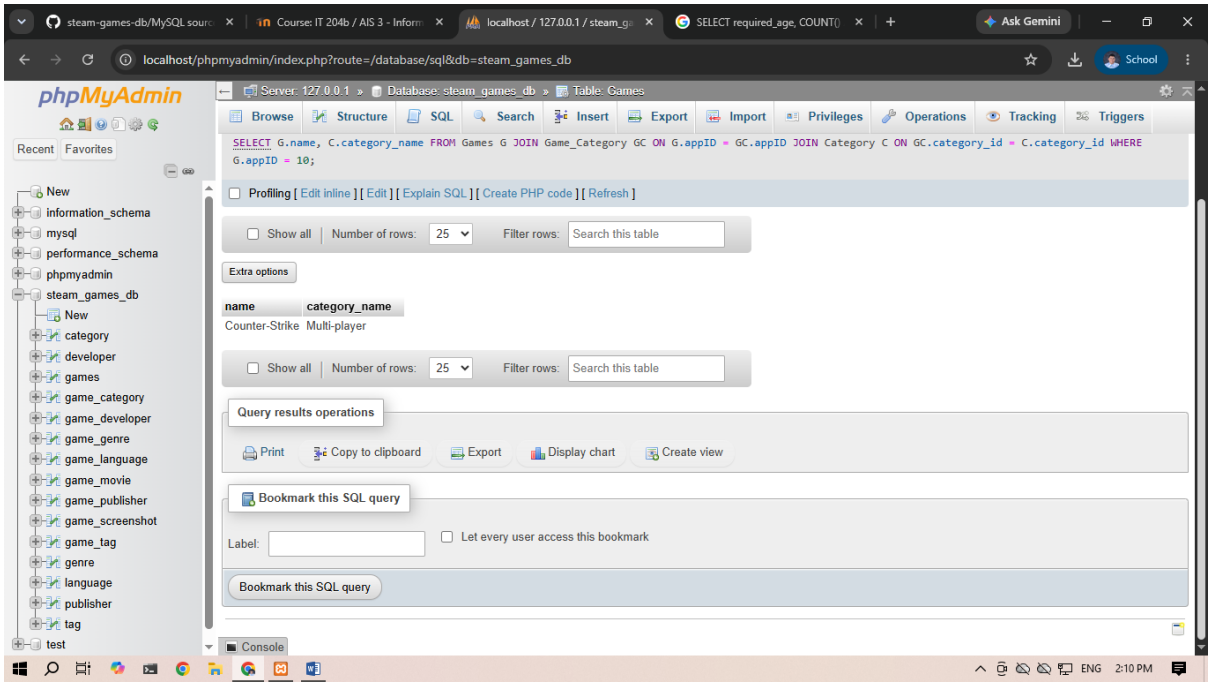

SELECT G.name,D.developer_name,G.support_email FROM Games G JOIN Game_Developer GD ON G.appID = GD.appID JOIN Developer D ON GD.developer_id = D.developer_id WHERE G.required_age >= 17 GROUP BY G.name,D.developer_name,G.support_email;

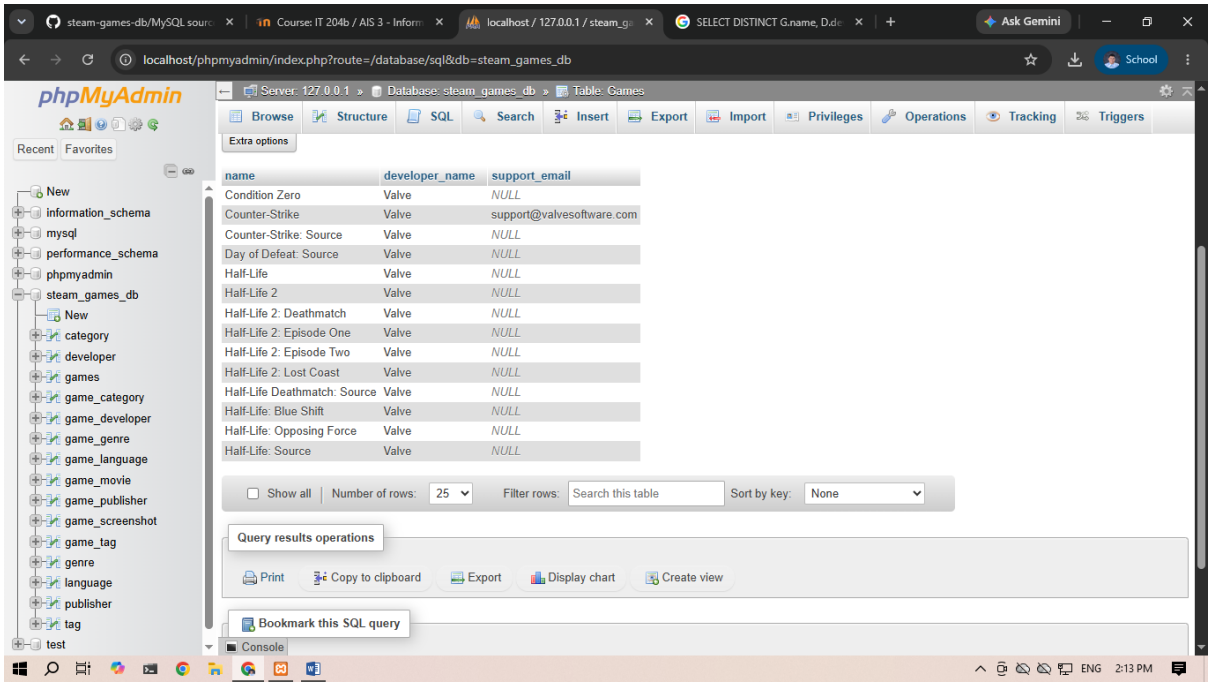

SELECT G.name, (G.positive + G.negative) * G.average_playtime_forever AS engagement_score

FROM Games G

ORDER BY engagement_score DESC LIMIT 10;

