OpenClaw安装步骤

系统要求

Windows

MacOS

- **操作系统：** macOS 12.0 或更高版本
- **处理器：** Intel 或 Apple Silicon（M1/M2/M3）
- **内存：** 至少 8GB（推荐 16GB）
- **磁盘空间：** 至少 5GB 可用空间

一、连接VPN

安装clash，输入订阅文件链接

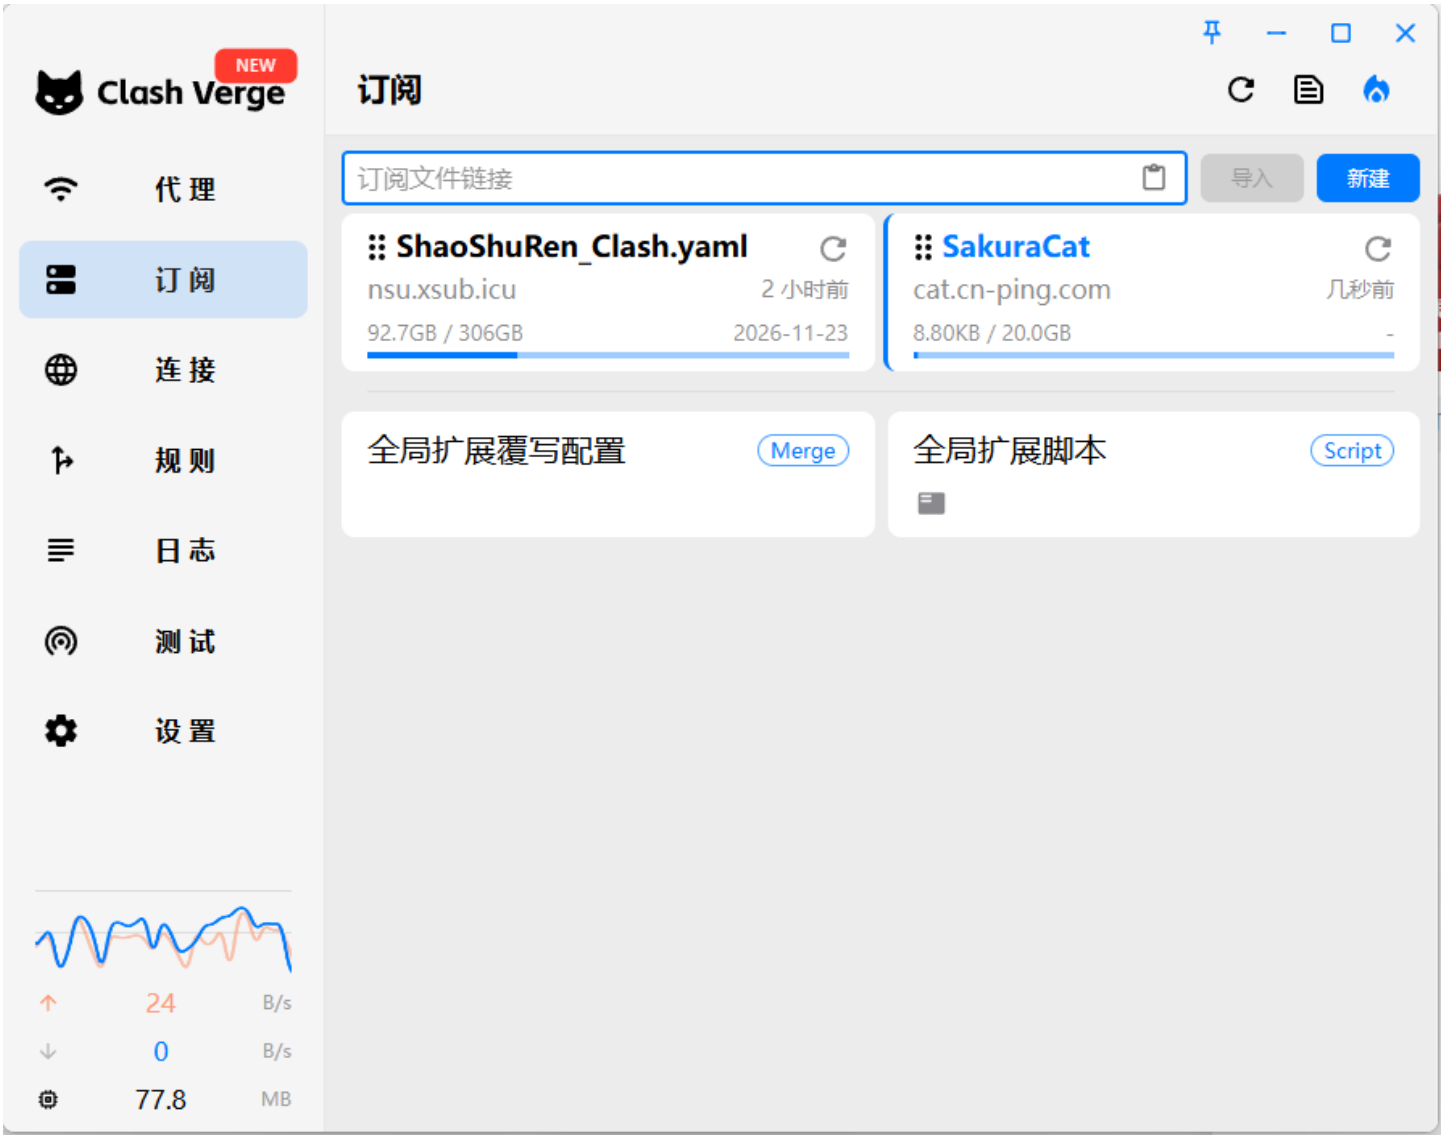
Clash Verge
NEW
代理
订阅
连接
规则
日志
测试
设置
24 B/s
0 B/s
77.8 MB
订阅
订阅文件链接
导入
新建
ShaoShuRen_Clash.yaml
nsu.xsub.icu
2 小时前
92.7GB / 306GB
2026-11-23
SakuraCat
cat.cn-ping.com
几秒前
8.80KB / 20.0GB
-
全局扩展覆写配置
Merge
全局扩展脚本
Script

开启系统代理

三、Windows流程

1. 安装git

https://git-scm.com/ 下载git，安装时一路选择next即可

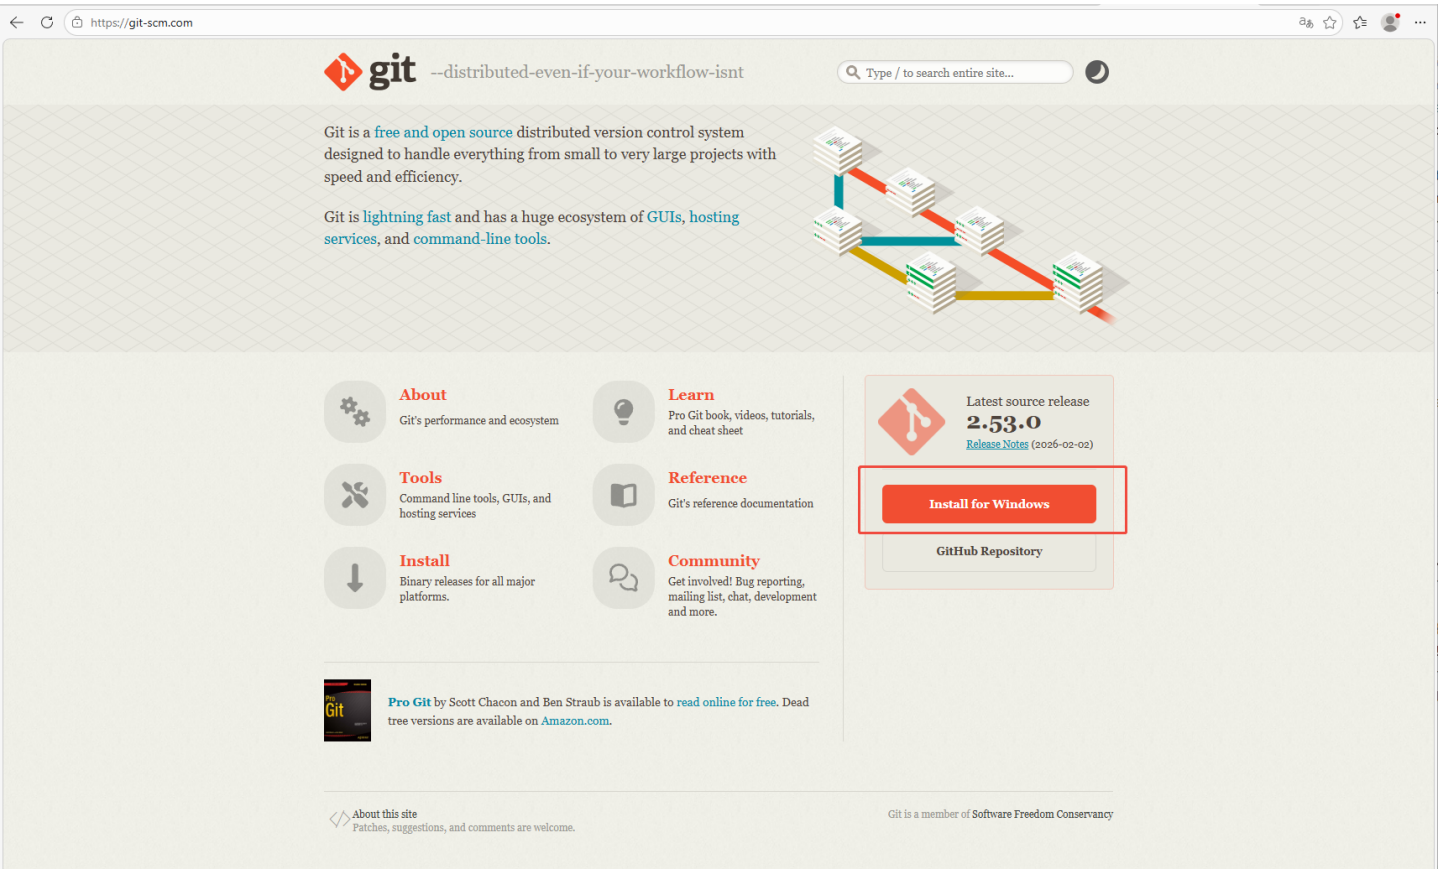

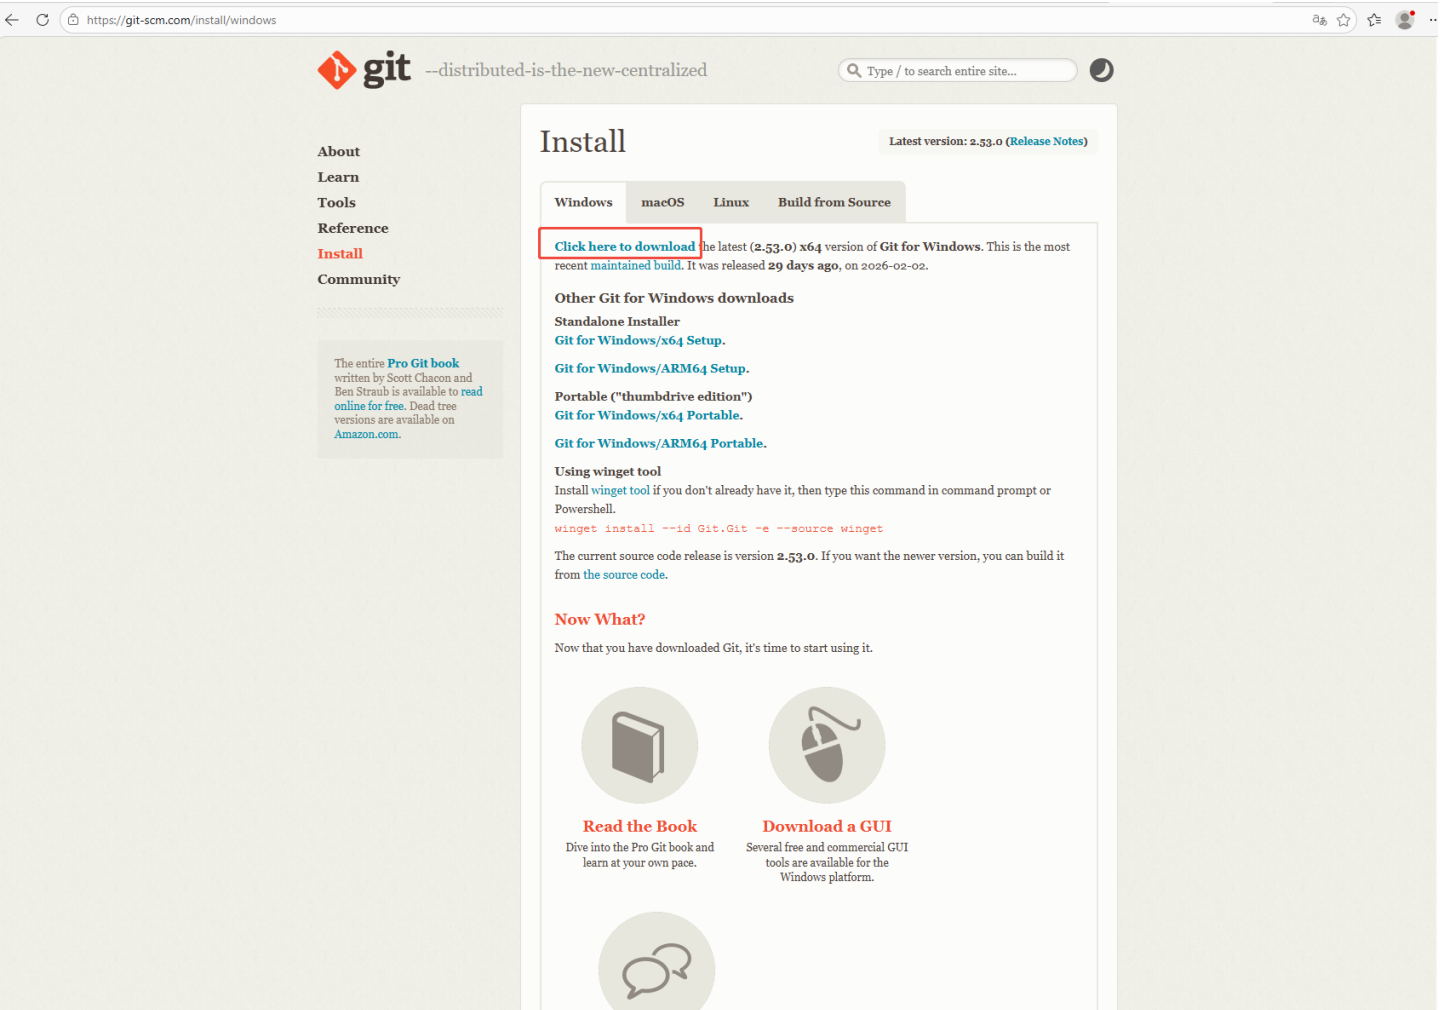

2. 安装nvm

https://github.com/coreybutler/nvm-windows/releases 下载nvm-setup.exe，一路选next即可。

Releases Tags

Find a release

Jan 1, 2025

github-actions

1.2.2

c059022

Compare

1.2.2 Latest

What's Changed

This is a fix for users who install on a drive other than `C:\`. See this note for details.

- Bump actions/setup-go from 4 to 5 by @dependabot in #1204
- Bump actions/cache from 3 to 4 by @dependabot in #1203
- Bump softprops/action-gh-release from 1 to 2 by @dependabot in #1202
- Bump actions/github-script from 6 to 7 by @dependabot in #1201

Full Changelog: `1.2.1...1.2.2`

Attestation Report

Antivirus Report

- nvm.exe
- author-nvm.exe
- nvm-setup.exe

Antivirus Report

- nvm.exe
- author-nvm.exe
- nvm-setup.exe

Antivirus Report

- nvm.exe
- author-nvm.exe
- nvm-setup.exe

Antivirus Report

- nvm.exe
- author-nvm.exe
- nvm-setup.exe

Antivirus Report

- nvm.exe
- author-nvm.exe
- nvm-setup.exe

Antivirus Report

- nvm.exe
- author-nvm.exe
- nvm-setup.exe

Contributors

dependabot

Assets 7

nvm-noinstall.zip	6.01 MB	Jan 1, 2025
nvm-noinstall.zip.checksum.txt	34 Bytes	Jan 1, 2025
nvm-setup.exe	5.35 MB	Jan 1, 2025
nvm-setup.zip	4.84 MB	Jan 1, 2025
nvm-setup.zip.checksum.txt	34 Bytes	Jan 1, 2025
Source code (zip)		Jan 1, 2025

如果git环境变量有问题：搜索环境变量

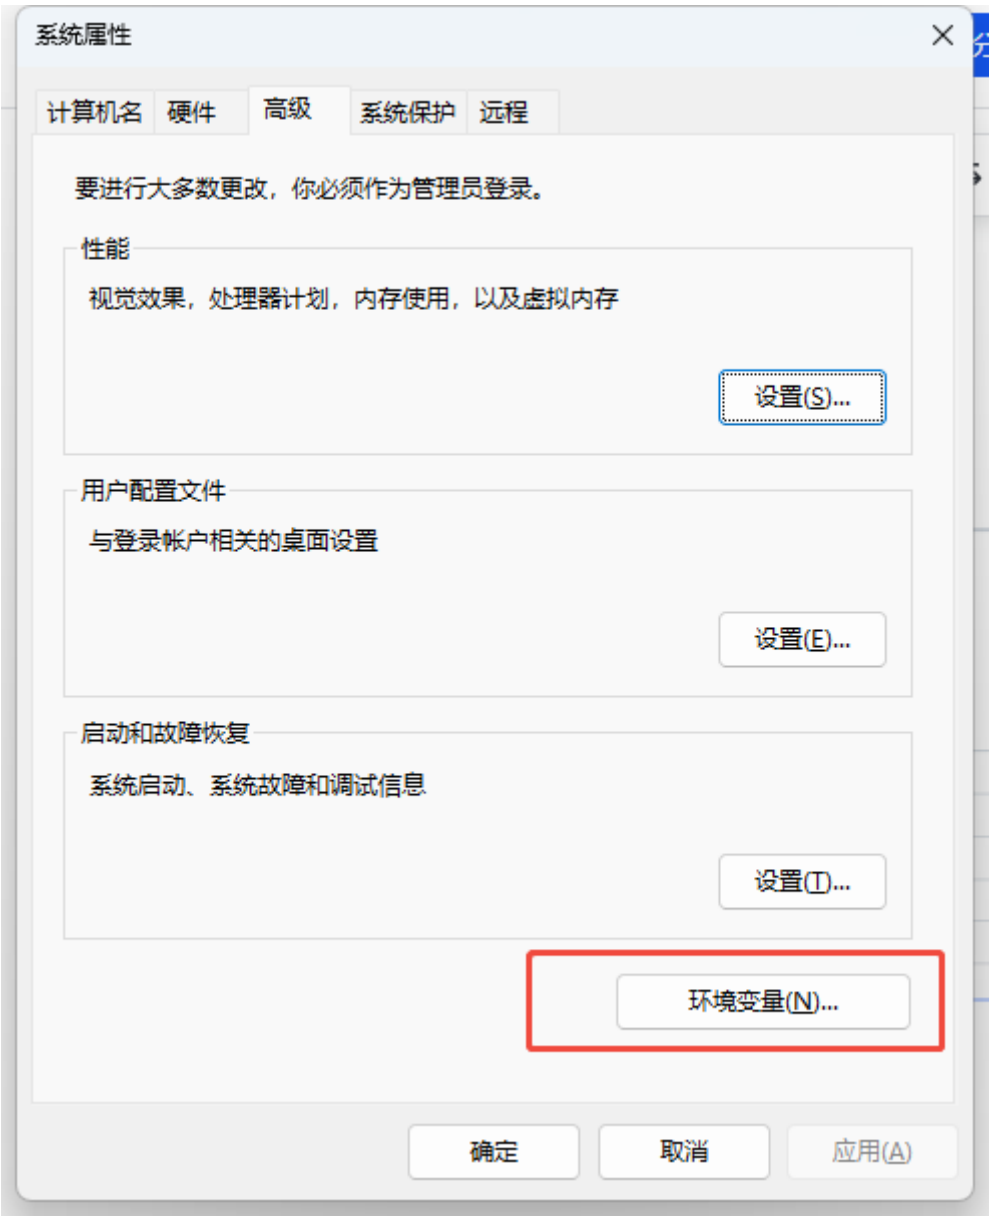

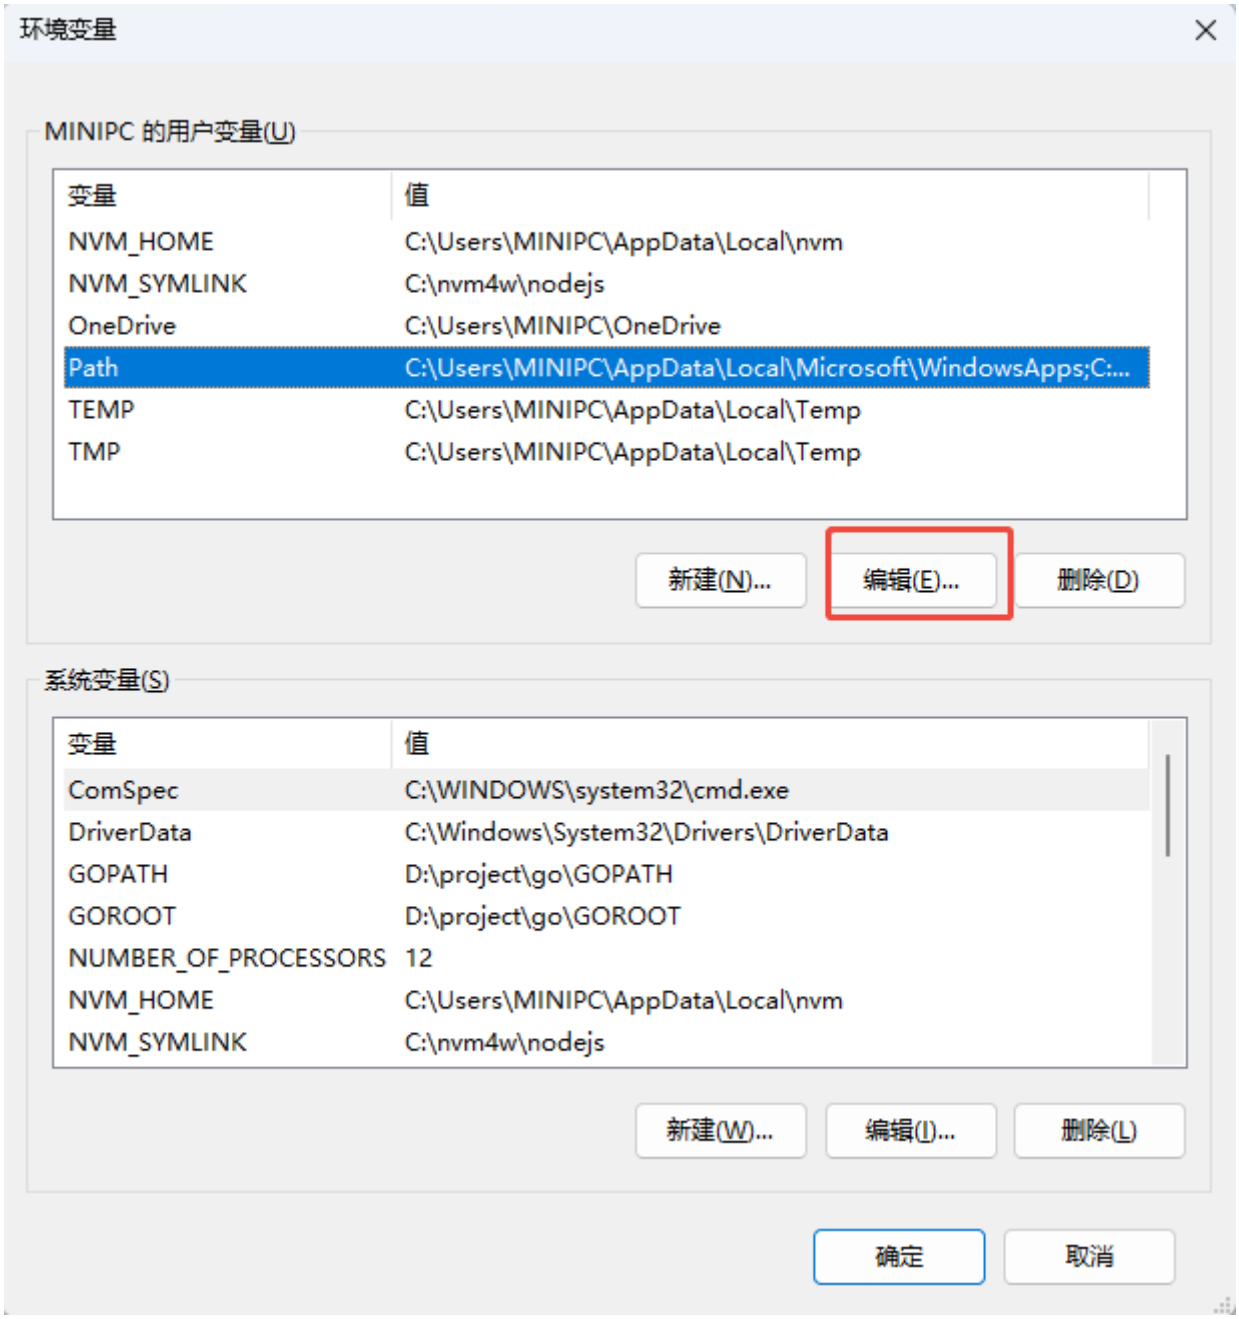

加上git的安装地址，参考以下

代码块

```
C:\Program Files\Git\cmd
C:\Program Files\Git\bin
C:\Program Files\Git\mingw64\libexec\git-core
C:\Program Files\Git\mingw64\share\git-core
```

3. 安装Node.js 22.22.0版本

电脑下方搜索框搜索powershell，以管理员身份运行

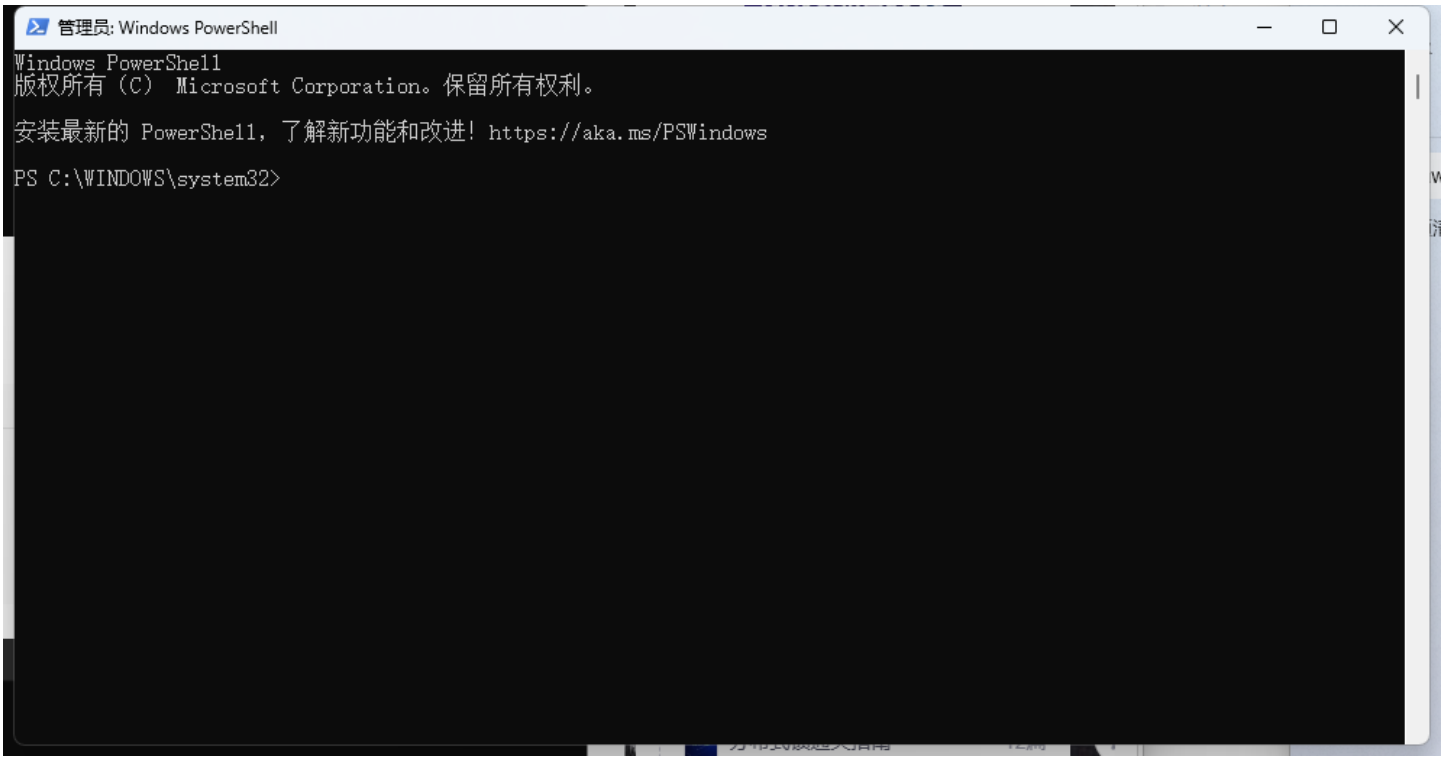

运行安装指令：

代码块

```
nvm install 22
```

运行使用指令：

代码块

```
nvm use 22.22.0
```

效果如下图所示

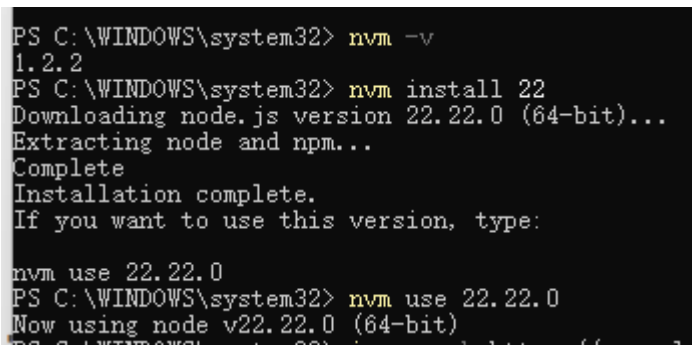

如果环境变量有问题：

代码块

```
1
```

4. 安装配置OpenClaw

继续在刚刚的PowerShell窗口中运行以下命令：

代码块

```
1   iwr -useb https://openclaw.ai/install.ps1 | iex
```

首次运行该命令会出现执行策略报错，如下图所示：

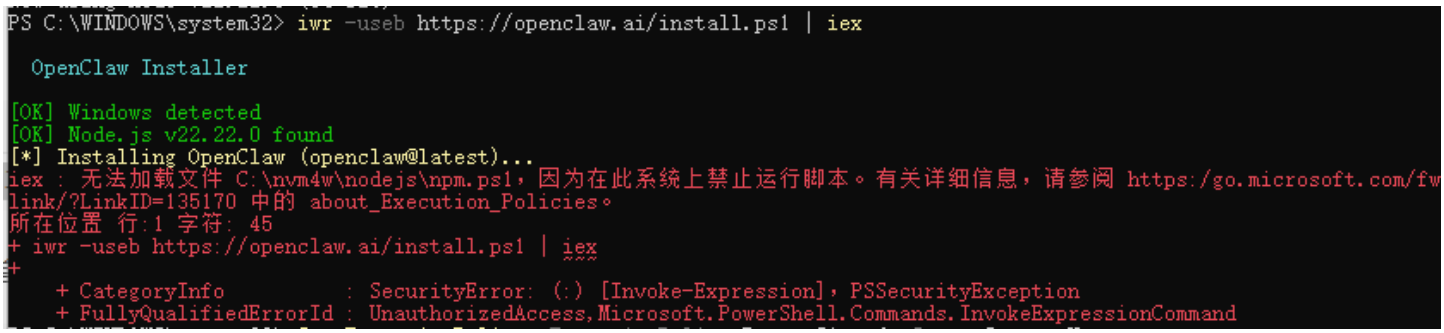

此时需要输入以下指令更改执行策略，执行后输入"Y"

代码块

```
1   Set-ExecutionPolicy -ExecutionPolicy RemoteSigned -Scope CurrentUser
```

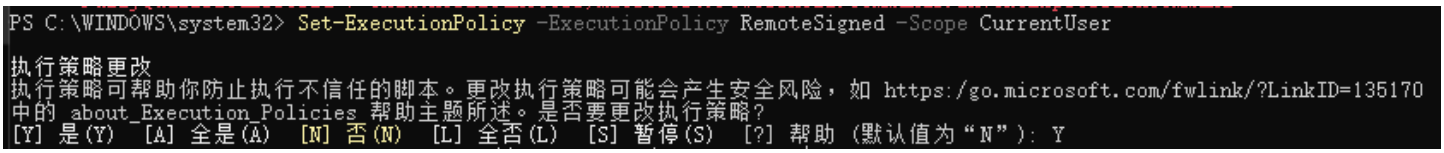

重新运行安装命令：

代码块

```
1   iwr -useb https://openclaw.ai/install.ps1 | iex
```

此时可以正常安装

```
PS C:\WINDOWS\system32> iwr -useb https://openclaw.ai/install.ps1 | iex

  OpenClaw Installer

[OK] Windows detected
[OK] Node.js v22.22.0 found
[*] Installing OpenClaw (openclaw@latest)...
[OK] OpenClaw installed

OpenClaw installed successfully (2026.2.26)!

Finally unpacked. Now point me at your problems.

Starting setup...

🦞 OpenClaw 2026.2.26 (bc50708) — I'm basically a Swiss Army knife, but with more opinions and fewer sharp edges.

Windows detected — OpenClaw runs great on WSL2!
Native Windows might be trickier.
Quick setup: wsl --install (one command, one reboot)
Guide: https://docs.openclaw.ai/windows

OPENCLAW
🦞 OPENCLAW 🦞

T  OpenClaw onboarding
```

> 如果不小心关闭了PowerShell窗口，可以重新打开PowerShell，输入以下指令继续配置OpenClaw
>
> 代码块
>
> ```
> 1   openclaw onboard --flow quickstart
> ```

是否继续，用左右箭头按键选择"Yes"

```
*  I understand this is personal-by-default and shared/multi-user use requires lock-down. Continue?
|  > Yes /   No
```

选择快速开始"QuickStart"

```
Onboarding mode
> QuickStart (Configure details later via openclaw configure.)
  Manual
```

上下按键选择模型，按模型接入要求输入API key或登录

```
* Model/auth provider
  > OpenAI (Codex OAuth + API key)
    Anthropic
    Chutes
    vLLM
    MiniMax
    Moonshot AI (Kimi K2.5)
    Google
    xAI (Grok)
    Mistral AI
    Volcano Engine
    BytePlus
    OpenRouter
    Kilo Gateway
    Qwen
    Z.AI
    Qianfan
    Copilot
    Vercel AI Gateway
    OpenCode Zen
    Xiaomi
    Synthetic
    Together AI
    Hugging Face
    Venice AI
  ...
```

成功后如下所示，Default model选择第一个Keep current (qwen-portal/coder-model)

```
  Qwen OAuth complete

  Model configured ----------------------------+
                                               |
  Default model set to qwen-portal/coder-model |
                                               |
-----------------------------------------------+

  Provider notes ------------------------------------------------------------------+
                                                                                    |
  Qwen OAuth tokens auto-refresh. Re-run login if refresh fails or access is revoked. |
  Base URL defaults to https://portal.qwen.ai/v1. Override                          |
  models.providers.qwen-portal.baseUrl if needed.                                   |
                                                                                    |
------------------------------------------------------------------------------------+

  Default model
  > Keep current (qwen-portal/coder-model)
    Enter model manually
    qwen-portal/coder-model
    qwen-portal/vision-model
```

配置通讯工具先跳过，选择最后一个Skip for now

```
* Select channel (QuickStart)
    Telegram (Bot API)
    WhatsApp (QR link)
    Discord (Bot API)
    IRC (Server + Nick)
    Google Chat (Chat API)
    Slack (Socket Mode)
    Signal (signal-cli)
    iMessage (imsg)
    Feishu/Lark (飞书)
    Nostr (NIP-04 DMs)
    Microsoft Teams (Bot Framework)
    Mattermost (plugin)
    Nextcloud Talk (self-hosted)
    Matrix (plugin)
    BlueBubbles (macOS app)
    LINE (Messaging API)
    Zalo (Bot API)
    Zalo (Personal Account)
    Synology Chat (Webhook)
    Tlon (Urbit)
  > Skip for now (You can add channels later via `openclaw channels add`)
```

成功后如下所示

```
o  Select channel (QuickStart)
|  Skip for now
Config overwrite: C:\Users\MINIPC\.openclaw\openclaw.json (sha256 cae81d3a36bb932adbdcde67ffe23d5aa68e1e25d670349cd7335d
70b142bdae -> 14ec59f72c12e7d5e635776717863f0535a747d048eb928e07c6b110fb6f8c6a, backup=C:\Users\MINIPC\.openclaw\opencla
w.json.bak)
Updated ~\.openclaw\openclaw.json
Workspace OK: ~\.openclaw\workspace
Sessions OK: ~\.openclaw\agents\main\sessions
```

配置skill选择No

```
o  Skills status -------------+
|                             |
|  Eligible: 3                |
|  Missing requirements: 40   |
|  Unsupported on this OS: 8  |
|  Blocked by allowlist: 0    |
+-----------------------------+

*  Configure skills now? (recommended)
|    Yes / > No
```

hooks全选，即对每个选项按空格后，下箭头按键切换至下一个选项，再按空格，重复该操作，直至所有选项前都有个绿色的"+"，按下enter键

```
*  Enable hooks?
|  [+] Skip for now
|  [+] 🚀 boot-md (Run BOOT.md on gateway startup)
|  [+] 📎 bootstrap-extra-files (Inject additional workspace bootstrap files via glob/path patterns)
|  [+] 📝 command-logger (Log all command events to a centralized audit file)
|  [+] 💾 session-memory (Save session context to memory when /new or /reset command is issued)
```

安装启动网关，如下所示。

```
*  Installing Gateway service…
Installed Scheduled Task: OpenClaw Gateway
Task script: C:\Users\MINIPC\.openclaw\gateway.cmd
o  Gateway service installed.
|
o
Agents: main (default)
Heartbeat interval: 30m (main)
Session store (main): C:\Users\MINIPC\.openclaw\agents\main\sessions\sessions.json (1 entries)
- agent:main:main (436m ago)
```

此时会打开一个新的窗口，如下所示。两个窗口都不要关掉。

```
openclaw-gateway

OpenClaw 2026.2.26 (bc50708) — Your terminal just grew claws—type something and let the bot pinch the busywork.

08:34:42 [canvas] host mounted at http://127.0.0.1:18789/__openclaw__/canvas/ (root C:\Users\MINIPC\.openclaw\canvas)
08:34:42 [heartbeat] started
08:34:42 [health-monitor] started (interval: 300s, grace: 60s)
08:34:42 [gateway] agent model: qwen-portal/coder-model
08:34:42 [gateway] listening on ws://127.0.0.1:18789, ws://[::1]:18789 (PID 26788)
08:34:42 [gateway] log file: C:\Users\MINIPC\AppData\Local\Temp\openclaw\openclaw-2026-03-02.log
08:34:42 [browser/server] Browser control listening on http://127.0.0.1:18791/ (auth=token)
08:34:43 [hooks:loader] Registered hook: boot-md -> gateway:startup
08:34:43 [hooks:loader] Registered hook: bootstrap-extra-files -> agent:bootstrap
08:34:43 [hooks:loader] Registered hook: command-logger -> command
08:34:43 [hooks:loader] Registered hook: session-memory -> command:new, command:reset
08:34:43 [hooks] loaded 4 internal hook handlers
```

回到第一个窗口，打开bot的方式选择Open the Web UI，之后可以在浏览器中使用OpenClaw

```
*  How do you want to hatch your bot?
|    Hatch in TUI (recommended)
|  > Open the Web UI
|    Do this later
└
```

此时完成配置，如下所示

```
How do you want to hatch your bot?
Open the Web UI

Dashboard ready ----------------------------------------------------------------+
                                                                                |
  Dashboard link (with token):                                                  |
  http://127.0.0.1:18789/#token=7db72aecc33197bb2f177340f116de0fc126993380f128de |
  Opened in your browser. Keep that tab to control OpenClaw.                    |
+-------------------------------------------------------------------------------+
|
Workspace backup ----------------------------------------+
                                                         |
  Back up your agent workspace.                          |
  Docs: https://docs.openclaw.ai/concepts/agent-workspace |
+--------------------------------------------------------+
|
Security ------------------------------------------------------+
                                                              |
  Running agents on your computer is risky — harden your setup:  |
  https://docs.openclaw.ai/security                           |
+-------------------------------------------------------------+
|
Web search (optional) ------------------------------------------------------------+
                                                                                   |
  If you want your agent to be able to search the web, you'll need an API key.    |
                                                                                   |
  OpenClaw uses Brave Search for the `web_search` tool. Without a Brave Search API key, |
  web search won't work.                                                           |
                                                                                   |
  Set it up interactively:                                                         |
  - Run: openclaw configure --section web                                          |
  - Enable web_search and paste your Brave Search API key                          |
                                                                                   |
  Alternative: set BRAVE_API_KEY in the Gateway environment (no config changes).   |
  Docs: https://docs.openclaw.ai/tools/web                                         |
+-----------------------------------------------------------------------------------+
|
What now ------------------------------------------------------------+
                                                                    |
  What now: https://openclaw.ai/showcase ("What People Are Building"). |
+-------------------------------------------------------------------+
|
—  Onboarding complete. Dashboard opened; keep that tab to control OpenClaw.
```

浏览器会自动打开控制台，后续也可以直接访问http://127.0.0.1:18789/，但是要保证后台（即第二个窗口）一直开启

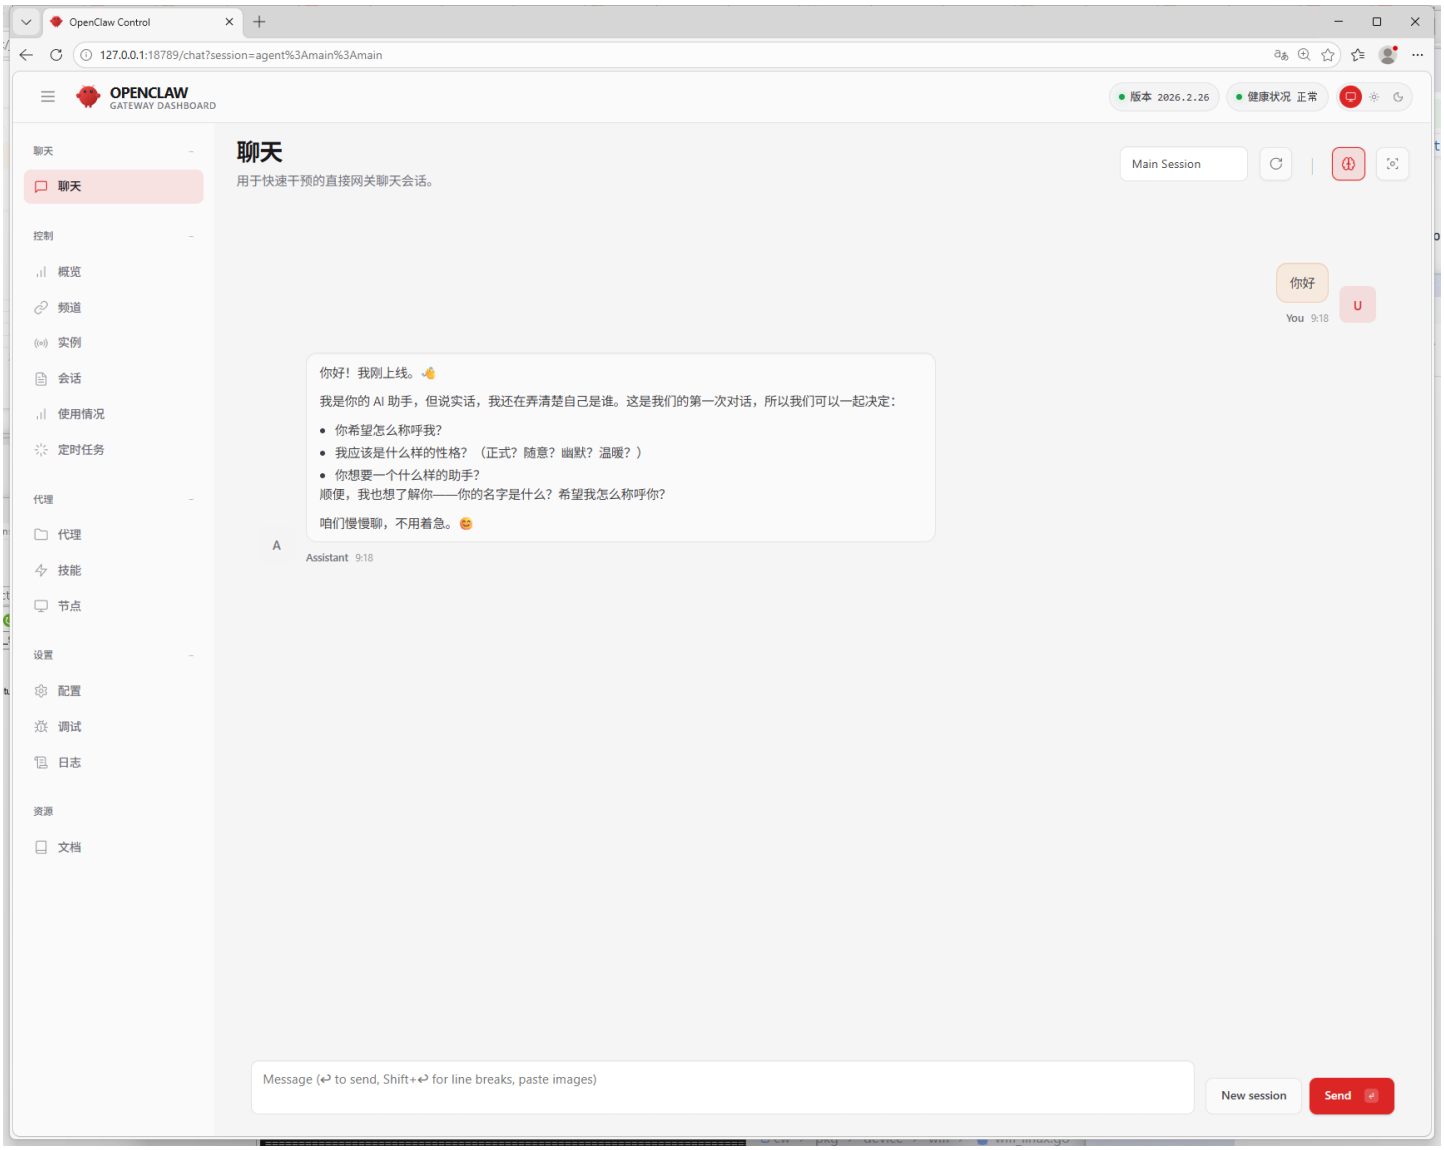

发送消息后有回复则说明配置成功

四、MacOS流程

1. 检查系统版本(12.0及以上)

终端（command + space ）输入

代码块

```
sw_vers
```

输出示例

代码块

```
ProductName:    macOS
```

```
ProductVersion: 14.2
BuildVersion:   23C64
```

2. 安装Homebrew

代码块

```
/bin/bash -c "$(curl -fsSL https://raw.githubusercontent.com/Homebrew/install/HEAD/install.sh)"
```

安装完成后，根据提示执行初始化命令

代码块

```
echo 'eval "$(/opt/homebrew/bin/brew shellenv)"' >> ~/.zprofile
eval "$(/opt/homebrew/bin/brew shellenv)"
```

验证安装

代码块

```
brew --version
```

3. 安装Node.js

需要Node.js v18或更高版本

代码块

```
brew install node
```

验证安装

代码块

```
node --version
npm --version
```

4. 安装Git

```
brew install git
```

验证

```
代码块
git --version
```

5. 安装OpenClaw

```
代码块
npm install -g openclaw
```

安装完后验证

```
代码块
openclaw --version
```

启动gateway

```
代码块
openclaw gateway start
```

验证状态，running即为成功

```
代码块
openclaw gateway status
```

6. 配置API密钥

编辑认证文件

```
代码块
nano ~/.openclaw/agents/main/agent/auth-profiles.json
```

添加密钥，按ctrl+O保存，ctrl+X退出

```
代码块
{
  "bailian": {
    "apiKey": "sk-xxxxxxxxxxxxxxxxxxxxxxxx"
  }
}
```

设置默认模型：编辑配置文件

```
代码块
nano ~/.openclaw/gateway/config.json
```

添加或修改

```
代码块
{
  "default_model": "bailian/qwen3.5-plus"
}
```

7. 首次运行

启动web聊天页面

```
代码块
openclaw webchat
```

浏览器会自动打开，访问http://localhost:3000

五、API配置

腾讯云混元

https://console.cloud.tencent.com/hunyuan/start

```
代码块
```

```
  "models": {
    "mode": "merge",
    "providers": {
      "hunyuan": {
        "baseUrl": "https://api.hunyuan.cloud.tencent.com/v1",
        "apiKey": "HY_API_KEY",
        "api": "openai-completions",
        "models": [
          { "id": "hunyuan-turbos-latest", "name": "hunyuan Turbos" },
          { "id": "hunyuan-t1-latest", "name": "hunyuan T1" },
        ]
      }
    }
  },
  "agents": {
    "defaults": {
      "model": {
        "primary": "hunyuan/hunyuan-turbos-latest"
      },
      "models": {
        "hunyuan/hunyuan-turbos-latest": {},
        "hunyuan/hunyuan-t1-latest": {}
      }
    }
  },
```

阿里云

https://www.aliyun.com/benefit?utm_content=se_1022753455

修改配置

代码块

```
  "models": {
    "mode": "merge",
    "providers": {
      "bailian": {
        "baseUrl": "https://dashscope.aliyuncs.com/compatible-mode/v1",
        "apiKey": "DASHSCOPE_API_KEY",
        "api": "openai-completions",
        "models": [
          {
            "id": "qwen3.5-plus",
            "name": "qwen3.5-plus",
            "reasoning": false,
            "input": ["text", "image"],
```

```
            "contextWindow": 1000000,
            "maxTokens": 65536
          },
          {
            "id": "qwen3-coder-next",
            "name": "qwen3-coder-next",
            "reasoning": false,
            "input": ["text"],
            "contextWindow": 262144,
            "maxTokens": 65536
          }
        ]
      }
    }
  },
  "agents": {
    "defaults": {
      "model": {
        "primary": "bailian/qwen3.5-plus"
      },
      "models": {
        "bailian/qwen3.5-plus": {},
        "bailian/qwen3-coder-next": {}
      }
    }
  },
```

火山引擎

打开【火山方舟大模型服务平台】https://www.volcengine.com/product/ark

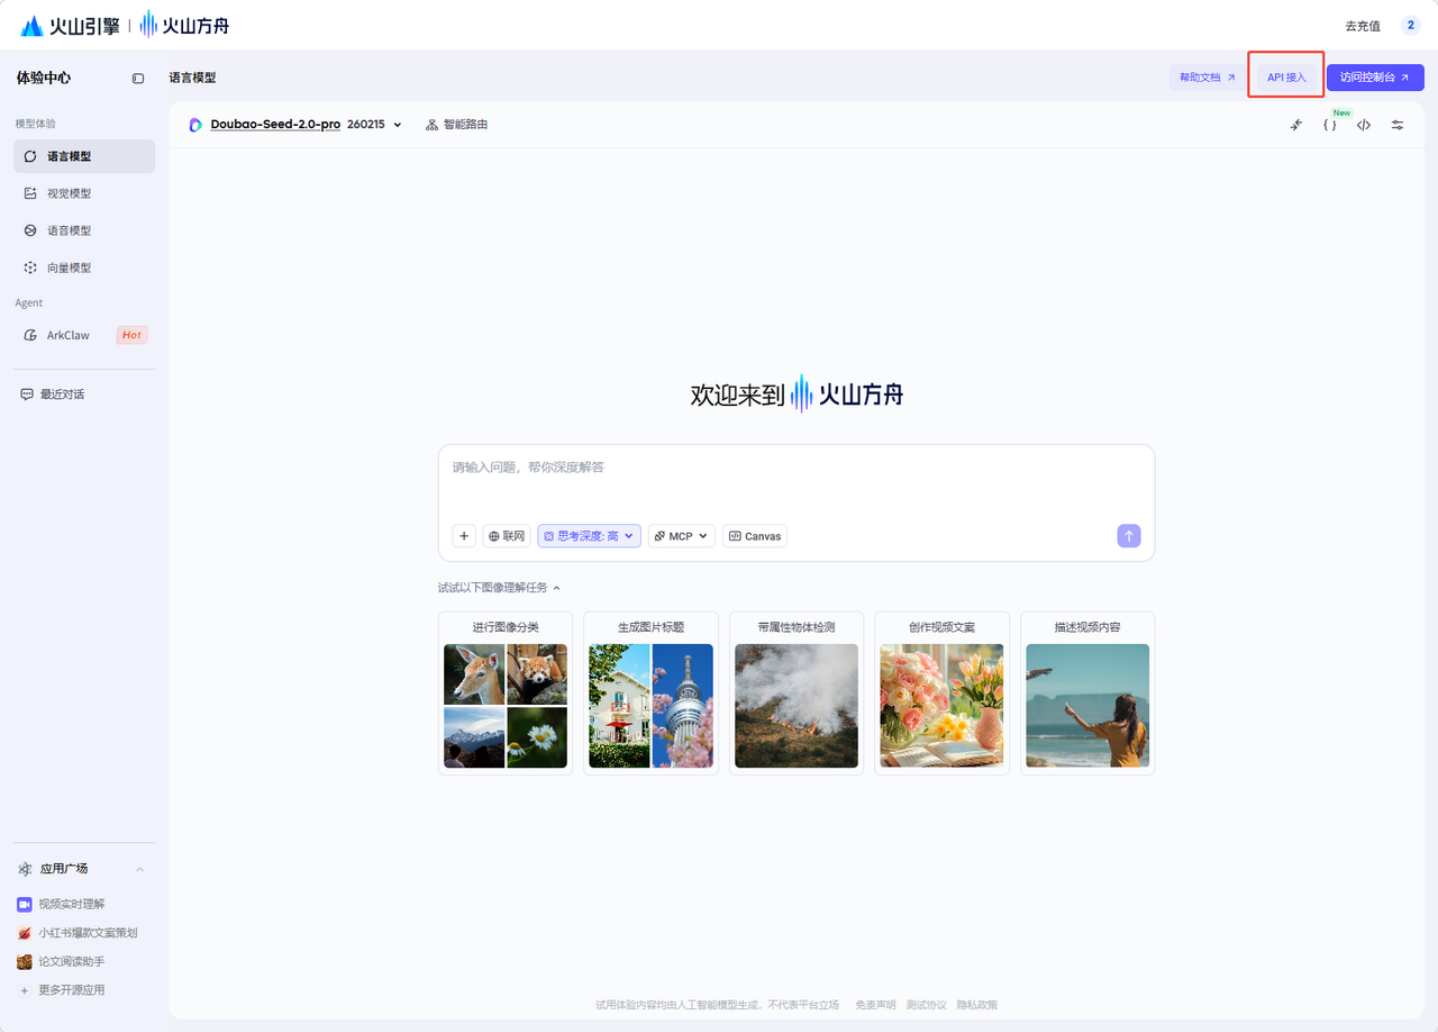

开通想要接入的模型

关键：完整复制生成的 API Key（格式通常为一串 UUID）。注意：这里千万不要使用火山引擎 IAM 全局的 AK/SK，它不支持 OpenAI 兼容接口的 Bearer 认证，会直接报 401 错误！

写入配置文件，开通了什么填什么（id），name随便填一个

代码块

```
{
  "models": {
    "providers": {
      "volcengine": {
        "baseUrl": "https://ark.cn-beijing.volces.com/api/v3",
        "apiKey": "${VOLCENGINE_API_KEY}",
        "api": "openai-completions",
        "models": [
          { "id": "doubao-1-5-pro-32k-250115", "name": "豆包 1.5 Pro 32K" },
          { "id": "doubao-1-5-lite-32k-250115", "name": "豆包 1.5 Lite 32K" }
        ]
      }
    }
```

```
  },
  "agents": {
    "defaults": {
      "model": { "primary": "volcengine/doubao-1-5-pro-32k-250115" }
      下边的列表也需要填一下
    }
  }
}
```

MiniMax

MiniMax OAuth

代码块

```
openclaw plugins enable minimax-portal-auth  # 如果已加载则跳过。
openclaw gateway restart  # 如果网关已在运行则重启
openclaw onboard --auth-choice minimax-portal
```

MiniMax M2.1

代码块

```
{
  env: { MINIMAX_API_KEY: "sk-..." },
  agents: { defaults: { model: { primary: "minimax/MiniMax-M2.1" } } },
  models: {
    mode: "merge",
    providers: {
      minimax: {
        baseUrl: "https://api.minimax.io/anthropic",
        apiKey: "${MINIMAX_API_KEY}",
        api: "anthropic-messages",
        models: [
          {
            id: "MiniMax-M2.1",
            name: "MiniMax M2.1",
            reasoning: false,
            input: ["text"],
            cost: { input: 15, output: 60, cacheRead: 2, cacheWrite: 10 },
            contextWindow: 200000,
            maxTokens: 8192
          }
        ]
      }
    }
```

```
    }
  }
```

MiniMax M2.1

代码块

```
{
  env: { MINIMAX_API_KEY: "sk-..." },
  agents: {
    defaults: {
      models: {
        "anthropic/claude-opus-4-5": { alias: "opus" },
        "minimax/MiniMax-M2.1": { alias: "minimax" }
      },
      model: {
        primary: "anthropic/claude-opus-4-5",
        fallbacks: ["minimax/MiniMax-M2.1"]
      }
    }
  }
}
```

六、接入渠道

飞书

访问飞书开放平台https://open.feishu.cn/app

点击创建企业自建应用，填写应用名称和应用描述

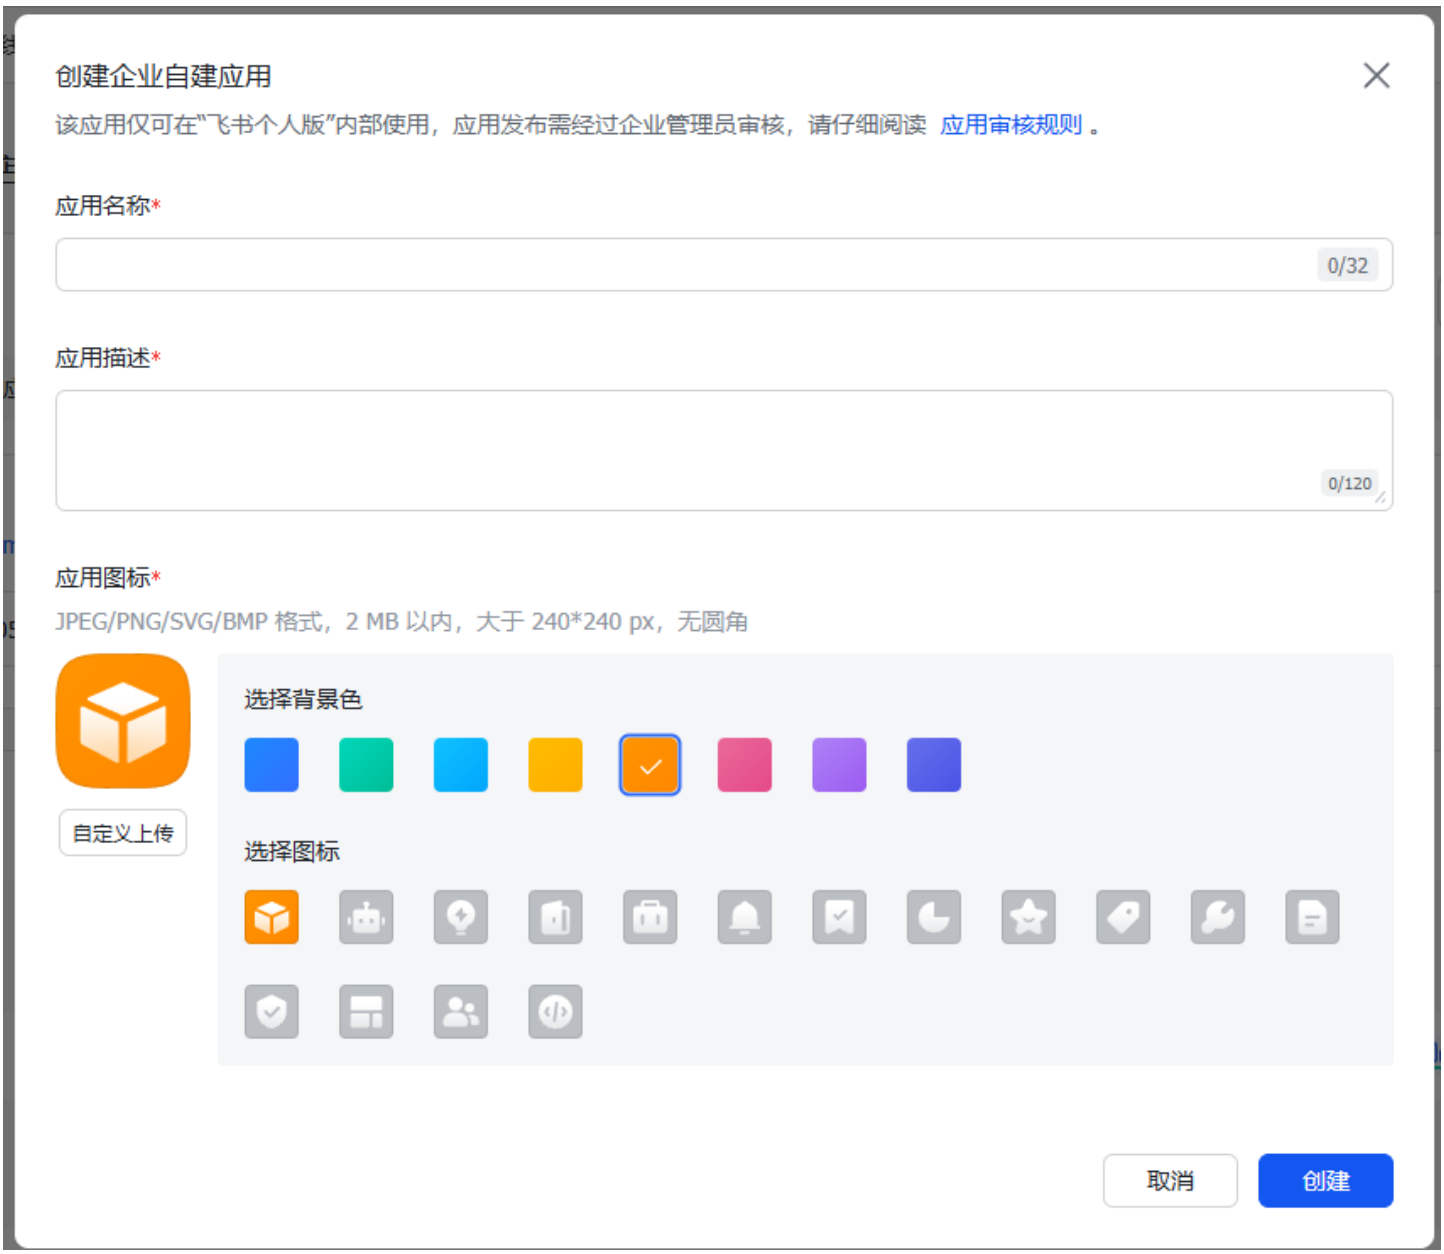

点击创建版本并发布

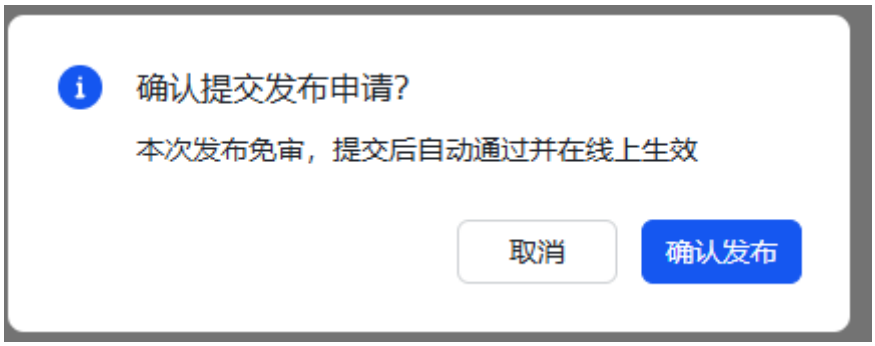

获取应用与凭证，复制App ID与App Secret

一键导入权限配置：【权限管理】->【批量导入】，粘贴json配置

代码块

```
1  {
2    "scopes": {
3      "tenant": [
4        "aily:file:read",
5        "aily:file:write",
6        "application:application.app_message_stats.overview:readonly",
7        "application:application:self_manage",
8        "application:bot.menu:write",
9        "cardkit:card:write",
10       "contact:contact.base:readonly",
11       "contact:user.employee_id:readonly",
12       "corehr:file:download",
13       "docs:document.content:read",
14       "event:ip_list",
15       "im:app_feed_card:write",
16       "im:biz_entity_tag_relation:read",
17       "im:biz_entity_tag_relation:write",
18       "im:chat",
19       "im:chat.access_event.bot_p2p_chat:read",
20       "im:chat.announcement:read",
21       "im:chat.announcement:write_only",
22       "im:chat.chat_pins:read",
23       "im:chat.chat_pins:write_only",
24       "im:chat.collab_plugins:read",
25       "im:chat.collab_plugins:write_only",
26       "im:chat.managers:write_only",
27       "im:chat.members:bot_access",
28       "im:chat.members:read",
29       "im:chat.members:write_only",
30       "im:chat.menu_tree:read",
31       "im:chat.menu_tree:write_only",
32       "im:chat.moderation:read",
33       "im:chat.tabs:read",
34       "im:chat.tabs:write_only",
35       "im:chat.top_notice:write_only",
36       "im:chat.widgets:read",
37       "im:chat.widgets:write_only",
38       "im:chat:create",
39       "im:chat:delete",
40       "im:chat:moderation:write_only",
41       "im:chat:operate_as_owner",
42       "im:chat:read",
43       "im:chat:readonly",
44       "im:chat:update",
45       "im:datasync.feed_card.time_sensitive:write",
46       "im:message",
47       "im:message.group_at_msg:readonly",
```

```
48          "im:message.group_msg",
49          "im:message.p2p_msg:readonly",
50          "im:message.pins:read",
51          "im:message.pins:write_only",
52          "im:message.reactions:read",
53          "im:message.reactions:write_only",
54          "im:message.urgent",
55          "im:message.urgent.status:write",
56          "im:message.urgent:phone",
57          "im:message.urgent:sms",
58          "im:message:readonly",
59          "im:message:recall",
60          "im:message:send_as_bot",
61          "im:message:send_multi_depts",
62          "im:message:send_multi_users",
63          "im:message:send_sys_msg",
64          "im:message:update",
65          "im:resource",
66          "im:tag:read",
67          "im:tag:write",
68          "im:url_preview.update",
69          "im:user_agent:read",
70          "sheets:spreadsheet",
71          "wiki:wiki:readonly"
72        ],
73        "user": [
74          "aily:file:read",
75          "aily:file:write",
76          "contact:contact.base:readonly",
77          "im:chat.access_event.bot_p2p_chat:read"
78        ]
79      }
80    }
81
```

【应用能力】-> 【添加应用能力】->【机器人】，开启机器人能力并配置名称

打开PowerShell，安装飞书插件

代码块

```
openclaw plugins install @openclaw/feishu
```

```
PS C:\Users\MINIPC> openclaw plugins install @openclaw/feishu

🦞 OpenClaw 2026.3.2 (85377a2) — I speak fluent bash, mild sarcasm, and aggressive tab-completion energy.

Downloading @openclaw/feishu…
Extracting C:\Users\MINIPC\AppData\Local\Temp\openclaw-npm-pack-M3ucdW\openclaw-feishu-2026.3.2.tgz…
Plugin "feishu" has 1 suspicious code pattern(s). Run "openclaw security audit --deep" for details.
Installing to C:\Users\MINIPC\.openclaw\extensions\feishu…
Installing plugin dependencies…
05:51:05 [plugins] plugins.allow is empty; discovered non-bundled plugins may auto-load: feishu (C:\Users\MINIPC\.opencl
aw\extensions\feishu\index.ts). Set plugins.allow to explicit trusted ids.
Config warnings:
- plugins.entries.feishu: plugin feishu: duplicate plugin id detected; later plugin may be overridden (C:\Users\MINIPC\.
openclaw\extensions\feishu\index.ts)
Config overwrite: C:\Users\MINIPC\.openclaw\openclaw.json (sha256 85635e8a3f24a363b35df787c472f5c6f66d34c853aa6d5f587c19
fe1ee2b7b0 -> 8c6dd86c292ce6ee2e80450a844b15b2af45d3646e1231ff0d35f9a54375ffa1, backup=C:\Users\MINIPC\.openclaw\opencla
w.json.bak)
Installed plugin: feishu
Restart the gateway to load plugins.
```

添加飞书渠道

代码块

```
openclaw channels add
```

是否现在开始配置渠道，选择yes

```
(C:\Users\MINIPC\.openclaw\extensions\feishu\index.ts)
05:51:53 [plugins] plugins.allow is empty; discovered non-bundled plugins may auto-load: feishu (C:\Users\MINIPC\.opencl
aw\extensions\feishu\index.ts). Set plugins.allow to explicit trusted ids.
Config warnings:\n- plugins.entries.feishu: plugin feishu: duplicate plugin id detected; later plugin may be overridden
(C:\Users\MINIPC\.openclaw\extensions\feishu\index.ts)
  Channel setup

◇ Channel status

  Telegram: needs token
  WhatsApp (default): not linked
  Discord: needs token
  Slack: needs tokens
  Signal: needs setup
  signal-cli: missing (signal-cli)
  iMessage: needs setup
  imsg: missing (imsg)
  Feishu: needs app credentials
  IRC: not configured
  Google Chat: not configured
  Google Chat: install plugin to enable
  Nostr: install plugin to enable
  Microsoft Teams: install plugin to enable
  Mattermost: install plugin to enable
  Nextcloud Talk: install plugin to enable
  Matrix: install plugin to enable
  BlueBubbles: install plugin to enable
  LINE: install plugin to enable
  Zalo: install plugin to enable
  Zalo Personal: install plugin to enable
  Synology Chat: install plugin to enable
  Tlon: install plugin to enable

◆ Configure chat channels now?
  ● Yes / ○ No
```

渠道类型选择飞书

```
◆ Select a channel
  ○ Telegram (Bot API)
  ○ WhatsApp (QR link)
  ○ Discord (Bot API)
  ○ IRC (Server + Nick)
  ○ Google Chat (Chat API)
  ○ Slack (Socket Mode)
  ○ Signal (signal-cli)
  ○ iMessage (imsg)
  ● Feishu/Lark (飞书) (needs app creds)
  ○ Nostr (NIP-04 DMs)
  ○ Microsoft Teams (Bot Framework)
  ○ Mattermost (plugin)
  ○ Nextcloud Talk (self-hosted)
  ○ Matrix (plugin)
  ○ BlueBubbles (macOS app)
  ○ LINE (Messaging API)
  ○ Zalo (Bot API)
  ○ Zalo (Personal Account)
  ○ Synology Chat (Webhook)
  ○ Tlon (Urbit)
  ○ Finished
```

如何处理APP密钥，选择第一个

```
◆ How do you want to provide this App Secret?
  ● Enter App Secret (Stores the credential directly in OpenClaw config)
  ○ Use external secret provider
```

输入刚才复制的App Secret和App ID

```
◇ How do you want to provide this App Secret?
  Enter App Secret

◇ Enter Feishu App Secret
  Oh[redacted]

◇ Enter Feishu App ID
  cli_[redacted]
[info]: [ 'client ready' ]

◇ Feishu connection test

  Connected as ou_f[redacted]
```

之后按情况选择

```
◇ Feishu connection mode
  WebSocket (default)

◇ Which Feishu domain?
  Feishu (feishu.cn) - China

◇ Group chat policy
  Open - respond in all groups (requires mention)
```

渠道选择finished

```
◆ Select a channel
  ○ Telegram (Bot API)
  ○ WhatsApp (QR link)
  ○ Discord (Bot API)
  ○ IRC (Server + Nick)
  ○ Google Chat (Chat API)
  ○ Slack (Socket Mode)
  ○ Signal (signal-cli)
  ○ iMessage (imsg)
  ○ Feishu/Lark (飞书)
  ○ Nostr (NIP-04 DMs)
  ○ Microsoft Teams (Bot Framework)
  ○ Mattermost (plugin)
  ○ Nextcloud Talk (self-hosted)
  ○ Matrix (plugin)
  ○ BlueBubbles (macOS app)
  ○ LINE (Messaging API)
  ○ Zalo (Bot API)
  ○ Zalo (Personal Account)
  ○ Synology Chat (Webhook)
  ○ Tlon (Urbit)
  ● Finished (Done)
```

设置飞书用户通过私聊与机器人交互时的访问策略，选择yes

```
Configure DM access policies now? (default: pairing)
● Yes / ○ No
```

选择推荐的配对模式

```
Feishu DM policy
Pairing (recommended)

Add display names for these accounts? (optional)
Yes

feishu account name (default)
feishu
```

是否选择绑定

```
Bind configured channel accounts to agents now?
Yes

Route feishu account "default" to agent
main (default)

Routing bindings

Added: feishu accountId=default

Config warnings:
- plugins.entries.feishu: plugin feishu: duplicate plugin id detected; later plugin may be overridden (C:\Users\MINIPC\.openclaw\extensions\feishu\index.ts)
Config overwrite: C:\Users\MINIPC\.openclaw\openclaw.json (sha256 2cd22da8f85d8e785ea8e9a426836c2b3d217b21e88a568e13c436aa6e2fe905 -> 1dc50645526cfd2bbe50578a180207ad75a26488a7a8283cc054bb1d61cf3d1b, backup=C:\Users\MINIPC\.openclaw\openclaw.json.bak)

Channels updated.
```

重启网关

代码块

```
openclaw gateway restart
```

成功启动网关后，回到飞书开发平台，配置事件订阅：【事件与回调】->【事件配置】->【使用长连接接收事件(WebSocket模式)】->添加事件 `im.message.receive_v1`

在应用列表中搜索你的机器人并发送一条消息进行测试

默认情况下，机器人会回复一个配对码，在PowerShell中执行该命令

代码块

```
openclaw pairing approve feishu <pairing code>
```

```
PS [redacted]> openclaw pairing approve feishu 2 [redacted]
Config warnings:\n- plugins.entries.feishu: plugin feishu: duplicate plugin id detected; later plugin may be overridden
(C:\Users\MINIPC\.openclaw\extensions\feishu\index.ts)
Config warnings:\n- plugins.entries.feishu: plugin feishu: duplicate plugin id detected; later plugin may be overridden
(C:\Users\MINIPC\.openclaw\extensions\feishu\index.ts)
06:21:48 [plugins] plugins.allow is empty; discovered non-bundled plugins may auto-load: feishu (C:\Users\MINIPC\.opencl
aw\extensions\feishu\index.ts). Set plugins.allow to explicit trusted ids.
Config warnings:\n- plugins.entries.feishu: plugin feishu: duplicate plugin id detected; later plugin may be overridden
(C:\Users\MINIPC\.openclaw\extensions\feishu\index.ts)
06:21:54 [plugins] feishu_doc: Registered feishu_doc, feishu_app_scopes
06:21:54 [plugins] feishu_chat: Registered feishu_chat tool
06:21:54 [plugins] feishu_wiki: Registered feishu_wiki tool
06:21:54 [plugins] feishu_drive: Registered feishu_drive tool
06:21:54 [plugins] feishu_bitable: Registered bitable tools
Config warnings:\n- plugins.entries.feishu: plugin feishu: duplicate plugin id detected; later plugin may be overridden
(C:\Users\MINIPC\.openclaw\extensions\feishu\index.ts)

🦞 OpenClaw 2026.3.2 (85377a2) — Pairing codes exist because even bots believe in consent—and good security hygiene.

◇  Config warnings
│
│  - plugins.entries.feishu: plugin feishu: duplicate plugin id detected; later plugin may
│    be overridden (C:\Users\MINIPC\.openclaw\extensions\feishu\index.ts)
│
Approved feishu sender ou_[redacted]
```

批准后，即可正常对话

QQ

https://q.qq.com/qqbot/openclaw/ QQ开放平台扫码登录，创建机器人，复制三行指令

代码块

```
openclaw plugins install @sliverp/qqbot@latest
openclaw channels add --channel qqbot --token "xxxxxxxxx:xxxxxxxxxxx"
openclaw gateway restart
```

钉钉

钉钉开放平台https://open.dingtalk.com/

需要获取开发权限，企业需要审批，组织不用

创建应用

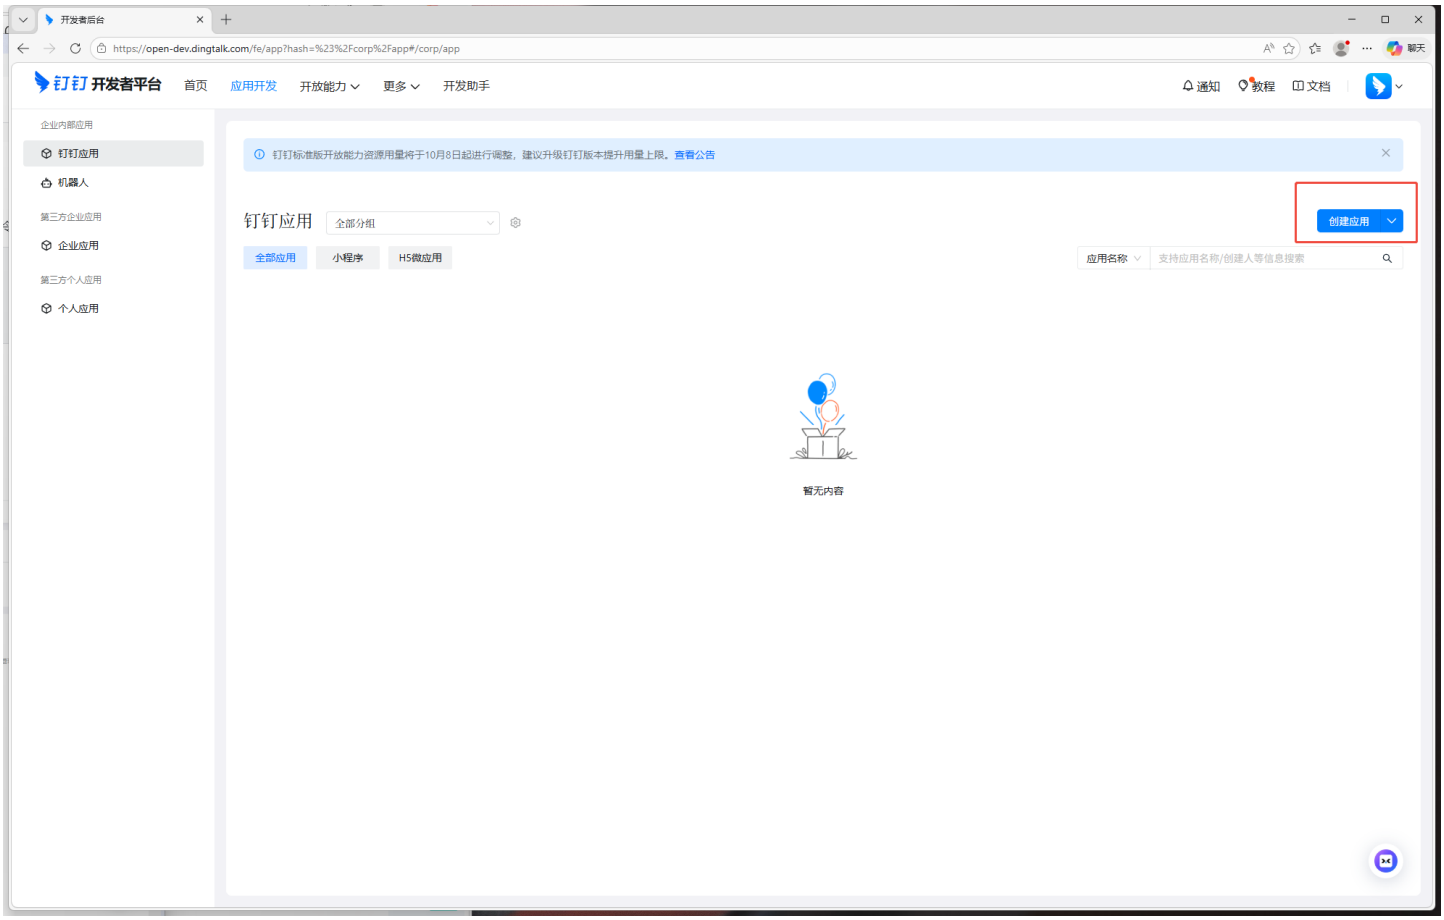

【添加应用能力】->【机器人】

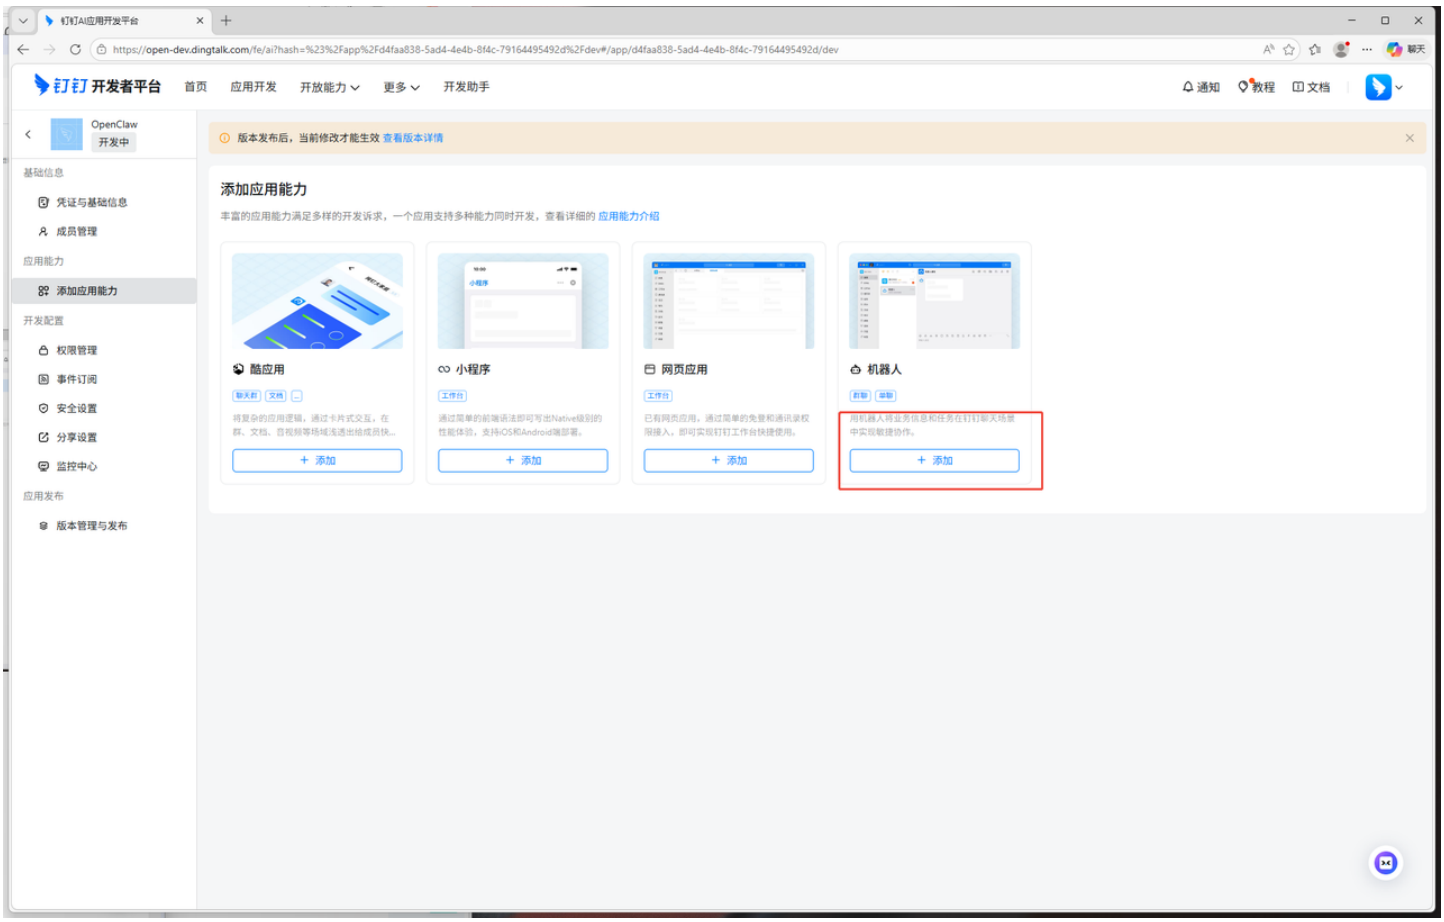

打开开关

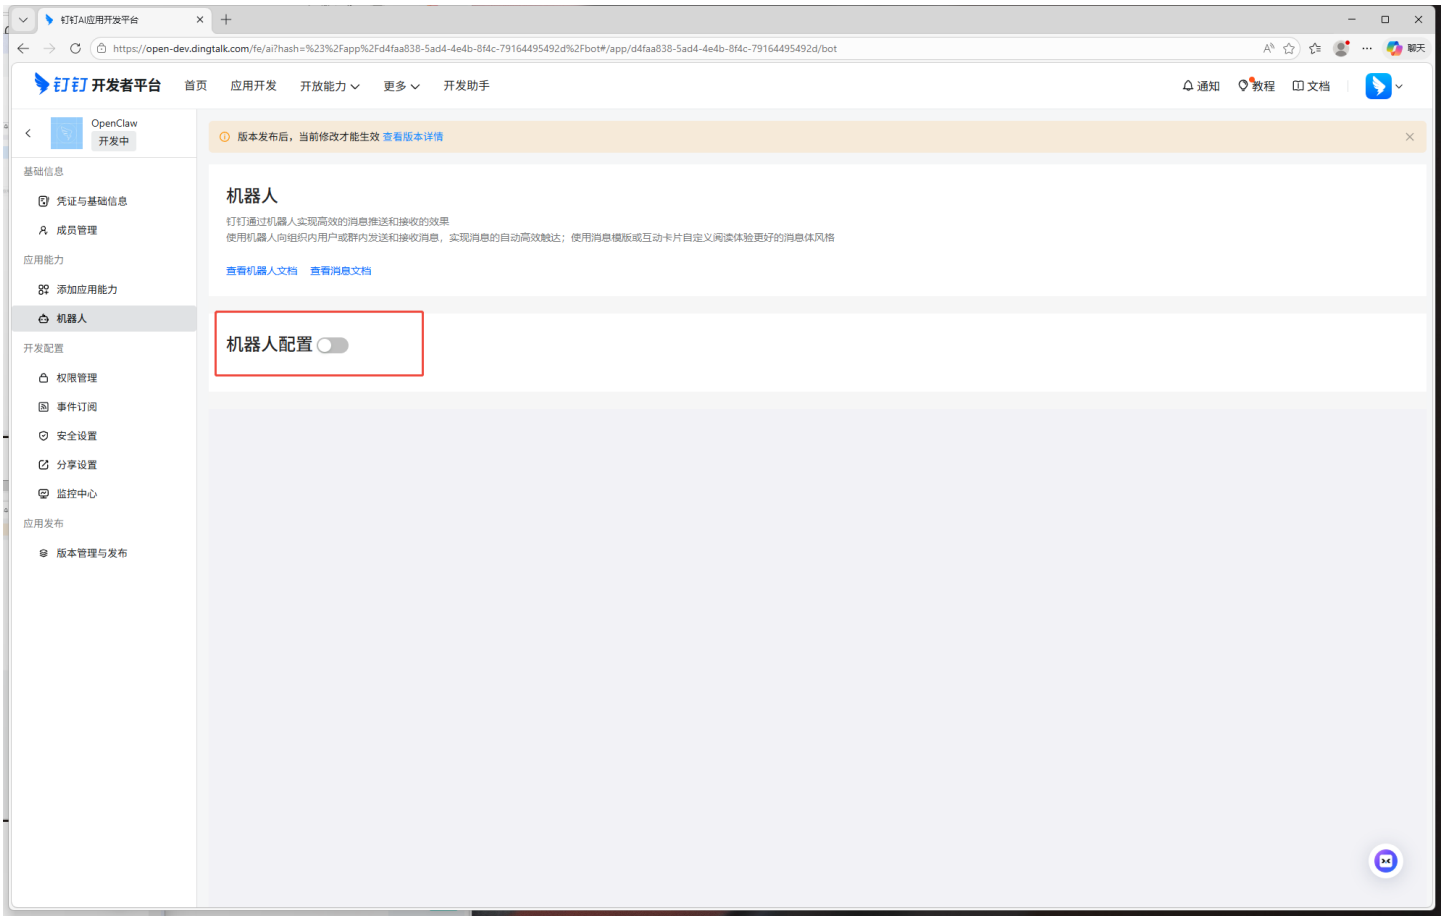

确保是stream模式

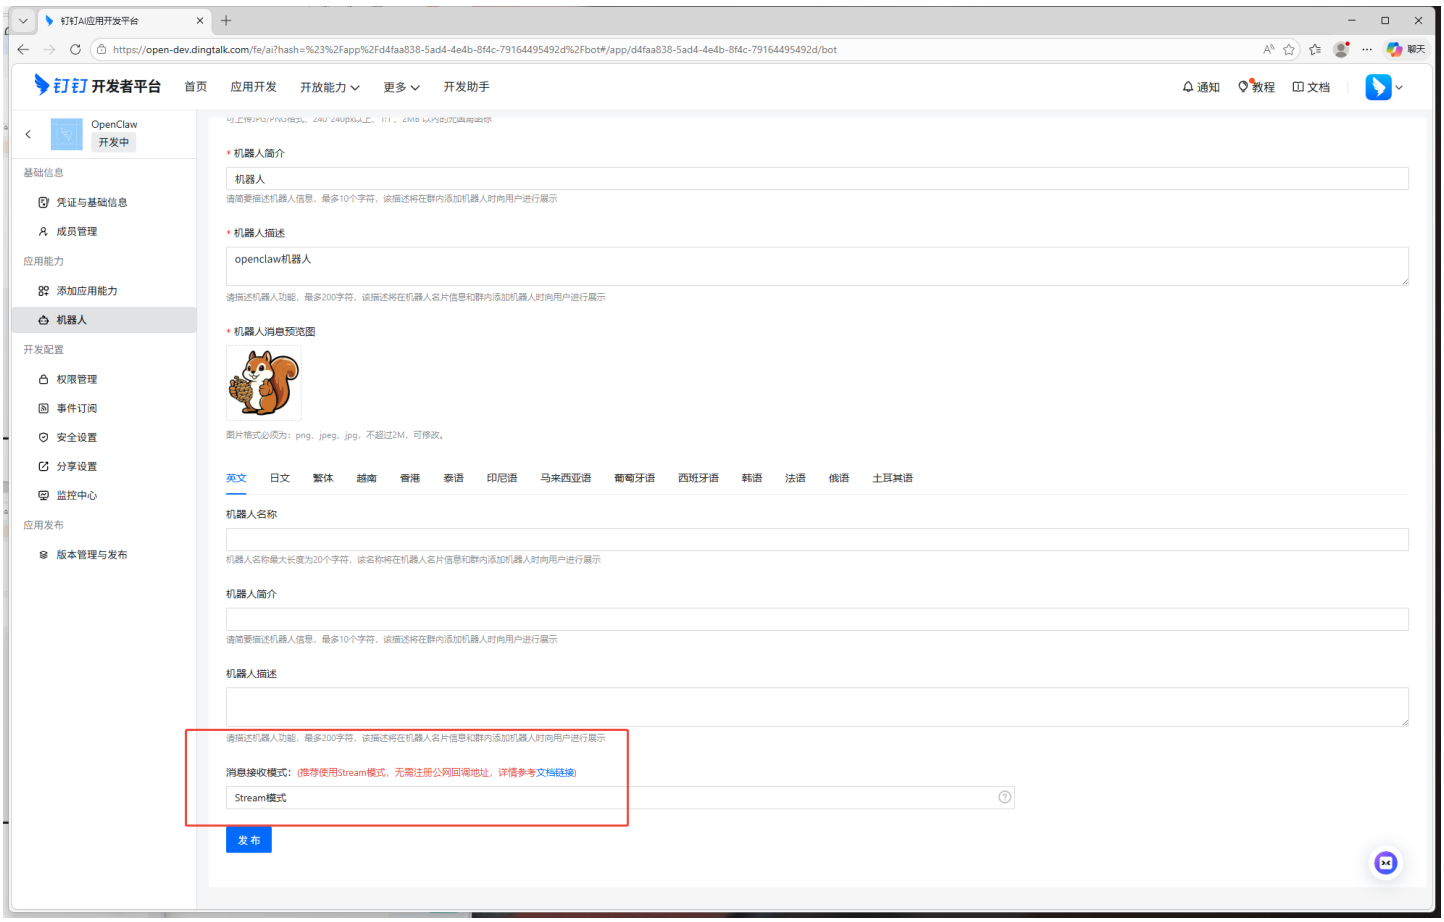

发布机器人

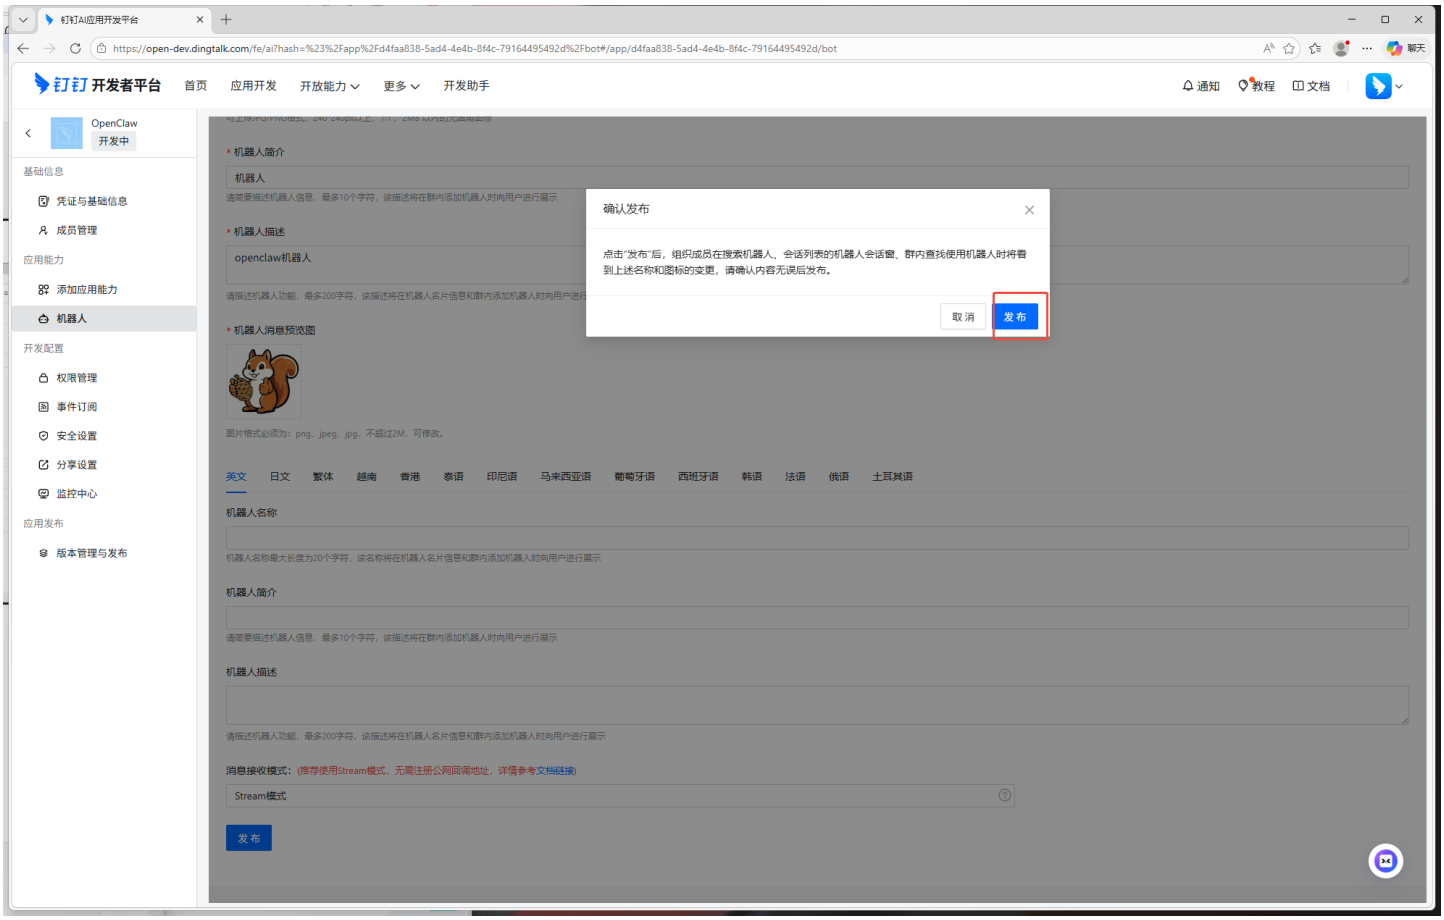

权限管理，开通权限

代码块

```
Card.Streaming.Write
Card.Instance.Write
qyapi_robot_senmsg
```

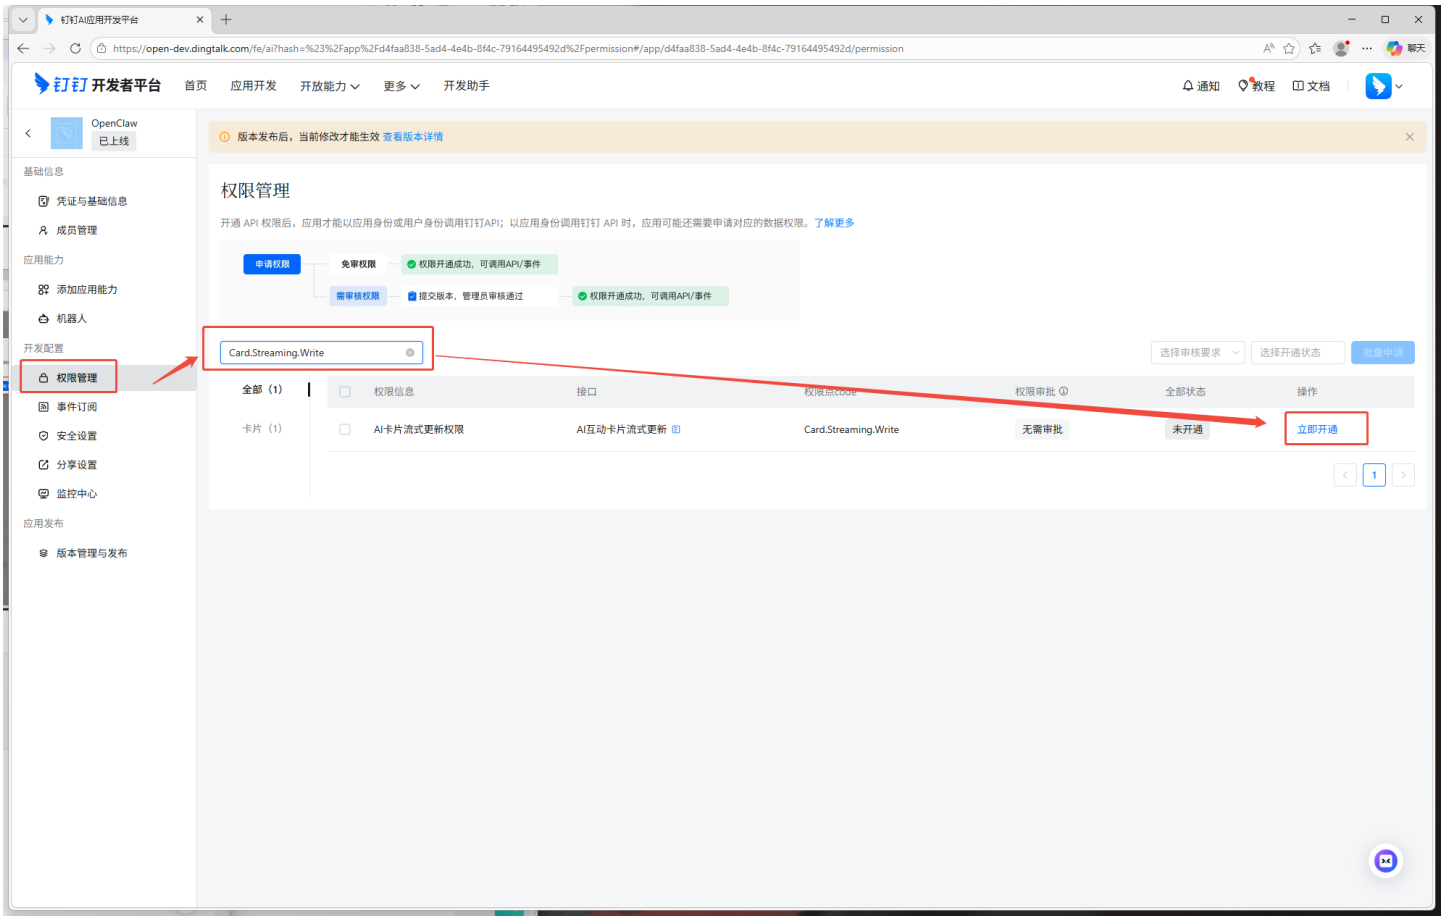
钉钉AI应用开发平台
https://open-dev.dingtalk.com/fe/ai?hash=%23%2Fapp%2Fd4faa838-5ad4-4e4b-8f4c-79164495492d%2Fpermission#/app/d4faa838-5ad4-4e4b-8f4c-79164495492d/permission
钉钉 开发者平台
首页
应用开发
开放能力
更多
开发助手
通知
教程
文档
OpenClaw
已上线
基础信息
凭证与基础信息
成员管理
应用能力
添加应用能力
机器人
开发配置
权限管理
事件订阅
安全设置
分享设置
监控中心
应用发布
版本管理与发布
版本发布后，当前修改才能生效 查看版本详情
权限管理
开通 API 权限后，应用才能以应用身份或用户身份调用钉钉API；以应用身份调用钉钉 API 时，应用可能还需要申请对应的数据权限。了解更多
申请权限
免审权限
权限开通成功，可调用API/事件
需审核权限
提交版本，管理员审核通过
权限开通成功，可调用API/事件
Card.Streaming.Write
全部（1）
卡片（1）
权限信息
接口
权限点code
权限审批
全部状态
操作
AI卡片流式更新权限
AI互动卡片流式更新
Card.Streaming.Write
无需审批
未开通
立即开通

获取密钥

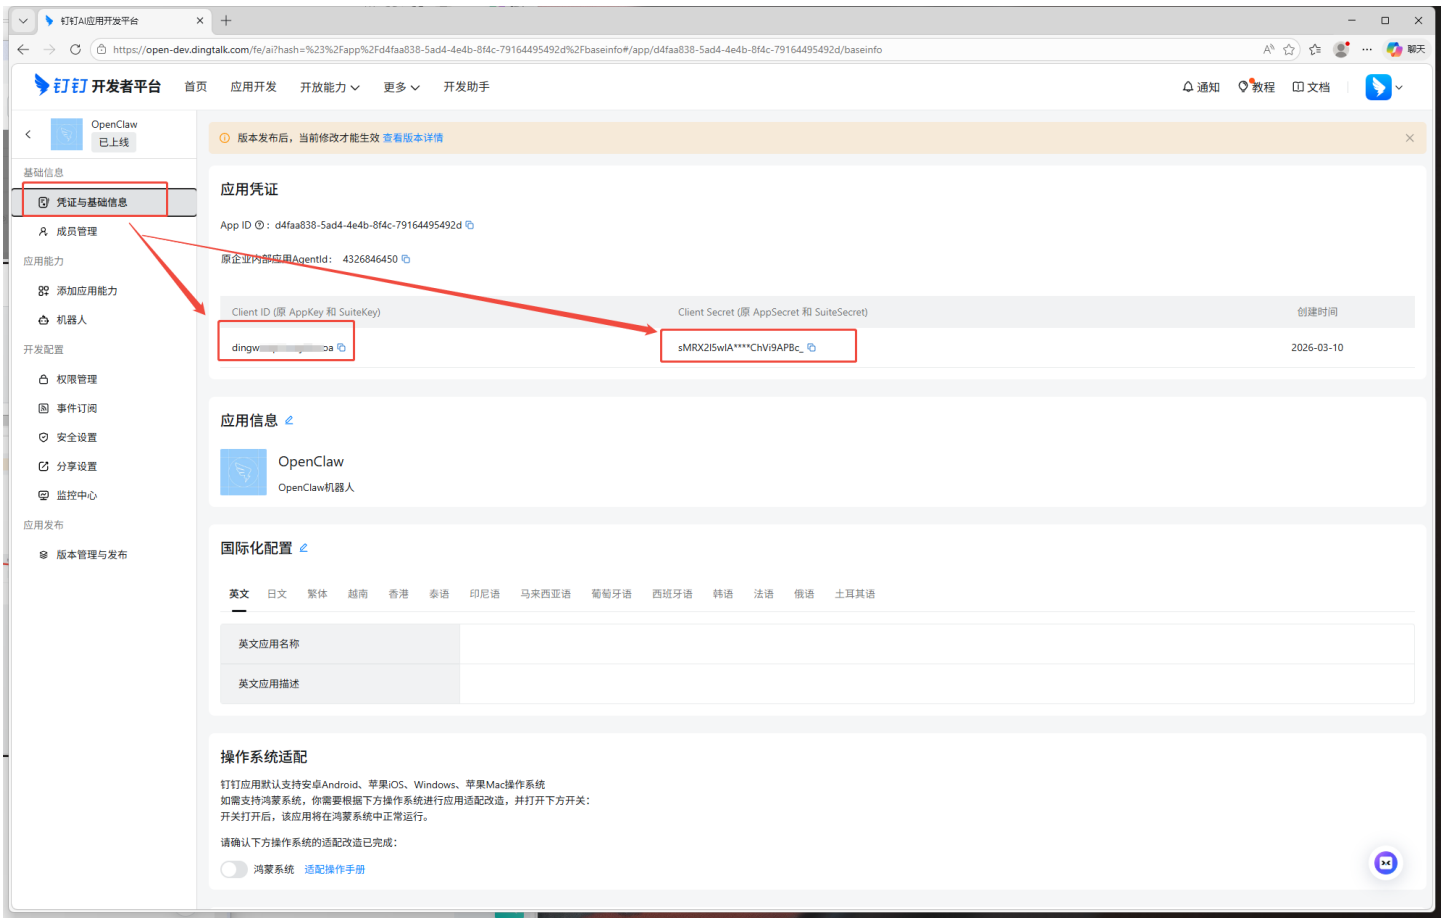
钉钉AI应用开发平台
https://open-dev.dingtalk.com/fe/ai?hash=%23%2Fapp%2Fd4faa838-5ad4-4e4b-8f4c-79164495492d%2Fbaseinfo#/app/d4faa838-5ad4-4e4b-8f4c-79164495492d/baseinfo
钉钉 开发者平台
首页
应用开发
开放能力
更多
开发助手
通知
教程
文档
OpenClaw
已上线
基础信息
凭证与基础信息
成员管理
应用能力
添加应用能力
机器人
开发配置
权限管理
事件订阅
安全设置
分享设置
监控中心
应用发布
版本管理与发布
版本发布后，当前修改才能生效 查看版本详情
应用凭证
App ID：d4faa838-5ad4-4e4b-8f4c-79164495492d
原企业内部应用AgentId： 4326846450
Client ID (原 AppKey 和 SuiteKey)
Client Secret (原 AppSecret 和 SuiteSecret)
创建时间
sMRX2I5wIA****ChVi9APBc_
2026-03-10
应用信息
OpenClaw
OpenClaw机器人
国际化配置
英文
日文
繁体
越南
香港
泰语
印尼语
马来西亚语
葡萄牙语
西班牙语
韩语
法语
俄语
土耳其语
英文应用名称
英文应用描述
操作系统适配
钉钉应用默认支持安卓Android、苹果iOS、Windows、苹果Mac操作系统
如需支持鸿蒙系统，你需要根据下方操作系统进行应用适配改造，并打开下方开关：
开关打开后，该应用将在鸿蒙系统中正常运行。
请确认下方操作系统的适配改造已完成：
鸿蒙系统
适配操作手册

安装钉钉插件

```
openclaw plugins install @dingtalk-real-ai/dingtalk-connector
```

写入openclaw配置，点击save保存

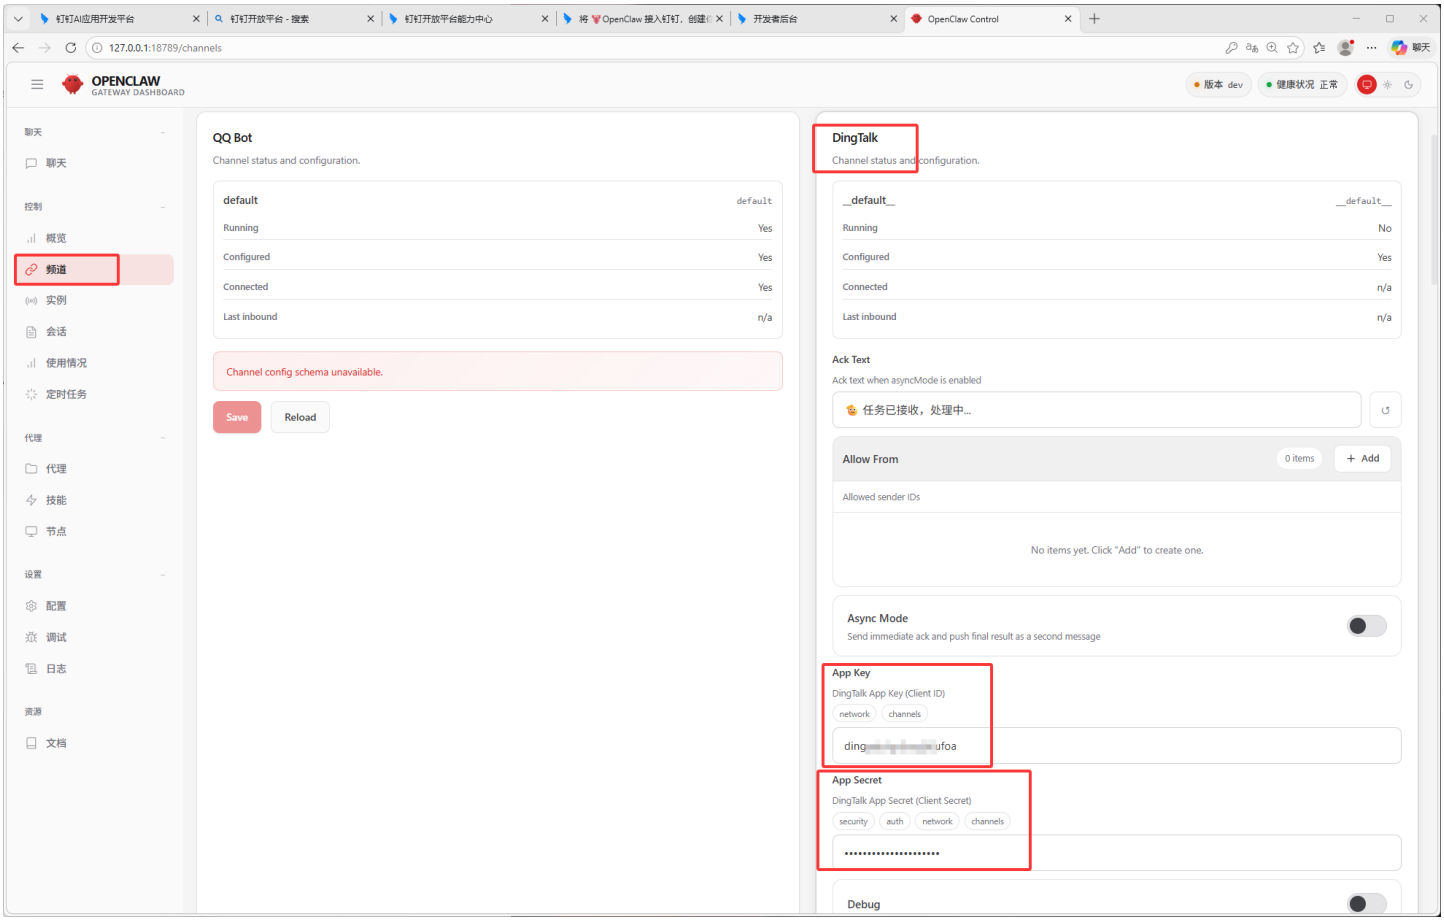

打开json文件写入：

代码块

```
{
  "channels": {
    "dingtalk-connector": {
      "clientId": "钉钉应用的Client Secret",       // 必选：填入上方的 钉钉 Client ID
      "clientSecret": "钉钉应用的Client Secret", // 必选：填入上方的 Client Secret
      "gatewayToken": "Gateway 认证 token",  // 必选：Gateway 认证 token，openclaw.json配置中 gateway.auth.token 的值
      "gatewayPassword": "",              // 可选：Gateway 认证 password（与 token 二选一）
      "sessionTimeout": 1800000           // 可选：会话超时(ms)，默认 30 分钟
    }
  },
  "gateway": { // gateway通常是已有的节点，配置时注意把http部分追加到已有节点下
    "auth": {
      "mode": "token",
      "token": "Gateway 认证 token" // 必选：一般是安装时默认就有
```

```
    },
    "http": {
      "endpoints": {
        "chatCompletions": {
          "enabled": true // 必选
        }
      }
    }
  }
}
```

七、安装技能

技能市场：https://clawhub.ai/

代码块

```
npx clawhub install <技能名>
```

```
PS C:\Users\MINIPC> npx clawhub install tts
✔OK. Installed tts -> C:\Users\MINIPC\.openclaw\workspace\skills\tts
PS C:\Users\MINIPC> npx clawhub install openai-whisper
✖Rate limit exceeded (retry in 1s, remaining: 0/20, reset in 1s)
Error: Rate limit exceeded (retry in 1s, remaining: 0/20, reset in 1s)
PS C:\Users\MINIPC> npx clawhub install openai-whisper
✔OK. Installed openai-whisper -> C:\Users\MINIPC\.openclaw\workspace\skills\openai-whisper
```

常用技能列表：

tts	语音转文字
openai-whisper	本地语音转文本

八、补充

1. OpenClaw官方文档

https://docs.openclaw.ai/zh-CN/install/

2. 核心文件说明

代码块

```
~/.openclaw/workspace/
├── MEMORY.md          # 长期记忆（重要！）
├── USER.md            # 用户信息
├── SOUL.md            # AI 人格设定
├── IDENTITY.md        # AI 身份信息
├── HEARTBEAT.md       # 定时任务配置
├── TOOLS.md           # 工具配置笔记
└── memory/            # 每日日志目录
    └── YYYY-MM-DD.md
```

3. 常用命令

更新版本

代码块

```
npm install -g openclaw@latest
```

gateway管理

代码块

```
openclaw gateway start      # 启动服务
openclaw gateway stop       # 停止服务
openclaw gateway restart    # 重启服务
openclaw gateway status     # 查看状态
```

打开web界面

代码块

```
openclaw dashboard
openclaw dashboard --no-open
```

打开TUI界面

代码块

```
openclaw tui
```

会话管理

代码块

```
openclaw sessions list      # 查看会话列表
openclaw sessions spawn     # 创建子会话
```

技能管理

代码块

```
openclaw skills list        # 查看已安装技能
openclaw skills install     # 安装新技能
```

配置管理

代码块

```
openclaw config get         # 查看配置
openclaw config patch       # 修改配置
```