

Assignment0

1) Todo: Calculator

```
((2018-2014)/(2014-1994))*100
```

```
## [1] 20
```

2) Todo: Functions

```
m <- (2018 - 2014)
x <- (2014 - 1994)
a <- ((m/x)*100)
a
```

```
## [1] 20
```


3) Todo: Workplace

```
b= c(4,5,8,11)
sum(b)
```

```
## [1] 28
```

4) Todo: Plots

```
f = rnorm(100)
plot(f)
```

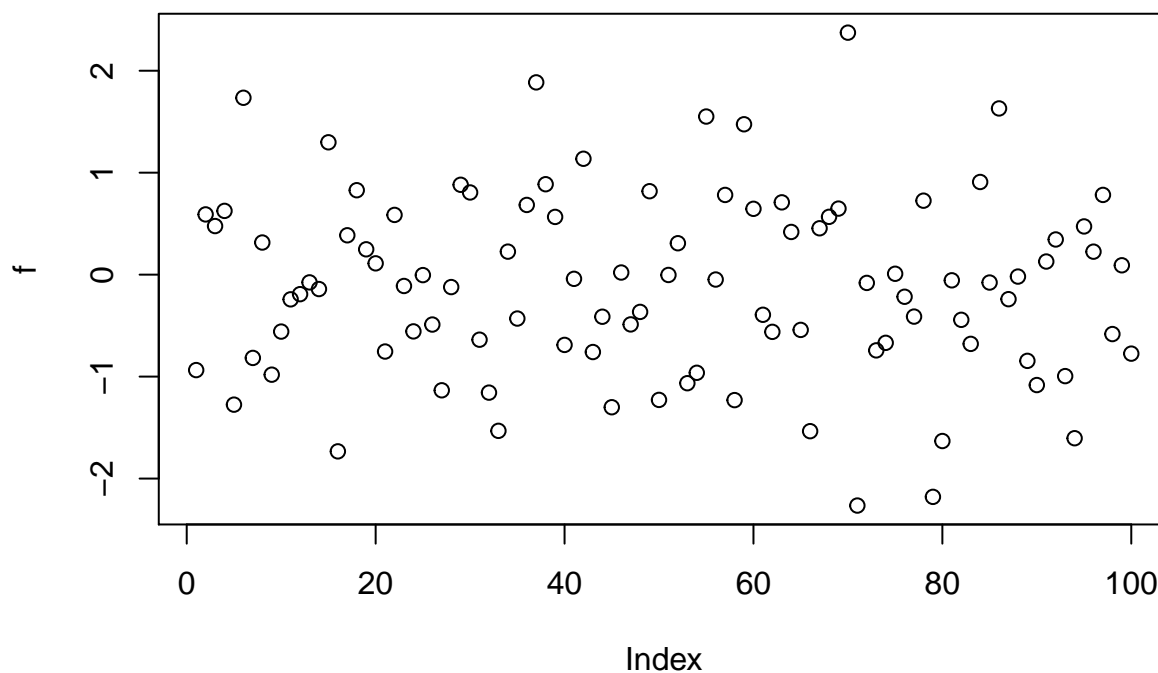

5) Todo: Help

```
help (sqrt)
```

6) Todo: Data Structures


```
P= seq(from= 31, to= 60)
Q= (matrix(data= P, ncol=5, nrow=6))
```

Q

```
##      [,1] [,2] [,3] [,4] [,5]
## [1,]   31   37   43   49   55
## [2,]   32   38   44   50   56
## [3,]   33   39   45   51   57
## [4,]   34   40   46   52   58
## [5,]   35   41   47   53   59
## [6,]   36   42   48   54   60
```


7) Todo: Lists

```
x1= rnorm(100)
x2= rnorm(100)
x3= rnorm(100)
t= data.frame(a = x1, b=(x1+x2), c= (x1+x2+x3))
plot(t)
```

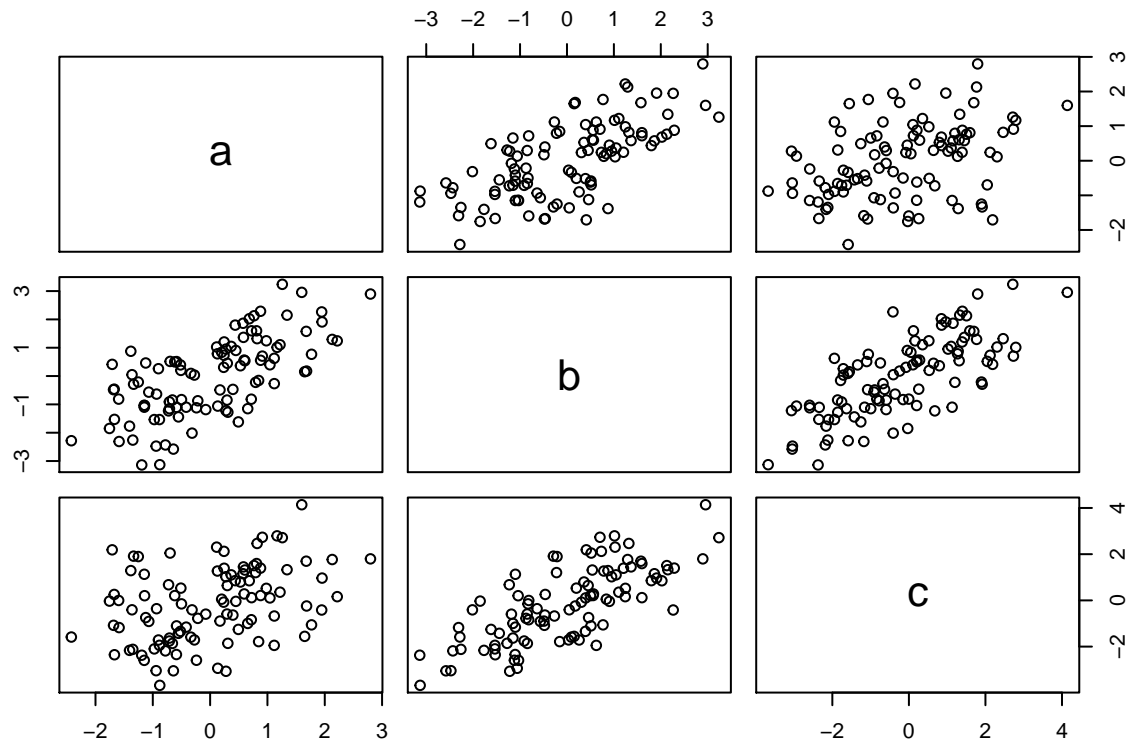

8) Todo: Graphics

```
plot(t$a, type="l", ylim=range(t),
     lwd=3, col=rgb(1,0,0,0.3))
lines(t$b, type="s", lwd=2,
      col=rgb(0.3,0.4,0.3,0.9))
points(t$c, pch=20, cex=4, col=rgb(0,0,1,0.3))
```

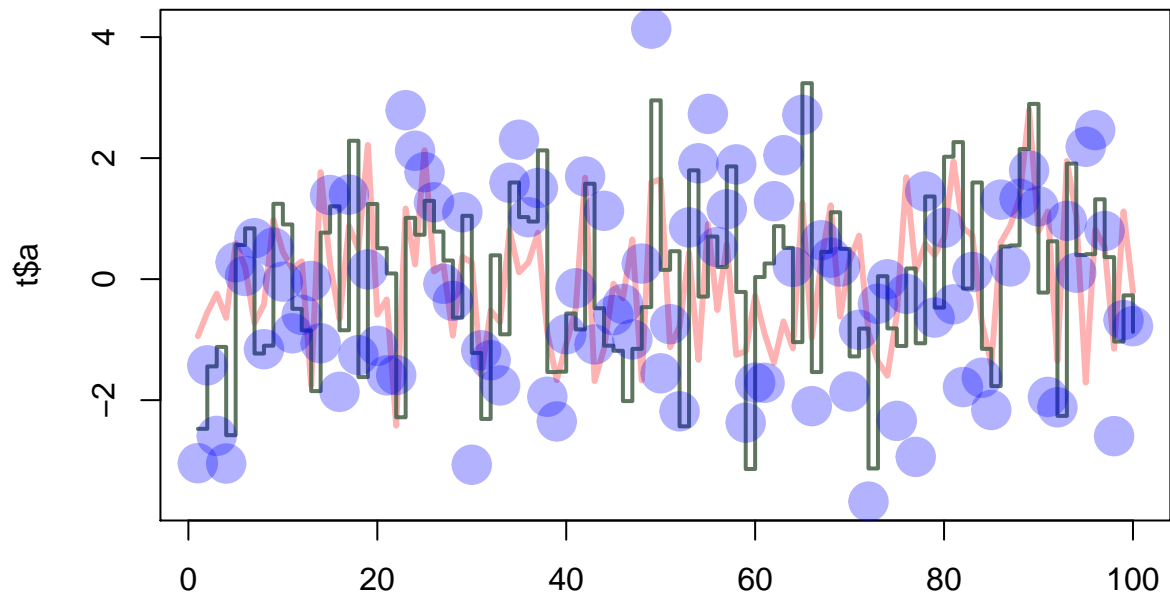

Index

Expla-

nation: rgb = red, green and blue. This is used for colours in the group.

9) Todo: Not available data

```
sqrt(rnorm(100))
```

```
## Warning in sqrt(rnorm(100)): NaNs produced
```

```
## [1] 0.53696381      NaN 0.41787844      NaN 0.47684820 0.74452468
## [7]      NaN      NaN      NaN      NaN      NaN 0.48483589
## [13] 1.50087135 0.94528645 0.63685662      NaN 0.63153764 0.26348388
## [19] 1.18023802      NaN 1.26964083      NaN 0.91931227      NaN
## [25]      NaN 1.35739863 0.51331209      NaN 0.93264260 0.66052426
## [31]      NaN      NaN 0.95738044      NaN      NaN 0.65395177
## [37]      NaN 1.12485763 0.29368227 0.19981427 0.90256849 0.28938795
## [43]      NaN 0.84233518      NaN      NaN      NaN      NaN
## [49]      NaN      NaN      NaN 1.03464254 0.60449560      NaN
## [55]      NaN      NaN      NaN      NaN      NaN      NaN
## [61]      NaN      NaN 0.56281768 0.52896312      NaN      NaN
## [67] 1.79452850      NaN      NaN      NaN 0.67731791 0.75922561
## [73]      NaN      NaN 0.51094909      NaN 0.32628114 0.51194041
## [79]      NaN      NaN 1.74975697 0.07103699      NaN 0.65067765
## [85] 1.41968564 1.22279463      NaN      NaN      NaN 0.81481133
## [91]      NaN 1.11283755 0.57845794      NaN      NaN      NaN
## [97]      NaN 0.77735734      NaN      NaN
```

You get NaNs, not a number.

10) Todo: Reading from a file


```
myfile<- read.table(file="tst1.txt" , header =TRUE)
myvar <- myfile$g * 5
write.table (myvar, file="tst2.txt")
```

11)Todo: Dates

```

dates= strptime(c("20190310", "20191224", "20190421"),format="%Y%m%d")
presents = c(0,7,5)
plot(dates,presents)
lines(dates,presents)

```

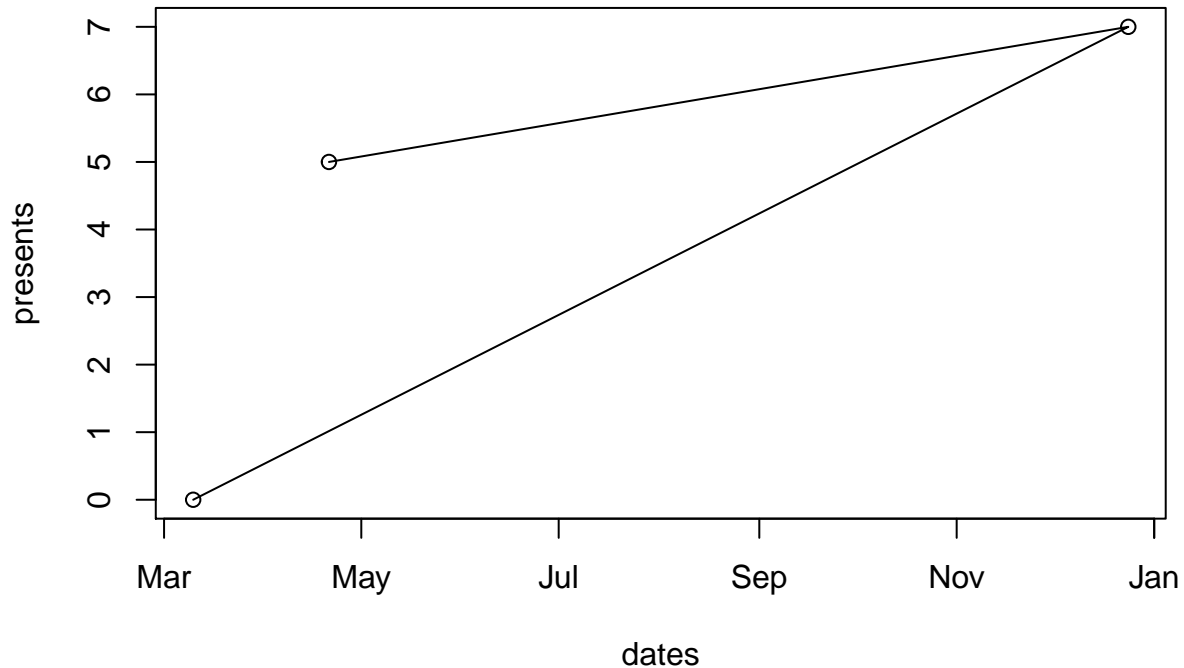

12) Todo: For-loop

```

myvec = seq(from=1, to=100)
s = c()
for(i in 1:length(myvec))
{
  if(myvec[i] < 5) {
    s[i] <- (myvec[i] *10)
  }else if (myvec[i] > 90){
    s[i] <- (myvec[i] *10)
  }else{
    s[i] = (myvec[i]*0.1)
  }
}
s

```

```

## [1] 10.0 20.0 30.0 40.0 0.5 0.6 0.7 0.8 0.9 1.0
## [11] 1.1 1.2 1.3 1.4 1.5 1.6 1.7 1.8 1.9 2.0
## [21] 2.1 2.2 2.3 2.4 2.5 2.6 2.7 2.8 2.9 3.0
## [31] 3.1 3.2 3.3 3.4 3.5 3.6 3.7 3.8 3.9 4.0
## [41] 4.1 4.2 4.3 4.4 4.5 4.6 4.7 4.8 4.9 5.0
## [51] 5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 6.0
## [61] 6.1 6.2 6.3 6.4 6.5 6.6 6.7 6.8 6.9 7.0
## [71] 7.1 7.2 7.3 7.4 7.5 7.6 7.7 7.8 7.9 8.0
## [81] 8.1 8.2 8.3 8.4 8.5 8.6 8.7 8.8 8.9 9.0
## [91] 910.0 920.0 930.0 940.0 950.0 960.0 970.0 980.0 990.0 1000.0

```

14) Todo: Writing your own functions

```

myfunc = function(argv1)
{
  S=c()
  for(i in 1:length(argv1))
  {
    if(argv1[i] < 5) {
      S[i] <- (argv1[i] *10)
    }else if (argv1[i] > 90){
      S[i] <- (argv1[i] *10)
    }else{
      S[i] = (argv1[i]*0.1)
    }
  }
  S
}
myfunc(argv1 = c(2:50))

```

```

## [1] 20.0 30.0 40.0 0.5 0.6 0.7 0.8 0.9 1.0 1.1 1.2 1.3 1.4 1.5
## [15] 1.6 1.7 1.8 1.9 2.0 2.1 2.2 2.3 2.4 2.5 2.6 2.7 2.8 2.9
## [29] 3.0 3.1 3.2 3.3 3.4 3.5 3.6 3.7 3.8 3.9 4.0 4.1 4.2 4.3
## [43] 4.4 4.5 4.6 4.7 4.8 4.9 5.0

```