


IdeaStamp dApp Wireframe


Assignment 3 wireframe for the core commit, reveal, and verification workflow. This document shows the main screens and the expected user journey.

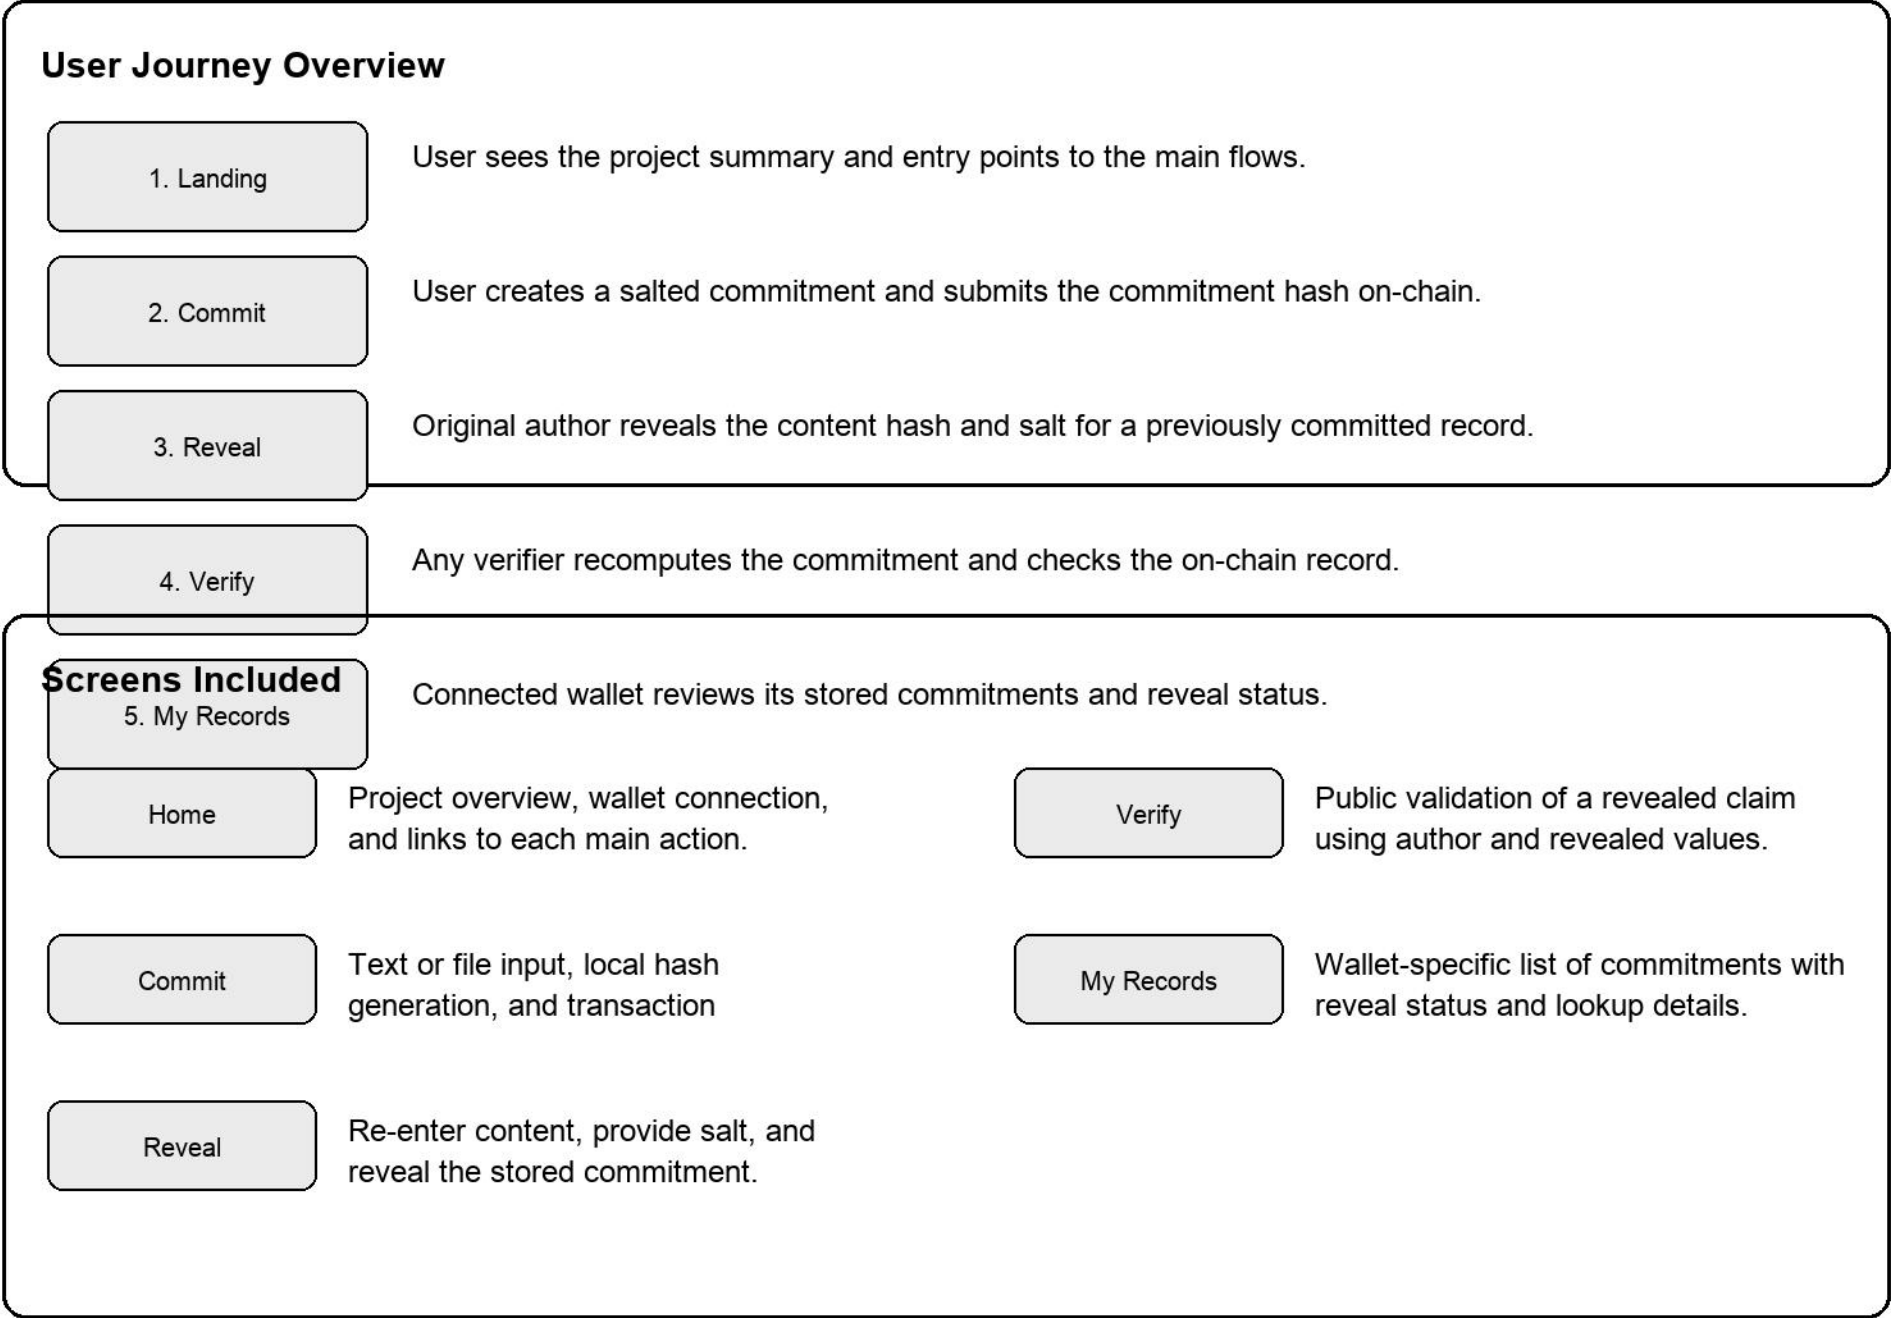

The wireframe is intentionally low fidelity. It focuses on structure, required interactions, and the end-to-end user flow described in the assignment brief.

Screen 1. Landing Page

The landing page introduces the system and gives the user direct access to the core actions required for the prototype.

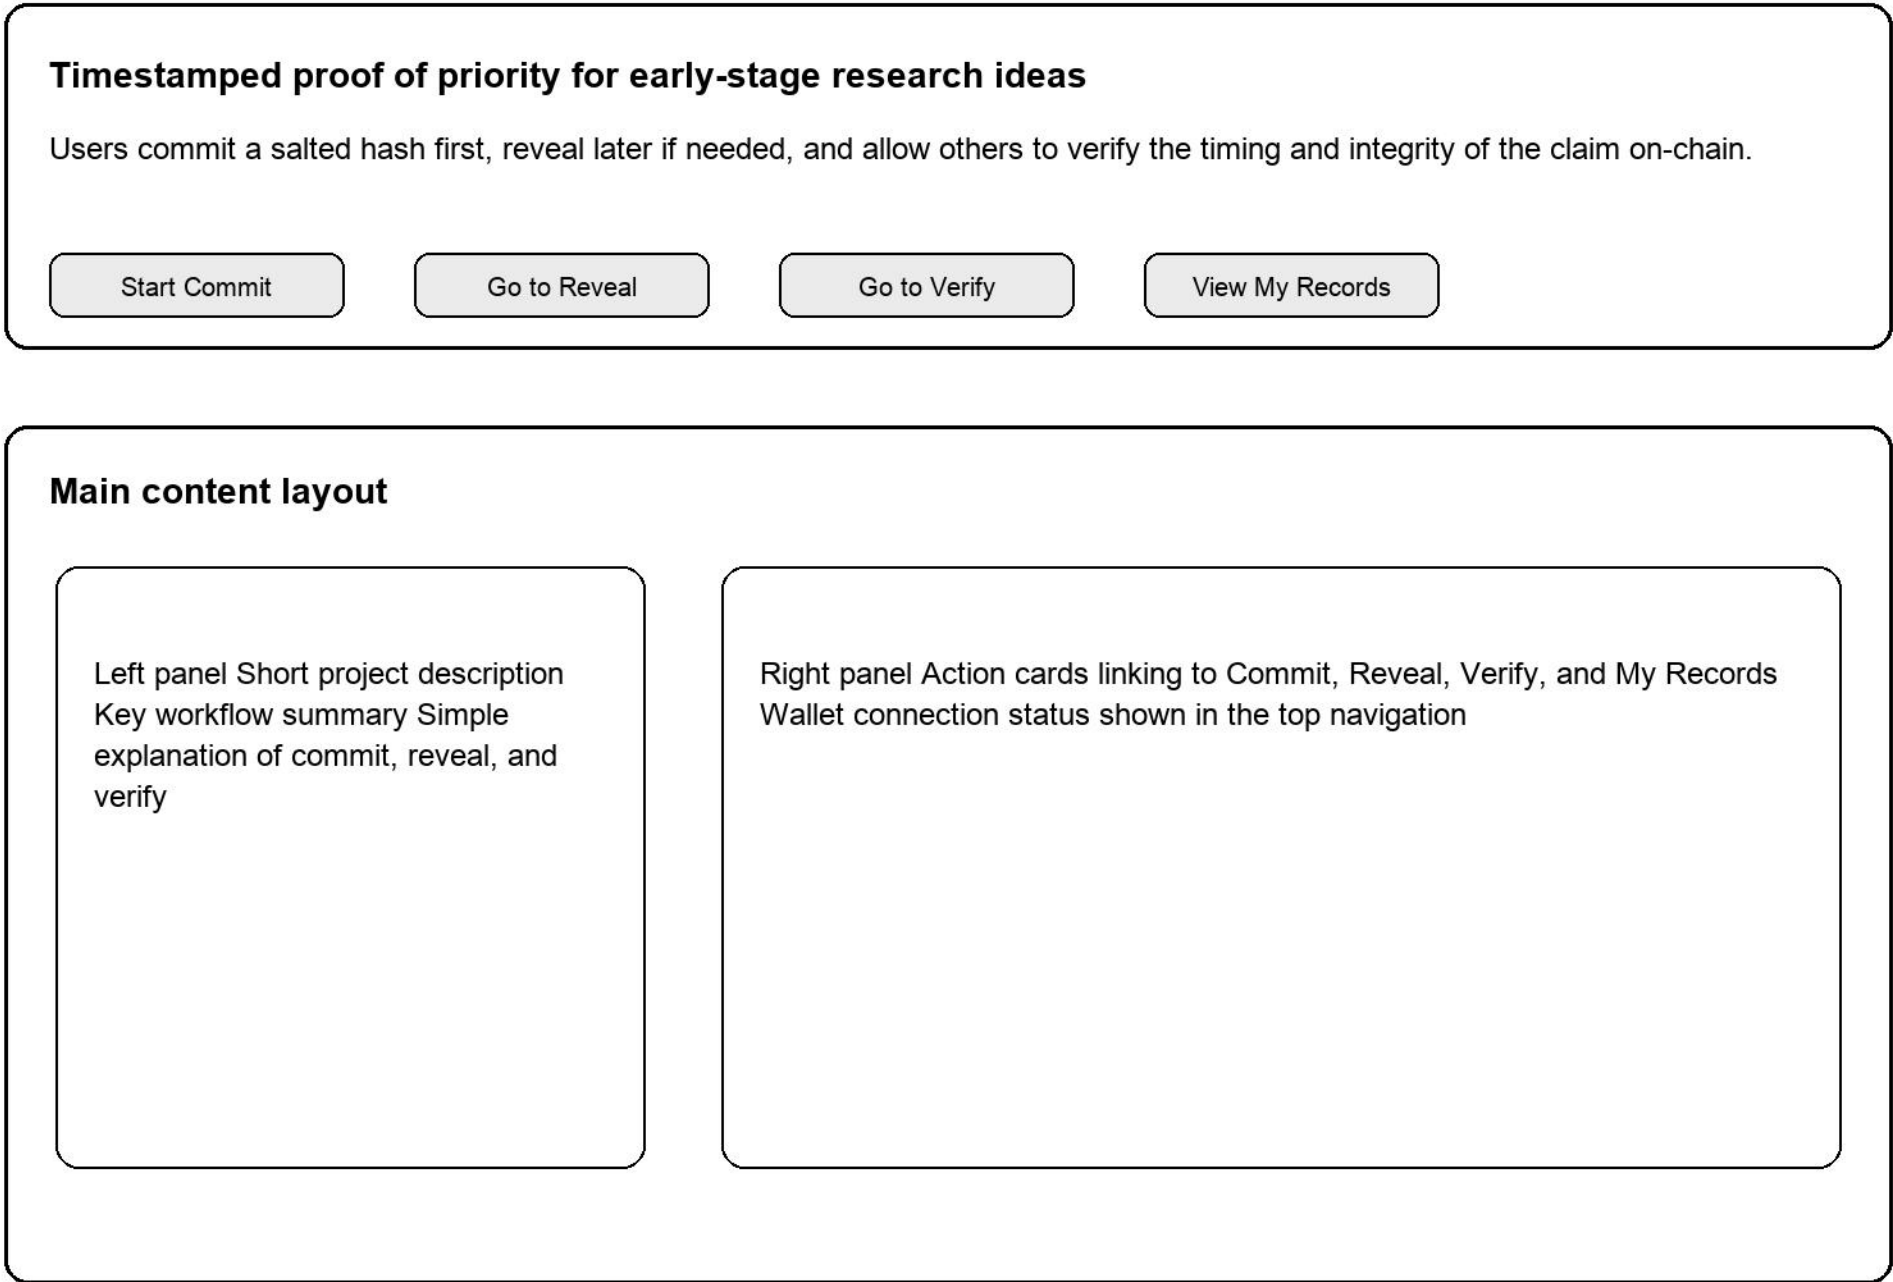

Purpose: orient a first-time user and provide a clear entry point into the main proof-of-priority workflow.

Screen 2. Commit Flow

The user prepares an idea submission, generates the local hashes, and submits the commitment hash to the contract.

Title or short label (optional)

Idea text area or file upload preview The user can paste a note or upload a draft file. The raw content stays off-chain.

Optional CID or storage reference

Generate Local Hashes

Submit Commit Transaction

contentHash

metadataHash

salt

commitmentHash

commit fee

wallet status

After local generation, the user reviews the values and confirms the on-chain commit. The transaction stores only the commitment hash and metadata reference fields.

Screen 3. Reveal Flow

The original author re-enters the content and provides the original salt so the contract can confirm the earlier commitment.

Reveal inputs

Original text or uploaded file The application recomputes the content hash locally before the reveal transaction is sent.

Original salt

metadataHash

Optional reveal CID

Submit Reveal

Validation panel

recomputed commitmentHash

stored record found

sender matches original author

record not already revealed

metadataHash matches stored value

If the reveal is valid, the contract stores the revealed content hash, salt, optional CID, and reveal timestamp.

Screen 4. Verify Flow

Verification is public. A verifier uses the revealed values to recompute the commitment and compare them with the stored on-chain record.

Verifier inputs

author address

revealed content or contentHash

revealed salt

metadataHash

Run Verification

Verification result

Computed commitmentHash from the supplied values

On-chain record summary
Exists: yes or no
Revealed: yes or no
Committed timestamp
Committed block number
Original author

Final interpretation
The verifier decides whether the revealed material matches the earlier commitment and whether the timing supports a priority claim.

Screen 5. My Records

The connected wallet can review its own commitments, reveal status, and navigation options for follow-up actions.

Commitment table

Label	Commitment Hash	Committed At	Revealed	Actions
Idea 1	0xabc...1234	2026-03-20	No	Reveal / View
Idea 2	0xdef...5678	2026-03-21	Yes	View
Idea 3	0x987...4321	2026-03-22	No	Reveal / View

This page helps the author manage previously committed records. It supports quick inspection of stored hashes, reveal status, and follow-up navigation to reveal or view details.

End-to-end flow: Home -> Commit -> Reveal -> Verify -> My Records