


EXP:27

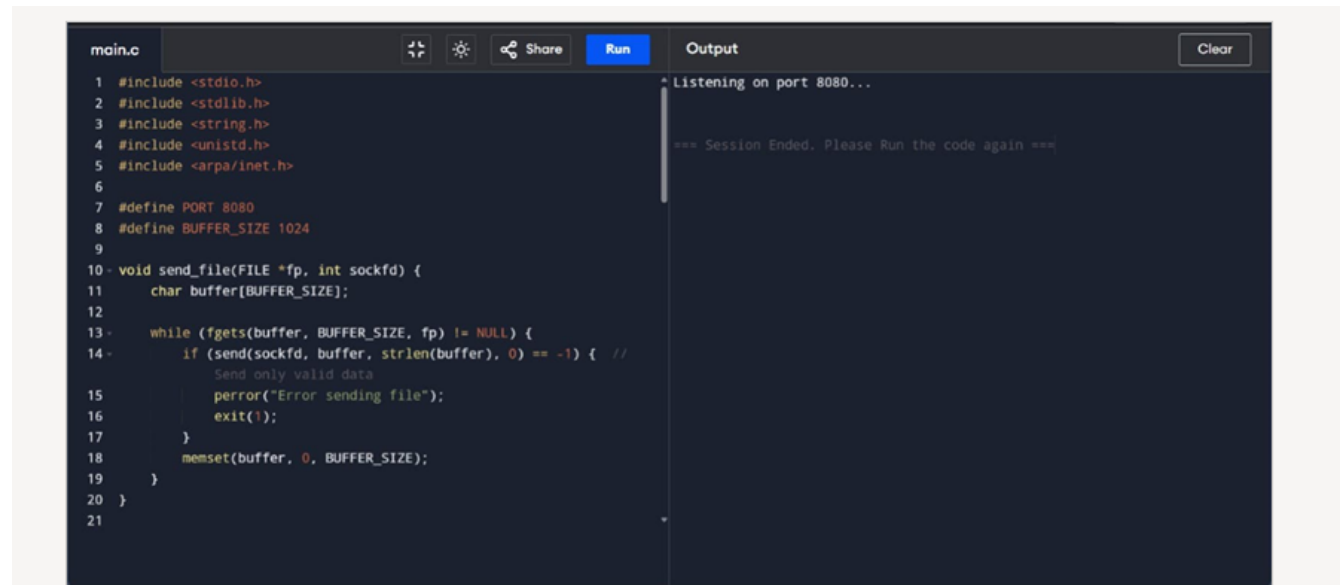

The image shows a code editor interface with a dark theme. The editor is divided into two main sections: a code editor on the left and an output window on the right. The code editor contains a C program named `main.c` that implements a simple file transfer over a network socket. The program includes headers for `stdio.h`, `stdlib.h`, `string.h`, `unistd.h`, and `arpa/inet.h`. It defines a port of 8080 and a buffer size of 1024. The `send_file` function takes a file pointer and a socket file descriptor as arguments. It reads data from the file into a buffer and sends it over the socket. If the send operation fails, it prints an error and exits. The output window shows the program's execution: it starts by listening on port 8080, then receives a session ended message, and prompts the user to run the code again.

```
main.c
1 #include <stdio.h>
2 #include <stdlib.h>
3 #include <string.h>
4 #include <unistd.h>
5 #include <arpa/inet.h>
6
7 #define PORT 8080
8 #define BUFFER_SIZE 1024
9
10 void send_file(FILE *fp, int sockfd) {
11     char buffer[BUFFER_SIZE];
12
13     while (fgets(buffer, BUFFER_SIZE, fp) != NULL) {
14         if (send(sockfd, buffer, strlen(buffer), 0) == -1) { //
15             // Send only valid data
16             perror("Error sending file");
17             exit(1);
18         }
19         memset(buffer, 0, BUFFER_SIZE);
20     }
21 }
```

Output

```
^ Listening on port 8080...
=== Session Ended. Please Run the code again ===
```