


EXP:28

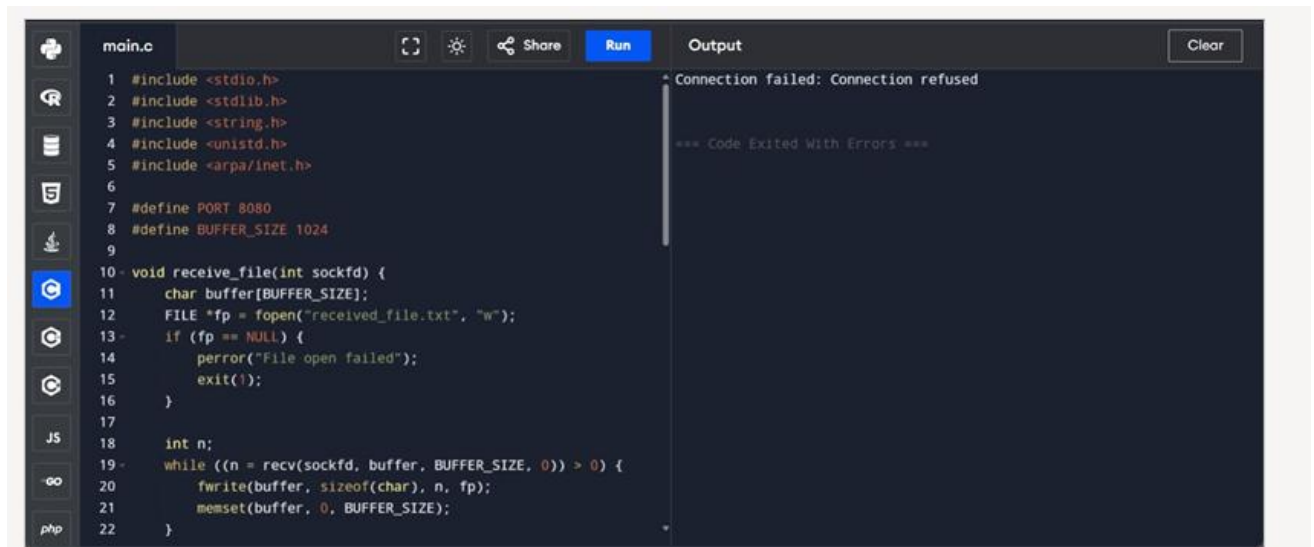

The image shows a code editor interface with a dark theme. On the left, a sidebar contains icons for file explorer, search, and other tools. The main editor area displays a C program named `main.c`. The code includes standard headers, defines a port of 8080 and a buffer size of 1024, and implements a `receive_file` function. The function attempts to open a file for writing and then receives data from a socket, writing it to the file. The output panel on the right shows the result of running the program: "Connection failed: Connection refused" and "=== Code Exited With Errors ===".

```
main.c
1 #include <stdio.h>
2 #include <stdlib.h>
3 #include <string.h>
4 #include <unistd.h>
5 #include <arpa/inet.h>
6
7 #define PORT 8080
8 #define BUFFER_SIZE 1024
9
10 void receive_file(int sockfd) {
11     char buffer[BUFFER_SIZE];
12     FILE *fp = fopen("received_file.txt", "w");
13     if (fp == NULL) {
14         perror("File open failed");
15         exit(1);
16     }
17
18     int n;
19     while ((n = recv(sockfd, buffer, BUFFER_SIZE, 0)) > 0) {
20         fwrite(buffer, sizeof(char), n, fp);
21         memset(buffer, 0, BUFFER_SIZE);
22     }
```

Output

Connection failed: Connection refused

=== Code Exited With Errors ===