


EXP:29

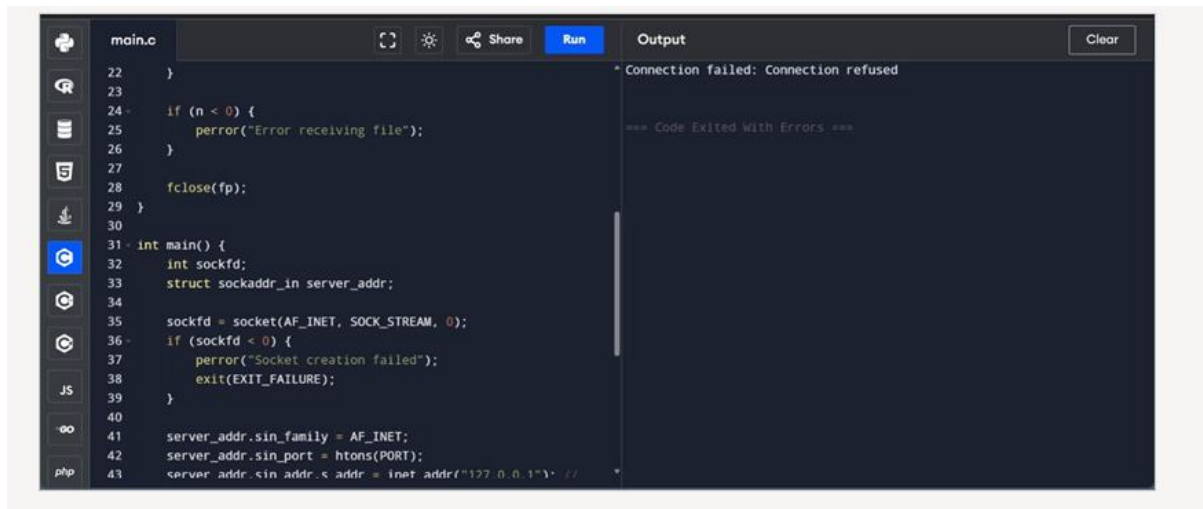

The image shows a code editor interface with a dark theme. On the left, a sidebar contains icons for file management and a language selector with options for C, JS, and php. The main editor area displays a C program named 'main.c'. The code defines a server that listens on a specific port and attempts to accept a connection. The output window on the right shows the result of running the program.

```
main.c
22 }
23
24 if (n < 0) {
25     perror("Error receiving file");
26 }
27
28 fclose(fp);
29 }
30
31 int main() {
32     int sockfd;
33     struct sockaddr_in server_addr;
34
35     sockfd = socket(AF_INET, SOCK_STREAM, 0);
36     if (sockfd < 0) {
37         perror("Socket creation failed");
38         exit(EXIT_FAILURE);
39     }
40
41     server_addr.sin_family = AF_INET;
42     server_addr.sin_port = htons(PORT);
43     server_addr.sin_addr.s_addr = inet_addr("127.0.0.1"); //
```

Output

```
Connection failed: Connection refused
=== Code Exited With Errors ===
```