


EXP:30

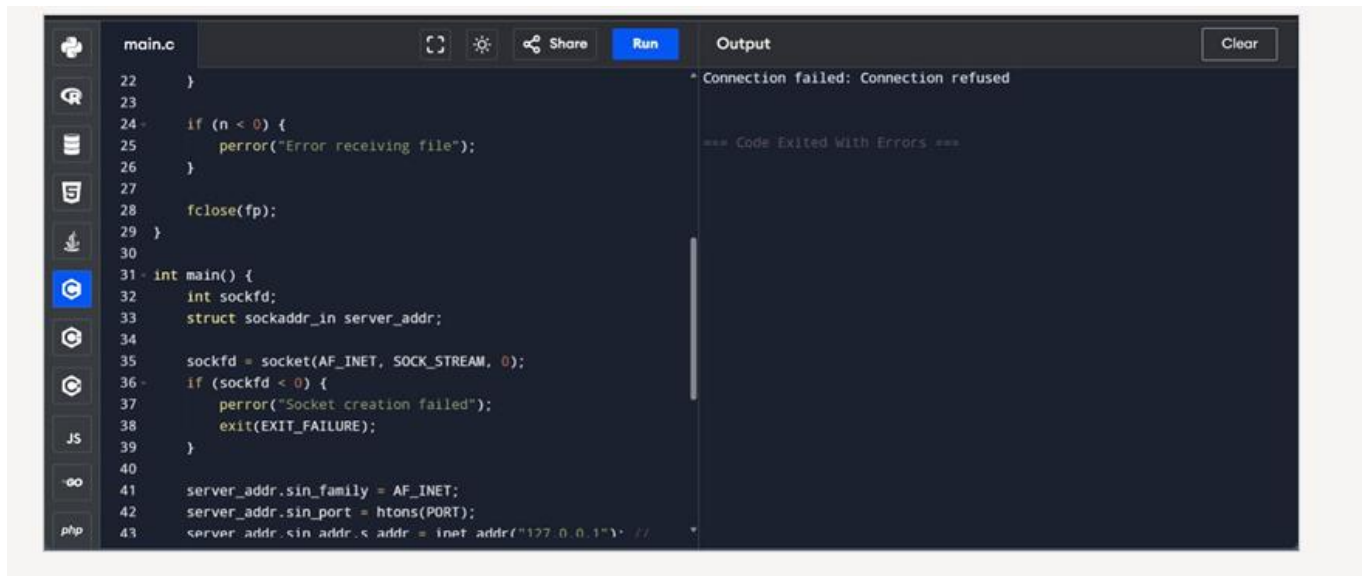

The image shows a code editor window with a dark theme. The editor is displaying a C program named `main.c`. The code is a simple socket server that listens for connections on a specific port. The output window on the right shows the result of running the program, which is "Connection failed: Connection refused".

```
22 }
23
24 if (n < 0) {
25     perror("Error receiving file");
26 }
27
28 fclose(fp);
29 }
30
31 int main() {
32     int sockfd;
33     struct sockaddr_in server_addr;
34
35     sockfd = socket(AF_INET, SOCK_STREAM, 0);
36     if (sockfd < 0) {
37         perror("Socket creation failed");
38         exit(EXIT_FAILURE);
39     }
40
41     server_addr.sin_family = AF_INET;
42     server_addr.sin_port = htons(PORT);
43     server_addr.sin_addr.s_addr = inet_addr("127.0.0.1"); //
```

Output:

```
* Connection failed: Connection refused
*** Code Exited With Errors ***
```