

UIL COMPUTER SCIENCE WRITTEN TEST

2026 INVITATIONAL B

FEBRUARY 2026

General Directions (Please read carefully!)

1. DO NOT OPEN THE EXAM UNTIL TOLD TO DO SO.
2. There are 40 questions on this contest exam. You will have 45 minutes to complete this contest.
3. All answers must be legibly written on the answer sheet provided. Indicate your answers in the appropriate blanks provided on the answer sheet. Clean erasures are necessary for accurate grading.
4. You may write on the test packet or any additional scratch paper provided by the contest director, but NOT on the answer sheet, which is reserved for answers only.
5. All questions have ONE and only ONE correct answer. There is a 2-point penalty for all incorrect answers.
6. Tests may not be turned in until 45 minutes have elapsed. If you finish the test before the end of the allotted time, remain at your seat and retain your test until told to do otherwise. You may use this time to check your answers.
7. If you are in the process of actually writing an answer when the signal to stop is given, you may finish writing that answer.
8. All provided code segments are intended to be syntactically correct, unless otherwise stated. You may also assume that any undefined variables are defined as used.
9. A reference to many commonly used Java classes is provided with the test, and you may use this reference sheet during the contest. AFTER THE CONTEST BEGINS, you may detach the reference sheet from the test booklet if you wish.
10. Assume that any necessary import statements for standard Java SE packages and classes (e.g., `java.util`, `System`, etc.) are included in any programs or code segments that refer to methods from these classes and packages.
11. NO CALCULATORS of any kind may be used during this contest.

Scoring

1. Correct answers will receive **6 points**.
2. Incorrect answers will lose **2 points**.
3. Unanswered questions will neither receive nor lose any points.
4. In the event of a tie, the student with the highest percentage of attempted questions correct shall win the tie.

STANDARD CLASSES AND INTERFACES – SUPPLEMENTAL REFERENCE

package java.lang

```
class Object
    boolean equals(Object anotherObject)
    String toString()
    int hashCode()

interface Comparable<T>
    int compareTo(T anotherObject)
        Returns a value < 0 if this is less than anotherObject.
        Returns a value = 0 if this is equal to anotherObject.
        Returns a value > 0 if this is greater than anotherObject.

class Integer implements Comparable<Integer>
    Integer(int value)
    int intValue()
    boolean equals(Object anotherObject)
    String toString()
    String toString(int i, int radix)
    int compareTo(Integer anotherInteger)
    static int parseInt(String s)

class Double implements Comparable<Double>
    Double(double value)
    double doubleValue()
    boolean equals(Object anotherObject)
    String toString()
    int compareTo(Double anotherDouble)
    static double parseDouble(String s)

class String implements Comparable<String>
    int compareTo(String anotherString)
    boolean equals(Object anotherObject)
    int length()
    String substring(int begin)
        Returns substring(begin, length()).
    String substring(int begin, int end)
        Returns the substring from index begin through index (end - 1).
    int indexOf(String str)
        Returns the index within this string of the first occurrence of str. Returns
        -1 if str is not found.
    int indexOf(String str, int fromIndex)
        Returns the index within this string of the first occurrence of str, starting
        the search at fromIndex. Returns -1 if str is not found.
    int indexOf(int ch)
    int indexOf(int ch, int fromIndex)
    char charAt(int index)
    String toLowerCase()
    String toUpperCase()
    String[] split(String regex)
    boolean matches(String regex)
    String replaceAll(String regex, String str)

class Character
    static boolean isDigit(char ch)
    static boolean isLetter(char ch)
    static boolean isLetterOrDigit(char ch)
    static boolean isLowerCase(char ch)
    static boolean isUpperCase(char ch)
    static char toUpperCase(char ch)
    static char toLowerCase(char ch)

class Math
    static int abs(int a)
    static double abs(double a)
    static double pow(double base, double exponent)
    static double sqrt(double a)
    static double ceil(double a)
    static double floor(double a)
    static double min(double a, double b)
    static double max(double a, double b)
    static int min(int a, int b)
    static int max(int a, int b)
    static long round(double a)
    static double random()
        Returns a double greater than or equal to 0.0 and less than 1.0.
```

package java.util

```
interface List<E>
class ArrayList<E> implements List<E>
    boolean add(E item)
    int size()
    Iterator<E> iterator()
    ListIterator<E> listIterator()
    E get(int index)
    E set(int index, E item)
    void add(int index, E item)
    E remove(int index)

class LinkedList<E> implements List<E>, Queue<E>
    void addFirst(E item)
    void addLast(E item)
    E getFirst()
    E getLast()
    E removeFirst()
    E removeLast()

class Stack<E>
    boolean isEmpty()
    E peek()
    E pop()
    E push(E item)

interface Queue<E>
class PriorityQueue<E>
    boolean add(E item)
    boolean isEmpty()
    E peek()
    E remove()

interface Set<E>
class HashSet<E> implements Set<E>
class TreeSet<E> implements Set<E>
    boolean add(E item)
    boolean contains(Object item)
    boolean remove(Object item)
    int size()
    Iterator<E> iterator()
    boolean addAll(Collection<? extends E> c)
    boolean removeAll(Collection<?> c)
    boolean retainAll(Collection<?> c)

interface Map<K,V>
class HashMap<K,V> implements Map<K,V>
class TreeMap<K,V> implements Map<K,V>
    Object put(K key, V value)
    V get(Object key)
    boolean containsKey(Object key)
    int size()
    Set<K> keySet()
    Set<Map.Entry<K, V>> entrySet()

interface Iterator<E>
    boolean hasNext()
    E next()
    void remove()

interface ListIterator<E> extends Iterator<E>
    void add(E item)
    void set(E item)

class Scanner
    Scanner(InputStream source)
    Scanner(String str)
    boolean hasNext()
    boolean hasNextInt()
    boolean hasNextDouble()
    String next()
    int nextInt()
    double nextDouble()
    String nextLine()
    Scanner useDelimiter(String regex)
```

STANDARD CLASSES AND INTERFACES – SUPPLEMENTAL REFERENCE

Package `java.util.function`

```
Interface BiConsumer<T,U>
    void accept(T t, U u)

Interface BiFunction<T,U,R>
    R apply(T t, U u)

Interface BiPredicate<T,U>
    boolean test(T t, U u)

Interface Consumer<T>
    void accept(T t)

Interface Function<T,R>
    R apply(T t)

Interface Predicate<T>
    boolean test(T t)

Interface Supplier<T>
    T get()
```

UIL COMPUTER SCIENCE WRITTEN TEST – 2026 INVITATIONAL B

Note: Correct responses are based on **Java SE Development Kit 22 (JDK 22)** from Oracle, Inc. All provided code segments are intended to be syntactically correct, unless otherwise stated (e.g., "error" is an answer choice) and any necessary Java SE 22 Standard Packages have been imported. Ignore any typographical errors and assume any undefined variables are defined as used. **For all output statements, assume that the System class has been statically imported using: `import static java.lang.System.*;`**

Question 1

Find a number M in base 10 such that when it is written in base 7 and then interpreted as base 5, it results in 345_{10} . Write your answer in the blank provided on your answer sheet for this question.

Question 2

What is output by the code to the right?

- A) 15.5
- B) 15
- C) 15.0
- D) NaN
- E) Infinity

```
int a = 5;
double b = 2.5;
int c = 4;
double result = a++ + b * --c / (a % 3)
    + +c - -b;
out.println(result);
```

Question 3

What is output by the code to the right?

- A) "2\n2.5\" B) "2\n2.5\\\"
- C) "2\n2.5\\\" D) "2\n2.5\\\\"
- E) Compile-time error

```
out.print("\\");
out.printf("%d", 10/4);
out.print("\\n");
out.printf("%.1f", 10/4.0);
out.print("\\\\");
out.printf("%s", "\\");
```

Question 4

What is output by the code to the right?

- A) true true true true
- B) false true true false
- C) true true true false
- D) false true false false
- E) false false false false

```
String s = "Comp Sci Rocks!";
String s2 = new String("Comp Sci Rocks!");
String s3 = new String("Comp Sci Rocks!").intern();

out.print(s == s2);
out.print(s == s3);
out.print(s2 == s3);
out.print(s.equals(s2) ^ s2.equals(s3));
```

Question 5

What is output by the code to the right?

- A) true false B) true true
- C) false false D) false true
- E) There is no output due to an error.

```
boolean a = false;
boolean b = true;
boolean c = false;
boolean result = a || b && (c = true) ^
    (c = false);
out.println(result + " " + c);
```

Question 6

What is output by the code to the right?

- A) 2147483648|5
- B) -2147483648|-2
- C) -2147483648|5
- D) 2147483647|5

```
int m = Integer.MIN_VALUE;
out.println(Math.abs(m) + "|" +
    Math.floorMod(m, 7));
```

Question 7

What is output by the code to the right?

- A) 5.0 B) 6.0 C) 7.0 D) 8.0 E) 6

```
int a = 4, b = 7, c = 3;
double r = a++ * --b / (double)(c += a) +
    (a % 3) - (b-- - ++c);
out.println(r);
```

Question 8 What is output by the code to the right? A) AC4 B) AD4 C) BC4 D) BD4 E) AE4	<pre>int x = 1; String s = ""; switch (x++) { case 1: if (++x == 3) s += "A"; else s += "B"; case 2: if (x++ == 3) s += "C"; else s += "D"; break; default: s += "E"; } out.println(s + x);</pre>
Question 9 What is output by the code to the right? A) 021 B) 0201 C) 0210 D) 021 10 E) 0211	<pre>int i = 0, j = 3; while (i < j) { out.print(i++ + " + --j); if (i == j) out.print(" "); }</pre>
Question 10 What is output by the code to the right? A) 30202 B) 30002 C) 30022 D) 20002	<pre>int[] a = {2, 0, 2, 0, 2}; int[] b = a; int i = 0; b[a[i]++] = a[++i] + a[i--]; out.println(a[0] + " + a[1] + " + a[2] + " + a[3] + " + a[4]);</pre>
Question 11 Assume a file exists at path dir/nums.txt and it contains exactly: 7 010 8 09 What is output by the code on the next page? A) dir nums.txt 30 B) dir nums.txt 31 C) dir nums.txt 32 D) dir nums.txt 33 E) There is no output due to a runtime error.	
Question 12 What is output by the code to the right? A) 12 54 B) 11 54 C) 12 45 D) 13 54 E) 12 60	<pre>int n = 508; int sum = 0, prod = 1; while (n > 0) { int d = n % 10; sum += d; if (sum % 2 == 0) prod *= (d + 1); else prod += n % 7; n /= 10; if (d == 0) sum--; } out.println(sum + " " + prod);</pre>

```

/* Code for Q11 */

File f = new File("dir" + File.separator + "nums.txt");
Scanner sc = new Scanner(f);

sc.useRadix(8);

int sum = sc.nextInt() + sc.nextInt() + sc.nextInt(10);

int last;
if (sc.hasNextInt()) last = sc.nextInt();
else last = sc.nextInt(10);

sum += last;

out.println(f.getParent() + "|" + f.getName() + "|" + sum);
sc.close();

```

Question 13

What is output by the code to the right?

- A) 27
- B) 29
- C) 31
- D) 39
- E) Compile-time error

```

int x = 1, y = 2, z = 3;
boolean p = false;

out.println((x + y << z) ^ ((x | y & z)
    + (p || x++ == 1 && --y > 0
    ? 4 : 8)));

```

Question 14

Which statement is **always true** in Java for any int x?

- A) $\sim x == -x$
- B) $\sim x == -x - 1$
- C) $\sim x == x \wedge 1$
- D) $\sim x == x + 1$
- E) $\sim x == x - 1$

Question 15

What is output by the code to the right?

- A) 27
- B) 29
- C) 31
- D) 39
- E) There is no output due to a runtime error.

```

ArrayList<Integer> a = new
ArrayList<>();
a.add(0); a.add(1); a.add(2);
a.add(1); a.add(0);

List<Integer> v = a.subList(1, 4);

out.print(v.remove(1));
a.remove((Integer)1);
out.print(v.size());

```

Question 16 What is output by the code to the right? A) 23 B) 13 C) 123 D) There is no output due to a compile error. E) There is no output due to a runtime error.	<pre>try { String s = "apple"; char c = s.charAt(5); out.print(1); } catch (ArrayIndexOutOfBoundsException e) { out.print(2); } finally { out.print(3); }</pre>
Question 17 What could replace <1*> in the code to the right so that it will compile and run without error. A) pop B) remove C) poll D) Both A and B. E) All of the above.	<pre>Stack<String> st = new Stack<String>(); st.add("Johnny"); st.add("Cash"); st.add("Test"); st.<1*>(); st.<1*>(); st.add("Appleseed"); st.add("Quick"); st.<1*>();</pre>
Question 18 Assuming <1*> is filled in correctly, which of the following could not be found in the output by the code to the right? A) Johnny B) Test C) Appleseed D) Quick E) There is no output due to a runtime error.	<pre>for(int i = 0; i < 12; i++) st.add(st.<1*>()); out.println(st.<1*>());</pre>
Question 19 What is the big $\mathcal{O}$ runtime of the code to the right A) $\mathcal{O}(N \log N)$ B) $\mathcal{O}(N)$ C) $\mathcal{O}(N^2)$ D) $\mathcal{O}(\log N)$ E) $\mathcal{O}(1)$	<pre>String s = "Banana"; int i = s.charAt(0); //1 s.substring(2); //2 s.charAt(s.length()); //3 i = (int)(s); //4</pre>
Question 20 Which of the lines in the code to the right first causes an error? A) //1 B) //2 C) //3 D) //4 E) None of the above. All lines will be error-free.	<pre>int mystery(int a, int b) { if(a == b) return 1; if(a < b) return 2 * mystery(b, a); if(b < 0) return 0; return 3 + mystery(a - b, b - 1); }</pre>
Question 21 What is output if the following call is made to the function mystery to the right? mystery(10, 6); A) 31 B) 33 C) 39 D) 27 E) There is no output due to a runtime error.	<pre>int mystery(int a, int b) { if(a == b) return 1; if(a < b) return 2 * mystery(b, a); if(b < 0) return 0; return 3 + mystery(a - b, b - 1); }</pre>
Question 22 What is output if the following call is made to the function mystery to the right? mystery(25, 17); A) 35 B) 21 C) 25 D) 39 E) There is no output due to a runtime error.	<pre>int mystery(int a, int b) { if(a == b) return 1; if(a < b) return 2 * mystery(b, a); if(b < 0) return 0; return 3 + mystery(a - b, b - 1); }</pre>

Question 23 What can replace <1*> in the code to the right so that the iPhone class compiles and runs without error? A) implements IOS, Phone B) extends IOS, Phone C) extends IOS implements Phone D) implements Phone extends IOS E) More than one of the above.	
Question 24 Which of the following methods must be initialized by the iPhone class to the right? A) addApp(String a) B) numApps() C) iPhone constructor D) call() E) None are required. F) A, B, and D. G) C and D. H) All are required.	
Question 25 What can replace <2*> in the code to the right so that the iPhone class compiles and runs without error? A) protected B) public C) Nothing is required D) private E) A or B. F) A, B, or C. G) Any of the above.	<pre>interface Phone { String call(); } abstract class IOS { String number; ArrayList<String> apps; public IOS(String n) { number = n; apps = new ArrayList<>(); } abstract void addApp(String a); abstract int numApps(); } class iPhone <1*> { public iPhone(String n) { super(n); } <2*> void addApp(String a) { apps.add(a); } <2*> int numApps() { return apps.size(); } <3*> String call() { return number; } }</pre>
Question 26 What can replace <3*> in the code to the right so that the iPhone class compiles and runs without error? A) protected B) public C) Nothing is required D) private E) A or B. F) A, B, or C. G) Any of the above.	
Question 27 Assuming <1*>, <2*>, and <3*> are filled in correctly, what is output by the code to the right? A) 8328328321 4 B) null 5 C) 8328328321 5 D) null 4 E) There is no output due to a runtime error.	<pre>//////////client code////////// iPhone i = new iPhone("8328328321"); i.addApp("Facetime"); i.addApp("Notes"); i.addApp("Spotify"); i.addApp("Netflix"); i.addApp("Notes"); String n = i.call() + " "; out.print(n + i.numApps());</pre>
Question 28 What is output by the code to the right? A) false false B) false true C) true false D) true true E) There is no output due to a compile error.	<pre>String str = "Back Up Down Forwards"; String reg = "[A-Z][a-z]* ((\\W \\D)+)"; out.print(str.matches(reg) + " "); str = "NobodyToldMe212"; out.println(str.matches(reg));</pre>

Question 29

Which of the following is not a legal Java instantiation, i.e. causes no compile errors (possible runtime errors should be ignored)?

- A) `Collection<BigInteger> c = new Stack<BigInteger>();`
 B) `List l = new LinkedList<LinkedList>();`
 C) `Queue<LinkedList<String>> q = new PriorityQueue<LinkedList<String>>();`
 D) `LinkedHashMap<TreeMap, Object> lhm = new LinkedHashMap<>();`
 E) More than one of the above.
 F) None of the above.

Question 30

If a selection sort algorithm takes 16 seconds to sort a list of 4,000 items, how long will it take to sort a list of 2,000 items (assuming average-case for both)?

- A) 4 seconds B) 8 seconds C) 2 seconds D) 5 seconds E) 10 seconds

Question 31

Which of the following changes to the program to the right will cause the program to run without error, disregarding whatever output it may produce, and is the most accurate answer choice?

- A) Do nothing. The code will run without error as is.
 B) Remove the underscores from L1.
 C) Change L2 to `System.out.println(5);`.
 D) Wrap L2 in a static block (i.e., `static { ... }`) instead of just the non-static block it is currently contained within.
 E) Remove L3.
 F) More than one of the answer choices above are valid and will cause the program to run without error.
 G) None of the answer choices above are accurate, and the program will still error.

```
import static java.lang.System.*;

public class Q_31_32_33 {
    public static final int MOD =
        1_000_000_009; // L1

    {
        out.println(5); // L2
    }

    public static void main(String[] args) {
        out.println(MOD); // L3
    }
}
```

Question 32

Suppose no changes are made to the program to the right. What is output by the code to the right?

- A) 5 B) 1000000009
 C) 5 D) 1000000009
 1000000009 5
 E) No output is produced, but the program runs without error.

Question 33

Suppose the changes described by answer choice D to question 31 are made to the program to the right. What is output by the now modified code to the right?

- A) 5 B) 1000000009
 C) 5 D) 1000000009
 1000000009 5
 E) No output is produced, but the program runs without error.

Question 34

What is order of precedence of the operators to the right?

- A) II, I, IV, III B) I, II, IV, III
 C) III, II, I, IV D) III, I, II, IV
 E) IV, II, I, III F) IV, I, II, III

- I. ++ (post)
 II. -- (pre)
 III. -> (lambda)
 IV. :: (method reference)

Question 35

What is output by the code to the right?

- A) 10 8 10 3.14 10.0 3.141592653589793
- B) 10 8 10 3.14 10.0 3.141592653589793101
- C) 10 8 8 3.14 3.1 3.141592653589793
- D) 10 8 8 3.14 3.1 3.141592653589793101
- E) There is no output due to an error.

```
out.printf("%d %d %<d %.2f %<.1f %s%n",
    7 + 3,
    (int) Math.pow(2, 3),
    3.14159,
    Math.PI,
    "Hello".charAt(1)
);
```

Question 36

Consider the randomized algorithm to the right, which takes as input a set of unique vertices V of size n and outputs a graph. Alice claims that this algorithm is guaranteed to generate a tree on the vertex set V . Bob argues that the algorithm is not guaranteed to generate a tree. Each student has provided two formal proofs supporting their claim (options A and B by Alice; options C and D by Bob). Which of the following proofs is the most accurate?

- A) *Direct proof:* Since the algorithm adds exactly $n - 1$ edges and removes exactly one vertex at each iteration, the resulting graph must be a tree. Therefore, the algorithm always generates a tree.
- B) *Proof by contradiction:* Assume for contradiction that the algorithm produces a graph that is not a tree. Since the graph is undirected and has exactly $n - 1$ edges, this can only occur if the graph contains a cycle. Assume for contradiction that a cycle is created when adding some edge (u, v) . Then u and v must already be connected by a path using previously added edges. However, in this algorithm, after every edge insertion one of its endpoints is removed from V and never used again, so each connected component is always represented by exactly one remaining vertex in V . Therefore, two distinct vertices chosen from V can never already be connected, making it impossible for the new edge to close a cycle. This is a contradiction, thus the algorithm always generates a tree.
- C) *Proof by induction:* Assume for induction that the graph formed after k iterations of the for-loop is a tree. At iteration $k + 1$, the algorithm adds an edge between two random vertices and removes one vertex. Since random choices may create cycles, the resulting graph is not guaranteed to remain a tree. Therefore, by induction, the algorithm does not guarantee a tree.
- D) *Proof by counter-example:* Consider $V = \{a, b, c, d\}$. Suppose the algorithm performs the following sequence of choices: (i) Picks edge (a, b) ; removes vertex d . (ii) Picks edge (b, c) ; removes vertex b . (iii) Picks edge (c, a) ; removes vertex a . The resulting graph contains the cycle $a \rightarrow b \rightarrow c \rightarrow a$, which cannot exist in a tree, and therefore, the algorithm is not guaranteed to generate a tree.

```
private static final Random RAND =
    new Random();

private <T extends Comparable<T>>
    HashMap<T, HashSet<T>>
    generateTree(HashSet<T> V, int n)
{
    HashMap<T, HashSet<T>> graph =
        new HashMap<T, HashSet<T>>();

    for (int i = 0; i < n - 1; i++) {
        int idx1 = RAND.nextInt(V.size());
        int idx2;
        do {
            idx2 = RAND.nextInt(V.size());
        } while (idx1 == idx2);

        T u = null, v = null;
        int count = 0;
        Iterator<T> it = V.iterator();
        while (it.hasNext()) {
            T val = it.next();
            if (count == idx1) {
                u = val;
            } else if (count == idx2) {
                v = val;
            }
            count++;
        }

        if (!graph.containsKey(u)) {
            graph.put(u, new HashSet<T>());
        }
        graph.get(u).add(v);

        if (!graph.containsKey(v)) {
            graph.put(v, new HashSet<T>());
        }
        graph.get(v).add(u);

        if (RAND.nextBoolean()) {
            V.remove(v);
        } else {
            V.remove(u);
        }
    }
    return graph;
}
```

Question 37

Alice additionally wrote the following proof but decided to scrap it because she thought there was an issue with it. Please identify the issue, if any...

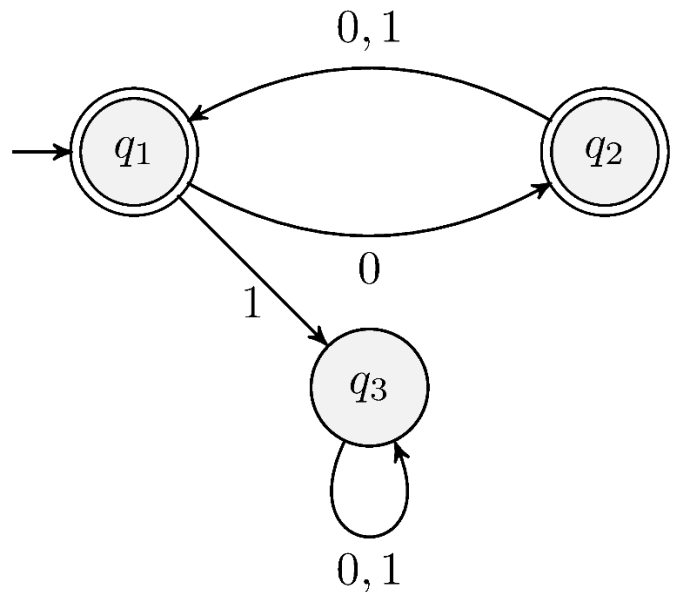
Proof by contradiction: Assume for contradiction that the algorithm produces a graph that is not a tree. Since the graph is undirected and has $n - 1$ edges, the only way this can occur is if the graph contains a cycle. Without loss of generality, let the cycle be $u \rightarrow v \rightarrow w \rightarrow \dots \rightarrow u$, with length at least three. For vertex u to be in a cycle, it must have been selected as a candidate vertex in at least two different iterations. However, after an edge is formed between u and another vertex, either u or that vertex is removed from the candidate set. Thus, u cannot appear in two different edges that are a part of a cycle. This contradicts the assumption that a cycle exists. Therefore, the algorithm must generate a tree.

- A) Since the algorithm is not guaranteed to generate a tree, her proof is wrong as she is arguing the wrong thing.
- B) There are no issues – the proof is perfectly valid as is.
- C) A cycle existing in the graph is not necessary and/or sufficient for $n - 1$ undirected edges to be unable to form a tree, thus her initial assumption is wrong.
- D) Her reasoning that “ u cannot appear in two different edges that are a part of a cycle” is false. Since this fact is used as the reason there is a contradiction, her proof is invalid.
- E) Assuming “without loss of generality” that the graph takes the form of “ $u \rightarrow v \rightarrow w \rightarrow \dots \rightarrow u$, with length at least three” is an unrealistic assumption and makes her proof too general, potentially leaving out important counter-examples.

Question 38

Pictured to the right is a Deterministic Finite Automata (DFA) over the language of bit strings (i.e., alphabet $\Sigma = \{0,1\}$). What is the regular expression corresponding to the set of all bit strings that can be generated by said DFA?

- A) $(0(0+1))^*$
- B) $((0(0+1))^* + ((0(0+1))^*1(0+1))^*)$
- C) $((0(0+1))^* + ((0(0+1))^*0))$
- D) $(0(0+1))^*1(0+1)^*$
- E) More than one of the above.

**Question 39**

What is the 8-bit two's complement representation of the following base 10 number? Write your answer in the blank provided on your answer sheet for this question.

-67

Question 40

How many 0s are present in the truth table created from the following boolean expression? Write your answer in the blank provided on your answer sheet for this question.

$(A \ \&\& \ !B \ || \ E) \ \&\& \ (C \wedge \ !D) \ \&\& \ (!E \ || \ !C \ \&\& \ A) \ || \ (B \wedge \ D \wedge \ C)$

★ ANSWER KEY – CONFIDENTIAL ★

UIL COMPUTER SCIENCE – 2025-2026 INVITATIONAL B

Questions (+6 points for each correct answer, -2 points for each incorrect answer)

- | | | | |
|----------------|--------------|--------------|----------------------|
| *1) <u>861</u> | 11) <u>C</u> | 21) <u>B</u> | 31) <u>F</u> |
| 2) <u>E</u> | 12) <u>A</u> | 22) <u>D</u> | 32) <u>B</u> |
| 3) <u>B</u> | 13) <u>C</u> | 23) <u>C</u> | 33) <u>C</u> |
| 4) <u>D</u> | 14) <u>B</u> | 24) <u>H</u> | 34) <u>F</u> |
| 5) <u>A</u> | 15) <u>E</u> | 25) <u>F</u> | 35) <u>C</u> |
| 6) <u>C</u> | 16) <u>D</u> | 26) <u>B</u> | 36) <u>B</u> |
| 7) <u>D</u> | 17) <u>A</u> | 27) <u>C</u> | 37) <u>D</u> |
| 8) <u>A</u> | 18) <u>C</u> | 28) <u>C</u> | 38) <u>C</u> |
| 9) <u>E</u> | 19) <u>E</u> | 29) <u>F</u> | *39) <u>10111101</u> |
| 10) <u>B</u> | 20) <u>D</u> | 30) <u>A</u> | *40) <u>19</u> |

* See "Explanation" section below for alternate, acceptable answers.

Note: Correct responses are based on **Java SE Development Kit 22 (JDK 22)** from Sun Microsystems, Inc. All provided code segments are intended to be syntactically correct, unless otherwise stated (e.g., "error" is an answer choice) and any necessary Java SE 22 Standard Packages have been imported. Ignore any typographical errors and assume any undefined variables are defined as used.

Explanations:

1.	861	Convert 345 from base 10 to base 5 $\rightarrow 2340_5$ Now treat that number as base 7 $\rightarrow 2340_7 = \boxed{861}_{10}$
2.	E	After doing the pre/post increment/decrement the equation look like... $5 + 2.5 * 3 / (0) + 3 - (-2.5);$ Double division by zero results in Infinity.
3.	B	The code prints a quote, then 10/4 as 2, then the literal characters \n, then 10/4.0 as 2.5, then two backslashes from \\\, then a final quote from \", giving "2\n2.5\\\""
4.	D	https://docs.oracle.com/javase/8/docs/api/java/lang/String.html#intern--
5.	A	Boolean evaluation with order of precedence.
6.	C	<code>Math.abs(Integer.MIN_VALUE)</code> overflows and stays -2147483648, while <code>Math.floorMod(m, 7)</code> returns the nonnegative remainder 5 (unlike <code>m % 7</code> , which would be -2).
7.	D	It becomes $4*6/8=3.0$, then +2, and subtracting $(6-9=-3)$ adds 3, giving 8.0.
8.	A	It enters case 1 with x=2, increments to 3 so adds A, falls through to case 2 where <code>x++==3</code> adds C and leaves x=4, printing AC4.
9.	E	It prints 02 on the first pass (i goes 0 $\rightarrow$ 1 and j goes 3 $\rightarrow$ 2) and 11 on the second (i goes 1 $\rightarrow$ 2 and j goes 2 $\rightarrow$ 1), then stops because <code>i < j</code> is false and never prints , so the output is 0211.
10.	B	<code>a[i]++</code> uses <code>a[0]=2</code> as the target index (then makes <code>a[0]=3</code>), the RHS becomes <code>a[1]+a[1]=0</code> , and since b aliases a it assigns <code>a[2]=0</code> , leaving 3 0 0 0 2 $\rightarrow$ 30002.
11.	C	<code>useRadix(8)</code> makes <code>nextInt()</code> read 7 and 010 as octal (7 and 8) while <code>nextInt(10)</code> reads 8 and 09 as decimal (8 and 9), and <code>getParent()/getName()</code> produce <code>dir</code> and <code>nums.txt</code> , so it prints <code>dir nums.txt 32</code> .
12.	A	Processing digits 8, 0, 5, the parity check happens <i>before</i> the <code>d==0</code> correction, so <code>prod</code> becomes 1 $\rightarrow$ 9 $\rightarrow$ 9 $\rightarrow$ 54 and <code>sum</code> ends 0 $\rightarrow$ 8 $\rightarrow$ 7 $\rightarrow$ 12, printing 12 54.
13.	C	<code>x + y << z</code> is $(x+y) << z = 3 << 3 = 24$, <code>x y & z</code> is $x (y \& z) = 1 (2 \& 3) = 3$, and the condition is true (due to / && precedence and short-circuiting) so it adds 4, giving $24 \wedge (3+4) = 24 \wedge 7 = 31$.
14.	B	In two's complement, bitwise NOT is equivalent to negating and subtracting one, so <code>~x</code> always equals <code>-x - 1</code> .
15.	E	<code>v.remove(1)</code> removes index 1 of the <code>subList</code> (printing 2), then modifying a directly invalidates v's expected modification count so the <code>v.size()</code> call throws a <code>ConcurrentModificationException</code> .
16.	D	<code>StringIndexOutOfBoundsException</code> and <code>ArrayIndexOutOfBoundsException</code> are different, so the exception is not caught. The <code>finally</code> block will always be executed, so 3 is printed before the error is output.
17.	A	<code>poll()</code> is only for objects that are children of <code>Queue</code> , and there is no <code>remove()</code> method for <code>Stack</code> with no arguments, so only <code>pop()</code> will work.
18.	C	Stacks are FILO designed, so both <code>add()</code> and <code>pop()</code> will interact with the top of the stack.
19.	E	Insertion and Deletion are $\mathcal{O}(1)$ operations for stacks, and the loop is constant time $\mathcal{O}(12) = \mathcal{O}(1)$. So the total is $\mathcal{O}(1) \cdot \mathcal{O}(1) + \mathcal{O}(1) = \mathcal{O}(2) = \mathcal{O}(1)$, so it is constant time.
20.	D	Lines 1 and 2 are totally valid, no errors. Line 3 causes a runtime error, but line 4 causes a compile time error, which will happen before the code is run to trigger line 3's error.
21.	B	Recursive Tracing.
22.	D	Recursive Tracing.
23.	C	You implement an interface and extend a class, but you must extend first when defining the child
24.	H	All 3 methods from the interface and abstract class must be implemented by the child. Additionally, you must define a <code>super()</code> call with one string argument in the <code>iPhone</code> constructor, as there is no default constructor in the abstract class, so the constructor for <code>iPhone</code> must be defined.

25.	F	You cannot decrease the scope of a method from a parent <code>class/interface</code> , and the methods in an <code>abstract class</code> are of scope smaller than anything except <code>private</code> by default if not defined. Can choose any scope except <code>private</code> .
26.	B	You cannot decrease the scope of a method from a parent <code>class/interface</code> , and the methods in an <code>interface</code> are of bigger scope than anything except <code>public</code> by default if not defined. Can only choose <code>public</code> scope.
27.	C	The output will be the phone number <code>8328328321</code> followed by a space, followed by the total number of apps, which is 5.
28.	C	The regex pattern is equivalent to a capital letter followed by any number (even 0) of lowercase letters, or any number of non-digit characters (<code>\W</code> also excludes <code>\D</code> entirely, so we take the less exclusive since it is an <code> </code>).
29.	F	All 4 instantiations are legal.
30.	A	Selection sort is $\mathcal{O}(N^2)$, so with 4,000 items, we square it, $16,000,000 = 16$ seconds, $1,000,000 = 1$ second. For 2,000 items $\rightarrow 4,000,000 = 4$ seconds.
31.	F	The code will run without error as is. However, answer choices B through E will also cause the code to run without error (albeit, producing different output). Thus, answer choices A through E are all accurate, but F is the most accurate, per the question's request.
32.	B	Since <code>L2</code> is not contained within a static block, it will not be executed ever. However, <code>L3</code> is contained within a static method that is called when running the program, and thus <code>L3</code> is the only line that gets printed. For integers with underscores in the format, the underscores are omitted when printed to the console.
33.	C	Despite the main method being automatically called, all static blocks are executed before that, and so <code>L2</code> is printed first, and then <code>L3</code> .
34.	F	Post-increment/decrement operations have higher precedence than pre-increment/decrement. Method reference has the highest precedence, and lambda has the lowest.
35.	C	The main tricky thing with this question is the "<" index argument. This specifies that the argument from the previous placeholder should be used. Note that when using the "<", this does not consume what would have been the next-used argument fed to the <code>printf</code> method. There is also no issue in providing more arguments to <code>printf</code> than what actually get used. So the order of arguments that get used are <code>7 + 3</code> , then <code>(int) Math.pow(2, 3)</code> , then <code>(int) Math.pow(2, 3)</code> again, then <code>3.14159</code> , then <code>3.14159</code> again, and lastly <code>Math.PI</code> . <code>%n</code> prints platform-independent newline character.
36.	B	First, Alice is correct, not Bob. This leaves answer choices A and B. The fact that $n - 1$ edges are formed in a graph with n vertices does not guarantee that a tree is formed – it could form a forest instead. The goal with the proof here is to mathematically show that the specific construction method of those $n - 1$ edges guarantees that a tree is formed. Option A is effectively circular logic, and just re-states what the proof goal is as an assumption despite having not shown that yet. Option B on the other hand accurately explains why this specific construction pattern guarantees that a tree is formed, and thus is the most accurate.
37.	D	Option A is false as stated above. Option C is false – the only other way for $n - 1$ unique edges of an n vertex graph to not form a tree is if it has multiple connected components. However, since there are $n - 1$ unique edges, it can be shown that if there are multiple connected components, then at least one edge from one of the multiple connected components must form a cycle and thus showing that a cycle is impossible to form is both sufficient and necessary to show the accuracy of this algorithm. Option E is also false. Often generalizing a proof increases its strength rather than loosens it, as we make fewer assumptions regarding the actual values of the graph (and thus is harder to prove). The assumption regarding form that is made is perfectly reasonable since a cycle must exist per the proof by contradiction's assumption. Option D is where the main issue exists. Consider vertex v in the cycle. This vertex appears in two different edges that are a part of the cycle we are assuming exists (i.e., (u, v) and (v, w)). Since we “assumed without loss of generality” the fact that the cycle was of the form $u \rightarrow v \rightarrow w \rightarrow \dots \rightarrow u$ doesn't mean that the second edge coming out of u is necessarily the...

		... problematic one – in another situation it might have instead been v . Moreover, What the algorithm guarantees is only that after an edge (u, v) is added, either u or v is removed from the candidate set, but it does not guarantee that u specifically is removed. Therefore, u may remain in V and be selected again in later iterations, allowing it to participate in multiple edges. The main way this would happen is if there are other vertices that are not a part of the cycle, but instead connected to nodes that are a part of the cycle (e.g., vertex u). So there may be more than 2 edges coming into/out of u , while u is still a part of some cycle (per the assumption).
38.	C	The initial state is q_1 and the two accepting states are q_1 and q_2. Only strings which end in an accepting state are included in the language of a DFA; thus, anything that visits q_3 cannot be generated by the DFA (as q_3 is a trap state since you cannot leave once entering). Here $*$ means “0 or more times,” $+$ means “or”, and when two symbols appear directly next to one another, it means “and” (much the same way that Java regex works). Thus, the only regular expression which guarantees that the final state is either q_1 or q_2, and abides by the state transition functions, is option C: $((0(0+1))^*) + ((0(0+1))^* 0)$ This regular expression reads as: “Either (i) 0 followed by either 0 or 1, all zero or more times, or (ii) 0 followed by either a 0 or 1, all zero or more times, followed by a 0.”
39.	10111101	67_{10} in binary = 01000011_2 , flip bit = 10111100_2 , add $1_2 = 10111101_2$
40.	19	Just write out all 32 combos, there’s some simplification, but in this case it is easier to just treat the expression as is, and plug all combos in and try.