

AGENT DESIGN

Five agents, **each doing one job well.**

The orchestration runs them in a fixed line. Each section below breaks one agent down: task type, inputs, logic, output, and guardrails.



Agent 1

Load CSV Data



Agent 2

Promotion Analysis



Agent 3

Trend Detection




Agent 4

**Generate AI
Insights**



Agent 5

**Write Dashboard
Output**

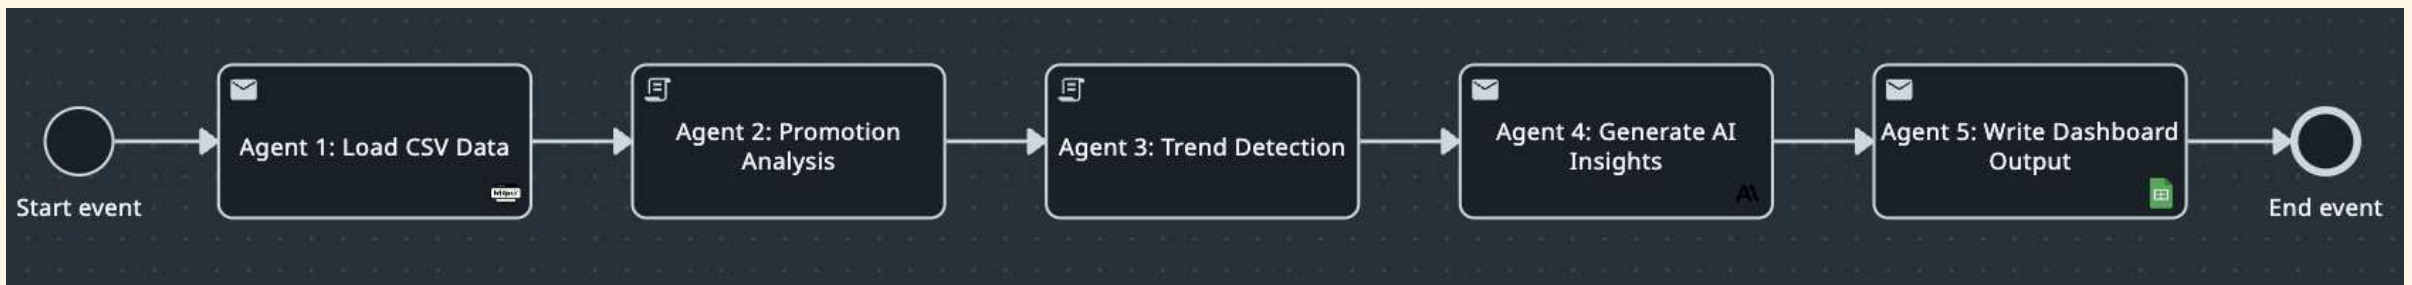




AGENT 01

Load CSV Data

Send Task · HTTP connector

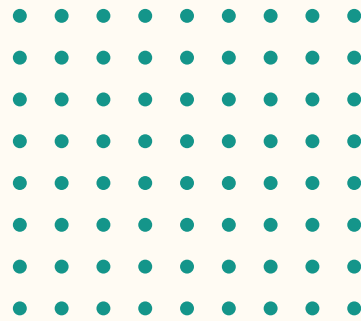

The pipeline's entry point: one HTTP GET pulls the CSV from a Google Drive link and stores it as raw text for every downstream agent.



INPUT

Start event trigger



DOES

GET request, authentication: manual,
against a fixed Drive download URL



OUTPUT

Raw CSV text in csv_raw_data

REQUEST BODY

```
{
  "method": "GET",
  "authentication": "manual",
  "url": "https://drive.google.com/uc?export=download&id=..."
}
```



GUARDRAILS

- Single fixed source URL, no arbitrary fetch
- Output captured to one named variable
- Error branch defined on the task

Promotion Analysis

Script Task · in-process JavaScript

The quantitative core: parses the CSV, splits promoted from non-promoted units, and computes percentage uplift overall, per category and channel.



INPUT

promo_flag units_sold category
channel country



DOES

Averages promo vs. non-promo units,
then takes the percentage gain,
grouped four ways



OUTPUT

scriptResponse: overall + per-group
uplift

CORE LOGIC

```
// split units by promo flag
if (isPromo) promoUnits.push(u);
else        noPromoUnits.push(u);

// uplift = % gain of promo avg
uplift = (avg(promo) - avg(noPromo))
         / avg(noPromo) * 100;
```



GUARDRAILS


- Empty groups return "0", never divide by zero
- Runs in-process, no external call to fail
- Pure function of the CSV, fully reproducible

3

AGENT 03

Trend Detection

Script Task · in-process JavaScript

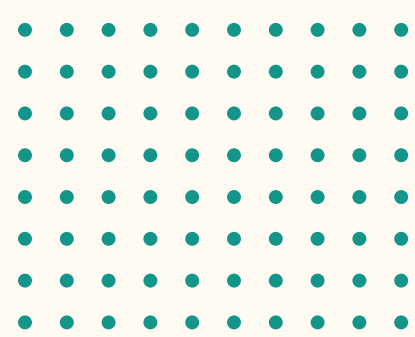

Looks only at promoted rows and asks which mechanics and timing move volume, comparing average units across three binary splits.



INPUT

discount_pct is_weekend is_holiday
(promo rows only)



DOES

Buckets units by deep vs. flat (0.25
cutoff), weekend vs. weekday, holiday
vs. not



OUTPUT

scriptResponse2: avg units per split

CORE LOGIC

```
// promo rows only
if (promo_flag !== 1) continue;

disc >= 0.25 ? bogo.push(u)
              : flat.push(u);
isWeekend ? weekend.push(u)
           : weekday.push(u);
isHoliday ? holiday.push(u)
           : nonHoliday.push(u);
```



GUARDRAILS


- Skips non-promo rows explicitly
- Averages guard against empty buckets
- Threshold isolated as one constant (0.25)



AGENT 04

Generate AI Insights

Send Task · Anthropic Claude (messages)

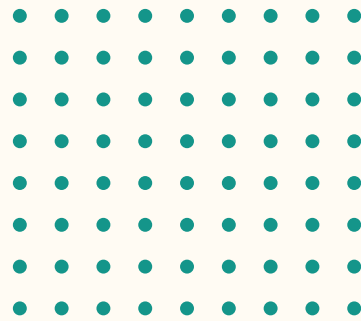

The reasoning layer. Feeds computed figures to Claude and asks for a tight executive summary plus two actionable recommendations.



INPUT

overall_uplift, flat_avg_units,
bogo_avg_units, category breakdown



DOES

Calls claude-sonnet-4-6 with a fixed
analyst prompt (temp 1, 1024 tokens)



OUTPUT

Summary + 2 recommendations as text

THE PROMPT

```
"You are an FMCG analyst. Overall promo uplift is " +  
vars.scriptResponse.overall_uplift + "%". Flat discount  
averages " + vars.scriptResponse2.flat_avg_units + " units  
vs BOGO at " + vars.scriptResponse2.bogo_avg_units + "  
units. Category breakdown: " +  
vars.scriptResponse.category_uplift + ".
```

```
Generate: 1) 2-sentence executive summary. 2) Two actionable  
recommendations."
```



GUARDRAILS

- Templated prompt, only numbers vary per run
- Token cap (1024) bounds output length and cost
- Claude sees only aggregates, never raw records

5

AGENT 05

Write Dashboard Output

Send Task · Google Sheets (WriteRow)

The delivery step: appends one timestamped row to a shared Google Sheet. In APPEND mode the sheet doubles as the audit log.



INPUT

Date, overall uplift, per-category uplift values



DOES

WriteRow in APPEND mode to Sheet1!A1:Z1000, headers off



OUTPUT

New row on the shared dashboard sheet

ROW WRITTEN

```
[ new Date().toISOString().split('T')[0],  
  overall_uplift,  
  cat_personal_care,  
  cat_dairy,  
  cat_home_care,  
  ... ]
```



GUARDRAILS

- APPEND only, never overwrites history
- Each row carries its own date stamp
- Bounded range keeps writes predictable

OUTPUT

